

TRACESAMPLER: MAKING SAMPLING ERRORS PREDICTABLE AND CORRECTABLE FOR ACCELERATED GENERATIVE SAMPLING

George Matthew¹, Guoqiang Zhang¹, Kenta Niwa²

¹University of Exeter, United Kingdom ²NTT Communication Science Laboratories, Japan

gm649@exeter.ac.uk g.z.zhang@exeter.ac.uk kenta.niwa@ntt.com

ABSTRACT

Accurate sampling from continuous-time generative models can require many model evaluations. Low-step sampling reduces this cost, but coarse updates introduce endpoint errors that can accumulate along the sampling trajectory and degrade generation quality. We introduce TraceSampler, a post-training method that corrects these errors without modifying the pretrained model. Rather than directly optimising the low-step update itself, TraceSampler models its endpoint error as a sample-specific prediction problem. A higher-step reference integration over the same interval provides the supervised target, while a compact representation makes the high-dimensional error predictable from the current sampling trace. This representation combines shared residual structure, directions derived from the trace, and a low-rank remainder, so shallow per-step MLP heads need only predict sample-dependent coefficients. These coefficients drive a two-stage learned residual correction: the first stage predicts the full endpoint residual, while a backbone evaluation at the intermediate state supplies new trace information for predicting the residual that remains; this evaluation is reused by the following step. TraceSampler is evaluated with Rectified Flow on CIFAR-10, SiT-XL/2 on ImageNet-256, and SD3.5 Medium for text-to-image generation. At 10 steps, it reduces trajectory MSE relative to matched-step Euler by 90.5% on CIFAR-10 and 85.6% on ImageNet-256, while achieving FID scores of 2.692 and 2.189, close to 120-step Heun references of 2.601 and 2.056 with $24\times$ fewer backbone evaluations. On SD3.5 Medium, TraceSampler improves image quality and prompt following; at 10 steps, ImageReward rises from 0.752 to 0.906 while trajectory MSE falls by 70.7%. These gains preserve Euler’s backbone-evaluation budget, add less than 0.4% inference FLOPs, and incur negligible wall-clock overhead, showing that coarse-step sampling error can be made predictable from the sampling trace and efficiently corrected.



Euler, 8 steps



TraceSampler, 8 steps

SD3.5 Medium, 512×512 . Prompt: “Portrait of Leonardo da Vinci as a steampunk cyborg, clockwork automaton with medieval technology.”

1 INTRODUCTION

Continuous-time generative models sample by numerically integrating a learned ODE from noise to data (Lipman et al., 2023; Song et al., 2021). Fewer steps accelerate generation but require coarser updates whose endpoint errors accumulate along the sampling trajectory and degrade generation quality. The challenge is to approach high-step accuracy with far fewer model evaluations.

Existing accelerated samplers reduce few-step error through more accurate numerical updates, optimisation of solver parameters or sampling schedules, and fitted or learned corrections to the sampling trajectory (Lu et al., 2025; Zhao et al., 2023; Zhang et al., 2024; Zhao et al., 2024; Wang et al., 2025a;b). These methods typically improve the update rule itself or fit solver or correction parameters that are determined before inference and shared across samples. While effective, this does not explicitly account for how the error made by a low-step update may differ from one sampling trajectory to another. If these differences are systematic, using the same solver design or fitted correction across samples may leave trajectory-specific error uncorrected.

Our hypothesis is that the endpoint error of a low-step update contains systematic structure tied to the current sampling trace, and that a compact representation can make this structure predictable. We introduce **TraceSampler**, a post-training framework built around this hypothesis. During offline fitting, the deployed low-step update and a higher-step reference integration start from the same state and span the same interval. Their endpoint difference—the *coarse-to-reference endpoint residual*—defines the step-local error made by the deployed update and, equivalently, the correction required to map its endpoint to the reference endpoint. TraceSampler treats this error as a per-trajectory supervised prediction target; the reference is absent at inference.

Because this error is image- or latent-dimensional, predicting it directly is impractical. TraceSampler therefore represents it compactly using shared residual structure, explicit directions derived from the current sampling trace, and a low-rank component for remaining variation. Shallow per-step MLP heads predict only the corresponding sample-dependent coefficients.

These coefficients reconstruct trajectory-specific residual estimates. The residual predictor estimates the full endpoint error from information already available in the sampling trace. A frozen-backbone evaluation at the intermediate state then adds new information to the trace, which the residual corrector uses to estimate the remaining error. This evaluation is reused by the following Euler update, preserving the matched backbone-evaluation budget.

Across CIFAR-10, ImageNet-256, and SD3.5 Medium, TraceSampler substantially improves low-step sampling. At 10 steps, it reaches FID 2.692 and 2.189 on CIFAR-10 and ImageNet-256, close to 120-step Heun values of 2.601 and 2.056, while reducing trajectory MSE by 90.5% and 85.6% with $24\times$ fewer backbone evaluations. On SD3.5 Medium, ImageReward rises from 0.752 to 0.906 while trajectory MSE falls by 70.7%, with improvements in image quality, prompt following, and estimated human preference relative to matched Euler. These gains preserve Euler’s backbone-evaluation budget, add below 0.4% inference FLOPs, and incur negligible measured wall-clock overhead.

2 RELATED WORK AND POSITIONING

Few-step samplers reduce coarse-step error through more accurate numerical updates, offline calibration of solver parameters or sampling schedules, and fitted corrections to the sampling trajectory. Representative approaches include DPM-Solver++ (Lu et al., 2025) and UniPC (Zhao et al., 2023), which derive numerical update rules; IIA (Zhang et al., 2024), which fits step-wise solver coefficients against finer integrations; and methods such as DC-Solver, DSS, and PAS that optimise compensation, solver/timestep parameters, or low-dimensional corrections (Zhao et al., 2024; Wang et al., 2025a;b).

TraceSampler differs at the level of what is modelled. Rather than learning or calibrating the sampling rule itself, it retains Euler as the deployed numerical rule and models the realised same-interval endpoint error made by that rule. This error is represented using shared residual structure, stage-specific directions constructed from the current sampling trace, and a low-rank remainder, with the corresponding coefficients predicted separately for each trajectory. TraceSampler therefore performs structured, sample-dependent prediction of the error made by the current update, rather than directly modifying the integration rule or making the deployed correction depend solely on quantities fixed offline and shared across trajectories.

Among the closest comparisons, UniPC also has a predictor–corrector structure, but UniP and UniC are numerical state-update formulas, whereas TraceSampler’s residual predictor and residual corrector are learned estimators of error around a fixed Euler update (Zhao et al., 2023). IIA is closely related through its use of finer integrations offline, but uses them to fit solver coefficients that are subsequently reused across samples, rather than to supervise per-trajectory endpoint-error prediction (Zhang et al., 2024). We therefore focus our empirical comparison on IIA–Euler as a same-base fitted baseline and UniPC as a strong matched-budget few-step solver, isolating the two closest comparisons.

The contributions are threefold: (i) casting the realised same-interval endpoint error of each deployed low-step update as a supervised per-trajectory prediction problem; (ii) a structured residual representation combining shared structure, stage-specific trajectory directions, and a low-rank remainder with sample-dependent coefficient prediction; and (iii) a two-stage learned residual correction that uses an intermediate backbone evaluation to refine the remaining error while reusing that evaluation in the following step, thereby preserving the backbone-evaluation budget.

3 TRACESAMPLER

3.1 PREDICTING AND CORRECTING COARSE-STEP SAMPLING ERROR

TraceSampler retains an Euler-form coarse update as its low-step backbone and learns the endpoint error made by that update. At step k , let x_k be the corrected state at t_k and v_k the backbone velocity available to the sampler. The coarse endpoint is $x_{k+1}^{\text{base}} = x_k + \Delta t_k v_k$, where $\Delta t_k = t_{k+1} - t_k$. With few sampling steps, this endpoint can deviate substantially from a higher-step reference over the same interval. During offline fitting, the reference solver starts from the same x_k and integrates over $[t_k, t_{k+1}]$, giving x_{k+1}^{ref} . Their endpoint difference defines the supervised residual target:

$$r_k = x_{k+1}^{\text{ref}} - x_{k+1}^{\text{base}}.$$

Thus, r_k is exactly the correction required to map the deployed coarse endpoint to its reference endpoint. The reference integration is used only to construct offline targets; it is absent at inference.

TraceSampler leaves the base update unchanged and learns two residual-estimation stages around it. The residual predictor uses information already available at the start of the step to estimate the full coarse-step error and moves the base endpoint to an intermediate state $\tilde{x}_{k+1}$. The frozen backbone is then evaluated at this intermediate state, $v_{k+1} = v_\theta(\tilde{x}_{k+1}, t_{k+1})$, adding new information to the sampling trace that the residual corrector uses to predict only the error left after the first correction. This evaluation is reused by the following step. Figure 1 illustrates this sequence.

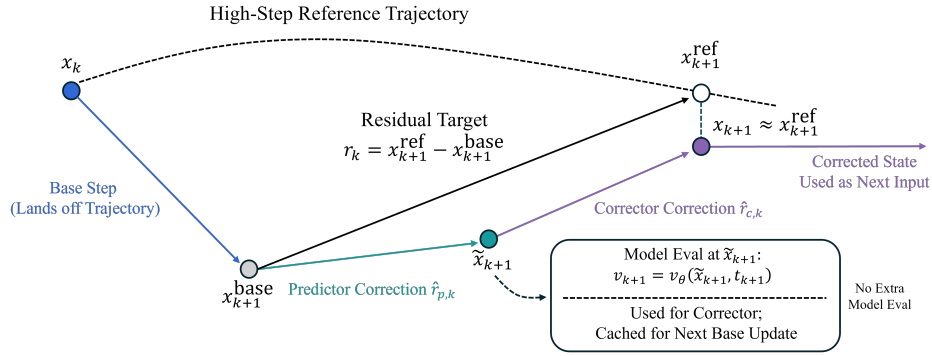


Figure 1: Two-stage learned residual correction for one sampling step.

Concretely, the residual predictor targets the full coarse-to-reference residual and produces

$$r_{p,k} = x_{k+1}^{\text{ref}} - x_{k+1}^{\text{base}} = r_k, \quad \tilde{x}_{k+1} = x_{k+1}^{\text{base}} + \hat{r}_{p,k},$$

where $\hat{r}_{p,k}$ is the predicted correction. Using the new backbone evaluation at $\tilde{x}_{k+1}$, the residual corrector targets only the remaining gap,

$$r_{c,k} = x_{k+1}^{\text{ref}} - \tilde{x}_{k+1}, \quad x_{k+1} = \tilde{x}_{k+1} + \hat{r}_{c,k}.$$

The intermediate-state evaluation is reused as the velocity for the following coarse update. On the first step, $v_0 = v_\theta(x_0, t_0)$; for $k > 0$, v_k is the cached evaluation from the preceding intermediate state

$\tilde{x}_k$, rather than a fresh evaluation at the corrected state x_k . The same evaluation therefore informs the remaining-residual prediction and seeds the next base step, preserving Euler’s backbone-evaluation count. On the final step, the corrector is omitted because its evaluation could not be reused, so the final state is $\tilde{x}_{k+1}$.

3.2 COMPACT RESIDUAL REPRESENTATION

The predictor and corrector residuals have the same dimensionality as the image or latent sampling state, making direct prediction impractical. TraceSampler therefore makes each residual predictable through a compact decomposition into three components:

$$\text{residual error} \approx \text{mean residual} + \text{explicit-direction component} + \text{low-rank residual component}.$$

The mean residual captures the correction typically required at a given sampling step. The explicit-direction component captures variation associated with the current sampling trace, while the low-rank residual component captures recurring variation that remains after those directions are accounted for. The coefficient heads therefore need only predict how strongly the explicit directions and low-rank basis vectors contribute for the current sample.

The predictor and corrector use the same compact form:

$$\hat{r}_{p,k} = \bar{r}_{p,k} + P_k \alpha_{p,k} + D_{p,k} \beta_{p,k}, \quad (1)$$

$$\hat{r}_{c,k} = \bar{r}_{c,k} + \tilde{C}_k \alpha_{c,k} + D_{c,k} \beta_{c,k}. \quad (2)$$

Here, $\bar{r}_{s,k}$ is the stage-specific mean residual, P_k and $\tilde{C}_k$ are matrices whose columns are the predictor and corrector trajectory directions, respectively, and $D_{s,k}$ is the fitted low-rank basis. The vectors $\alpha_{s,k}$ and $\beta_{s,k}$ are the sample-dependent coefficients for the trajectory directions and low-rank basis, respectively. Each column of P_k and $\tilde{C}_k$ has the same dimensionality as the image or latent sampling state.

The mean residuals and low-rank bases are fitted offline, while the explicit trajectory directions are constructed from the current sampling path. The coefficient values are sample-dependent: different trajectories at the same sampling step can receive different weights and therefore different corrections.

Predictor directions. The predictor acts before a new backbone evaluation is made, so its explicit directions use only trajectory information already available at the current sampling step. Two directions are constructed:

$$h_k = x_k - x_{k-1}, \quad m_k = \Delta t_k v_k - h_k.$$

The direction h_k is the displacement made by the previous sampling step and is set to zero on the first step. The direction m_k measures how the current coarse displacement differs from the previous displacement. Together, they describe the recent sampling motion and how that motion is changing. The directions are normalised before forming the predictor direction matrix P_k .

Corrector directions. The corrector acts after evaluating the backbone at the intermediate state $\tilde{x}_{k+1}$, giving the new velocity v_{k+1} . It can therefore construct additional directions using both the predictor update and this new backbone information. Let $\epsilon_0 = x_0$ denote the initial noise. Four directions are used:

$$\begin{aligned} s'_k &= \Delta t_k v_{k+1} - (\tilde{x}_{k+1} - x_k), & \delta_k &= \epsilon_0 - (\tilde{x}_{k+1} - t_{k+1} v_{k+1}), \\ q_k &= \tilde{x}_{k+1} - x_{k+1}^{\text{base}}, & \kappa_k &= \Delta t_k (v_k - v_{k-1}). \end{aligned}$$

The direction s'_k compares the displacement suggested by the newly evaluated velocity with the displacement that produced the intermediate state. The direction δ_k measures the difference between the initial noise ϵ_0 and the noise-state estimate implied by the intermediate state and newly evaluated velocity. The direction q_k is the predictor correction itself, allowing the corrector to strengthen or partially reverse it. The direction κ_k captures the change in velocity and is set to zero on the first step.

Because the four corrector directions can contain overlapping information, the raw directions are Gram–Schmidt orthogonalised in the fixed order

$$[s'_k, \delta_k, q_k, \kappa_k].$$

The resulting non-zero directions are then normalised before forming $\tilde{C}_k$.

3.3 SAMPLE-DEPENDENT COEFFICIENT PREDICTION

The residual representation defines the available correction components, but their contribution varies across trajectories. Shallow per-step MLP heads therefore predict the corresponding coefficients from trajectory features:

$$(\alpha_{p,k}, \beta_{p,k}) = g_{p,k}(\phi_{p,k}), \quad (\alpha_{c,k}, \beta_{c,k}) = g_{c,k}(\phi_{c,k}).$$

Here, $\phi_{p,k}$ and $\phi_{c,k}$ are compact feature vectors containing information available to the predictor and corrector, respectively.

Rather than predicting a full image- or latent-dimensional residual, each head predicts only a compact set of sample-dependent coefficients for the structured representation.

Each feature vector concatenates trajectory summaries, projections of the current state and recent displacement onto the fitted residual basis, the preceding coefficient-head output from the same stage, and compressed hidden activations from selected blocks of the frozen backbone. The hidden activations are taken from backbone evaluations already required by the sampling chain, so feature construction introduces no additional backbone evaluations. All features are normalised using statistics from the fitting data. Exact feature definitions, targeted blocks, compression operations, and input dimensions are given in Appendix A.1.

3.4 OFFLINE FITTING

Offline fitting estimates the shared mean residuals and low-rank bases, constructs sample-specific coefficient targets, and trains the predictor and corrector heads. Fitting follows the deployed chain rather than treating steps independently: at each non-final step the predictor is fitted and applied before corrector targets are formed, and corrected states are carried forward before fitting the next step. Thus the heads are trained on the chained states encountered at inference.

To describe the fitting procedure compactly, let

$$M_{p,k} = P_k, \quad M_{c,k} = \tilde{C}_k,$$

and let $s \in \{p, c\}$ denote the correction stage.

For each deployed correction stage, fitting proceeds in three parts. First, the mean residual is estimated. Second, the weights of the explicit trajectory directions are fitted by least squares. Finally, PCA is applied to the variation that remains, giving the low-rank basis and its coefficient targets.

Suppose the fitting set contains N trajectories, indexed by $i \in \{1, \dots, N\}$. Let $r_{s,k}^{(i)}$ denote the residual target for trajectory i at step k and stage s , and let $M_{s,k}^{(i)}$ denote its explicit direction matrix.

The mean residual, least-squares direction weights, and remaining variation are

$$\begin{aligned} \bar{r}_{s,k} &= \frac{1}{N} \sum_{i=1}^N r_{s,k}^{(i)}, \\ \alpha_{s,k}^{(i)} &= \arg \min_{\alpha} \left\| r_{s,k}^{(i)} - \bar{r}_{s,k} - M_{s,k}^{(i)} \alpha \right\|_2^2, \\ \eta_{s,k}^{(i)} &= r_{s,k}^{(i)} - \bar{r}_{s,k} - M_{s,k}^{(i)} \alpha_{s,k}^{(i)}. \end{aligned}$$

A rank- K PCA basis is fitted to the remainder and projected to obtain the low-rank weights, giving

$$\begin{aligned} D_{s,k} &= \text{PCA}_K \left(\{ \eta_{s,k}^{(i)} \}_{i=1}^N \right), \\ \beta_{s,k}^{(i)} &= D_{s,k}^\top \eta_{s,k}^{(i)}, \\ r_{s,k}^{(i)} &\approx \bar{r}_{s,k} + M_{s,k}^{(i)} \alpha_{s,k}^{(i)} + D_{s,k} \beta_{s,k}^{(i)}. \end{aligned}$$

Since the reference residual is known during offline fitting, the coefficient vectors $\alpha_{s,k}^{(i)}$ and $\beta_{s,k}^{(i)}$ can be calculated directly. They become the sample-specific training targets for the coefficient head $g_{s,k}$:

$$g_{s,k}(\phi_{s,k}^{(i)}) \approx \begin{pmatrix} \alpha_{s,k}^{(i)} \\ \beta_{s,k}^{(i)} \end{pmatrix}.$$

A separate predictor head is fitted for every sampling step, and a separate corrector head is fitted for every non-final sampling step. Each head is a single-hidden-layer MLP whose final layer is initialised to output the mean coefficient target before training, providing a shared starting point for trajectory-specific refinement. Implementation details are provided in Appendix A.2.

At inference, the reference residual is no longer needed. The saved mean residuals and low-rank bases are loaded, the explicit directions are constructed from the current trajectory, and the coefficient heads predict the sample-dependent coefficients. These quantities are combined using Eqs. (1) and (2) to reconstruct the predictor and corrector corrections.

Complete workflow. TraceSampler predicts coefficients rather than full residual tensors, separating offline-fitted correction geometry from sample-specific adaptation. Figure 2 summarises the pipeline: offline fitting constructs residual supervision and trains the heads; inference uses the saved representation with the frozen backbone, carrying each corrected state into the next step.

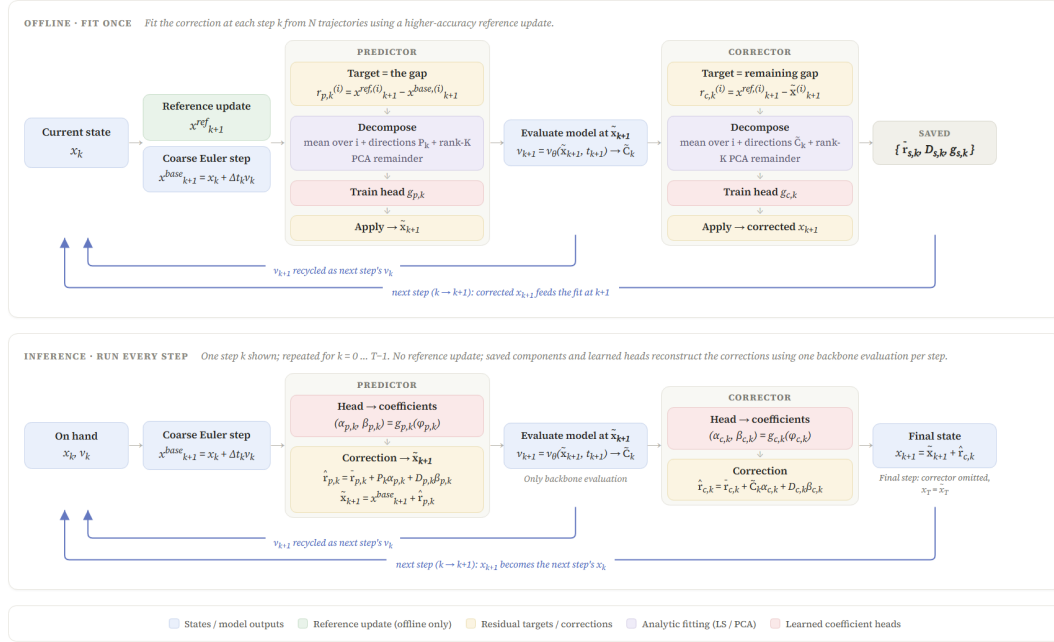


Figure 2: Offline fitting and inference workflow of TraceSampler.

3.5 OPTIONAL TIMESTEP-SCHEDULE OPTIMISATION

TraceSampler can optionally select a low-step schedule offline before fitting the final residual representation and heads. A probe propagates each step’s unrepresented residual through the remaining base-sampler rollout. Their Gram matrix G captures individual endpoint-error contributions and cross-step interactions. Rescaling the probe step sizes gives the objective ($p = 2$):

$$E_{\text{sched}}(\Delta t) = \sum_{i,j} G_{ij} \left(\frac{\Delta t_i}{\Delta t_i^{\text{probe}}} \right)^p \left(\frac{\Delta t_j}{\Delta t_j^{\text{probe}}} \right)^p, \quad p = 2. \quad (3)$$

Proposed schedules are remeasured on matched probe trajectories and accepted only when propagated endpoint-error MSE improves by more than twice the combined standard error. The selected schedule is fixed for fitting and inference; Appendix B gives full details and representative schedules.

4 EXPERIMENTS

4.1 EXPERIMENTAL SETUP

We evaluate TraceSampler with Rectified Flow on CIFAR-10 (Liu et al., 2023; Krizhevsky & Hinton, 2009), SiT-XL/2 on ImageNet-256 (Ma et al., 2024; Deng et al., 2009), and SD3.5 Medium at 512×512 (Esser et al., 2024). CIFAR-10 supports controlled ablations, ImageNet-256 tests

scaling, and SD3.5 evaluates the text-conditioned setting. We report FID, IS (Heusel et al., 2017; Salimans et al., 2016), and trajectory MSE on CIFAR-10 and ImageNet-256; SD3.5 additionally uses ImageReward (IR), CLIP similarity, GenEval, and HPSv2.1 (Xu et al., 2023; Radford et al., 2021; Ghosh et al., 2023; Wu et al., 2023).

Trajectory MSE measures deviation from the higher-step reference at matched timesteps, with reductions relative to Euler. Residual representations use all 24,576 trajectories, while coefficient heads use a 19,661/4,915 train/validation split. Table 1 summarises the main configurations; protocols and reference-substep details are in Appendix D, with hardware in Appendix C.4.

Table 1: Main TraceSampler fitting and sampling configurations.

Model/config.	Offline reference	PCA rank	MLP width	Schedule
RF CIFAR-10	120-step Heun	$K = 32$	$h = 12288$	Optimised
SiT-XL/2	120-step Heun	$K = 32$	$h = 12288$	Optimised
SD3.5 Medium (8-step)	64-step Euler	$K = 32$	$h = 24576$	Shift = 3
SD3.5 Medium (10-step)	60-step Euler	$K = 32$	$h = 24576$	Shift = 3

4.2 RESULTS

The results first isolate TraceSampler’s design choices on CIFAR-10, then evaluate scaling to ImageNet-256 and transfer to SD3.5 Medium, before examining computational cost.

4.3 CONTROLLED ABLATIONS

Controlled CIFAR-10 experiments isolate the main design choices. **Component build-up.** Table 2 shows the incremental construction from the same 8-step Euler sampler: predictor directions, corrector directions, the low-rank PCA basis, and timestep optimisation.

Table 2: Component build-up at 8 steps.

Method	Schedule	K	FID ↓	IS ↑	Trajectory MSE reduction ↑
Base Euler	Uniform	0	15.729	6.321	0.0%
Predictor directions only	Uniform	0	9.705	7.757	34.7%
Predictor + corrector directions	Uniform	0	4.101	8.612	80.5%
Full TraceSampler	Uniform	32	3.666	8.626	87.5%
Full TraceSampler + schedule	Optimised	32	2.798	8.552	90.8%

The explicit directions drive most of the gain: the corrector gives the largest jump, reaching FID 4.101 and an 80.5% trajectory MSE reduction after observing the post-predictor backbone. PCA improves FID to 3.666, while schedule optimisation reaches 2.798 and 90.8%. Thus trajectory-aligned structure dominates, the low-rank basis captures the remainder, and schedule optimisation adds a smaller final gain.

Sample-dependent prediction. To isolate the learned heads, we replace them with fixed step- and stage-specific mean oracle coefficients while keeping the residual bases, sample-dependent directions, schedule, and sampling configuration unchanged.

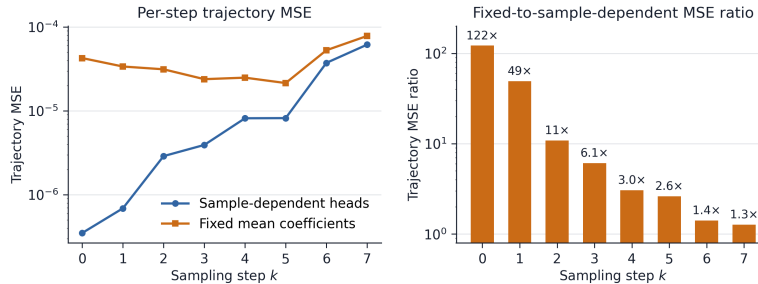


Figure 3: Per-step trajectory MSE and the fixed-to-sample-dependent error ratio.

Table 3: Coefficient-prediction ablation at 8 steps.

Coefficient prediction	FID ↓	IS ↑	Trajectory MSE reduction ↑
Fixed mean coefficients	3.240	8.563	81.5%
Sample-dependent heads	2.798	8.552	90.8%

The fixed-coefficient variant already reduces trajectory MSE by 81.5%, showing that coarse-step error contains a large systematic component captured by the shared representation. Making the coefficients trace-dependent increases the reduction to 90.8% and improves FID from 3.240 to 2.798. Thus the gain is not only a better average correction: conditioning on the current trajectory explains additional residual variation that a step-wise fixed correction cannot. Figure 3 shows that this sample dependence is strongest at early coarse steps. Further sweeps are in Appendix C.1.

4.4 MATCHED-BUDGET SAMPLING ON CIFAR-10 AND IMAGENET-256

Table 4: CIFAR-10 matched-budget comparison.

Budget	Euler		IIA-Euler		UniPC		TraceSampler		Traj. MSE red. ↑
	FID ↓	IS ↑	FID ↓	IS ↑	FID ↓	IS ↑	FID ↓	IS ↑	
5 steps	33.149	4.566	22.253	5.783	12.817	7.238	4.373	8.239	89.9%
6 steps	24.143	5.327	14.940	6.510	9.333	7.730	3.560	8.344	88.8%
8 steps	15.729	6.321	8.846	7.357	7.751	8.011	2.798	8.552	90.8%
10 steps	11.782	6.886	6.668	7.670	6.429	8.169	2.692	8.556	90.5%
12 steps	9.632	7.205	5.671	7.850	5.778	8.256	2.641	8.517	89.5%
Heun 120-step reference	FID 2.601, IS 8.570								

TraceSampler leads FID and IS at every CIFAR-10 budget, with the largest absolute gains when integration is coarsest: at 5 steps, FID drops from 33.149 for Euler and 12.817 for UniPC to 4.373. By 10 steps, FID reaches 2.692, close to the 120-step Heun value 2.601, together with a 90.5% trajectory-MSE reduction. The shrinking gap as the budget grows is expected if TraceSampler is primarily removing coarse-integration error rather than replacing the underlying generative model.

Table 5: ImageNet-256 matched-budget comparison.

Budget	Euler		IIA-Euler		UniPC		TraceSampler		Traj. MSE red. ↑
	FID ↓	IS ↑	FID ↓	IS ↑	FID ↓	IS ↑	FID ↓	IS ↑	
6 steps	19.786	114.66	13.233	151.307	4.630	206.75	3.624	209.74	79.8%
8 steps	10.675	161.18	7.405	185.997	3.105	227.55	2.418	235.21	83.2%
10 steps	7.189	186.80	5.204	204.654	2.544	238.45	2.189	245.15	85.6%
Heun 120-step reference	FID 2.056, IS 254.16								

The same pattern holds after scaling to ImageNet-256. TraceSampler improves both FID and IS at every tested budget, reducing 6-step FID from 19.786 for Euler and 4.630 for UniPC to 3.624. At 10 steps it reaches FID 2.189, IS 245.15, and an 85.6% trajectory-MSE reduction, approaching the 120-step reference. The agreement between trajectory error and generation metrics across two different backbones supports endpoint-residual prediction as a transferable correction signal; qualitative results are in Appendix C.2.

4.5 SD3.5 MEDIUM TEXT-TO-IMAGE GENERATION

We test text-conditioned transfer on SD3.5 Medium at matched 8- and 10-step budgets, jointly measuring quality, prompt following, preference, and trajectory matching.

Table 6: SD3.5 Medium results.

Sampler	IR ↑	FID ↓	IS ↑	CLIP ↑	GenEval ↑	HPS ↑	Traj. MSE red. ↑
Euler 8	0.611	17.320	39.23	0.2698	0.60997	0.2572	–
Euler 10	0.752	17.368	40.48	0.2697	0.64152	0.2702	–
TraceSampler 8	0.862	14.616	43.28	0.2661	0.64554	0.2807	67.9%
TraceSampler 10	0.906	15.478	43.05	0.2659	0.66811	0.2878	70.7%
Euler 64 eval. ref.	0.973	18.059	43.95	0.2651	0.68275	0.2968	–

TraceSampler reduces trajectory MSE by 67.9% at 8 steps and 70.7% at 10 while improving ImageReward, FID, IS, GenEval, and HPSv2.1 at both budgets. At 10 steps, ImageReward rises from 0.752 to 0.906, GenEval from 0.64152 to 0.66811, and HPSv2.1 from 0.2702 to 0.2878. CLIP decreases slightly, and the 64-evaluation reference itself does not dominate every distributional metric (e.g., FID), so closeness to the reference should not be read as monotonic improvement on every metric. The consistent gains in preference and compositional metrics nevertheless show that residual correction transfers beyond unconditional and class-conditional settings.

Figure 4 gives a matched-noise comparison with Euler and the 64-step reference; prompts are in Appendix C.3. TraceSampler recovers detail and structure lost by 8-step Euler while remaining visually close to the 64-step reference, consistent with Table 6.

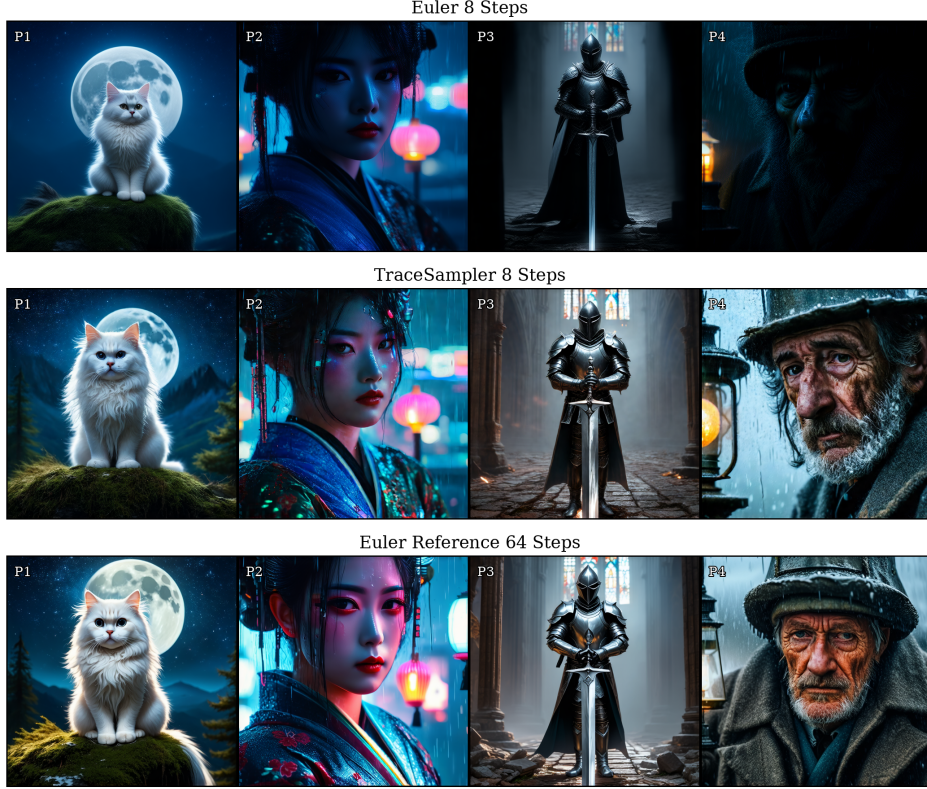


Figure 4: SD3.5 Medium qualitative comparison at matched noise.

4.6 COMPUTATIONAL COST

Reusing each intermediate-state backbone evaluation in the following base update preserves Euler’s backbone-evaluation budget; Table 7 isolates the added compute, throughput, and memory cost.

Table 7: Inference cost at 8 steps; FLOPs are per step.

Model	GFLOPs/step			Throughput (images/s)		Peak VRAM (GiB)	
	Euler	Trace	Increase	Euler	Trace	Euler	Trace
Rectified Flow	21.6931	21.7714	0.3610%	321.45	316.05	6.77	7.52
SiT-XL/2	474.4857	475.0351	0.1158%	31.07	30.97	7.92	8.51
SD3.5 Medium	4275.6574	4278.4379	0.0650%	4.144	4.126	11.60	14.22

Added compute is only 0.0650%–0.3610%, and measured throughput remains within 1.7% of Euler across all backbones. The main deployment trade-off is memory: peak VRAM rises by 0.59–2.62 GiB, mainly from the additional parameters of the coefficient heads. Changing the step budget or schedule requires one-time refitting; head sizes and offline costs are in Appendix C.

5 CONCLUSION

TraceSampler models coarse-step endpoint error as a structured, sample-dependent prediction target and corrects it without extra backbone evaluations. At 10 steps, it reaches FID 2.692 on CIFAR-10 and 2.189 on ImageNet-256 with 90.5% and 85.6% trajectory MSE reductions; on SD3.5 Medium, ImageReward rises from 0.752 to 0.906 as trajectory MSE falls 70.7%. Across all three settings, endpoint error contains predictable structure tied to the sampling trace that can be exploited for correction. These gains add less than 0.4% inference FLOPs with negligible wall-clock overhead.

REFERENCES

- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. ImageNet: A large-scale hierarchical image database. In *2009 IEEE Conference on Computer Vision and Pattern Recognition*, pp. 248–255, 2009.
- Patrick Esser, Sumith Kulal, Andreas Blattmann, Rahim Entezari, Jonas Müller, Harry Saini, Yam Levi, Dominik Lorenz, Axel Sauer, Frederic Boesel, et al. Scaling rectified flow transformers for high-resolution image synthesis. In *Forty-first International Conference on Machine Learning*, 2024.
- Dhruba Ghosh, Hannaneh Hajishirzi, and Ludwig Schmidt. GenEval: An object-focused framework for evaluating text-to-image alignment. In *Advances in Neural Information Processing Systems*, volume 36, pp. 52132–52152, 2023.
- Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. GANs trained by a two time-scale update rule converge to a local nash equilibrium. In *Advances in Neural Information Processing Systems*, volume 30, 2017.
- Alex Krizhevsky and Geoffrey Hinton. Learning multiple layers of features from tiny images. Technical report, 2009.
- Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C. Lawrence Zitnick. Microsoft COCO: Common objects in context. In *European Conference on Computer Vision*, pp. 740–755, 2014.
- Yaron Lipman, Ricky T. Q. Chen, Heli Ben-Hamu, Maximilian Nickel, and Matthew Le. Flow matching for generative modeling. In *International Conference on Learning Representations*, 2023.
- Xingchao Liu, Chengyue Gong, and Qiang Liu. Flow straight and fast: Learning to generate and transfer data with rectified flow. In *International Conference on Learning Representations*, 2023.
- Cheng Lu, Yuhao Zhou, Fan Bao, Jianfei Chen, Chongxuan Li, and Jun Zhu. DPM-Solver++: Fast solver for guided sampling of diffusion probabilistic models. *Machine Intelligence Research*, 22(4):730–751, 2025.
- Nanye Ma, Mark Goldstein, Michael S. Albergo, Nicholas M. Boffi, Eric Vanden-Eijnden, and Saining Xie. SiT: Exploring flow and diffusion-based generative models with scalable interpolant transformers. In *European Conference on Computer Vision*, pp. 23–40, 2024.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning*, pp. 8748–8763, 2021.
- Tim Salimans, Ian Goodfellow, Wojciech Zaremba, Vicki Cheung, Alec Radford, and Xi Chen. Improved techniques for training GANs. In *Advances in Neural Information Processing Systems*, volume 29, 2016.
- Yang Song, Jascha Sohl-Dickstein, Diederik P. Kingma, Abhishek Kumar, Stefano Ermon, and Ben Poole. Score-based generative modeling through stochastic differential equations. In *International Conference on Learning Representations*, 2021.
- Guangyi Wang, Wei Peng, Lijiang Li, Wenyu Chen, Yuren Cai, and Song-Zhi Su. Diffusion sampling correction via approximately 10 parameters. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pp. 64023–64043, 2025a.
- Shuai Wang, Zexian Li, Qipeng Zhang, Tianhui Song, Xubin Li, Tiezheng Ge, Bo Zheng, and Limin Wang. Differentiable solver search for fast diffusion sampling. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pp. 63549–63568, 2025b.

-
- Xiaoshi Wu, Yiming Hao, Keqiang Sun, Yixiong Chen, Feng Zhu, Rui Zhao, and Hongsheng Li. Human preference score v2: A solid benchmark for evaluating human preferences of text-to-image synthesis. *arXiv preprint arXiv:2306.09341*, 2023.
- Jiazheng Xu, Xiao Liu, Yuchen Wu, Yuxuan Tong, Qinkai Li, Ming Ding, Jie Tang, and Yuxiao Dong. ImageReward: Learning and evaluating human preferences for text-to-image generation. In *Advances in Neural Information Processing Systems*, volume 36, pp. 15903–15935, 2023.
- Guoqiang Zhang, Kenta Niwa, and W. Bastiaan Kleijn. On accelerating diffusion-based sampling processes via improved integration approximation. In *International Conference on Learning Representations*, 2024.
- Wenliang Zhao, Lujia Bai, Yongming Rao, Jie Zhou, and Jiwen Lu. UniPC: A unified predictor-corrector framework for fast sampling of diffusion models. In *Advances in Neural Information Processing Systems*, volume 36, pp. 49842–49869, 2023.
- Wenliang Zhao, Haolin Wang, Jie Zhou, and Jiwen Lu. DC-Solver: Improving predictor-corrector diffusion sampler via dynamic compensation. In *European Conference on Computer Vision*, pp. 450–466. Springer, 2024.

APPENDICES

A IMPLEMENTATION DETAILS

A.1 FEATURE CONSTRUCTION AND TARGETED BLOCKS

Section 3 leaves the coefficient-head features $\phi_{s,k}$ abstract; this section specifies exactly what is available to each stage and how those signals are compressed. At sampling step k , the predictor’s state features use the corrected state x_k . Its velocity statistics and hidden activations use the backbone evaluation already available at t_k : the evaluation at x_0 for $k = 0$, and the evaluation computed at the preceding intermediate state $\tilde{x}_k$ for $k > 0$. The corrector uses $\tilde{x}_{k+1}$ together with the newly computed velocity and hidden activations at that state.

Handcrafted trajectory features. The compact trajectory-summary block was selected using held-out permutation importance. Candidate features whose permutation caused negligible degradation for both coefficient heads, including the state spread, state–velocity cosine, and global velocity norm, were removed. The retained features are the per-channel spatial standard deviation of the velocity, the norm of the most recent displacement, and the displacement–velocity cosine. These provide complementary information about update scale and changes in the local trajectory direction.

For the handcrafted trajectory summaries, the displacement is defined relative to the state associated with the available backbone velocity. For the predictor,

$$d_{p,k} = \begin{cases} 0, & k = 0, \\ \tilde{x}_k - x_{k-1}, & k > 0, \end{cases}$$

while for the corrector,

$$d_{c,k} = \tilde{x}_{k+1} - x_k.$$

For stage $s \in \{p, c\}$, the trajectory-summary block is therefore

$$\left[\text{std}_{h,w}(v), \|d_{s,k}\|_2, \frac{\langle d_{s,k}, v \rangle}{\|d_{s,k}\|_2 \|v\|_2} \right],$$

where $\text{std}_{h,w}(v)$ denotes the vector of per-channel standard deviations over the spatial dimensions h and w . The norm and cosine are set to zero when the required displacement is unavailable or has zero norm. For the predictor, $v = v_k$ is the available backbone velocity; for the corrector, $v = v_{k+1}$ is evaluated at $\tilde{x}_{k+1}$.

Residual-basis and history features. The residual-basis projections use displacement definitions distinct from the handcrafted trajectory summaries above:

$$d_{p,k}^{\text{basis}} = x_k - x_{k-1}, \quad d_{c,k}^{\text{basis}} = \tilde{x}_{k+1} - \tilde{x}_k,$$

with unavailable displacements set to zero. The feature vector contains the current stage state and the corresponding basis-projection displacement projected onto the low-rank residual basis fitted for that step and stage. The stage state is x_k for the predictor and $\tilde{x}_{k+1}$ for the corrector. The raw output of the preceding head at the same correction stage is concatenated to these features:

$$u_{p,k} = \begin{cases} 0, & k = 0, \\ g_{p,k-1}(\phi_{p,k-1}), & k > 0, \end{cases} \quad u_{c,k} = \begin{cases} 0, & k = 0, \\ g_{c,k-1}(\phi_{c,k-1}), & k > 0. \end{cases}$$

Each preceding output contains both the explicit-direction coefficients and the residual-basis coefficients. No timestep scalar is appended.

Table 8: Model-specific hidden-activation features. Input dimensions are shown as predictor/corrector (P/C).

Model	Targeted blocks	Compression	Input dim.
Rectified Flow CIFAR-10	Zero-indexed NCSN++ residual blocks 4, 19, 26, and 39	Spatial mean and standard deviation for each activation channel; no learned activation projection	1639/1641
SiT-XL/2	Conditional halves of <code>block.0</code> , <code>block.26</code> , and <code>block.27</code>	Fixed block-specific PCA projection to 256 dimensions, followed by token-wise mean and standard deviation	1928/1930
SD3.5 Medium	Conditional image streams of <code>block.7</code> , <code>block.14</code> , and <code>block.20</code>	Fixed block-specific PCA projection to 256 dimensions, followed by token-wise mean and standard deviation	3092/3094

Targeted backbone blocks. For SiT-XL/2 and SD3.5 Medium, the targeted blocks were selected using layer-informativeness probes. For each candidate block, a ridge readout was fitted from pooled activation statistics to the leading PCA coefficients of the reference-base residual, and predictive performance was measured using held-out R^2 across sampling steps.

For Rectified Flow, four NCSN++ residual blocks were chosen to span the encoder, bottleneck region, and decoder without collecting activations from the complete U-Net. The exact blocks used for each model are reported in Table 8.

Activation compression. For SiT-XL/2 and SD3.5 Medium, each targeted activation is projected to 256 dimensions before its token-wise mean and standard deviation are calculated. The common projection dimension keeps the head inputs compact and consistent across blocks with different original widths. Each block-specific projection is fitted from all sampling times of a 4096-sample Euler rollout. Token-mean activations are centred, and their leading 256 right singular vectors define the fixed projection used during coefficient-head fitting and inference.

Feature normalisation. Each feature dimension is standardised separately for every sampling step and correction stage using the mean and standard deviation over all 24,576 collected fitting trajectories. These statistics are calculated before the per-head training-validation split. A feature dimension whose standard deviation is below 10^{-6} is assigned a normalisation scale of one. The stored statistics are reused for validation and inference, where all denominators are additionally clamped below by 10^{-6} .

A.2 PREDICTION-HEAD TRAINING

A separate predictor head is fitted for every sampling step, and a separate corrector head is fitted for every non-final sampling step. Heads are fitted in sampling order. At each non-final step, the predictor is fitted first and applied to construct the intermediate states used to fit the corrector. The resulting corrected states form the starting states for the following sampling step, so offline fitting follows the same chained state updates used during inference.

The training target is the concatenation of the oracle trajectory-direction coefficients and low-rank residual-basis coefficients. The implementation uses an unweighted mean-squared error over all scalar outputs:

$$\mathcal{L}_{s,k} = \frac{1}{m_{s,k}} \|g_{s,k}(\phi_{s,k}) - y_{s,k}\|_2^2,$$

where $y_{s,k}$ is the concatenated oracle coefficient target and $m_{s,k}$ is its dimension. The coefficient targets are not standardised; only the input features are standardised.

Table 9: Prediction-head architecture and training settings.

Setting	Configuration
Architecture	Independent one-hidden-layer ReLU MLP for each predictor step and each non-final corrector step; hidden width 12288 for Rectified Flow and SiT-XL/2 and 24576 for SD3.5 Medium
Optimisation	AdamW; initial learning rate 10^{-3} , weight decay 10^{-3} , dropout 0.1, batch size 2048, and 20-epoch linear warm-up
Learning-rate schedule	ReduceLROnPlateau with factor 0.5 and patience 50
Stopping and selection	Up to 20,000 epochs; early stopping with patience 400 on the 4,915-trajectory validation set; best validation checkpoint retained
Numerical precision	Backbone evaluations in bfloat16 autocast; residual decomposition, coefficient targets, feature normalisation, and MLP fitting in float32

The output layer is initialised with zero weights and a bias equal to the mean training coefficient vector. Numerical handling of direction normalisation and corrector Gram-Schmidt orthogonalisation is described in Appendix A.3. The per-sample coefficient least-squares systems use isotropic ridge regularisation of 10^{-8} .

A.3 RESIDUAL DECOMPOSITION ACROSS CHANNELS

A separate residual decomposition is fitted for each sampling step and correction stage using all collected fitting trajectories. After subtracting the stage mean, the explicit-direction coefficients are fitted by the ridge-regularised least-squares system described in Section 3.4, and PCA is applied to

the remaining component $\eta_{s,k}^{(i)}$. Near-zero directions are treated as zero during normalisation and Gram–Schmidt orthogonalisation for numerical stability.

Each explicit trajectory direction spans the full sampling state and therefore uses a single coefficient per sample. Channel-wise decomposition is applied only to the PCA remainder: Rectified Flow uses a single joint pixel-space basis, whereas SiT-XL/2 and SD3.5 Medium use separate PCA bases for each latent channel. Thus, the reported rank K is the joint PCA rank for Rectified Flow and the rank *per latent channel* for SiT-XL/2 and SD3.5 Medium. The explicit-direction coefficients and PCA coefficients are then concatenated to form the training target for the coefficient head.

B TIMESTEP-SCHEDULE OPTIMISATION DETAILS

This section expands the optional schedule-selection procedure from Section 3.5. It is applied to the Rectified Flow and SiT configurations reported with optimised schedules; SD3.5 Medium retains its built-in shifted schedule.

B.1 SCHEDULE SELECTION AND REPRESENTATIVE 8-STEP SCHEDULES

Schedule optimisation is performed separately for each model and sampling-step budget. The selected grid is therefore specific to the deployed configuration. SD3.5 Medium retains its built-in shifted schedule, so this section reports the selected 8-step grids for Rectified Flow CIFAR-10 and SiT-XL/2.

Figure 5 summarises the schedule-selection procedure used to obtain these grids.

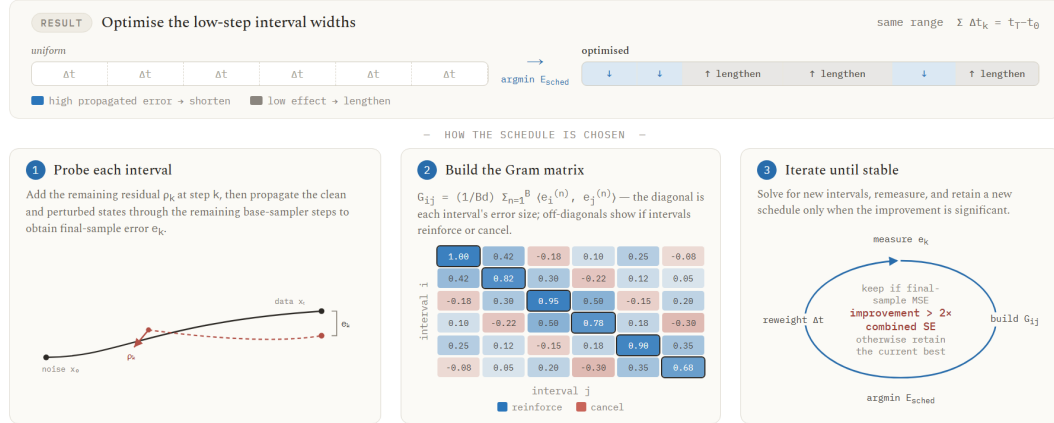


Figure 5: Overview of the optional timestep-schedule optimisation procedure.

Both grids span

$$t_0 = 0.001 \quad \text{to} \quad t_8 = 0.999.$$

A uniform 8-step grid over this range would use

$$\Delta t_k^{\text{uniform}} = \frac{0.998}{8} = 0.124750.$$

Table 10 reports both the selected sampling times t_k and the corresponding step sizes $\Delta t_k = t_{k+1} - t_k$. Values are rounded to six decimal places.

Table 10: Selected sampling times and step sizes for the representative 8-step schedules.

k	Rectified Flow CIFAR-10		SiT-XL/2	
	t_k	Δt_k	t_k	Δt_k
0	0.001000	0.092182	0.001000	0.103061
1	0.093182	0.104293	0.104061	0.104207
2	0.197475	0.115650	0.208269	0.092542
3	0.313125	0.126756	0.300811	0.095130
4	0.439881	0.158832	0.395941	0.105806
5	0.598713	0.174227	0.501747	0.127641
6	0.772940	0.176058	0.629388	0.218872
7	0.948998	0.050000	0.848260	0.150740
8	0.999000	—	0.999000	—

Both schedules place timesteps more densely in the earlier part of the trajectory than in the later part, suggesting that errors introduced early in sampling have the greatest propagated effect on the final sample. For Rectified Flow CIFAR-10, the step sizes generally increase from the beginning to the penultimate update, allowing the later middle portion of the trajectory to be traversed more coarsely. The final step is then reduced sharply to 0.050000, suggesting that additional resolution is beneficial when the corrector is omitted.

The SiT-XL/2 schedule shows a related but less regular pattern. Its first six updates use step sizes close to or below the uniform width, placing six intermediate timesteps before $t = 0.63$. The remaining part of the trajectory is covered by two substantially larger updates. Thus, both models concentrate sampling resolution earlier in the trajectory, while the short final step appears only for Rectified Flow, indicating that the detailed allocation remains model-dependent.

B.2 SEARCH IMPLEMENTATION

The schedule search follows the procedure described in Section 3.5. Before the final coefficient heads are trained, a lightweight probe computes oracle decomposition coefficients directly from the known residual targets. These coefficients are used only to measure the residual left by the compact representation; the probe trajectory itself is advanced with the base sampler.

For probe trajectory n , let $\rho_k^{(n)}$ denote the unrepresented residual left at step k , using both correction stages except on the final step, where only the predictor is deployed. Its propagated effect is measured by adding it to the clean base endpoint and rolling both states through the remaining base-sampler steps:

$$e_k^{(n)} = \mathcal{B}_{k+1:T} \left(x_{k+1}^{\text{base}} + \rho_k^{(n)} \right) - \mathcal{B}_{k+1:T} \left(x_{k+1}^{\text{base}} \right),$$

where $\mathcal{B}_{k+1:T}$ denotes the remaining base-sampler rollout. The Gram matrix in Eq. (3) is measured from these propagated perturbations,

$$G_{ij} = \frac{1}{Bd} \sum_{n=1}^B \left\langle e_i^{(n)}, e_j^{(n)} \right\rangle,$$

with B probe trajectories and d scalar values in the sampling state. This makes the diagonal terms individual propagated-error contributions and the off-diagonal terms their interactions.

For a T -step schedule, the step sizes are parameterised by unconstrained variables $z_0, \dots, z_{T-1}$. Given a minimum step size $\Delta t_{\min}$,

$$\Delta t_k = \Delta t_{\min} + (t_T - t_0 - T\Delta t_{\min}) \frac{\exp(z_k)}{\sum_{j=0}^{T-1} \exp(z_j)}.$$

This guarantees $\Delta t_k \geq \Delta t_{\min}$ while preserving the fixed total sampling-time range. The variables z_k are optimised using L-BFGS-B.

Each proposed schedule is then evaluated directly on the probe trajectories. For probe trajectory n , the mean-squared combined propagated error is

$$m^{(n)} = \frac{1}{d} \left\| \sum_{k=0}^{T-1} e_k^{(n)} \right\|_2^2,$$

where d is the number of scalar elements in the sampling state. The measured propagated-error score is the mean over the B probe trajectories,

$$\hat{E} = \frac{1}{B} \sum_{n=1}^B m^{(n)}.$$

Lower values indicate a smaller propagated effect of the residual errors on the final state.

The standard error of the measured propagated-error score is

$$\text{SE} = \sqrt{\frac{1}{B(B-1)} \sum_{n=1}^B \left(m^{(n)} - \hat{E} \right)^2}.$$

A candidate replaces the current best schedule when

$$\hat{E}_{\text{best}} - \hat{E}_{\text{candidate}} > 2\sqrt{\text{SE}_{\text{best}}^2 + \text{SE}_{\text{candidate}}^2}.$$

All schedule comparisons use matched probe trajectories with the same initial-noise and conditioning seeds.

Table 11: Timestep-schedule search settings. All settings are shared across the optimised configurations except for the number of probe trajectories.

Setting	Value
Probe trajectories	4096 for Rectified Flow CIFAR-10; 2048 for SiT-XL/2
Sampling-time range	$[10^{-3}, 1 - 10^{-3}]$
Minimum step size	0.001
Error-scaling exponent	$p = 2$
Optimiser	L-BFGS-B
Maximum optimisation passes	10
Convergence criterion	$\max_k \left \log \left(\frac{\Delta t_k^{\text{new}}}{\Delta t_k^{\text{old}}} \right) \right < 0.02$
Acceptance criterion	Mean propagated-error improvement greater than twice the combined standard error

C ADDITIONAL EXPERIMENTAL RESULTS AND COST DETAILS

This section collects supporting material that is useful for reproducibility or design inspection without duplicating the main result tables: design-space sweeps, an ImageNet-256 qualitative comparison, the prompts used for the SD3.5 qualitative comparison, and one-time preparation and coefficient-head costs.

C.1 DESIGN-SPACE ABLATIONS

We vary the PCA rank K , the accuracy of the local reference update, and the deployed sampling budget. The PCA-rank and reference-accuracy sweeps use the 8-step TraceSampler configuration. Figure 6 summarises all three sweeps, while Table 12 reports the PCA-rank and reference-accuracy settings numerically. The deployed configuration is selected primarily by FID, with IS and trajectory MSE used as complementary diagnostics.

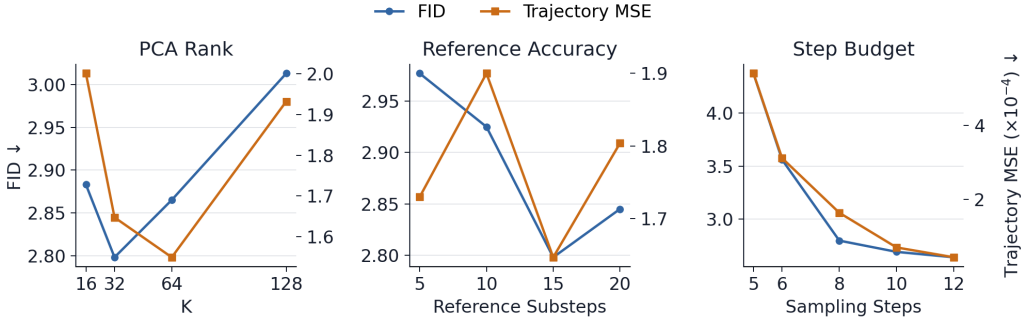


Figure 6: Design-space ablations.

Table 12: Key Rectified Flow CIFAR-10 design-space ablation results.

Ablation	Setting	FID ↓	IS ↑	Trajectory MSE ↓
Reference accuracy	5 Heun substeps	2.977	8.526	1.730×10^{-4}
	10 Heun substeps	2.925	8.508	1.900×10^{-4}
	15 Heun substeps	2.798	8.552	1.647×10^{-4}
	20 Heun substeps	2.845	8.581	1.804×10^{-4}
PCA rank	$K = 16$	2.883	8.530	2.001×10^{-4}
	$K = 32$	2.798	8.552	1.647×10^{-4}
	$K = 64$	2.865	8.493	1.549×10^{-4}
	$K = 128$	3.013	8.498	1.932×10^{-4}

Moderate settings are sufficient for both residual capacity and reference accuracy. Increasing the PCA rank from $K = 16$ to $K = 32$ improves FID, whereas larger ranks provide no further sample-quality gain. Although $K = 64$ gives the lowest trajectory MSE, its FID and IS are slightly weaker than those obtained with $K = 32$, showing that closer trajectory matching does not translate monotonically into improved final-sample metrics.

A similar saturation is observed for reference accuracy. Fifteen Heun substeps give the strongest FID result, while increasing the local reference to 20 substeps provides no further improvement. Performance therefore saturates once the reference is sufficiently accurate to expose the coarse-step error.

C.2 IMAGENET-256 QUALITATIVE COMPARISON

Figure 7 compares Euler and TraceSampler at the same 10-step budget on SiT-XL/2 ImageNet-256.

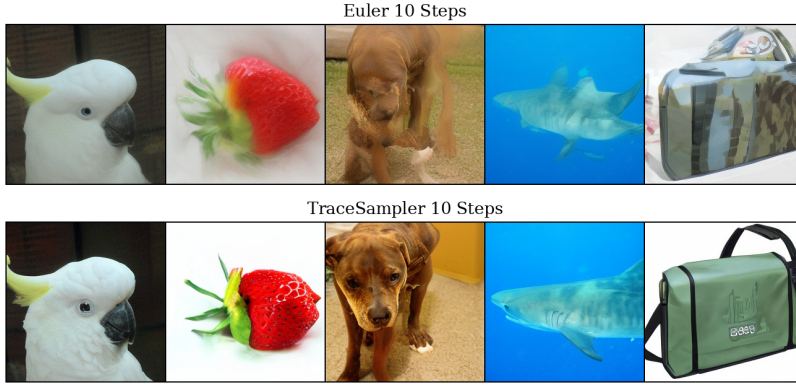


Figure 7: Qualitative comparison between Euler and TraceSampler on SiT-XL/2 ImageNet-256.

C.3 SD3.5 QUALITATIVE PROMPTS

Table 13: Prompts used in the SD3.5 Medium qualitative comparison.

Label	Prompt
P1	A fluffy white cat sitting on a mossy mountain ledge under a huge full moon, soft starlight, crisp detailed fur, cinematic night landscape.
P2	A close-up portrait of a cyberpunk geisha on a rainy Tokyo rooftop, detailed expressive face, neon skyline, holographic lanterns, wet silk kimono, cinematic lighting.
P3	A masked knight in ornate silver armour standing inside a ruined cathedral, sword point resting on the stone floor in front of him, both hands on the hilt, glowing stained-glass light, misty air, cinematic atmosphere.
P4	A close-up portrait of an old lighthouse keeper in a storm, detailed weathered face, thick wool coat, lantern glow, rain on glass, cinematic lighting.

C.4 PREPARATION MEASUREMENTS

The CIFAR-10 and SiT-XL/2 experiments use an NVIDIA A100 80 GB GPU; SD3.5 Medium uses an NVIDIA RTX PRO 6000 Blackwell 95 GB GPU. The table below reports the one-time offline preparation measurements; inference measurements are reported directly in the main paper.

Table 14: Measured offline preparation time for 8-step TraceSampler configurations.

Model	Schedule optimisation	Artefact fitting	Total
RF CIFAR-10	0:26:57	2:32:42	2:59:39
SiT-XL/2	1:07:04	9:02:39	10:09:42
SD3.5 Medium	—	8:35:00	8:35:00

C.5 COEFFICIENT-HEAD SIZE

The coefficient heads are lightweight in compute relative to the frozen backbones but introduce additional persistent inference memory. Table 15 reports the parameter count of one predictor and one corrector head for each model; all coefficient-head weights are stored in 16-bit precision at inference.

Table 15: Parameters per TraceSampler coefficient head.

Model	Predictor (M)	Corrector (M)
Rectified Flow	20.570	20.619
SiT-XL/2	25.30	25.35
SD3.5 Medium	88.646	88.744

These counts describe separate step-specific heads rather than parameters added to the frozen backbone. At each correction stage, only the corresponding shallow MLP is evaluated on compact features. The additional parameters therefore primarily contribute persistent weight storage and do not have the same computational or activation-memory impact as an equivalent increase in backbone size. The measured end-to-end inference-memory overhead is reported in Table 7.

D BASELINE AND EVALUATION CONFIGURATIONS

This section records the sampler settings used for the matched-budget baselines and the scoring protocols used throughout Section 4.

D.1 BACKBONES AND CONDITIONING

The Rectified Flow experiments use the official CIFAR-10 1-Rectified-Flow *checkpoint_8.pth*; ImageNet uses *SiT-XL-2-256x256.pt*; and SD3.5 uses *stabilityai/stable-diffusion-3.5-medium*. SiT uses CFG scale 1.5; SD3.5 uses CFG scale 4.5 and no Skip-Layer Guidance. Rectified Flow and SiT-XL/2 use 120-step Heun references; at 10 deployed steps this corresponds to 12 reference substeps per coarse interval, while the 8-step RF ablation uses 15. SD3.5 uses 8 Euler reference substeps at 8 steps and 6 at 10 steps, yielding 64- and 60-interval references. For SD3.5 offline fitting, conditioning prompts are drawn from a 30,000-caption bank built from COCO 2014 validation annotations using one caption per image for the first 30,000 image IDs (Lin et al., 2014). These captions are used only for conditioning; residual targets are obtained from frozen-backbone rollouts, with no target images or image-derived supervision used during TraceSampler fitting. GenEval and HPSv2.1 use their respective official prompt sets.

D.2 SAMPLER BASELINES

Table 16: Configurations used for the sampler baselines.

Baseline	Configuration
IIA-Euler	Basic $r = 1$ IIA adapted to the flow-matching update. Two global coefficients combine the current and previous Euler increments. Calibration uses 512 trajectories, three fine-Euler substeps per coarse step, and ridge regularisation of 10^{-10} .
UniPC	Multistep predictor with order 3, the bh2 variant, log-SNR spacing, <code>data_prediction</code> , lower-order final steps, and one model evaluation per deployed step.

D.3 EVALUATION PROTOCOLS

Table 17: Evaluation sets and scoring configurations.

Evaluation	Configuration
CIFAR-10	50000 generated samples. FID uses 2048-dimensional Inception-V3 features against CIFAR-10 training-set statistics; IS uses ten splits.
ImageNet-256	50000 class-conditional samples. FID and IS use the <code>VIRTUAL_imagenet256_labeled.npz</code> reference statistics and ten IS splits.
COCO captions	One image for each of 30000 captions. The evaluation reports ImageReward-v1.0, Inception FID and IS, raw CLIP-L/14 image-text cosine similarity, reported as CLIP similarity, and trajectory MSE against the matched higher-step reference.
GenEval	Standard 553-prompt metadata with four images per prompt, CFG 4.5, and the official MMDetection-2 scoring pipeline.
HPSv2.1	Official anime, concept-art, paintings, and photo prompt subsets, with one image per retained prompt and the mean of the four subset scores. Prompts exceeding 77 tokens for any SD3 text encoder are excluded.