

Counterfactual Rollouts for Offline Contrastive Goal-Conditioned Reinforcement Learning

Tingrui Huang¹ Ai Bo² Junzhe Zhang²

¹Eindhoven University of Technology, Eindhoven, The Netherlands

²Department of Electrical Engineering and Computer Science,
Syracuse University, Syracuse, NY, USA

Abstract

Contrastive reinforcement learning (CRL) learns goal-conditioned values by associating state-action pairs with the states subsequently reached, assuming that no unobserved variable jointly affects the recorded action and its outcome. When offline demonstrations come from a demonstrator with information hidden from the learner, this assumption fails and the critic absorbs spurious action-outcome associations. We formalize this setting with confounded Markov decision processes and introduce counterfactual transitions that separate what the data identify from what they do not; minimizing over all compatible transitions yields a worst-case occupancy that lower-bounds the true one. Causal Contrastive Reinforcement Learning (CauCRL) learns a pessimistic counterfactual transition from positive and negative offline demonstrations and trains the critic on counterfactual rollouts, substantially improving success rates over standard CRL on confounded goal-reaching tasks.

is particularly appealing, since a single learned policy can be reused across many tasks (Duan et al., 2016).

A variety of algorithms have been proposed for goal-conditioned RL, including reward shaping (Ng et al., 1999), hindsight relabeling (Andrychowicz et al., 2017), goal-conditioned supervised learning (Ghosh et al., 2021), and universal value function approximation (Schaul et al., 2015), to name a few; see Liu et al. (2022) for a survey. Among them, contrastive RL is a simple and effective framework that trains a critic to distinguish future states of the same trajectory from states of unrelated trajectories, and uses this critic as a goal-conditioned value function (Eysenbach et al., 2021, 2022). While successful in practice, these methods rely on the crucial assumption that the actions observed in the offline data, along with the subsequent states they produce, are not simultaneously influenced by unobserved confounders. If this assumption is violated, the probability of reaching the goal following a candidate policy becomes non-identifiable, i.e., it cannot be uniquely determined from the available data and model assumptions. The following example illustrates such challenges.

Example 1 (Challenges of Unobserved Confounding). Consider the windy-corridor task described in Fig. 2 (left), where the agent must reach the goal without touching the lava (Bo et al., 2026). A short route passes through a corridor next to the lava, while a longer route is safe. At each time step t , a wind $U^{(t)}$ blows through the corridor; when it is unfavorable, moving forward along the short route pushes the agent into the lava. The learner cannot observe the wind. Instead, it observes demonstrations from an expert who can: the expert moves forward along the short route when the wind is favorable and pauses otherwise, while a small fraction of demonstrations follow the longer route. The wind $U^{(t)}$ thus becomes an unobserved confounder affecting both the observed action and the next state. We apply standard contrastive RL (Eysenbach et al., 2022) to these demonstrations. As shown in Fig. 2 (right), it fails to achieve a high success rate:

1 INTRODUCTION

Learning to make good decisions from sparse feedback is a long-standing challenge in reinforcement learning (RL) (Sutton and Barto, 2018). In many real-world applications, the agent receives little or no reward signal: it may only observe expert demonstrations, or be told whether a task has been accomplished. Among various paradigms of learning from sparse feedback, imitation learning (Pomerleau, 1989; Ross et al., 2011; Ho and Ermon, 2016), which learns from demonstrations without any reward signal, and goal-conditioned RL (Kaelbling, 1993; Schaul et al., 2015), which learns to reach goals specified at test time, have emerged as crucial and popular directions. Goal-conditioned RL

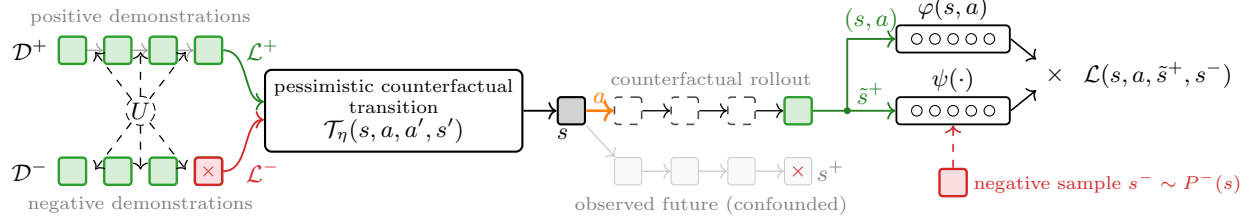


Figure 1: Overview of CauCRL. A pessimistic counterfactual transition $\mathcal{T}_\eta$ is learned from positive demonstrations $\mathcal{D}^+$ and negative demonstrations $\mathcal{D}^-$, confounded by U . Its rollout from (s, a) yields a counterfactual future $\tilde{s}^+$ that replaces the observed future s^+ as the positive sample, contrasted against a negative sample $s^- \sim P^-(s)$.

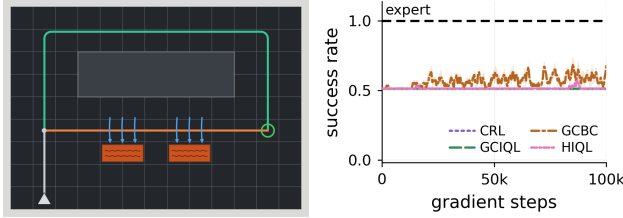


Figure 2: Windy corridor (left) and success rate over training (right): under confounded demonstrations, all baselines stay below the expert success rate of 1.0.

since forward moves along the short route are almost always followed by reaching the goal in the demonstrations, the critic overvalues them, even though the learner cannot determine when they are safe. $\square$

Recently, a growing body of literature has explored the nuanced interactions between causal inference (Pearl, 2009; Bareinboim et al., 2022) and RL to address data biases in decision-making under uncertainty, known as *causal reinforcement learning*. Several algorithms have been proposed for various policy learning settings, including off-policy evaluation and learning (Kallus and Zhou, 2018; Namkoong et al., 2020; Kallus and Zhou, 2020; Bennett et al., 2021; Zhang and Bareinboim, 2025), offline-to-online learning (Zhang and Bareinboim, 2019), robust offline and deep RL (Joshi et al., 2024; Li et al., 2025, 2026), meta-RL (Bo et al., 2026), and imitation learning (de Haan et al., 2019; Zhang et al., 2020; Ruan et al., 2024; Balazadeh et al., 2024), to name a few. Despite these progresses, a systematic approach for goal-conditioned RL under unobserved confounding is still missing. It is unclear how one can learn the goal-reaching occupancy underlying contrastive RL when the demonstrations that provide its positive samples are confounded.

This paper aims to address this gap by proposing Causal Contrastive Reinforcement Learning (CauCRL; Fig. 1), which trains contrastive critics on pessimistic counterfactual rollouts that remain consistent with the confounded demonstrations. More specifi-

cally, our contributions are summarized as follows. (1) We formulate goal-conditioned RL from confounded demonstrations and introduce counterfactual transitions together with a worst-case occupancy measure that lower-bounds the true probability of reaching the goal (Sec. 2.1); (2) We develop a computational procedure for CauCRL that learns a pessimistic counterfactual transition from positive and negative demonstrations and uses its counterfactual rollouts as positive samples for contrastive critic learning (Sec. 3); (3) Finally, we validate CauCRL through simulations on goal-reaching tasks with confounded demonstrations, ranging from discrete navigation to high-dimensional continuous control (Sec. 4). Due to space constraints, all proofs are provided in Appendix A.

Notations. We use capital letters to denote random variables (X), lowercase letters for their values (x), and calligraphic letters for their domains ($\mathcal{X}$). For a set $\mathcal{X}$, $|\mathcal{X}|$ denotes its cardinality. We write $P(X)$ for a probability distribution over X and $P(Y | X)$ for the set of conditional distributions $P(Y | X = x)$ over all realizations x . We abbreviate $P(X = x)$ as $P(x)$ and $P(Y = y | X = x)$ as $P(y | x)$. Finally, $\mathbb{1}\{Z = z\}$ is an indicator that equals 1 if $Z = z$ and 0 otherwise.

2 GOAL-CONDITIONED RL WITH UNOBSERVED CONFOUNDING

We consider goal-conditioned RL (Eysenbach et al., 2022) from offline trajectories of a demonstrator that may use information unavailable to the learner, modeled by a confounded Markov decision process (Zhang and Bareinboim, 2016; Bo et al., 2026).

Definition 1. A confounded goal-conditioned Markov decision process is a tuple $\mathcal{M} = \langle \mathcal{S}, \mathcal{A}, \mathcal{Y}, \mathcal{U}, \mathcal{F}, P \rangle$, where (1) $\mathcal{S}$, $\mathcal{A}$, and $\mathcal{Y} = \{0, 1\}$ are, respectively, the spaces of observed states, actions, and rewards; (2) $\mathcal{U}$ is the space of unobserved latent variables; (3) $\mathcal{F}$ is a set of structural mechanisms $f_S : \mathcal{S} \times \mathcal{A} \times \mathcal{U} \rightarrow \mathcal{S}$ and $f_A : \mathcal{S} \times \mathcal{U} \rightarrow \mathcal{A}$, where f_S determines the state transition and f_A determines the behavioral policy of the demonstrator; and (4) P is an exogenous distribu-

tion over $\mathcal{U}$. Goals are states, $s^* \in \mathcal{S}$, and the reward indicates whether the goal is reached, $Y = \mathbb{1}\{S = s^*\}$.

The process starts from an initial state $S^{(0)} \sim P(S^{(0)})$. At each time step t , a latent variable $U^{(t)}$ is drawn independently from $P(U)$, an action $A^{(t)}$ is taken, and the environment moves to $S^{(t+1)} \leftarrow f_S(S^{(t)}, A^{(t)}, U^{(t)})$ with reward $Y^{(t)} = \mathbb{1}\{S^{(t)} = s^*\}$. Since the structural functions and exogenous distributions are invariant with regard to time steps, we write (S, A, S') for $(S^{(t)}, A^{(t)}, S^{(t+1)})$ when the time index is clear.

The learner acts through a policy $\pi(a | s)$. Following a policy is an intervention $do(\pi)$ that replaces the behavior mechanism f_A by π while leaving the remaining mechanisms unchanged (Pearl, 2009); similarly, $do(A^{(t)} = a)$ sets a single action to a . A subscript on a random variable denotes the corresponding counterfactual: S'_a is the next state had the action been set to a . The resulting interventional transition is $P_a(s' | s) = P(S'_a = s' | S = s) = \int_{\mathcal{U}} \mathbb{1}\{f_S(s, a, u) = s'\} dP(u)$, and a policy π induces the interventional distribution over trajectories $(\bar{s}, \bar{a}) = (s^{(0)}, a^{(0)}, s^{(1)}, a^{(1)}, \dots)$,

$$P_\pi(\bar{s}, \bar{a}) = P(s^{(0)}) \prod_{t \geq 0} \pi(a^{(t)} | s^{(t)}) P_{a^{(t)}}(s^{(t+1)} | s^{(t)}).$$

For a state-action pair (s, a) and goal s^* , we define the discounted goal-reaching occupancy as

$$d^\pi(s^* | s, a) = (1 - \gamma) \sum_{k=0}^{\infty} \gamma^k \times P_{a, \pi}(S^{(t+k)} = s^* | S^{(t)} = s), \quad (1)$$

where $P_{a, \pi}$ sets $A^{(t)}$ to a and lets subsequent actions follow π . Since $Y^{(t+k)} = \mathbb{1}\{S^{(t+k)} = s^*\}$, this occupancy coincides with the Q-function of π , $d^\pi(s^* | s, a) = Q^\pi(s, a) := (1 - \gamma) \mathbb{E}_{a, \pi}[\sum_{k=0}^{\infty} \gamma^k Y^{(t+k)} | S^{(t)} = s]$ (Eysenbach et al., 2022). The learner seeks a policy π that maximizes this goal-reaching probability.

Contrastive RL (Eysenbach et al., 2022) learns this occupancy with a critic $f_\omega(s, a, s^*) = \varphi_\omega(s, a)^\top \psi_\omega(s^*)$ by contrasting positive and negative samples. For a state-action pair (s, a) , a positive sample s^+ is a state from the discounted future of a trajectory under π , while a negative sample $s^- \sim P^-(s)$ is drawn from a marginal state distribution that differs from the state distribution of the current policy estimate π . The critic is trained with the binary NCE objective

$$\max_{\omega} \mathbb{E}_{\substack{(s, a, s^+) \sim P_\pi \\ s^- \sim P^-}} \left[\log \sigma(f_\omega(s, a, s^+)) + \log(1 - \sigma(f_\omega(s, a, s^-))) \right]. \quad (2)$$

At the optimum, the critic recovers the unnormalized occupancy of the positive samples (Eysenbach et al.,

2022): $\exp f^*(s, a, s^*) = d^\pi(s^* | s, a) / P^-(s^*)$, i.e., Q^π up to an action-independent factor, so the policy can be improved by favoring actions with high critic values.

In the offline setting, on the other hand, the learner cannot intervene and must instead learn from recorded trajectories of a demonstrator, who observes the latent variable and selects actions by the behavioral policy $A^{(t)} \leftarrow f_A(S^{(t)}, U^{(t)})$. Demonstrations therefore follow the observational distribution

$$P(\bar{s}, \bar{a}) = P(s^{(0)}) \prod_{t \geq 0} \int_{\mathcal{U}} \mathbb{1}\{f_A(s^{(t)}, u) = a^{(t)}\} \times \mathbb{1}\{f_S(s^{(t)}, a^{(t)}, u) = s^{(t+1)}\} dP(u),$$

in which the same latent realization u drives both the action and the transition. From these data, the learner can estimate the observational transition $P(s' | s, a) = P(S' = s' | S = s, A = a)$, but not the latent variable. The offline data consist of two parts. Positive demonstrations follow an observational distribution $P^+(\bar{s}, \bar{a})$ of this form, induced by the expert behavioral policy f_A , and contain trajectories reaching the goal. Negative demonstrations are generated by a non-expert behavioral policy, such as a randomized one, but record the eventual states it reaches, such as the lava in Example 1. We denote their state distribution by $P^-(s)$, which serves as the negative distribution in Eq. (2).¹

Offline CRL trains Eq. (2) on these data, taking the positive sample $(s, a, s^+) \sim P^+$ from the discounted future of the same demonstration instead of from P_π . This change of data is where the guarantee breaks: because U affects both the demonstrator’s action and the next state, generally $P(s' | s, a) \neq P_a(s' | s)$, so positive samples follow the observational counterpart $d(s^* | s, a)$ of Eq. (1), with $P_{a, \pi}$ replaced by $P(\cdot | S^{(t)} = s, A^{(t)} = a)$. The critic then recovers $d(s^* | s, a) / P^-(s^*)$ rather than Q^π , biasing both the critic and the policy improved from it. The following example illustrates this challenge.

Example 2 (Example 1 continued). In the windy corridor, $U^{(t)}$ is the wind, which the demonstrator observes but the learner does not. The expert policy f_A moves forward along the short route only when the wind is favorable, so recorded forward moves are almost always followed by reaching the goal, and a contrastive critic trained on these continuations values them highly. A learner that cannot observe the wind, however, would move forward regardless of it: conditioning on a forward action selects favorable wind, so the observational transition $P(s' | s, \text{forward})$ never

¹Unlike the original CRL (Eysenbach et al., 2022), negatives here are drawn from the non-expert demonstrations P^- , which we expect to sufficiently cover undesirable states for the task; Sec. 3 uses them as an inductive bias toward negative outcomes for counterfactual transitions.

leads into the lava, whereas the interventional transition $P_{\text{forward}}(s' | s)$ also covers unfavorable wind. $\square$

2.1 Counterfactual Modeling

Evaluating a policy requires the interventional transition $P_a(s' | s)$, whereas the offline data provide only the observational transition $P(s' | s, a)$. Under unobserved confounding, the former is generally not identifiable from the latter (Pearl, 2009; Bareinboim et al., 2022): different confounded MDPs can induce the same observational distribution but different interventional transitions. Consequently, the occupancy $d^\pi(s^* | s, a)$ in Eq. (1) is generally not identifiable either (Kallus and Zhou, 2020; Zhang and Bareinboim, 2025). Rather than treating $P_a(s' | s)$ as a single unknown, we use counterfactual reasoning to separate its identified and unidentified components. For an action $a \in \mathcal{A}$, the counterfactual (potential outcome) variable $S_{A^{(t)}=a}^{(t+1)} = f_S(S^{(t)}, a, U^{(t)})$ denotes the next state that would have been observed had the action at time t been set to a , with the state and the unobserved confounder held at their realized values (Pearl, 2009). Unlike interventional quantities, counterfactual variables can be evaluated jointly with the factual ones under the same realization of $U^{(t)}$, relating the outcome of action a to the action a' actually selected by the demonstrator. Conditioning on the factual state and action yields the counterfactual transition probability

$$\mathcal{T}(s, a, a', s') = P(S_{A^{(t)}=a}^{(t+1)} = s' | S^{(t)} = s, A^{(t)} = a'). \quad (3)$$

It answers the counterfactual query: “What would the next state have been had the action at state s been set to a , given that the demonstrator in fact selected a' ?” This construction follows the same counterfactual reasoning as the effect of treatment on the treated (ETT) (Shpitser and Pearl, 2009), which we extend here to state transitions in MDPs. Conditioning on $A^{(t)} = a'$ retains information about the confounder under which the demonstrator acted.

The counterfactual transition connects the observational and interventional transitions. When $a = a'$, the consistency axiom (Galles and Pearl, 1998; Pearl, 2009) gives $\mathcal{T}(s, a, a, s') = P(s' | s, a)$, which is identified from the offline data. Averaging over the demonstrator’s action instead recovers the interventional transition by the law of total probability,

$$\sum_{a' \in \mathcal{A}} \mathcal{T}(s, a, a', s') P(a' | s) = P_a(s' | s), \quad (4)$$

where the sum becomes an integral for continuous actions. A counterfactual transition is therefore compatible with the offline data as long as it coincides with the observational transition along the direction

$a = a'$; the remaining entries, with $a \neq a'$, describe the outcomes of actions the demonstrator did not take and are free parameters. Thus, the compatible set is $\mathbb{T} = \{\mathcal{T} : \mathcal{T}(s, a, a, \cdot) = P(\cdot | s, a) \text{ for all } s, a\}$, where each $\mathcal{T}(s, a, a', \cdot)$ is a distribution over $\mathcal{S}$.

Building on the counterfactual transition, we define the counterfactual occupancy measure

$$Q^\pi(s, a, a') = (1 - \gamma) \sum_{k=0}^{\infty} \gamma^k P(S_{A^{(t)}=a, \pi}^{(t+k)} = s^* | S^{(t)} = s, A^{(t)} = a'), \quad (5)$$

where $S_{A^{(t)}=a, \pi}^{(t+k)}$ is the state that would have been reached at time $t+k$ had $A^{(t)}$ been set to a and subsequent actions followed π , given that the demonstrator in fact selected a' . Averaging over the demonstrator’s action recovers the Q-function, $Q^\pi(s, a) = \sum_{a'} Q^\pi(s, a, a') P(a' | s)$, as in Eq. (4). Since the unobserved confounder is drawn independently at each step, the counterfactual occupancy satisfies the counterfactual Bellman equation

$$\begin{aligned} Q^\pi(s, a, a') &= (1 - \gamma) \mathbb{1}\{s = s^*\} \\ &+ \gamma \sum_{s'} \mathcal{T}(s, a, a', s') \sum_{\tilde{a}, \tilde{a}'} \pi(\tilde{a} | s') \\ &\times P(\tilde{a}' | s') Q^\pi(s', \tilde{a}, \tilde{a}'). \end{aligned} \quad (6)$$

That is, the next state follows the counterfactual transition, after which the policy selects $\tilde{a}$ while the demonstrator’s action $\tilde{a}'$ is again drawn from $P(\cdot | s')$.

The counterfactual Bellman equation depends on the unobserved confounder only through the counterfactual transition. Replacing the true counterfactual transition with a candidate $\mathcal{T}$ yields a candidate MDP $\mathcal{M}_{\mathcal{T}}$, and we use the subscript $\mathcal{T}$ for quantities computed in $\mathcal{M}_{\mathcal{T}}$. In particular, solving Eq. (6) with any compatible $\mathcal{T} \in \mathbb{T}$ gives the counterfactual occupancy measure $Q_{\mathcal{T}}^\pi(s, a, a')$, whose average $Q_{\mathcal{T}}^\pi(s, a) = \sum_{a'} Q_{\mathcal{T}}^\pi(s, a, a') P(a' | s)$ is the Q-function of π in $\mathcal{M}_{\mathcal{T}}$ (Lemma A.1). By consistency, $\mathbb{T}$ contains the true counterfactual transition of $\mathcal{M}$. Since the offline data cannot distinguish it from the other compatible ones, minimizing over $\mathbb{T}$ gives a worst-case occupancy measure, which lower-bounds the true one.

Proposition 1. *For every counterfactual transition $\mathcal{T} \in \mathbb{T}$, the counterfactual Bellman equation (6) has a unique solution $Q_{\mathcal{T}}^\pi(s, a, a')$, and the worst-case occupancy measure for a policy $\pi(a | s)$,*

$$\underline{Q}^\pi(s, a) = \inf_{\mathcal{T} \in \mathbb{T}} \sum_{a' \in \mathcal{A}} Q_{\mathcal{T}}^\pi(s, a, a') P(a' | s)$$

satisfies $\underline{Q}^\pi(s, a) \leq Q^\pi(s, a)$ for every (s, a) .

The proof is given in Appendix A. Since $\mathbb{T}$ and $P(a' | s)$ are determined by the observational data, Q^π lower-bounds the probability of reaching the goal without access to the unobserved confounder.

3 CAUSAL CONTRASTIVE REINFORCEMENT LEARNING

We now present Causal Contrastive Reinforcement Learning (CauCRL), which approximates the pessimistic construction of Sec. 2.1 with learned models. CauCRL retains the observed dynamics for the factual component and models the unidentified component pessimistically. It learns a pessimistic counterfactual transition model (Sec. 3.1), generates counterfactual rollouts under learner-selected actions whose states serve as positive samples for the contrastive critic, and improves the policy with this critic (Sec. 3.2). Algorithm 1 summarizes the procedure.

3.1 Learning Counterfactual Transitions

Computing the worst-case occupancy measure in Proposition 1 requires characterizing the worst-case counterfactual transitions within $\mathbb{T}$. In discrete domains, the entries with $a \neq a'$ are unrestricted, and the worst case is given by the Manski bounds (Manski, 1990): the interventional transition follows the observational one with probability $P(a | s)$ and is otherwise unconstrained. Such bounds have been applied to off-policy evaluation (Zhang and Bareinboim, 2025) and deep Q-learning (Li et al., 2025). In continuous domains, however, the demonstrator selects any particular action with probability zero, so the constraint $\mathcal{T}(s, a, a', \cdot) = P(\cdot | s, a)$ alone does not restrict nearby actions, and consistent bound estimation requires additional smoothness constraints (Tan et al., 2024).

We therefore assume that the counterfactual transition is Lipschitz continuous in all of its conditioning arguments: for some constant $L < \infty$,

$$\begin{aligned} W(\mathcal{T}(s_1, a_1, a'_1, \cdot), \mathcal{T}(s_2, a_2, a'_2, \cdot)) \\ \leq L(d_{\mathcal{S}}(s_1, s_2) + d_{\mathcal{A}}(a_1, a_2) + d_{\mathcal{A}}(a'_1, a'_2)) \end{aligned}$$

for all $s_1, s_2 \in \mathcal{S}$ and $a_1, a_2, a'_1, a'_2 \in \mathcal{A}$, where W denotes the Wasserstein-1 distance between distributions over $\mathcal{S}$. Along the action arguments, this assumption mirrors the smoothness conditions of Kim et al. (2018). Continuity in the evaluated action a corresponds to smooth treatment response (STR): the next-state distribution changes gradually with the intervened action. Continuity in the demonstrator’s action a' corresponds to smooth treatment selection (STS): situations in which the demonstrator selects nearby actions lead to similar counterfactual outcomes. Continuity

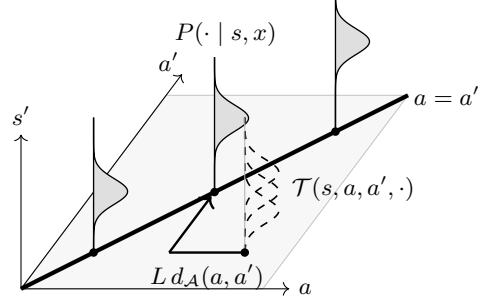


Figure 3: Lipschitz continuity of the counterfactual transition. Along the diagonal $a = a'$ (thick line), $\mathcal{T}(s, a, a, \cdot) = P(\cdot | s, a)$ is identified (filled densities over s'). An off-diagonal entry $\mathcal{T}(s, a, a', \cdot)$ is not identified (dashed densities). The shortest transport to the diagonal is L-shaped (arrow): it moves the evaluated action from a and the demonstrator’s action from a' to a common value x , with total length $d_{\mathcal{A}}(a, a')$.

in the current state s encodes the locality of the transition dynamics typical of RL. For example, in grid-world navigation, agents moving in neighboring cells are likely to lead to a collision.

As illustrated in Fig. 3, consistency identifies $\mathcal{T}$ along the diagonal $a = a'$. An unidentified entry (s, a, a') with $a \neq a'$ reaches the diagonal by moving a and a' to a common value x between them, a path of total length $d_{\mathcal{A}}(a, a')$. Lipschitz continuity limits how far probability mass can be transported along this path,

$$W(\mathcal{T}(s, a, a', \cdot), P(\cdot | s, x)) \leq L d_{\mathcal{A}}(a, a').$$

The counterfactual transition thus lies in a Wasserstein ball around the identified transitions: the outcomes of actions close to the demonstrator’s remain close to the observed ones, while the ball widens as the evaluated action moves away. The worst-case occupancy measure is obtained by restricting the minimization in Proposition 1 to Lipschitz-continuous elements of $\mathbb{T}$.

We model a pessimistic counterfactual transition with a conditional generative model $\mathcal{T}_\eta$: a neural network g_η maps the state s , the evaluated action a , the demonstrator’s action a' , and noise $\varepsilon \sim \mathcal{N}(0, I)$ to a next state $\tilde{s}' = g_\eta(s, a, a', \varepsilon)$. Spectral normalization of its weights (Miyato et al., 2018) bounds the Lipschitz constant of g_η in (s, a, a') for every ε ; with shared noise, this bound carries over to the Wasserstein distance between next-state distributions.

The model is trained with two objectives. The observational objective fits the entries with $a = a'$ to the positive demonstrations $\mathcal{D}^+$ drawn from P^+ ,

$$\mathcal{L}^+(\eta) = \mathbb{E}_{(s, a, s') \sim \mathcal{D}^+} [\ell(\mathcal{T}_\eta(s, a, a, \cdot), s')],$$

where ℓ is a proper scoring rule, such as the negative

log-likelihood or the energy score. Minimizing $\mathcal{L}^+$ enforces the consistency constraint that defines $\mathbb{T}$; the remaining entries are chosen pessimistically. Since the negative demonstrations record only states, the interventional objective pairs each state–action pair (s, a') from $\mathcal{D}^+$ with an alternative action $a \neq a'$ drawn from a proposal $\rho(\cdot | s)$, such as a uniform distribution, and with an independent negative state s^- from $\mathcal{D}^-$:

$$\mathcal{L}^-(\eta) = \mathbb{E}_{(s, a') \sim \mathcal{D}^+, a \sim \rho, s^- \sim \mathcal{D}^-} [\ell(\mathcal{T}_\eta(s, a, a', \cdot), s^-)].$$

Minimizing $\mathcal{L}^-$ steers the entries with $a \neq a'$ toward states reached by non-expert behavior; without further constraints, its minimizer is $\mathcal{T}(s, a, a', \cdot) = P^-$. When P^- concentrates on absorbing failure states such as the lava, this coincides with the worst case of the Manski bounds, which places all unidentified mass on states from which the goal cannot be reached, and thus approximates the minimizer in Proposition 1. The combined objective is given by

$$\mathcal{L}_\mathcal{T}(\eta) = \mathcal{L}^+(\eta) + \mathcal{L}^-(\eta) \quad (7)$$

is minimized over spectrally normalized networks: $\mathcal{L}^+$ anchors the model to the identified transitions, $\mathcal{L}^-$ selects pessimistic outcomes among the unidentified ones, and the Lipschitz constraint keeps $\mathcal{T}_\eta$ within the Wasserstein ball of radius $L d_\mathcal{A}(a, a')$. This prevents arbitrarily adverse predictions and lets the model generalize to action pairs not covered by the data. Implementation details are given in Appendix B.

3.2 Counterfactual Rollouts

Evaluating a policy π requires next states drawn from the interventional transition $P_a(s' | s)$, which by Eq. (4) averages the counterfactual transition over the demonstrator’s action. Since $P(A | S)$ is identified from the demonstrations, we estimate it from $\mathcal{D}^+$ with a statistical model $\mu_\phi(a' | s)$, the nominal behavioral policy. Any conditional density estimator can be used; our choices are detailed in Appendix B. For a counterfactual transition $\mathcal{T}$, averaging over the demonstrator’s action defines the induced transition

$$P_a^\mathcal{T}(s' | s) = \sum_{a' \in \mathcal{A}} \mathcal{T}(s, a, a', s') P(a' | s), \quad (8)$$

which coincides with $P_a(s' | s)$ for the true counterfactual transition. As previously defined, we write $\mathcal{M}_\mathcal{T}$ for the MDP with transition $P_a^\mathcal{T}$ (Sec. 2.1).

A counterfactual rollout samples from $P_a^{\mathcal{T}_\eta}$ under the policy π , with μ_ϕ in place of $P(a' | s)$ (CTFROLLOUT in Algorithm 1). It starts from a state–action pair (s, a) at time t , with $\tilde{s}^{(t)} = s$ and $\tilde{a}^{(t)} = a$; at each step $h \geq t$, the demonstrator’s action $a'^{(h)}$ is drawn from the nominal policy, the next state $\tilde{s}^{(h+1)}$ from $\mathcal{T}_\eta$, and

Algorithm 1 Causal Contrastive RL (CauCRL)

Require: $\mathcal{D}^+$, $\mathcal{D}^-$, rounds R , horizon H

- 1: Fit nominal policy μ_ϕ on $\mathcal{D}^+$
- 2: Fit $\mathcal{T}_\eta$ by minimizing Eq. (7)
- 3: Initialize critic f_ω and actor π_θ
- 4: **for** $r = 1, \dots, R$ **do**
- 5: $\tilde{\mathcal{D}} \leftarrow \text{CTFROLLOUT}(\pi_\theta, \mathcal{T}_\eta, \mu_\phi)$
- 6: $\pi_\theta \leftarrow \text{POLICYIMPROVEMENT}(\tilde{\mathcal{D}}, \pi_\theta)$
- 7: **end for**
- 8: **return** π_θ
- 9: **procedure** CTFROLLOUT($\pi, \mathcal{T}, \mu$)
- 10: Sample $(s, a) \sim \mathcal{D}^+$; set $\tilde{s}^{(t)} = s$, $\tilde{a}^{(t)} = a$
- 11: **for** $h = t, \dots, t + H - 1$ **do**
- 12: Sample $a'^{(h)} \sim \mu(\cdot | \tilde{s}^{(h)})$
- 13: Sample $\tilde{s}^{(h+1)} \sim \mathcal{T}(\tilde{s}^{(h)}, \tilde{a}^{(h)}, a'^{(h)}, \cdot)$
- 14: Sample $\tilde{a}^{(h+1)} \sim \pi(\cdot | \tilde{s}^{(h+1)})$
- 15: **end for**
- 16: **return** rollouts $\tilde{\mathcal{D}}$
- 17: **end procedure**
- 18: **procedure** POLICYIMPROVEMENT($\tilde{\mathcal{D}}, \pi$)
- 19: **for** each gradient step **do**
- 20: Sample $(s, a, \tilde{s}^+)$ from $\tilde{\mathcal{D}}$ and $s^- \sim \mathcal{D}^-$
- 21: Update f_ω by Eq. (9) and π by Eq. (10)
- 22: **end for**
- 23: **return** π
- 24: **end procedure**

the learner’s next action from π ; a' is resampled even at the first step, since the recorded action would give the confounded $\mathcal{T}(s, a, a', \cdot) = P(\cdot | s, a)$. Algorithm 1 uses the current actor as the rollout policy, which may also be kept fixed across rounds.

Replacing the positive samples from P^+ with these rollouts yields the counterfactual NCE objective

$$\max_{\omega} \mathbb{E}_{(s, a, \tilde{s}^+) \sim \text{CTFROLLOUT}, s^- \sim P^-} \left[\log \sigma(f_\omega(s, a, \tilde{s}^+)) + \log(1 - \sigma(f_\omega(s, a, s^-))) \right], \quad (9)$$

where each pair (s, a) from $\mathcal{D}^+$ takes the rollout state $\tilde{s}^+ = \tilde{S}^{(t+K)}$ as its positive goal, with $P(K = k) = (1 - \gamma)\gamma^k$ for $k \geq 0$, and the negative goals are unchanged. The following proposition shows that the optimal critic recovers the Q-function of π in the MDP induced by the counterfactual transition.²

Proposition 2. *Suppose that CTFROLLOUT in Eq. (9) uses a counterfactual transition $\mathcal{T}$ and the nominal policy $\mu = P(\cdot | s)$. The critic that opti-*

²The constant $1/P^-(s^*)$ requires $P^-(s^*) > 0$. This can always be ensured by mixing random states from the whole dataset into the negative samples, as in the original CRL (Eysenbach et al., 2022). These additional states serve only as negatives for the critic in Eq. (9); they are not used to train the counterfactual transition in Eq. (7).

mizes Eq. (9) is the Q -function of π in $\mathcal{M}_{\mathcal{T}}$, up to a multiplicative constant $1/P^-(s^*)$:

$$\exp f^*(s, a, s^*) = \frac{1}{P^-(s^*)} \cdot Q_{\mathcal{T}}^{\pi}(s, a).$$

The proof is given in Appendix A. Since $P^-(s^*)$ does not depend on the action, $\arg \max_a f^*(s, a, s^*) = \arg \max_a Q_{\mathcal{T}}^{\pi}(s, a)$: the critic retains the value interpretation of contrastive RL, now in the MDP induced by the counterfactual transition. In practice, rollouts are truncated at a horizon H ; sampling K only up to H changes the distribution of positive goals by at most γ^{H+1} in total variation. Details of the rollout construction are given in Appendix B.

Policy improvement. CauCRL retains the actor update used in standard offline CRL. The actor selects actions with high critic values while remaining close to the actions in the offline demonstrations:

$$\max_{\theta} \mathbb{E}_{\substack{(s, a') \sim \mathcal{D}^+ \\ a \sim \pi_{\theta}(\cdot | s)}} \left[f_{\omega}(s, a, s^*) + \lambda_{\text{BC}} \log \pi_{\theta}(a' | s) \right]. \quad (10)$$

The critic evaluates the policy’s own action a , while the behavioral-cloning term, weighted by λ_{BC} , keeps π_{θ} close to the recorded action a' . By Proposition 2, higher critic values mean higher Q -values in $\mathcal{M}_{\mathcal{T}}$, so this update improves the policy in that MDP.

Proposition 3. Assume that states and actions are tabular, $\mu = P(\cdot | s)$, and $P^-(s^*) > 0$. Let the critic f be δ -accurate for rollouts of π under $\mathcal{T}$, i.e., $|P^-(s^*) \exp f(s, a, s^*) - Q_{\mathcal{T}}^{\pi}(s, a)| \leq \delta$ for all (s, a) , and let $\pi'(s) \in \arg \max_a f(s, a, s^*)$ be the policy obtained after one iteration of POLICYIMPROVEMENT with $\lambda_{\text{BC}} = 0$. Then π' achieves a higher goal-reaching occupancy than π in $\mathcal{M}_{\mathcal{T}}$, up to the critic error:

$$Q_{\mathcal{T}}^{\pi'}(s, a) \geq Q_{\mathcal{T}}^{\pi}(s, a) - \frac{2\gamma\delta}{1-\gamma} \quad \text{for all } (s, a).$$

The proof (Appendix A) mirrors the approximate policy improvement result of Eysenbach et al. (2022, Lemma 4.2), with $\mathcal{M}_{\mathcal{T}}$ in place of the true environment. For the Bayes-optimal critic of Proposition 2, $\delta = 0$ and π' improves upon π exactly, so alternating CTFROLLOUT and POLICYIMPROVEMENT in Algorithm 1 performs approximate policy iteration in $\mathcal{M}_{\mathcal{T}_{\eta}}$.

Proposition 3 guarantees improvement in $\mathcal{M}_{\mathcal{T}}$. When $\mathcal{T}$ is the worst-case counterfactual transition of Proposition 1, $Q_{\mathcal{T}}^{\pi}$ lower-bounds the true occupancy. With the pessimistic $\mathcal{T}_{\eta}$ learned in Sec. 3.1, CauCRL improves an approximation of this lower bound as a proxy for policy improvement in the real environment.

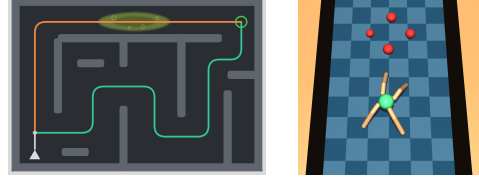


Figure 4: Continuous-control environments: (a) PointMaze with a stochastic swamp region (yellow) and (b) AntMaze with falling-rock hazards (red).

4 EXPERIMENTS

We evaluate CauCRL on three goal-conditioned navigation tasks with unobserved confounding and increasing control complexity: Windy Corridor with discrete actions, PointMaze with continuous planar control, and AntMaze with eight-dimensional continuous actions (Fig. 4). In each environment, the demonstrator observes latent information that affects both its actions and subsequent transitions but is hidden from the learner and all evaluated methods.

We compare CauCRL against four goal-conditioned offline learning baselines. **CRL** is standard contrastive reinforcement learning (Eysenbach et al., 2022) and our primary baseline; it uses the same demonstrations and actor regularization as CauCRL but trains its critic on recorded rather than counterfactual future goals, so comparing the two isolates the effect of counterfactual rollouts. **GCBC** performs behavioral cloning on hindsight-reabeled trajectories (Lynch et al., 2020; Ghosh et al., 2021). **GCIQL** is a goal-conditioned variant of implicit Q-learning (Kostrikov et al., 2022), and **HIQL** uses latent future states as high-level actions for long-horizon goal-conditioned control (Park et al., 2023). All baselines treat recorded next states as outcomes of the recorded actions and do not model the confounder. For continuous-control tasks, CRL and CauCRL share the actor-critic architecture and optimizer; full setup and training details are in Appendices C.2–C.4.

We report mean goal-reaching success and, where applicable, robust-route rates over five seeds, with $\pm$ s.e.m. over the final 10% of evaluation checkpoints; per-seed results are in Appendix C.5.

Experiment 1: Windy Corridor. We revisit the 15×15 Windy Corridor task of Example 1 (Appendix C.1), with a short passage adjacent to lava and a longer safe route. The demonstrator primarily takes the shortcut and uses the observed wind to pause when forward motion is unsafe, while a smaller fraction of demonstrations follows the safe route. Because the wind is resampled at every step and hidden from the learner, only the safe route reaches the goal reliably.

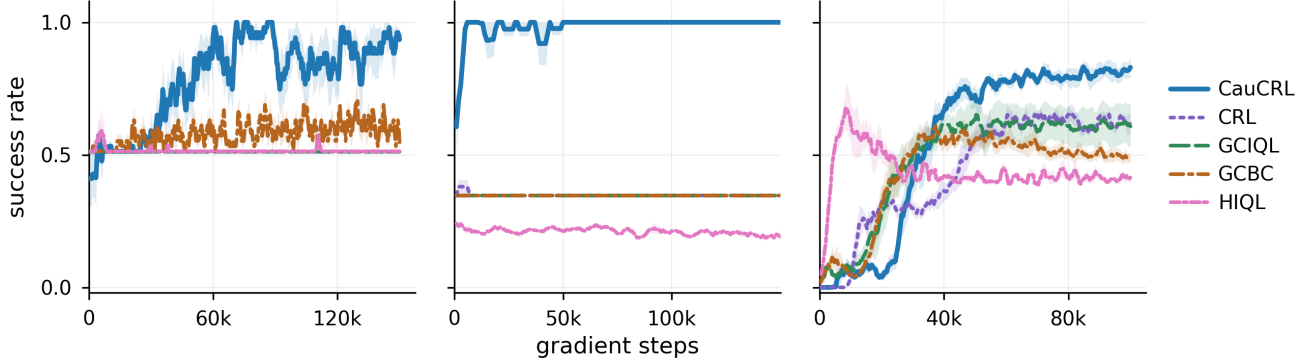


Figure 5: Success rates over training on Windy Corridor (left), PointMaze (middle), and AntMaze (right). Curves show means over five random seeds, with shaded regions indicating standard errors.

In Fig. 5 (left), CauCRL achieves a mean success rate of 0.919 ± 0.036 and a robust-route rate of 1.00, despite the safe route requiring about 39 steps instead of 13. Although its success varies across seeds (0.797 to 1.000), every evaluation episode takes the safe route. All baselines remain below 0.60 success; CRL, GCIQL, and HIQL reach 0.513 on every seed and converge to the confounded shortcut. Because demonstrations pair shortcut actions almost exclusively with successful outcomes, confounding-unaware critics overvalue this route. CauCRL assigns pessimistic outcomes to moving forward where the demonstrator might have waited, so its critic prefers the safe route.

Experiment 2: PointMaze. The agent observes a four-frame history of planar positions and the goal (16 dimensions) and selects two-dimensional velocities (Appendix C.2). The shortcut crosses three swamp cells, each active with probability 0.30 at every step; entering an active cell freezes the agent for the remainder of the 50-step episode. The demonstrator observes the swamp condition and primarily follows the shortcut, waiting when necessary, while a smaller set of demonstrations takes the detour.

In Fig. 5 (middle), CauCRL achieves both a mean success rate and detour rate of 1.00. CRL, GCBC, and GCIQL each achieve 0.347 success and never take the detour, close to the probability $(1 - 0.30)^3 \approx 0.343$ that all three cells are inactive when crossed. HIQL performs worse (0.176 ± 0.013). Since the swamp is hidden and resampled at every step, waiting cannot improve these odds for the learner; CauCRL instead identifies the detour as the reliable route.

Experiment 3: AntMaze. The Ant has a 31-dimensional observation, an eight-dimensional action space, and an 800-step horizon (Appendix C.3). The direct route crosses two rockfall zones, each activated with probability 0.40 per episode, while a longer route avoids them; contact with a falling rock terminates the

episode. The demonstrator observes the rockfall state, but the learner observes only the Ant state and goal. Because the demonstrator crosses only when the route is safe, its trajectories contain no rock-contact failures and make direct-route actions appear safe. CauCRL additionally trains its counterfactual transition on forced crossings that override a demonstrator decision to wait and expose the resulting rock collisions.

In Fig. 5 (right), CauCRL achieves 0.815 ± 0.030 success, compared with 0.629 ± 0.015 for CRL, an absolute improvement of 0.186. GCIQL reaches 0.616 ± 0.076 , while GCBC and HIQL achieve 0.498 ± 0.022 and 0.409 ± 0.006 , respectively. CauCRL’s lowest seed (0.712) exceeds CRL’s highest (0.677).

5 CONCLUSION

We study offline goal-conditioned reinforcement learning under unobserved confounding, where demonstrators may use information unavailable to the learner. Standard contrastive RL can then learn spurious action–outcome associations from observational future states. To address this problem, we introduce Causal Contrastive Reinforcement Learning (CauCRL), which learns a pessimistic counterfactual transition from positive and negative demonstrations and uses counterfactual rollouts for contrastive critic learning. Our causal formulation separates identified factual transitions from unidentified counterfactual outcomes and yields a worst-case goal-reaching occupancy that lower-bounds the true occupancy. Experiments across discrete and continuous-control tasks show that CauCRL consistently improves robustness over confounding-unaware baselines. These results highlight the value of counterfactual future-state supervision under confounding. Future work will evaluate CauCRL beyond maze-style navigation, including goal-conditioned manipulation and more diverse sources of unobserved confounding.

AI Use Statement

In this work, we used generative AI tools to assist with research ideation, methodological discussions, experimental design and diagnostics, code development and debugging, and checking mathematical arguments. We also used these tools for retrieving and summarizing related work and for drafting and revising portions of the manuscript.

All AI-assisted outputs were reviewed and verified by the authors. Mathematical arguments were checked against the stated assumptions and derivations, code was inspected and validated through experiments, and literature summaries were verified against the original sources. The authors made all final decisions regarding the methodology, experiments, interpretations, and presentation, and take full responsibility for the content of this work.

References

- Andrychowicz, M., Wolski, F., Ray, A., Schneider, J., Fong, R., Welinder, P., McGrew, B., Tobin, J., Abbeel, P., and Zaremba, W. (2017). Hindsight experience replay. In *Advances in Neural Information Processing Systems*, volume 30.
- Balazadeh, V., Chidambaram, K., Nguyen, V., Krishnan, R. G., and Syrgkanis, V. (2024). Sequential decision making with expert demonstrations under unobserved heterogeneity. In *Advances in Neural Information Processing Systems*, volume 37, pages 65476–65498.
- Bareinboim, E., Correa, J. D., Ibeling, D., and Icard, T. (2022). On Pearl’s hierarchy and the foundations of causal inference. In Geffner, H., Dechter, R., and Halpern, J. Y., editors, *Probabilistic and Causal Inference: The Works of Judea Pearl*, pages 507–556. ACM.
- Bennett, A., Kallus, N., Li, L., and Mousavi, A. (2021). Off-policy evaluation in infinite-horizon reinforcement learning with latent confounders. In Banerjee, A. and Fukumizu, K., editors, *Proceedings of The 24th International Conference on Artificial Intelligence and Statistics*, volume 130 of *Proceedings of Machine Learning Research*, pages 1999–2007. PMLR.
- Bo, A., Zhang, J., and Guroy, M. C. (2026). Counterfactual bootstrap for robust meta-reinforcement learning. In *Proceedings of the 43rd International Conference on Machine Learning*, volume 306 of *Proceedings of Machine Learning Research*, pages 8707–8731. PMLR.
- Bortkiewicz, M., Pałucki, W., Myers, V., Dziarmaga, T., Arczewski, T., Kuciński, L., and Eysenbach, B. (2025). Accelerating goal-conditioned reinforcement learning algorithms and research. In Yue, Y., Garg, A., Peng, N., Sha, F., and Yu, R., editors, *International Conference on Learning Representations*, volume 2025, pages 15732–15754.
- Chevalier-Boisvert, M., Dai, B., Towers, M., de Lazcano, R., Willems, L., Lahlou, S., Pal, S., Castro, P. S., and Terry, J. (2023). Minigrid & Miniworld: Modular & customizable reinforcement learning environments for goal-oriented tasks. In *Advances in Neural Information Processing Systems*, volume 36.
- de Haan, P., Jayaraman, D., and Levine, S. (2019). Causal confusion in imitation learning. In *Advances in Neural Information Processing Systems*, volume 32.
- Duan, Y., Schulman, J., Chen, X., Bartlett, P. L., Sutskever, I., and Abbeel, P. (2016). RL²: Fast reinforcement learning via slow reinforcement learning. *arXiv preprint arXiv:1611.02779*.
- Eysenbach, B., Salakhutdinov, R., and Levine, S. (2021). C-Learning: Learning to achieve goals via recursive classification. In *International Conference on Learning Representations*.
- Eysenbach, B., Zhang, T., Levine, S., and Salakhutdinov, R. R. (2022). Contrastive learning as goal-conditioned reinforcement learning. In Koyejo, S., Mohamed, S., Agarwal, A., Belgrave, D., Cho, K., and Oh, A., editors, *Advances in Neural Information Processing Systems*, volume 35, pages 35603–35620. Curran Associates, Inc.
- Galles, D. and Pearl, J. (1998). An axiomatic characterization of causal counterfactuals. *Foundations of Science*, 3(1):151–182.
- Ghosh, D., Gupta, A., Reddy, A., Fu, J., Devin, C., Eysenbach, B., and Levine, S. (2021). Learning to reach goals via iterated supervised learning. In *International Conference on Learning Representations*.
- Ho, J. and Ermon, S. (2016). Generative adversarial imitation learning. In *Advances in Neural Information Processing Systems*, volume 29.
- Joshi, S., Zhang, J., and Bareinboim, E. (2024). Towards safe policy learning under partial identifiability: A causal approach. In *AAAI Conference on Artificial Intelligence*, pages 13004–13012.
- Kaelbling, L. P. (1993). Learning to achieve goals. In *International Joint Conference on Artificial Intelligence*, pages 1094–1099.
- Kallus, N. and Zhou, A. (2018). Confounding-robust policy improvement. In *Advances in Neural Information Processing Systems*, volume 31.

- Kallus, N. and Zhou, A. (2020). Confounding-robust policy evaluation in infinite-horizon reinforcement learning. In Larochelle, H., Ranzato, M., Hadsell, R., Balcan, M., and Lin, H., editors, *Advances in Neural Information Processing Systems*, volume 33, pages 22293–22304. Curran Associates, Inc.
- Kim, W., Kwon, K., Kwon, S., and Lee, S. (2018). The identification power of smoothness assumptions in models with counterfactual outcomes. *Quantitative Economics*, 9(2):617–642.
- Kostrikov, I., Nair, A., and Levine, S. (2022). Offline reinforcement learning with implicit Q-learning. In *International Conference on Learning Representations*.
- Li, M., Zhang, J., and Bareinboim, E. (2025). Confounding robust deep reinforcement learning: A causal approach. In Belgrave, D., Zhang, C., Lin, H., Pascanu, R., Koniusz, P., Ghassemi, M., and Chen, N., editors, *Advances in Neural Information Processing Systems*, volume 38, pages 138292–138325. Curran Associates, Inc.
- Li, M., Zhang, J., and Bareinboim, E. (2026). Causal flow Q-learning for robust offline reinforcement learning. In *Forty-third International Conference on Machine Learning*.
- Liu, M., Zhu, M., and Zhang, W. (2022). Goal-conditioned reinforcement learning: Problems and solutions. In *Proceedings of the Thirty-First International Joint Conference on Artificial Intelligence*, pages 5502–5511.
- Lynch, C., Khansari, M., Xiao, T., Kumar, V., Thompson, J., Levine, S., and Sermanet, P. (2020). Learning latent plans from play. In *Proceedings of the Conference on Robot Learning*, volume 100 of *Proceedings of Machine Learning Research*, pages 1113–1132.
- Manski, C. F. (1990). Nonparametric bounds on treatment effects. *American Economic Review*, 80(2):319–323.
- Miyato, T., Kataoka, T., Koyama, M., and Yoshida, Y. (2018). Spectral normalization for generative adversarial networks. In *International Conference on Learning Representations*.
- Myers, V., Zheng, B., Eysenbach, B., and Levine, S. (2025). Offline goal-conditioned reinforcement learning with quasimetric representations. In Belgrave, D., Zhang, C., Lin, H., Pascanu, R., Koniusz, P., Ghassemi, M., and Chen, N., editors, *Advances in Neural Information Processing Systems*, volume 38, pages 19654–19679. Curran Associates, Inc.
- Namkoong, H., Keramati, R., Yadlowsky, S., and Brunskill, E. (2020). Off-policy policy evaluation for sequential decisions under unobserved confounding. In Larochelle, H., Ranzato, M., Hadsell, R., Balcan, M., and Lin, H., editors, *Advances in Neural Information Processing Systems*, volume 33, pages 18819–18831. Curran Associates, Inc.
- Ng, A. Y., Harada, D., and Russell, S. (1999). Policy invariance under reward transformations: Theory and application to reward shaping. In *Proceedings of the Sixteenth International Conference on Machine Learning*, pages 278–287.
- Park, S., Frans, K., Eysenbach, B., and Levine, S. (2025). OGBench: Benchmarking offline goal-conditioned RL. In *International Conference on Learning Representations*.
- Park, S., Ghosh, D., Eysenbach, B., and Levine, S. (2023). HIQL: Offline goal-conditioned RL with latent states as actions. In Oh, A., Naumann, T., Globerson, A., Saenko, K., Hardt, M., and Levine, S., editors, *Advances in Neural Information Processing Systems*, volume 36, pages 34866–34891. Curran Associates, Inc.
- Pearl, J. (2009). *Causality: Models, Reasoning and Inference*. Cambridge University Press, 2 edition.
- Pomerleau, D. A. (1989). ALVINN: An autonomous land vehicle in a neural network. In *Advances in Neural Information Processing Systems*, volume 1.
- Ross, S., Gordon, G., and Bagnell, D. (2011). A reduction of imitation learning and structured prediction to no-regret online learning. In *Proceedings of the Fourteenth International Conference on Artificial Intelligence and Statistics*, pages 627–635.
- Ruan, K., Zhang, J., Di, X., and Bareinboim, E. (2024). Causal imitation for Markov decision processes: a partial identification approach. In Globerson, A., Mackey, L., Belgrave, D., Fan, A., Paquet, U., Tomczak, J., and Zhang, C., editors, *Advances in Neural Information Processing Systems*, volume 37, pages 87592–87620. Curran Associates, Inc.
- Schaul, T., Horgan, D., Gregor, K., and Silver, D. (2015). Universal value function approximators. In Bach, F. and Blei, D., editors, *Proceedings of the 32nd International Conference on Machine Learning*, volume 37 of *Proceedings of Machine Learning Research*, pages 1312–1320, Lille, France. PMLR.
- Shpitser, I. and Pearl, J. (2009). Effects of treatment on the treated: Identification and generalization. In *Conference on Uncertainty in Artificial Intelligence*, pages 514–521.
- Sutton, R. S. and Barto, A. G. (2018). *Reinforcement Learning: An Introduction*. MIT Press, 2 edition.

- Tan, J., Blanchet, J., and Syrgkanis, V. (2024). Consistency of neural causal partial identification. In *Advances in Neural Information Processing Systems*, volume 37, pages 68956–68999.
- Zhang, J. and Bareinboim, E. (2016). Markov decision processes with unobserved confounders: A causal approach. Technical Report R-23, Purdue AI Lab.
- Zhang, J. and Bareinboim, E. (2019). Near-optimal reinforcement learning in dynamic treatment regimes. In Wallach, H., Larochelle, H., Beygelzimer, A., d’Alché Buc, F., Fox, E., and Garnett, R., editors, *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc.
- Zhang, J. and Bareinboim, E. (2025). Causal eligibility traces for confounding robust off-policy evaluation. In Chiappa, S. and Magliacane, S., editors, *Proceedings of the Forty-first Conference on Uncertainty in Artificial Intelligence*, volume 286 of *Proceedings of Machine Learning Research*, pages 4933–4942. PMLR.
- Zhang, J., Kumor, D., and Bareinboim, E. (2020). Causal imitation learning with unobserved confounders. In *Advances in Neural Information Processing Systems*, volume 33, pages 12263–12274.
- Zheng, C., Eysenbach, B., Walke, H., Yin, P., Fang, K., Salakhutdinov, R., and Levine, S. (2024a). Stabilizing contrastive RL: Techniques for robotic goal reaching from offline data. In Kim, B., Yue, Y., Chaudhuri, S., Fragkiadaki, K., Khan, M., and Sun, Y., editors, *International Conference on Learning Representations*, volume 2024, pages 28236–28264.
- Zheng, C., Salakhutdinov, R., and Eysenbach, B. (2024b). Contrastive difference predictive coding. In Kim, B., Yue, Y., Chaudhuri, S., Fragkiadaki, K., Khan, M., and Sun, Y., editors, *International Conference on Learning Representations*, volume 2024, pages 47577–47601.

A PROOFS

This appendix collects the proofs of the three propositions in the main text. Proposition 1 shows that minimizing the counterfactual occupancy over all compatible counterfactual transitions lower-bounds the true goal-reaching occupancy, which underlies the pessimistic construction of Sec. 2.1; Proposition 2 identifies the Bayes-optimal critic trained on counterfactual rollouts, which underlies the counterfactual NCE objective of Sec. 3.2; and Proposition 3 shows that greedy updates with an approximately optimal critic improve the policy in the MDP induced by the counterfactual transition. All three proofs follow the standard dynamic-programming playbook: each quantity

of interest is characterized as the unique fixed point of a γ -contractive Bellman operator, and identities and inequalities between these quantities are obtained by verifying them for the corresponding operators.

Throughout, we fix a goal $s^* \in \mathcal{S}$ and a discount factor $\gamma \in (0, 1)$, and all functions are bounded and equipped with the supremum norm $\|\cdot\|_\infty$. Sums over states and actions become integrals for continuous spaces, and all arguments carry over verbatim. Entries (s, a, a') with $P(a' | s) = 0$ receive zero weight in Eq. (6) and in the definition of Q^π , so they play no role and can be fixed arbitrarily. For a policy π and a counterfactual transition $\mathcal{T} \in \mathbb{T}$, we define the counterfactual Bellman operator, acting on functions $q(s, a, a')$, as the right-hand side of Eq. (6),

$$\begin{aligned} (\mathcal{K}_\mathcal{T}^\pi q)(s, a, a') &= (1 - \gamma) \mathbb{1}\{s = s^*\} \\ &\quad + \gamma \sum_{s'} \mathcal{T}(s, a, a', s') \sum_{\tilde{a}, \tilde{a}'} \pi(\tilde{a} | s') \\ &\quad \times P(\tilde{a}' | s') q(s', \tilde{a}, \tilde{a}'), \end{aligned}$$

and the Bellman operator of π in $\mathcal{M}_\mathcal{T}$, acting on functions $q(s, a)$, as

$$\begin{aligned} (\mathcal{B}_\mathcal{T}^\pi q)(s, a) &= (1 - \gamma) \mathbb{1}\{s = s^*\} \\ &\quad + \gamma \sum_{s'} P_a^\mathcal{T}(s' | s) \sum_{\tilde{a}} \pi(\tilde{a} | s') q(s', \tilde{a}), \end{aligned}$$

where $P_a^\mathcal{T}$ is the induced transition in Eq. (8). Finally, $d_\mathcal{T}^\pi(s^* | s, a)$ denotes the goal-reaching occupancy of π in $\mathcal{M}_\mathcal{T}$, i.e., Eq. (1) with P_a replaced by $P_a^\mathcal{T}$, and $P_{a,\pi}^\mathcal{T}$ denotes the trajectory distribution in $\mathcal{M}_\mathcal{T}$ that sets $A^{(t)}$ to a and lets subsequent actions follow π . The operator facts shared by the three proofs are encapsulated in the following lemma.

Lemma A.1. *Let π be a policy and $\mathcal{T} \in \mathbb{T}$, and let B denote either $\mathcal{K}_\mathcal{T}^\pi$ or $\mathcal{B}_\mathcal{T}^\pi$.*

- (a) *B is monotone, satisfies $B(q - c) = Bq - \gamma c$ for every constant c , and is a γ -contraction in $\|\cdot\|_\infty$. Consequently, B has a unique bounded fixed point, which is the limit of $B^n q$ as $n \rightarrow \infty$ for every bounded q .*
- (b) *The fixed point of $\mathcal{B}_\mathcal{T}^\pi$ is $d_\mathcal{T}^\pi(s^* | s, a)$.*
- (c) *If $Q_\mathcal{T}^\pi(s, a, a')$ is the fixed point of $\mathcal{K}_\mathcal{T}^\pi$, then $Q_\mathcal{T}^\pi(s, a) = \sum_{a'} Q_\mathcal{T}^\pi(s, a, a') P(a' | s)$ is the fixed point of $\mathcal{B}_\mathcal{T}^\pi$. In particular, $Q_\mathcal{T}^\pi(s, a) = d_\mathcal{T}^\pi(s^* | s, a)$, i.e., $Q_\mathcal{T}^\pi$ is the Q -function of π in $\mathcal{M}_\mathcal{T}$.*

Proof. We first prove (a). Both operators are of the form

$$(Bq)(x) = (1 - \gamma) \mathbb{1}\{x = s^*\} + \gamma \sum_y K(x, y) q(y),$$

where s is the state component of x . For $\mathcal{K}_{\mathcal{T}}^{\pi}$, we have $x = (s, a, a')$, $y = (s', \tilde{a}, \tilde{a}')$, and

$$K(x, y) = \mathcal{T}(s, a, a', s') \pi(\tilde{a} | s') P(\tilde{a}' | s'),$$

while for $\mathcal{B}_{\mathcal{T}}^{\pi}$, we have $x = (s, a)$, $y = (s', \tilde{a})$, and

$$K(x, y) = P_a^{\mathcal{T}}(s' | s) \pi(\tilde{a} | s').$$

In both cases, $K(x, \cdot)$ is a probability distribution, since $\mathcal{T}(s, a, a', \cdot)$, $\pi(\cdot | s')$, $P(\cdot | s')$, and $P_a^{\mathcal{T}}(\cdot | s)$ are. Since $K \geq 0$, B is monotone, and since $\sum_y K(x, y) = 1$, $B(q - c) = Bq - \gamma c$. Moreover,

$$\begin{aligned} |(Bq_1)(x) - (Bq_2)(x)| &\leq \gamma \sum_y K(x, y) |q_1(y) - q_2(y)| \\ &\leq \gamma \|q_1 - q_2\|_{\infty}, \end{aligned}$$

so B is a γ -contraction. The Banach fixed-point theorem gives the remaining claims of (a).

We next prove (b). The $k = 0$ term of Eq. (1) in $\mathcal{M}_{\mathcal{T}}$ equals $(1 - \gamma) \mathbb{1}\{s = s^*\}$, since $S^{(t)} = s$. For $k \geq 1$, conditioning on the next state $S^{(t+1)} = s'$ and the next action $A^{(t+1)} = \tilde{a}$, the Markov property of $\mathcal{M}_{\mathcal{T}}$ gives

$$\begin{aligned} P_{a,\pi}^{\mathcal{T}}(S^{(t+k)} = s^* | S^{(t)} = s) \\ = \sum_{s'} P_a^{\mathcal{T}}(s' | s) \sum_{\tilde{a}} \pi(\tilde{a} | s') \\ \times P_{\tilde{a},\pi}^{\mathcal{T}}(S^{(t+k)} = s^* | S^{(t+1)} = s'). \end{aligned}$$

Multiplying by $(1 - \gamma)\gamma^k$, summing over $k \geq 1$, and using time-homogeneity to shift the time index by one, we obtain

$$\begin{aligned} d_{\mathcal{T}}^{\pi}(s^* | s, a) &= (1 - \gamma) \mathbb{1}\{s = s^*\} \\ &+ \gamma \sum_{s'} P_a^{\mathcal{T}}(s' | s) \sum_{\tilde{a}} \pi(\tilde{a} | s') \\ &\times d_{\mathcal{T}}^{\pi}(s^* | s', \tilde{a}). \end{aligned}$$

Hence $d_{\mathcal{T}}^{\pi}$ is a fixed point of $\mathcal{B}_{\mathcal{T}}^{\pi}$, and by (a) it is the unique one.

It remains to prove (c). Multiplying the fixed-point equation $Q_{\mathcal{T}}^{\pi} = \mathcal{K}_{\mathcal{T}}^{\pi} Q_{\mathcal{T}}^{\pi}$ by $P(a' | s)$ and summing over a' , the first term is unchanged, since $\sum_{a'} P(a' | s) = 1$. In the second term, Eq. (8) gives

$$\sum_{a'} \mathcal{T}(s, a, a', s') P(a' | s) = P_a^{\mathcal{T}}(s' | s),$$

while the inner sum over $\tilde{a}'$ gives

$$\sum_{\tilde{a}'} P(\tilde{a}' | s') Q_{\mathcal{T}}^{\pi}(s', \tilde{a}, \tilde{a}') = Q_{\mathcal{T}}^{\pi}(s', \tilde{a}).$$

Therefore

$$\begin{aligned} Q_{\mathcal{T}}^{\pi}(s, a) &= (1 - \gamma) \mathbb{1}\{s = s^*\} \\ &+ \gamma \sum_{s'} P_a^{\mathcal{T}}(s' | s) \sum_{\tilde{a}} \pi(\tilde{a} | s') Q_{\mathcal{T}}^{\pi}(s', \tilde{a}), \end{aligned}$$

that is, $Q_{\mathcal{T}}^{\pi} = \mathcal{B}_{\mathcal{T}}^{\pi} Q_{\mathcal{T}}^{\pi}$. By (a) and (b), $Q_{\mathcal{T}}^{\pi}(s, a) = d_{\mathcal{T}}^{\pi}(s^* | s, a)$. This completes the proof. $\square$

Proof of Proposition 1. The proof proceeds in three steps. We first note that the counterfactual Bellman equation is well posed for every compatible counterfactual transition. We then show that the true counterfactual transition of $\mathcal{M}$ is compatible, and that the corresponding solution is the true counterfactual occupancy (5). Averaging over the demonstrator's action then recovers the true occupancy, and minimizing over $\mathbb{T}$ can only decrease it.

For every $\mathcal{T} \in \mathbb{T}$, Eq. (6) is the fixed-point equation $q = \mathcal{K}_{\mathcal{T}}^{\pi} q$. By Lemma A.1(a), it has a unique bounded solution $Q_{\mathcal{T}}^{\pi}(s, a, a')$.

We next show that the true counterfactual transition of $\mathcal{M}$ is compatible. Let

$$\mathcal{T}_{\mathcal{M}}(s, a, a', s') = P(S_{A^{(t)=a}}^{(t+1)} = s' | S^{(t)} = s, A^{(t)} = a')$$

denote the counterfactual transition (3) of $\mathcal{M}$. On the event $\{A^{(t)} = a\}$, the consistency axiom gives $S_{A^{(t)=a}}^{(t+1)} = S^{(t+1)}$. Hence

$$\begin{aligned} \mathcal{T}_{\mathcal{M}}(s, a, a, s') &= P(S^{(t+1)} = s' | S^{(t)} = s, A^{(t)} = a) \\ &= P(s' | s, a), \end{aligned}$$

so $\mathcal{T}_{\mathcal{M}} \in \mathbb{T}$.

We now show that the true counterfactual occupancy (5) solves Eq. (6) with $\mathcal{T}_{\mathcal{M}}$. Fix (s, a, a') with $P(a' | s) > 0$, and let $E = \{S^{(t)} = s, A^{(t)} = a'\}$. The $k = 0$ term of Eq. (5) equals $(1 - \gamma) \mathbb{1}\{s = s^*\}$, since $S_{A^{(t)=a,\pi}}^{(t)} = S^{(t)} = s$. For $k \geq 1$, conditioning on the counterfactual next state gives

$$\begin{aligned} P(S_{A^{(t)=a,\pi}}^{(t+k)} = s^* | E) \\ = \sum_{s'} \mathcal{T}_{\mathcal{M}}(s, a, a', s') P(S_{A^{(t)=a,\pi}}^{(t+k)} = s^* | E_{s'}), \end{aligned}$$

where $E_{s'} = E \cap \{S_{A^{(t)=a}}^{(t+1)} = s'\}$. Since $A^{(t)} = f_A(S^{(t)}, U^{(t)})$ and $S_{A^{(t)=a}}^{(t+1)} = f_S(S^{(t)}, a, U^{(t)})$, the event $E_{s'}$ is determined by $(S^{(t)}, U^{(t)})$. From time $t + 1$ onward, the counterfactual trajectory starts at s' , draws $\tilde{a} \sim \pi(\cdot | s')$, and then evolves through f_S and π , driven by $U^{(t+1)}, U^{(t+2)}, \dots$, which are drawn independently of $(S^{(t)}, U^{(t)})$. Conditional on $E_{s'}$, it therefore has the same law as a trajectory that starts at $S^{(t+1)} = s'$, sets $A^{(t+1)}$ to $\tilde{a} \sim \pi(\cdot | s')$, and follows π thereafter. Since the structural mechanisms are invariant over time, it follows that

$$\begin{aligned} (1 - \gamma) \sum_{k \geq 1} \gamma^k P(S_{A^{(t)=a,\pi}}^{(t+k)} = s^* | E_{s'}) \\ = \gamma \sum_{\tilde{a}} \pi(\tilde{a} | s') d^{\pi}(s^* | s', \tilde{a}). \end{aligned}$$

Applying the law of total probability to the demonstrator's action at s' , as below Eq. (5), gives

$$d^\pi(s^* | s', \tilde{a}) = \sum_{\tilde{a}'} P(\tilde{a}' | s') Q^\pi(s', \tilde{a}, \tilde{a}').$$

Combining the three displays, we obtain

$$\begin{aligned} Q^\pi(s, a, a') &= (1 - \gamma) \mathbb{1}\{s = s^*\} \\ &\quad + \gamma \sum_{s'} \mathcal{T}_\mathcal{M}(s, a, a', s') \sum_{\tilde{a}, \tilde{a}'} \pi(\tilde{a} | s') \\ &\quad \times P(\tilde{a}' | s') Q^\pi(s', \tilde{a}, \tilde{a}'), \end{aligned}$$

that is, $Q^\pi = \mathcal{K}_{\mathcal{T}_\mathcal{M}}^\pi Q^\pi$. By uniqueness of this solution, $Q_{\mathcal{T}_\mathcal{M}}^\pi(s, a, a') = Q^\pi(s, a, a')$.

Finally, averaging over $a' \sim P(\cdot | s)$ and applying the law of total probability as below Eq. (5) gives

$$\sum_{a'} Q_{\mathcal{T}_\mathcal{M}}^\pi(s, a, a') P(a' | s) = Q^\pi(s, a).$$

Since $\mathcal{T}_\mathcal{M} \in \mathbb{T}$, the infimum defining $\underline{Q}^\pi(s, a)$ is at most its value at $\mathcal{T}_\mathcal{M}$, and hence

$$\underline{Q}^\pi(s, a) \leq Q^\pi(s, a) \quad \text{for every } (s, a).$$

This completes the proof. $\square$

Proof of Proposition 2. The proof has two steps. We first show that the positive goals generated by CTFRULLOUT follow the goal-reaching occupancy of π in $\mathcal{M}_\mathcal{T}$; the claim then follows by computing the Bayes-optimal critic of Eq. (9) and identifying it through Lemma A.1(c). Throughout, we consider untruncated rollouts, i.e., $H = \infty$ (the effect of truncation is discussed after the proposition), and optimize Eq. (9) over all functions f . The critic is then determined on pairs (s, a) in the support of the distribution ν of training pairs drawn from $\mathcal{D}^+$, and on goals with $P^-(s^*) > 0$.

Consider the iteration h of CTFRULLOUT. The demonstrator's action $a^{(h)}$ is drawn from $\mu(\cdot | \tilde{s}^{(h)})$ independently of the past given $\tilde{s}^{(h)}$. Marginalizing it out and using $\mu = P(\cdot | s)$, the next state satisfies

$$\begin{aligned} P(\tilde{s}^{(h+1)} = s' | \tilde{s}^{(h)}, \tilde{a}^{(h)}) \\ &= \sum_{a'} \mathcal{T}(\tilde{s}^{(h)}, \tilde{a}^{(h)}, a', s') P(a' | \tilde{s}^{(h)}) \\ &= P_{\tilde{a}^{(h)}}^\mathcal{T}(s' | \tilde{s}^{(h)}), \end{aligned}$$

by Eq. (8), and the next action is drawn from $\pi(\cdot | \tilde{s}^{(h+1)})$. Hence the rollout from (s, a) has the trajectory distribution $P_{a, \pi}^\mathcal{T}$. Since K is drawn independently with $P(K = k) = (1 - \gamma)\gamma^k$, the positive goal

$\tilde{s}^+ = \tilde{S}^{(t+K)}$ satisfies

$$\begin{aligned} P(\tilde{s}^+ = s^* | s, a) &= (1 - \gamma) \sum_{k=0}^{\infty} \gamma^k \\ &\quad \times P_{a, \pi}^\mathcal{T}(S^{(t+k)} = s^* | S^{(t)} = s) \\ &= d_{\mathcal{T}}^\pi(s^* | s, a). \end{aligned}$$

We now compute the critic that maximizes Eq. (9). By the previous display, positive triples $(s, a, \tilde{s}^+)$ are distributed as $q^+(s, a, s^*) = \nu(s, a) d_{\mathcal{T}}^\pi(s^* | s, a)$. Since s^- is drawn independently of (s, a) , negative triples (s, a, s^-) are distributed as $q^-(s, a, s^*) = \nu(s, a) P^-(s^*)$. The objective in Eq. (9) therefore equals

$$\sum_{s, a, s^*} \left[q^+ \log \sigma(f) + q^- \log (1 - \sigma(f)) \right],$$

which decouples across (s, a, s^*) . For each triple with $\nu(s, a) > 0$ and $P^-(s^*) > 0$, the map $x \mapsto q^+ \log \sigma(x) + q^- \log(1 - \sigma(x))$ is strictly concave and is maximized at $\sigma(x) = q^+ / (q^+ + q^-)$, i.e., at $\exp x = q^+ / q^-$, with the convention $\exp x = 0$ when $q^+ = 0$. The factor $\nu(s, a)$ cancels, so the optimal critic satisfies

$$\exp f^*(s, a, s^*) = \frac{d_{\mathcal{T}}^\pi(s^* | s, a)}{P^-(s^*)}.$$

By Lemma A.1(c), $d_{\mathcal{T}}^\pi(s^* | s, a) = Q_{\mathcal{T}}^\pi(s, a)$, and therefore

$$\exp f^*(s, a, s^*) = \frac{1}{P^-(s^*)} \cdot Q_{\mathcal{T}}^\pi(s, a).$$

This proves the claim. $\square$

Proof of Proposition 3. The proof has two steps and follows the approximate policy improvement argument of Eysenbach et al. (2022, Lemma 4.2), with $\mathcal{M}_\mathcal{T}$ in place of the true environment. We first show that the greedy policy π' is 2δ -greedy with respect to $Q_{\mathcal{T}}^\pi$; the claim then follows by propagating this inequality through the Bellman operator of π' .

By Lemma A.1(c), $Q_{\mathcal{T}}^\pi$ and $Q_{\mathcal{T}}^{\pi'}$ are the fixed points of $\mathcal{B}_{\mathcal{T}}^\pi$ and $\mathcal{B}_{\mathcal{T}}^{\pi'}$, respectively. Let $\hat{Q}(s, a) = P^-(s^*) \exp f(s, a, s^*)$, so that $|\hat{Q} - Q_{\mathcal{T}}^\pi| \leq \delta$ pointwise by assumption, and let $V^\pi(s) = \sum_a \pi(a | s) Q_{\mathcal{T}}^\pi(s, a)$.

Since $P^-(s^*) > 0$, the map $x \mapsto P^-(s^*) \exp x$ is increasing, so $\pi'(s) \in \arg \max_a f(s, a, s^*)$ also maximizes $\hat{Q}(s, \cdot)$. Hence, for every s ,

$$\begin{aligned} Q_{\mathcal{T}}^\pi(s, \pi'(s)) &\geq \hat{Q}(s, \pi'(s)) - \delta \\ &\geq \sum_a \pi(a | s) \hat{Q}(s, a) - \delta \\ &\geq V^\pi(s) - 2\delta, \end{aligned}$$

where the first and last inequalities use $|\widehat{Q} - Q_{\mathcal{T}}^{\pi}| \leq \delta$, and the middle one uses that a maximum dominates any average.

We next propagate this bound. Since π' is deterministic,

$$\begin{aligned} (\mathcal{B}_{\mathcal{T}}^{\pi'} Q_{\mathcal{T}}^{\pi})(s, a) &= (1 - \gamma) \mathbb{1}\{s = s^*\} \\ &\quad + \gamma \sum_{s'} P_a^{\mathcal{T}}(s' | s) Q_{\mathcal{T}}^{\pi}(s', \pi'(s')). \end{aligned}$$

Applying the previous inequality at every s' and using that $Q_{\mathcal{T}}^{\pi}$ is the fixed point of $\mathcal{B}_{\mathcal{T}}^{\pi}$, we obtain

$$\mathcal{B}_{\mathcal{T}}^{\pi'} Q_{\mathcal{T}}^{\pi} \geq \mathcal{B}_{\mathcal{T}}^{\pi} Q_{\mathcal{T}}^{\pi} - 2\gamma\delta = Q_{\mathcal{T}}^{\pi} - 2\gamma\delta$$

pointwise. We now show by induction that

$$(\mathcal{B}_{\mathcal{T}}^{\pi'})^n Q_{\mathcal{T}}^{\pi} \geq Q_{\mathcal{T}}^{\pi} - 2\gamma\delta \sum_{k=0}^{n-1} \gamma^k$$

for every $n \geq 1$. The case $n = 1$ is the display above. If the bound holds for n , then the monotonicity of $\mathcal{B}_{\mathcal{T}}^{\pi'}$ and the identity $\mathcal{B}_{\mathcal{T}}^{\pi'}(q - c) = \mathcal{B}_{\mathcal{T}}^{\pi'} q - \gamma c$ from Lemma A.1(a) give

$$\begin{aligned} (\mathcal{B}_{\mathcal{T}}^{\pi'})^{n+1} Q_{\mathcal{T}}^{\pi} &\geq \mathcal{B}_{\mathcal{T}}^{\pi'} Q_{\mathcal{T}}^{\pi} - 2\gamma^2\delta \sum_{k=0}^{n-1} \gamma^k \\ &\geq Q_{\mathcal{T}}^{\pi} - 2\gamma\delta \sum_{k=0}^n \gamma^k. \end{aligned}$$

Letting $n \rightarrow \infty$, Lemma A.1(a) gives $(\mathcal{B}_{\mathcal{T}}^{\pi'})^n Q_{\mathcal{T}}^{\pi} \rightarrow Q_{\mathcal{T}}^{\pi'}$, and therefore

$$Q_{\mathcal{T}}^{\pi'}(s, a) \geq Q_{\mathcal{T}}^{\pi}(s, a) - \frac{2\gamma\delta}{1 - \gamma} \quad \text{for all } (s, a).$$

This completes the proof. $\square$

B IMPLEMENTATION DETAILS

This section provides implementation details for Cau-CRL beyond the algorithmic description in Sec. 3. The continuous-control experiments use environment-specific parameterizations of the nominal behavioral policy and counterfactual transition model. Network architectures and optimization hyperparameters are reported in Appendix C.4.

B.1 Nominal Behavioral Policy

For both continuous-control environments, we parameterize the nominal behavioral policy as a K -component censored Gaussian mixture density network with $K = 5$ and diagonal covariance,

$$\mu_{\phi}(a | c) = \sum_{k=1}^K w_k(c) \mathcal{N}_{\mathcal{A}}^{\text{cens}}(a; \mu_k(c), \sigma_k(c)),$$

where $\mathcal{N}_{\mathcal{A}}^{\text{cens}}$ denotes the Gaussian distribution censored to the action box $\mathcal{A}$, with continuous density in the interior and point mass at clipped boundaries. The conditioning context is $c = s$ for AntMaze and $c = (s, g)$ for PointMaze. The PointMaze context contains only learner-visible information; privileged hazard and demonstrator metadata are excluded.

For Windy Corridor, the action space is discrete, and we parameterize the nominal behavioral policy as a categorical distribution with context $c = s$,

$$\begin{aligned} \mu_{\phi}(a | c) &= \text{softmax}(f_{\phi}(c))_a, \\ a &\in \{\text{left}, \text{right}, \text{forward}, \text{wait}\}, \end{aligned}$$

where f_{ϕ} is an MLP with two hidden layers of 128 ReLU units applied to a one-hot encoding of the agent's x -coordinate, y -coordinate, and heading. The **wait** action is the demonstrator's no-op, which it uses to pause when the wind is unfavorable. It is kept in the support of μ_{ϕ} because it occurs in the demonstrations, even though the learned policy selects only among the three movement actions.

In all three environments, the nominal-policy likelihood is

$$\mathcal{L}_{\mu}(\phi) = -\mathbb{E}_{(c,a) \sim \mathcal{D}_{\mu}} [\log \mu_{\phi}(a | c)]. \quad (11)$$

The environments use different fitting procedures. In PointMaze, μ_{ϕ} is trained separately on the 4,800 expert episodes, excluding the uniform-coverage and blind-demonstrator subsets, and the checkpoint is selected on a validation split before the model is frozen. In AntMaze, $\mathcal{L}_{\mu}$ is optimized jointly with the counterfactual-transition objective with coefficient $\lambda_{\mu} = 1$, and the final iterate is used. In Windy Corridor, $\mathcal{D}_{\mu}$ consists of the 1,000 demonstrations in $\mathcal{D}^+$, on which $\mathcal{L}_{\mu}$ reduces to the four-way cross-entropy. We optimize it separately with Adam (learning rate 10^{-3} , batch size 256) for 3,000 updates and use the final iterate. Because the state space is small (15×15 cells and four headings), we evaluate the frozen μ_{ϕ} once on every reachable state and store the resulting table, from which the counterfactual rollouts sample the nominal action.

For AntMaze, the learned mixture weights are also used by the rollout construction in Appendix B.3. Network and optimization hyperparameters are reported in Appendix C.4.

B.2 Counterfactual Transition Model

The three environments use different parameterizations of the counterfactual transition model $T_{\eta}(s, a, a', \cdot)$ introduced in Sec. 3.1, where a denotes the target action and a' the demonstrator action. Windy Corridor uses a finite categorical model

with locally restricted support, while PointMaze and AntMaze use neural transition models with different spectral-normalization schemes.

Windy Corridor. Because the state and action spaces are finite, the counterfactual transition is represented explicitly over states and action pairs. Actions other than **forward** have deterministic one-step dynamics and are represented by point masses at their corresponding successors. Factual forward transitions use the empirical one-step distribution $\hat{P}(\cdot | s, a)$.

For off-diagonal forward transitions, we use a categorical kernel κ_η to combine the empirical transition distributions associated with the two actions:

$$T_\eta(s, a, a', y) = (1 - \epsilon) \sum_{x, x'} \hat{P}(x | s, a) \hat{P}(x' | s, a') \\ \times \kappa_\eta(y | x, x', s, a, a') + \frac{\epsilon}{|\mathcal{S}|}, \quad (12)$$

with $\epsilon = 10^{-3}$.

The kernel is categorical over 75 local offsets around the deterministic successor of the target action, corresponding to $\Delta x, \Delta y \in \{-2, \dots, 2\}$ and heading changes in $\{0, \pm 1\}$. Its support is restricted to candidate successors within radius $r = 2$ of both factual anchors under the state metric used by the model. The kernel is parameterized using translation-invariant local features and does not receive the latent wind variable. It is trained by cross-entropy using the counterfactual supervision described in Sec. 3.1.

PointMaze. PointMaze uses a stochastic generator that predicts the two-dimensional planar displacement of the agent conditioned on the current state, target action a , and demonstrator action a' . Let $\Delta x = x' - x$ denote the observed planar displacement. For each input, the model produces $M = 8$ samples $\Delta \tilde{x}_1, \dots, \Delta \tilde{x}_M$ and is trained with the Monte Carlo energy score

$$\hat{\ell}_{\text{ES}} = \frac{1}{M} \sum_{m=1}^M \|\Delta \tilde{x}_m - \Delta x\|_2 \\ - \frac{1}{2M(M-1)} \sum_{m \neq n} \|\Delta \tilde{x}_m - \Delta \tilde{x}_n\|_2. \quad (13)$$

The sampled displacement is clipped before constructing the next stacked state by shifting the position history and inserting the generated planar position.

To control sensitivity to the target action, the linear maps on the target-action pathway are projected to spectral norm at most 1. Together with the 1-Lipschitz nonlinearities and clipping operation, this gives a Lipschitz bound of 1 with respect to the target action in raw action units. An auxiliary classifier

is trained jointly to predict the hazard-transition indicator. Let $\mathcal{D}_{\text{diag}}$ and $\mathcal{D}_{\text{off}}$ denote the diagonal and off-diagonal subsets of a data partition $\mathcal{D}$. For each regime $r \in \{\text{diag}, \text{off}\}$, we define

$$\mathcal{L}_r(\mathcal{D}) = \frac{1}{|\mathcal{D}_r|} \sum_{i \in \mathcal{D}_r} \hat{\ell}_{\text{ES},i} + \frac{\lambda_{\text{on}}}{|\mathcal{D}|} \sum_{i \in \mathcal{D}_r} \ell_{\text{onset},i}^{\text{BCE}}, \quad (14)$$

where $\lambda_{\text{on}} = 0.25$. The complete PointMaze transition-model objective is

$$\mathcal{L}_{\text{ETT}}(\mathcal{D}) = \mathcal{L}_{\text{diag}}(\mathcal{D}) + \mathcal{L}_{\text{off}}(\mathcal{D}). \quad (15)$$

The onset component is estimated using class-stratified sampling and reweighted to the empirical event prevalence.

AntMaze. AntMaze uses a deterministic predictor of the full state displacement, conditioned on the current state, target action a , and demonstrator action a' . Its predictive distribution is a Dirac measure, for which the energy score reduces to

$$\ell_{\text{ES}} = \|g_\eta(s, a, a') - (s' - s)\|_2. \quad (16)$$

Spectral normalization is applied to every layer of the displacement network using 10 power iterations and coefficient 2.0. This coefficient controls the per-layer spectral scale and is used as a regularizer; it is not interpreted as a global Lipschitz constant of the transition network.

Additional architecture and optimization hyperparameters are reported in Appendix C.4.

B.3 Counterfactual Rollout and Replay Construction

Model-generated continuations are stored separately from the original offline demonstrations, which remain fixed throughout training. Generated trajectories preserve their temporal structure so that future-goal relabeling is performed within the same recorded or generated trajectory.

Windy Corridor. For Windy Corridor, each continuation starts from a recorded state-action pair (s, a) drawn uniformly from $\mathcal{D}^+$, and the recorded action is kept as the first target action. At each generated state, a nominal demonstrator action a' is sampled from the tabulated μ_ϕ , the next state is sampled from the tabulated $T_\eta(s, a, a', \cdot)$, and the next target action is sampled from the current learner. Because the target action always comes from the learner, the factual branch is used exactly when the learner’s action coincides with the sampled demonstrator action, and no separate retention probability is needed. A continuation ends at lava, at the goal, or at the rollout horizon.

The augmentation buffer is regenerated with the current policy at the start of each training round. Contrastive positives are relabeled from future states of the generated continuations, while behavioral cloning continues to use the recorded actions in $\mathcal{D}^+$.

PointMaze. For PointMaze, we retain a recorded state–action pair and replace its subsequent continuation with a rollout from the learned counterfactual transition model. The generated suffix supplies future states for contrastive goal relabeling, while behavioral-cloning supervision continues to use the recorded actions from the offline demonstrations.

AntMaze. For AntMaze, the recorded prefix is retained up to the route decision and the remaining trajectory is replaced by a model-generated continuation. At each generated state, a nominal demonstrator action is sampled from μ_ϕ and a target action is sampled from the current learner. The probability of retaining the factual branch is

$$p_{\text{diag}}(s) = \sum_{k=1}^K w_k(s)^2,$$

computed from the mixture weights of the nominal behavioral policy; otherwise the transition model is evaluated using the learner-selected action.

We generate continuations of length 90 and refresh the augmentation buffer throughout actor–critic training using the current policy. Each refresh contains 2,000 generated continuations, and generated and recorded trajectories each contribute half of the training minibatch. Additional rollout parameters are listed in Appendix C.4.

B.4 Contrastive Critic and Actor Training

CauCRL uses the same actor–critic parameterization as the corresponding CRL baseline within each environment. PointMaze represents goals using the full stacked state, whereas AntMaze uses the planar (x, y) position.

The implementation uses in-batch negative sampling for contrastive critic training. PointMaze uses a single critic, while AntMaze uses two independently parameterized critics and evaluates actor actions using the minimum of their scores.

The actor is a tanh-Gaussian goal-conditioned policy. Behavioral-cloning regularization uses recorded offline actions; PointMaze draws these actions from a separately balanced BC minibatch, whereas AntMaze uses the standard training minibatch. Network dimensions and optimization hyperparameters are reported in Appendix C.4.

C EXPERIMENTAL SETUP

C.1 Windy Corridor

Geometry. Windy Corridor is a 15×15 Mini-Grid (Chevalier-Boisvert et al., 2023) environment with two routes from the start $(1, 1)$ to the goal $(13, 1)$. The short route runs east along row $y = 1$, directly above a row of lava cells at $x \in \{3, 4, 5\}$ and $x \in \{8, 9, 10\}$. The safe route descends along column $x = 1$, follows row $y = 13$, and returns north along column $x = 13$; it takes about 39 steps, compared with about 13 on the short route. Entering a lava cell terminates the episode as a failure.

Dynamics and wind. The agent’s actions are **left**, **right**, and **forward**; the demonstrator can additionally **wait**. A wind direction is drawn independently at every step, east, south, west, or north with probability 0.1 each and still with probability 0.6. It is observed by the demonstrator before acting and resampled after the transition. Wind affects only **forward**: a tailwind moves the agent two cells, a headwind cancels the move, and a crosswind moves it one cell forward and then one cell in the wind direction. On the short route, a south wind therefore pushes the agent into the lava from six positions along row $y = 1$; the safe route has no such positions.

Observation. The learner observes its cell and heading, $s_t = (x_t, y_t, h_t)$, and the goal is the target cell (x, y) . The wind is never included in the learner observation.

Demonstrator and dataset. At the beginning of each episode, the demonstrator selects the short route with probability 0.95 and the safe route otherwise. On the short route, it observes the current wind and waits whenever it stands at one of the six exposed positions under a south wind; on the safe route, it follows the corridor without consulting the wind. The demonstration dataset $\mathcal{D}^+$ contains 1,000 episodes and 14,028 transitions, of which 952 follow the short route and 48 the safe route. Every episode reaches the goal, so the dataset contains no lava failures. All offline RL methods use $\mathcal{D}^+$.

A separate pool of 1,000 trajectories of a uniformly random policy is used only to construct P^- for the counterfactual transition model (Appendix B.2) and is excluded from actor–critic replay.

Evaluation. Each evaluation checkpoint uses 300 episodes with a fixed set of environment seeds, deterministic policy actions, and a horizon of 400 steps under the natural wind distribution. Success is recorded when the agent reaches the goal cell. We additionally report the robust-route rate, the fraction of episodes

that enter the safe-route row $y = 13$.

C.2 PointMaze

Geometry. PointMaze is a 9×5 grid maze with two start-to-goal routes. The agent starts at $(0.5, 3.5)$ and the goal is at $(8.5, 3.5)$. The short route runs along row $y = 3$ and crosses three hazard cells at $(3, 3)$, $(4, 3)$, and $(5, 3)$. The safe route branches downward at $x = 1$, follows row $y = 1$, and rejoins the short route at $x = 7$. Episodes have a horizon of 50 steps.

Dynamics and hazard. Actions are two-dimensional velocities clipped to $[-1, 1]^2$, with additive Gaussian noise of standard deviation 0.01. Each environment step is integrated over 10 simulation sub-steps with per-axis wall collision.

Each of the three hazard cells is independently active with probability 0.30 at every step. The hazard indicators are observed by the demonstrator before acting and are resampled after the transition. If the agent ends a step inside an active hazard cell, it enters an absorbing failure state: its position remains fixed, subsequent actions have no effect, and the goal reward can no longer be obtained.

Observation. The learner observes the four most recent planar positions,

$$s_t = [x_t, y_t, \dots, x_{t-3}, y_{t-3}],$$

giving an 8-dimensional state representation. The goal is represented in the corresponding stacked form. Hazard indicators are never included in the learner observation.

Demonstrator and dataset. At the beginning of each episode, the demonstrator selects either the safe route or the short route. Safe-route demonstrations follow a shortest path computed with the hazard cells treated as blocked. On the short route, the demonstrator observes the current hazard indicators and, before entering a hazard cell, avoids actions predicted to terminate in an active cell.

The offline dataset contains 6,600 episodes and 330,000 transitions:

Behavior	Episodes
Wait at the hazard, then cross	3,073
Cross immediately	1,470
Uniform coverage	1,200
Blind demonstrator	600
Forced safe detour	257

The resulting dataset contains 4,514 successful episodes, 1,451 absorbed failures, and 635 timeouts. All offline RL methods use the complete dataset. The nominal behavioral policy described in Appendix B.1

is fitted only on the 4,800 demonstrator episodes, excluding the uniform-coverage and blind-demonstrator subsets.

Evaluation. Each evaluation checkpoint uses 300 episodes with a fixed set of environment seeds and deterministic policy actions. Success is recorded when the agent reaches the task goal according to the environment reward. We additionally report the safe-detour rate. An episode is classified as taking the detour if it enters the lower route before entering any hazard cell; otherwise, entering a hazard cell first is classified as taking the shortcut.

C.3 AntMaze

Geometry. AntMaze is a continuous-control ring maze with two routes from the start to the goal. The Ant starts at $(0, 0)$ and the goal is at $(24, 0)$. The direct route crosses two stochastic rockfall zones, while a longer perimeter route avoids both. Episodes have a horizon of 800 steps.

The two rockfall zones lie on the direct route. Zone 1 spans $x \in [6.6, 9.4]$ and Zone 2 spans $x \in [14.6, 17.4]$, with both covering $y \in [-2, 2]$. The learner observes a 29-dimensional Ant state and selects 8-dimensional joint torques; the goal is represented by its planar (x, y) position. Rockfall states and activation schedules are hidden from the learner.

Hazard. Each rockfall zone is independently activated with probability $p_{\text{active}} = 0.40$ at the beginning of an episode. Conditional on activation, the start times are sampled independently as

$$t_0^{(1)} \sim \mathcal{U}\{10, \dots, 45\}, \quad t_0^{(2)} \sim \mathcal{U}\{90, \dots, 125\}.$$

An activated zone remains active for 72 steps and drops four rocks. Physical contact between a rock and the Ant produces an absorbing failure: the agent loses control for the remainder of the episode and can no longer receive the goal reward.

Demonstrator and dataset. The demonstrator first chooses between the direct and detour routes using an episode-level route variable independent of the rockfall activations. Detour trajectories follow the safe perimeter route without consulting the rockfall schedules. On direct-route trajectories, the demonstrator observes the activation schedule of each zone and decides whether to enter or wait. A crossing is attempted only when the predicted crossing interval, using a 50-step crossing estimate and an 8-step safety margin, does not overlap the corresponding rockfall interval.

The demonstration dataset contains 1,000 episodes and 311,005 transitions, collected with $p_{\text{active}} = 0.40$. Direct and detour routes each account for 50% of the

Table 1: Actor-critic architectures and training hyperparameters.

	Windy Corridor	PointMaze	AntMaze
State dimension	3	8	29
Action dimension	3 (discrete)	2	8
Goal dimension	2	8	2
Episode horizon	400	50	800
Batch size	64	256	1024
Actor hidden layers	[128]	[256, 256]	[1024, 1024]
Critic hidden layers	[128]	[256, 256]	[1024, 1024]
Activation	ReLU	ReLU	ReLU
Representation dimension	64	64	16
Number of critics	1	1	2
Discount γ	0.99	0.95	0.999
BC coefficient λ_{BC}	1	0.05	0.05
Entropy coefficient	0	0	0
Actor learning rate	2×10^{-3}	3×10^{-4}	3×10^{-4}
Critic learning rate	2×10^{-3}	3×10^{-4}	3×10^{-4}
Optimizer	SGD	Adam	Adam
Main updates	100k	300k	100k
Critic warm-up	—	30k	—
Evaluation interval	250	1k	400
Evaluation episodes	300	300	300

demonstrations. The dataset contains 994 successful episodes and 6 timeouts, with no rock-contact failures.

A separate pool of 300 episodes is used only for fitting the counterfactual transition model and is excluded from actor-critic replay. This pool is collected in the same environment by overriding a demonstrator decision to wait at Zone 1 with a go decision and retaining trajectories in which the override produces a realized Zone 1 rock-contact failure.

Evaluation. Each evaluation checkpoint uses 300 episodes with fixed environment seeds and deterministic policy actions over the full 800-step horizon. Evaluation uses the same rockfall activation probability $p_{\text{active}} = 0.40$ as data collection. Success is recorded when the Ant reaches the task goal at (24, 0) according to the environment reward.

C.4 Network Architectures and Training Hyperparameters

Table 1 summarizes the actor-critic configurations used for all three environments. Within each environment, CRL and CauCRL use the same actor and critic architectures. All experiments were run on NVIDIA GeForce RTX 5090 GPUs.

For Windy Corridor, the critic encodes the state-action pair and the goal with one-hot features over grid states and cells, and the contrastive score uses temperature 0.07. The actor receives the raw (x, y, h) state. Its objective $(1 - \lambda) \mathbb{E}_{\pi}[f] + \lambda \log \pi(a \mid s, g)$ with $\lambda = 0.5$ corresponds to $\lambda_{BC} = 1$. Actor minibatches are drawn uniformly over distinct recorded state-action pairs rather than over transitions, so the rare safe-route decisions are not outweighed by the frequent short-route ones.

Table 2 reports the nominal behavioral-policy configurations. As described in Appendix B.1, the PointMaze and Windy Corridor models are trained separately and then frozen, whereas the AntMaze model is optimized jointly with the counterfactual transition model.

For PointMaze, the 4,800 nominal-policy episodes are split by complete episode into 4,321 training and 479 validation episodes. Validation NLL is evaluated every 500 updates. Context normalization statistics are fit on the training split only. For AntMaze, the nominal-policy head uses the same positive-sample normalization statistics and episode-level holdout as the transition model. For Windy Corridor, the nominal policy is trained on a random 90% episode split of $\mathcal{D}^+$ and is tabulated over all grid states after training.

Table 3 summarizes the learned counterfactual-transition models.

For PointMaze, checkpoint selection uses the earliest minimum of

$$\mathcal{L}_{\text{ETT}}(\mathcal{V}) = \mathcal{L}_{\text{diag}}(\mathcal{V}) + \mathcal{L}_{\text{off}}(\mathcal{V}),$$

evaluated on the held-out validation partition $\mathcal{V}$. AntMaze and Windy Corridor use the final transition-model iterate without validation-based checkpoint selection. For Windy Corridor, the factual next-state network and the counterfactual kernel κ_{η} share the settings in Table 3, and the background weight is $\epsilon = 10^{-3}$.

The AntMaze counterfactual-replay configuration is summarized in Table 4.

The Windy Corridor configuration is summarized in Table 5.

Baseline configurations. For GCIQL, both continuous-control environments use expectile 0.9 and Polyak coefficient 0.005. The PointMaze actor uses AWR with inverse temperature 3.0 and weights clipped at 100, whereas AntMaze uses the DDPG+BC-style actor with coefficient 0.3.

For HIQL, both continuous-control environments use three hidden layers of size 512, layer normalization, representation dimension 10, expectile 0.7, low- and high-level actor coefficients of 3.0, Polyak coefficient 0.005, learning rate 3×10^{-4} , and batch size 1024. PointMaze uses discount 0.95 and a 10-step subgoal horizon, whereas AntMaze uses discount 0.99 and a 25-step subgoal horizon. HIQL is trained for 330,000 updates with checkpoints every 1,000 updates.

The PointMaze subgoal horizon differs from the OG-Bench (Park et al., 2025) default of 25. We evaluated horizons in $\{5, 10, 25\}$ together with actor coefficients in $\{3, 10\}$; the 5-step setting produced nearly degenerate subgoal advantages because most sampled subgoals

already lay within the success radius, and we retained a horizon of 10.

For Windy Corridor, all baselines are trained on $\mathcal{D}^+$ for 100,000 updates and evaluated every 250 updates with the protocol of Appendix C.1. Their mini-batches are drawn uniformly over distinct recorded state-action pairs, as for CRL. GCBC uses the CRL actor trained only with the behavioral-cloning loss on future-state relabeled goals. GCIQL uses expectile 0.9, Polyak coefficient 0.005, and the AWR actor with inverse temperature 3.0 and weights clipped at 100. Its Q and V networks use one hidden layer of 128 units on the critic’s one-hot features and are trained with Adam at learning rate 3×10^{-4} . HIQL uses the continuous-control configuration above with a categorical low-level actor, discount 0.99, and a 3-step subgoal horizon, since Windy Corridor demonstrations are only 10 to 40 steps long.

For both GCIQL and HIQL, goal relabeling uses a binary 1/0 reward for the first non-failure arrival at the relabeled goal rather than the 0/−1 convention used by the reference OGBench implementations. Absorbing failure states use a zero bootstrap mask, while time-limit truncations continue to bootstrap. Other baseline settings follow the corresponding reference implementations.

C.5 Result Details

Table 6 reports the complete per-seed results for all three benchmarks: for each method and random seed, the success rate averaged over the final 10% of evaluation checkpoints. These are the per-seed values behind the means reported in Section 4 and plotted in Figures 2 and 5.

D RELATED WORK

Contrastive goal-conditioned reinforcement learning. Contrastive reinforcement learning (CRL) casts goal-conditioned control as learning a critic that distinguishes future achieved states from unrelated states, thereby connecting contrastive representation learning with goal-reaching value functions (Eysenbach et al., 2022). Subsequent work has extended this framework along several directions. Stable CRL studies architectural and optimization choices that make contrastive goal-conditioned policies effective on offline, image-based robotic manipulation tasks (Zheng et al., 2024a). TD InfoNCE replaces Monte-Carlo future-state estimation with a temporal-difference contrastive objective, enabling trajectory stitching and more sample-efficient long-horizon prediction (Zheng et al., 2024b). More recently,

JaxGCRL systematically studies modern CRL design choices and finds strong performance with symmetric InfoNCE objectives and distance-based critics (Bortkiewicz et al., 2025), while quasimetric representations combine contrastive successor representations with temporal-distance structure for offline goal-conditioned learning (Myers et al., 2025).

Our approach is complementary to these developments: CauCRL modifies the transition and future-outcome supervision used to train a goal-conditioned critic, rather than relying on a particular contrastive objective. For example, InfoNCE-based CRL can use counterfactually augmented future states as positive pairs, while a TD-based contrastive method can apply the same robust transition construction to the one-step successors used in its bootstrapped targets.

Table 2: Nominal behavioral-policy architectures and training settings.

	Windy Corridor	PointMaze	AntMaze
Conditioning context	state (one-hot, 34-D)	state + goal (16-D)	state (29-D)
Action dimension	4 (discrete)	2	8
Mixture components K	–	5	5
Hidden layers	(categorical) [128, 128]	[128, 128]	[512, 512]
Activation	ReLU	SiLU	ReLU
Covariance	–	diagonal	diagonal
Action likelihood	categorical	censored on $[-1, 1]^2$	censored on empirical action box
Scale parameterization	–	$\sigma \in [0.02, 2.0]$, $ \mu \leq 3$	$\log \sigma \in [-5, 2]$
Spectral normalization	none	none	all layers, coef. 2.0, 10 power iterations
Batch size	256	512	1024
Learning rate	10^{-3}	3×10^{-4}	10^{-3}
Gradient clipping	–	10.0	–
Training updates	3k	20k	20k
Optimization	separate, then frozen	separate, then frozen	joint with transition model, $\lambda_\mu = 1$
Checkpoint selection	final iterate	best validation NLL	final iterate
Training data	900 expert episodes	4,800 expert episodes	full demonstration pool
Validation split	–	10% by episode	episode-level holdout shared with the counterfactual transition model

Table 3: Counterfactual transition-model architectures and training settings.

	Windy Corridor	PointMaze	AntMaze
Prediction target	next state (75 local offsets)	planar displacement (2-D)	full-state displacement (29-D)
Hidden layers	[128, 128]	[128, 128] + generator	[512, 512]
Activation	ReLU	ReLU	ReLU
Lipschitz control	locality restriction, $r = 2$	target-action spectral projection, $L_a \leq 1$	all-layer spectral normalization, coef. 2.0
Power iterations	–	–	10
Predictive form	categorical (tabulated)	stochastic, $M = 8$	deterministic (Dirac)
Batch size	256	256	1024
Training updates	6k	2.5k	20k
Learning rate	10^{-3}	3×10^{-4}	10^{-3}
Optimizer	Adam	Adam	Adam
Checkpoint selection	final iterate	earliest validation minimum	final iterate

Table 4: AntMaze counterfactual rollout and replay hyperparameters.

Hyperparameter	Value
Rollout start	route-dependent split point
Rollout horizon	90
Rollouts per refresh	2,000
Refresh interval	every training round
Generated-data fraction	0.5
State feasibility	state bounds and maze free space

Table 5: Windy Corridor counterfactual rollout and replay hyperparameters.

Hyperparameter	Value
Rollout start	recorded (s, a) , uniform over $\mathcal{D}^+$
Rollout horizon	400
Rollouts per refresh	10,000
Refresh interval	every training round (5k updates)
Training rounds	20
Generated-data fraction	1.0 (critic); actor BC uses $\mathcal{D}^+$
State feasibility	tabulated over legal grid states

Table 6: Per-seed final success rates (mean over the final 10% of evaluation checkpoints) on all three benchmarks.

Benchmark	Method	Per-seed				
Windy	CauCRL	0.797	0.984	0.919	0.895	1.000
	CRL	0.513	0.513	0.513	0.513	0.513
	GCIQL	0.513	0.513	0.513	0.513	0.513
	GCBC	0.586	0.562	0.635	0.574	0.574
	HIQL	0.513	0.513	0.513	0.513	0.513
PointMaze	CauCRL	1.000	1.000	1.000	1.000	1.000
	CRL	0.347	0.347	0.347	0.347	0.347
	GCIQL	0.347	0.347	0.347	0.347	0.347
	GCBC	0.347	0.347	0.347	0.347	0.347
	HIQL	0.194	0.173	0.166	0.213	0.135
AntMaze	CauCRL	0.712	0.869	0.798	0.820	0.879
	CRL	0.596	0.620	0.646	0.677	0.605
	GCIQL	0.532	0.612	0.516	0.913	0.508
	GCBC	0.476	0.499	0.429	0.529	0.559
	HIQL	0.401	0.390	0.421	0.417	0.418