

THINK IN STRATEGIES, ACT WITH TOOLS: TRACE-ABLE AGENTIC OPTIMIZATION FOR COMBINATORIAL PROBLEMS

Zhongnian Li, Shi Xu, Peng Ying, Weikang Gong, Zhixiao Wang, Xinzheng Xu*

School of Computer Science and Technology / School of Artificial Intelligence

China University of Mining and Technology

Xuzhou, China

{zhongnianli, xushi, pengying, wkgong, zhxwang, xxzheng}@cumt.edu.cn

ABSTRACT

Optimization by PROMpting (OPRO) directly leverages Large Language Models (LLMs) to generate candidate solutions through natural-language prompting. However, OPRO’s optimization process is difficult to track, which prevents LLMs from capturing useful information accumulated over previous iterations, thereby limiting solution quality. To address this limitation, we propose a Tool-Augmented Strategic Agent (TASA) which summarizes and exploits trajectory to improve solution quality. Specifically, TASA plans the strategy for each step based on the optimization trajectory, which decomposes the optimization process into traceable strategy selections. Moreover, we leverage LLM to construct problem-specific tools and introduce a strategy-guided adaptive tool planner, which efficiently utilizes the information of trajectory to update solutions. We establish local convergence under persistent exploration and evaluate the complete framework under a shared candidate-evaluation budget. The results support its solution quality and the traceability of strategy-guided search.

1 INTRODUCTION

Recent advances in Large Language Models (LLMs) Team et al. (2024); Grattafiori et al. (2024); Guo et al. (2025); Yang et al. (2025) substantially improve their capabilities in reasoning Wei et al. (2022); Gao et al. (2023), planning Yao et al. (2023a); Zhou et al. (2024), and decision-making Yao et al. (2023b), providing possibilities for using LLMs to solve optimization problems. Optimization by PROMpting (OPRO) Yang et al. (2024) leverages an LLM as the optimizer to generate candidate solutions by iterative prompting process. Specifically, OPRO prompts the LLM to directly generate promising candidate solutions by constructing a prompt that contains a description of the optimization problem and previously evaluated solutions. Due to its advantages, OPRO attracts considerable attention, inspiring broader research on LLM-based optimization Guo et al. (2023); Liu et al. (2024b); van Stein & Bäck (2025); Zheng et al. (2025); Ye et al. (2025).

Unfortunately, the limited traceability of OPRO’s optimization process makes it difficult for LLMs to capture useful information from previous iterations, thereby limiting solution quality. As illustrated in Figure 1(a), the LLM directly outputs a candidate solution without explicitly stating the intention or trajectory behind its generation. Consequently, OPRO retains only the candidate solutions generated across iterations, without an explicit account of how each new solution is generated. This lack of the information hinders LLM from accurately assessing the current search state, thereby limiting ability of OPRO to identify promising search directions. For example, when the candidate set is dominated by similar solutions, the OPRO may struggle to escape the corresponding region of the solution space and discover a better solution.

To address this limitation, we propose a Tool-Augmented Strategic Agent (TASA) to plan the strategy for each step based on the optimization trajectory. Specifically, TASA constructs an explicit

*Corresponding author: xxzheng@cumt.edu.cn

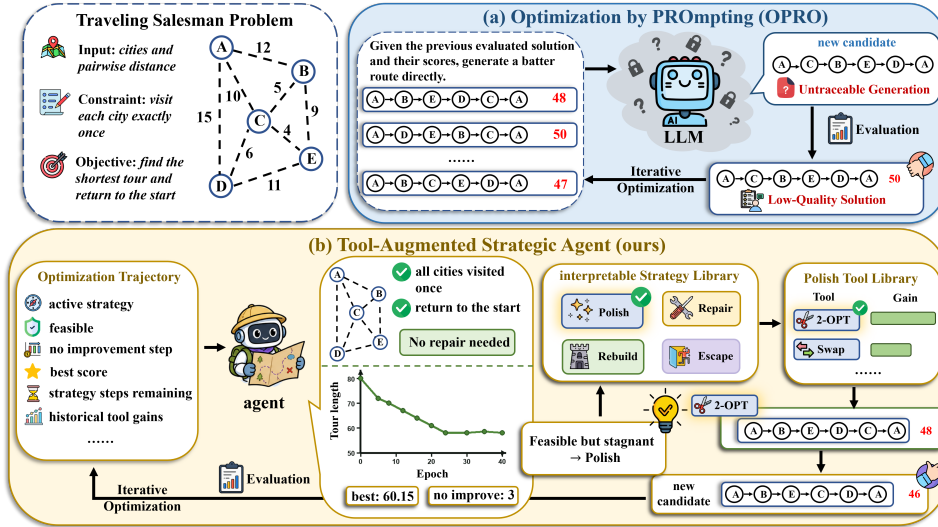


Figure 1: *Motivation and overview of our Tool-Augmented Strategic Agent.* TASA shifts the role of the LLM from directly generating solutions to planning optimization strategies from optimization trajectories, and executes these strategies through strategy-guided adaptive tool planner.

optimization trajectory by continuously recording information about its optimization process, primarily the selected optimization strategies and tool invocations. As illustrated in Figure 1, after constructing the trajectory, the agent analyzes the recorded information and accordingly selects the polish strategy to further shorten the current tour through local adjustments. TASA aims to enable agent to exploit the optimization trajectory for more informed optimization decisions by shifting the LLM’s role from directly generating candidate solutions to planning optimization strategies.

In this paper, we leverage an LLM to construct a library of problem-specific tools according to the characteristics of each optimization problem. The resulting library organizes executable, problem-adaptive tools by optimization strategy. Building on this tool library, we introduce a strategy-guided adaptive tool planner, which efficiently translates the optimization strategies selected by agent into concrete solution updates. This mechanism balances the exploitation of previously well-performing tools, the exploration of underexplored tools, and the avoidance of repeatedly selecting poorly performing tools. Finally, the planner applies the selected tool to the candidate solution, enabling the efficient execution of the LLM-planned strategy. Moreover, we analyze the probabilistic local convergence of TASA under strategy-conditioned tool neighborhoods. Experimental results across diverse combinatorial optimization problems demonstrate that TASA not only makes the optimization process traceable but also improves solution quality.

Our main contributions are summarized below.

- We propose a tool-augmented strategic agent for traceable combinatorial optimization and provide a theoretical analysis of its probabilistic local convergence under strategy-conditioned tool neighborhoods.
- We construct problem-specific tools and introduce a strategy-guided adaptive tool planner that invokes these tools to efficiently update solutions.
- Experimental results across diverse combinatorial optimization problems demonstrate that TASA not only makes the optimization process traceable but also improves solution quality.

2 RELATED WORK

2.1 LLM-BASED COMBINATORIAL OPTIMIZATION

Large Language Models (LLMs) Grattafiori et al. (2024); Team et al. (2024); Guo et al. (2025); Yang et al. (2025) apply to combinatorial optimization through both direct solution generation and automatic heuristic design Da Ros et al. (2026). Optimization by PROMpting (OPRO) Yang et al. (2024) treats the LLM as an optimizer and generates new candidates from previously evaluated solutions. FunSearch Romera-Paredes et al. (2024) combines a LLM with an evaluator to evolve program components in function space, while Evolution of Heuristics (EoH) Liu et al. (2024a) jointly evolves

natural-language heuristic ideas and their executable implementations. These methods demonstrate the potential of LLMs to optimize over both candidate solutions and heuristic programs. TASA complements these approaches with explicit links between trajectory-conditioned strategies, executable tool updates, and observed search outcomes.

2.2 TOOL-AUGMENTED AGENTS

Tool-augmented agents Karpas et al. (2022); Paranjape et al. (2023); Shen et al. (2023); Song et al. (2023); Hao et al. (2023); Patil et al. (2024); Qin et al. (2024); Tang et al. (2023); Lu et al. (2023); Xu et al. (2023); Wu et al. (2024); Kong et al. (2024); Gao et al. (2024) extend LLMs by enabling them to interact with external tools and environments Cai et al. (2024); Qian et al. (2023); Yuan et al. (2024). ReAct Yao et al. (2023b) integrates reasoning with action generation, allowing LLMs to update their plans based on observations from the environment, while Toolformer Schick et al. (2023) trains language models to determine which APIs to invoke, when to invoke them, and how to incorporate their outputs. In optimization Li et al. (2023); Ahmaditeshnizi et al. (2024), OptiGuide translates natural-language queries into code that modifies and invokes existing solvers, supporting solution interpretation and what-if analysis.

However, these methods mainly target general task interaction or solver-assisted analysis, rather than treating tools as structured operators for iterative solution improvement. In contrast, TASA constructs problem-specific tools and employs a strategy-guided adaptive tool planner that selects them according to optimization trajectory.

3 METHOD

3.1 PROBLEM FORMALIZATION

In this paper, we consider a combinatorial optimization problem P defined over a finite discrete candidate space Ω_P . Since candidate solutions generated during optimization may violate problem constraints, we utilize $v_P(x)$ to represent the constraint-violation status of a candidate x . Each component of $v_P(x)$ corresponds to a specific constraint, taking the value 0 if the constraint is satisfied and 1 if it is violated. The vector is divided into a hard-constraint component $v_P^{\text{hard}}(x)$ and a soft-constraint component $v_P^{\text{soft}}(x)$ (when the problem contain soft-constraint). Hard constraints determine the feasibility of a candidate, whereas soft constraints express desirable but nonmandatory requirements. A candidate is considered feasible if none of its hard constraints are violated. Accordingly, the feasible solution set is defined as

$$\mathcal{X}_P = \{x \in \Omega_P \mid v_P^{\text{hard}}(x) = 0\} \quad (1)$$

To unify the optimization directions of different combinatorial optimization problems, we transform original objective function $g_P(x)$ of each problem into a higher-is-better score by a problem-specific transformation function $\phi_P(\cdot)$. The unified internal scoring function $f_P(x)$ defined as

$$f_P(x) = \phi_P(g_P(x)) - \mathcal{P}_P(v_P(x)) \quad (2)$$

where $\mathcal{P}_P(\cdot)$ is a problem-specific penalty function used to penalize constraint violations and guide the search toward the feasible region.

Under this formulation, our goal is to identify the best feasible solution found within a budget of M candidate evaluations as

$$\hat{x}_P^M \in \arg \max_{x \in \mathcal{X}_P \cap \mathcal{E}_M} f_P(x) \quad (3)$$

where $\mathcal{E}_M = x^1, x^2, \dots, x^M$ denotes the set of candidates evaluated during the search.

3.2 PROBLEM-SPECIFIC TOOLS CONSTRUCTION

To maintain adaptability of TASA across tasks, we utilize an LLM to construct a problem-specific tools library based on the characteristics of each optimization problem. TASA constructs tool library through the following two coupled stages.

Tool Archetype Generation. Given a structured context containing the problem description, constraints, candidate-solution schema, and strategy definitions, the LLM generates tool archetypes for each of the four strategies. Each archetype describes the intended functionality and behavior rather than providing directly executable code.

Problem-Specific Tool Archetype Instantiation. Once generated, the tool archetypes are validated for structural correctness, safety, and compatibility with the available primitive operators. Valid archetypes are then bound to registered operators and instantiated as callable tools adapted to the current problem, while invalid archetypes are corrected or rejected.

The LLM specifies each tool’s strategy, operator sequence, and parameters. Registered operators execute these updates and may perform multiple updates per candidate. Tool-construction prompts appear in the supplementary material.

3.3 OPTIMIZATION STRATEGY PLANNING

TASA uses an LLM to select optimization strategies from the problem description, available tools, and optimization trajectory. This allows the agent to relate the current search state to the purpose of the next solution update. We let $z \in \mathcal{Z} := \{\text{rebuild}, \text{repair}, \text{polish}, \text{escape}\}$ denote an optimization strategy, with the four strategies defined as follows.

- **rebuild** reconstructs a solution from a different structural configuration, enabling the exploration of a new region of the search space.
- **repair** focuses on reducing constraint violations and restoring the feasibility of the current solution.
- **polish** performs local refinement around a promising feasible solution to further improve score.
- **escape** applies stronger structural perturbations to move away from a stagnant search region.

The allocation among these intentions adapts to the search state. At each replanning iteration k , s_k summarizes solution quality, feasibility, stagnation, remaining budget, and tool feedback from the recorded trajectory. This representation connects the observed search progress to the next optimization intention. Based on this representation, the strategy planner produces $z_k = \Phi_{\text{LLM}}(s_k)$, where Φ_{LLM} denotes an inference-time decision process induced by a prompt, and z_k denotes the optimization strategy selected at iteration k .

3.4 STRATEGY-GUIDED ADAPTIVE TOOL PLANNER

To translate the strategy selected by the agent into concrete solution updates, we introduce a strategy-guided adaptive tool planner that balances tool exploration and optimization gain. The strategy z_k represents the optimization intention at iteration k , but does not directly specify which tool should be executed.

Candidate Tool Library Construction. The planner first constructs a candidate tool library that is compatible with both the problem structure and the current strategy, given by $\mathcal{C}_k = \mathcal{T}(P) \cap \mathcal{T}(z_k)$, where $\mathcal{T}(P)$ denotes the set of tools applicable to problem P , and $\mathcal{T}(z_k)$ denotes the set of tools consistent with strategy z_k . Their intersection maps the abstract optimization strategy to a library of executable candidate tools.

Balancing Tool Exploration and Optimization Gain. After constructing the candidate tool library, the planner balances exploration and exploitation by evaluating less-tested tools while prioritizing those with proven effectiveness. Let $\mathcal{C}_k^0 = \{t \in \mathcal{C}_k \mid n_t = 0\}$ denote the set of untried candidate tools, and define $\mathcal{C}_k^{\min} = \{t \in \mathcal{C}_k \mid n_t = \min_{s \in \mathcal{C}_k} n_s\}$ as the set of candidate tools with the smallest invocation count. Here, n_t denotes the number of times tool t has been invoked. We further define the gain-maximizing tool as $t_k^* = \arg \max_{t \in \mathcal{C}_k} p_k(t)$, where $p_k(t)$ denotes the priority score assigned to tool t at iteration k .

Conditioned on the optimization trajectory s_k , the tool t_k is selected according to the following probability distribution

$$\Pr(t_k = t \mid s_k) = \begin{cases} \frac{\mathbb{I}[t \in \mathcal{C}_k^0]}{|\mathcal{C}_k^0|}, & \mathcal{C}_k^0 \neq \emptyset, \\ \epsilon \frac{\mathbb{I}[t \in \mathcal{C}_k^{\min}]}{|\mathcal{C}_k^{\min}|} + (1 - \epsilon)\mathbb{I}[t = t_k^*], & \mathcal{C}_k^0 = \emptyset. \end{cases} \quad (4)$$

where $\mathbb{I}[\cdot]$ is the indicator function and $\epsilon \in [0, 1]$ controls the exploration rate. If untried tools remain, the planner selects one uniformly from $\mathcal{C}_k^0$, prioritizing the evaluation of previously unused candidates. Once all current candidate tools have been invoked, the planner explores with probability ϵ by selecting uniformly from the least-invoked tools in $\mathcal{C}_k^{\min}$. With probability $1 - \epsilon$, the planner follows the current optimization trajectory by selecting highest-priority tool t_k^* . This mechanism maintains tool diversity and prevents premature concentration on a small subset of tools.

Dynamic Tool Priority $p_k(t)$. When randomized exploration is not performed, the planner selects the tool with the highest dynamic priority, defined as

$$p_k(t) = \alpha \bar{r}_t + (1 - \alpha)r_t^{\max} - \lambda \zeta_t, \quad (5)$$

where $\bar{r}_t$ and $r_t^{\max}$ respectively denote the average and maximum historical gains of tool t , and $\alpha \in [0, 1]$ controls their relative contributions. Moreover, ζ_t is the number of consecutive invocations without improvement, and $\lambda \geq 0$ controls the stagnation penalty. Once the tool produces an improvement, ζ_t is reset to zero.

The planner thus maintains tool diversity through initial and randomized exploration while progressively allocating more resources to tools that produce larger and more reliable improvements.

3.5 PROBABILISTIC LOCAL CONVERGENCE ANALYSIS

At each replanning time, the agent maps the optimization trajectory to a strategy z . Rather than updating the candidate solutions directly, TASA activates the compatible tool library $\mathcal{C}(z) := \mathcal{T}(P) \cap \mathcal{T}(z)$, from which the tool planner selects an executable tool. We first characterize the neighborhoods induced by the strategies and their compatible tools, and then establish the corresponding local convergence result.

Definition 1 (Strategy-Conditioned Tool Neighborhood) For each $t \in \mathcal{C}(z)$, let $q_t(x' \mid x)$ denote the probability that tool t generates a feasible candidate x' using the reference solution x . The neighborhood induced by strategy z is

$$\mathcal{N}_{\mathcal{T}}(x \mid z) := \bigcup_{t \in \mathcal{C}(z)} \{x' \in \mathcal{X}_P : q_t(x' \mid x) > 0\}. \quad (6)$$

Since TASA may activate different strategies, we aggregate their neighborhoods to define the overall local search region.

Definition 2 (TASA-Induced Local Optimum) Define the overall reachable neighborhood $\mathcal{N}_{\text{TASA}}(x)$ and the improving set $\mathcal{I}_{\text{TASA}}(x)$ of TASA, respectively, as

$$\mathcal{N}_{\text{TASA}}(x) := \bigcup_{z \in \mathcal{Z}} \mathcal{N}_{\mathcal{T}}(x \mid z), \quad (7)$$

$$\mathcal{I}_{\text{TASA}}(x) := \{x' \in \mathcal{N}_{\text{TASA}}(x) : f_P(x') > f_P(x)\}. \quad (8)$$

A feasible solution is TASA-locally optimal if $\mathcal{I}_{\text{TASA}}(x) = \emptyset$. The set of all TASA-locally optimal solutions is denoted by $\mathcal{L}_{\text{TASA}}$.

At iteration k , $\hat{x}_P^k$ denotes the best feasible solution found so far. $\mathcal{B}_k$ denotes the generated batch. x_k denote the reference solution. x'_k denote the candidate solution.

Assumption 3 (Strict Improvements) The feasible set $\mathcal{X}_P$ is finite. Assume an initial feasible solution is available. TASA updates

$$\hat{x}_P^{k+1} = \arg \max_{x \in \{\hat{x}_P^k\} \cup (\mathcal{B}_k \cap \mathcal{X}_P)} f_P(x), \quad (9)$$

breaking ties in favor of $\hat{x}_P^k$. Thus, the best feasible solution changes only after a strict improvement. Since strict improvements can occur only finitely many times, persistent exploration is needed to ensure that TASA does not remain at a solution that is not locally optimal.

Assumption 4 (Persistent Local Exploration) Let $\mathcal{F}_k$ contain the full search history before batch $\mathcal{B}_k$. For every $x \notin \mathcal{L}_{\text{TASA}}$, there exists $p_x > 0$, uniform over iterations and histories with $\hat{x}_P^k = x$, such that almost surely

$$\Pr(\mathcal{B}_k \cap \mathcal{I}_{\text{TASA}}(x) \neq \emptyset \mid \mathcal{F}_k) \geq p_x. \quad (10)$$

Assumptions 3 and 4 ensure finite improvement steps and exclude non-locally optimal solutions as limiting states. To formalize these implications, we establish two auxiliary lemmas, whose statements and proofs are deferred to supplementary material.

Theorem 5 (TASA-Local Convergence) Under Assumptions 3 and 4, the probability that the best feasible solution reaches a TASA-induced local optimum in finite time and remains unchanged thereafter is given by

$$\Pr(\exists K < \infty, \exists x_\infty \in \mathcal{L}_{\text{TASA}}, \text{ such that } \hat{x}_P^k = x_\infty \text{ for all } k \geq K) = 1. \quad (11)$$

Here, K is a finite random time and x_∞ is the random limiting best feasible solution. The proof appears in the supplementary material. Assumption 4 requires persistent exploration through strategy planning and tool execution, whereas equation 4 describes tool selection for the current strategy. Together with strict improvement, this assumption yields local convergence.

4 EXPERIMENTS

4.1 EXPERIMENTAL SETUP

Datasets. To comprehensively evaluate our method, we consider eight representative combinatorial optimization problems in two groups. The first group includes discrete structure optimization problems, namely the 0–1 Knapsack Problem (KP), Maximum Cut Problem (MaxCut), Balanced Graph Partition Problem (BGP), and Traveling Salesman Problem (TSP). These problems assess the adaptability of our method to diverse solution representations and combinatorial search spaces. The second group covers routing and scheduling problems, namely the Capacitated Vehicle Routing Problem (VRP), Pickup-Delivery Routing Problem (PDR), Job-Shop Scheduling Problem (JSSP), and Unrelated Parallel-Machine Scheduling Problem (MS). They evaluate the method’s ability to handle complex constraints, including capacity limits, precedence relations, resource competition, and load balancing. Detailed instance sizes, parameter settings, and generation procedures are provided in the supplementary material.

Baselines. We compare our method with twelve baselines, including one approximate global-optimum baseline, four traditional optimization baseline, four direct LLM baseline, and three LLM-generated heuristic baseline.

Approximate Global-Optimum Baseline. **RefSolver** (*Reference Solver*) Perron et al. (2023) applies an exact algorithm when tractable and otherwise returns a solution produced by a deterministic strong heuristic. **Traditional optimization baselines.** **RandSearch** (*Random Search*) Bergstra & Bengio (2012) independently samples candidate solutions without exploiting evaluation history. **BO** (*Bayesian Optimization*) uses a lightweight kernel-regression model to estimate objective values and selects candidates based on an upper confidence bound. **GA** (*Genetic Algorithm*) maintains a population of candidate solutions and generates new candidates through selection, crossover, and mutation. **CB** (*Combinatorial Bandit*) treats solution components as bandit arms and constructs candidates according to their estimated rewards and exploration bonuses.

Category	Method	KP	MaxCut	BGP	TSP
Approximate Global-Optimum	RefSolver	1.227 ± 0.069	1.001 ± 0.163	1.912 ± 0.118	<u>1.693 ± 0.097</u>
Traditional Optimization	RandSearch	−1.510 ± 0.255	−0.650 ± 0.302	−0.635 ± 0.186	−0.754 ± 0.048
	BO	−0.053 ± 0.086	−0.501 ± 0.255	−0.353 ± 0.077	−0.719 ± 0.054
	GA	−0.855 ± 0.342	−0.469 ± 0.196	−0.122 ± 0.152	−0.687 ± 0.060
	CB	<u>1.221 ± 0.063</u>	−0.617 ± 0.204	−0.635 ± 0.186	1.365 ± 0.064
Direct LLM Solver	OPRO	0.008 ± 0.286	−1.033 ± 0.173	−1.069 ± 0.136	−0.709 ± 0.082
	E2E Solver	0.235 ± 0.179	—	—	−0.870 ± 0.014
	Block E2E Solver	0.094 ± 0.119	1.148 ± 0.117	−0.109 ± 0.169	0.364 ± 0.016
	Block-LS	0.463 ± 0.022	<u>1.183 ± 0.176</u>	−0.100 ± 0.181	0.368 ± 0.053
LLM-Generated Heuristic	FunSearch	−0.526 ± 0.414	−0.309 ± 0.336	0.009 ± 0.248	−0.704 ± 0.047
	EoH	−0.023 ± 1.845	0.297 ± 1.081	0.676 ± 0.982	−0.744 ± 0.104
	CoT	−1.510 ± 0.255	−1.509 ± 0.638	−1.083 ± 0.203	−0.551 ± 0.053
Ours	TASA	1.227 ± 0.069	1.459 ± 0.009	<u>1.903 ± 0.132</u>	1.949 ± 0.051

Category	Method	VRP	PDR	JSSP	MS
Approximate Global-Optimum	RefSolver	<u>2.290 ± 0.069</u>	2.740 ± 0.063	<u>1.690 ± 0.372</u>	<u>1.920 ± 0.361</u>
Traditional Optimization	RandSearch	−0.452 ± 0.013	−0.718 ± 0.087	−0.250 ± 0.111	−0.009 ± 0.271
	BO	−0.401 ± 0.038	−0.288 ± 0.174	−0.248 ± 0.138	−0.241 ± 0.514
	GA	−0.439 ± 0.013	−0.209 ± 0.171	−0.428 ± 0.206	−0.272 ± 0.165
	CB	−0.452 ± 0.013	−0.718 ± 0.087	−1.287 ± 0.160	−0.009 ± 0.271
Direct LLM Solver	OPRO	−0.405 ± 0.016	−0.039 ± 0.249	−0.372 ± 0.310	−0.939 ± 0.399
	E2E Solver	−0.487 ± 0.021	−0.464 ± 0.613	−1.356 ± 0.601	−0.939 ± 0.399
	Block E2E Solver	−0.441 ± 0.028	−0.138 ± 0.246	−0.402 ± 0.209	−0.939 ± 0.399
	Block-LS	−0.413 ± 0.026	−0.047 ± 0.135	−0.347 ± 0.182	−0.772 ± 0.114
LLM-Generated Heuristic	FunSearch	−0.375 ± 0.022	−0.516 ± 0.152	−0.269 ± 0.211	−0.412 ± 0.518
	EoH	−0.325 ± 0.039	−0.480 ± 0.413	0.449 ± 0.815	0.601 ± 0.713
	CoT	−0.492 ± 0.009	−0.718 ± 0.087	0.917 ± 0.391	−0.009 ± 0.271
Ours	TASA	2.393 ± 0.068	<u>1.595 ± 0.138</u>	1.903 ± 0.383	2.020 ± 0.285

Table 1: Performance comparison on eight benchmark tasks. Results are reported as mean z -score $\pm$ standard deviation over seeds 1–3. Higher values indicate better performance. The best result for each task is shown in **bold**, and the second-best result is underlined. — indicates that no feasible solution was obtained for at least one seed.

Direct LLM solver baselines. **OPRO** (*Optimization by PROMpting*) Yang et al. (2024) prompts the LLM with the problem description and previously evaluated solutions to directly generate complete candidate solutions. **E2E Solver** (*End-to-End LLM Solver*) Jiang et al. (2025) uses a fixed prompt to directly generate complete candidate solutions for problem instance, without using previously evaluated solutions or optimization feedback. **Block E2E Solver** (*Block-wise End-to-End LLM Solver*) Zheng et al. (2024) decomposes a high-dimensional solution into blocks and asks the LLM to update one block at a time. **Block-LS** (*Block-wise LLM Solver with Local Search*) Jiang et al. (2025); Zheng et al. (2024) alternates block-wise LLM candidate generation with local refinement.

LLM-generated heuristic baselines. **FunSearch** Romera-Paredes et al. (2024) is a lightweight archive-guided search proxy that periodically injects randomly generated candidates and otherwise mutates high-scoring historical solutions. **EoH** (*Evolution of Heuristics*) Liu et al. (2024a) periodically introduces random candidates and otherwise recombines and mutates high-scoring historical solutions. **CoT** (*CoT Direct Solver*) Sprague et al. (2025) uses chain-of-thought prompting to guide the LLM through step-by-step problem analysis and directly generate candidate solutions. Detailed implementation settings are provided in the supplementary material. The supplementary material details these implementations, including LLM-call limits and subsequent local-search operations.

Implementation Details. Qwen-Plus Yang et al. (2025) is accessed via API and used as the language model. Each experiment is conducted using random seeds 1, 2, and 3. Under each seed, all methods are evaluated on the same problem instance, with randomness in instance generation

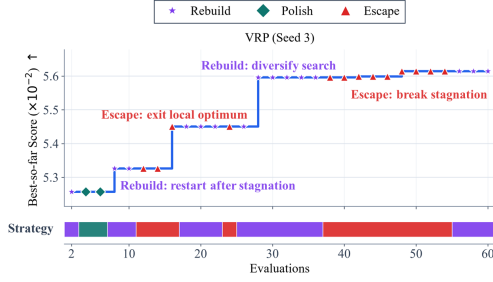


Figure 2: Traceability of TASA over 60 evaluations on a representative run of VRP (Seed 3). The curve shows the best-so-far scores, while the markers and colored timelines indicate the optimization strategies selected throughout the search.

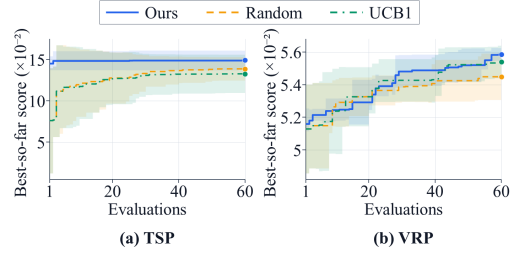


Figure 3: Effect of the tool-planning mechanism on best-so-far performance over 60 evaluations for TSP and VRP. The curves show the mean best-so-far scores over seeds 1-3, and the shaded regions indicate one standard deviation around the mean. Ours denotes the strategy-guided adaptive tool planner, while Random and UCB1 are alternative tool-planning policies.

and initialization controlled by the corresponding seed. Each run is limited to 60 candidate solution evaluations with a batch size of 2. The budget counts generated candidates. Tool construction, LLM calls, and computations within tools depend on the method, so results compare solution quality under this budget and the reported implementations.

Metrics. For fair comparison across problems with different objective scales and optimization directions, all native objectives are converted into higher-is-better scores. For problem p , seed s , and method m , the best feasible score is standardized as $z_{p,s,m} = \frac{y_{p,s,m} - \mu_{p,s}}{\sigma_{p,s}}$. Here, $y_{p,s,m}$ denotes the best feasible value of $f_P(x)$ achieved by method m . Details of the computation of $f_P(x)$ are provided in the supplementary material. For each problem p and seed s , $\mu_{p,s}$ is the mean of these values across all methods that produce a feasible solution, and $\sigma_{p,s}$ is the corresponding population standard deviation. Accordingly, $z_{p,s,m} > 0$ indicates above-average performance, whereas $z_{p,s,m} < 0$ indicates below-average performance for the corresponding problem and seed.

4.2 COMPARATIVE PERFORMANCE ON BENCHMARK TASKS

From the results presented in Table 1, it can be observed that TASA achieves the strictly best mean score on five tasks, ties RefSolver for the best result on KP, and ranks second on BGP and PDR. On BGP, it nearly matches RefSolver, with a gaps of only 0.009. Its average z -score across all tasks is 1.806, almost identical to RefSolver’s 1.809. These results show that, under the same evaluation budget, TASA is competitive with specialized solvers while retaining a unified framework across problems with diverse structures and constraints.

TASA also consistently outperforms direct LLM-based methods. It exceeds OPRO on every task by 2.376 z -score points on average and surpasses the strongest direct LLM baseline by an average of 1.762 points. The advantage is particularly clear on BGP, VRP, JSSP, and MS, where direct LLM solvers obtain negative mean scores while TASA remains strongly positive. These negative values arise from z -score normalization, as a method receives a negative score when its best feasible score falls below the cross-method mean for the corresponding problem and seed. These results support the combined use of optimization trajectories, strategy planning, and problem-specific tools in TASA under the reported settings.

Finally, TASA finds feasible solutions for every seed on all eight tasks and has a standard deviation below 0.2 on six tasks, demonstrating reliable performance across repeated runs. Because some baselines do not reliably produce feasible solutions across random seeds, we use “—” in Table 1 to indicate that no feasible solution was obtained for at least one seed. On four of the five tasks where it ranks first, its standard deviation is no larger than that of RefSolver. Its main weakness is PDR, where it trails RefSolver by 1.145 points, suggesting that more specialized routing and repair tools are needed. Overall, the results demonstrate the effectiveness, generality, and robustness of our method.

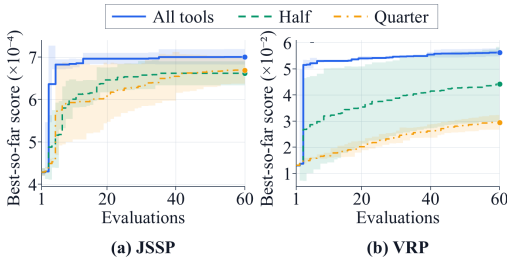


Figure 4: Effect of tool-library size on best-so-far performance over 60 evaluations for JSSP and VRP. The curves show the mean scores over seeds 1–3, and the shaded regions indicate one standard deviation around the mean. All Tools uses the full library, while Half Tools and Quarter Tools retain one-half and one-quarter of the tools, respectively.

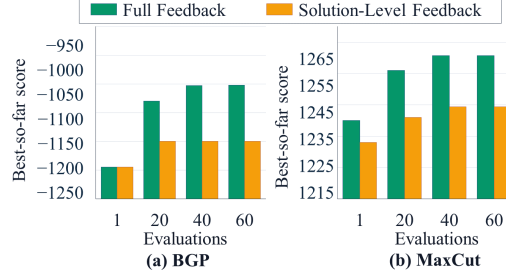


Figure 5: Effect of feedback granularity on best-so-far performance for BGP and MaxCut. The bars report the mean best-so-far scores over seeds 1–3 at evaluations 1, 20, 40, and 60. Full Feedback provides the strategy planner with the recorded optimization trajectory, whereas Solution-Level Feedback retains only solution-level information.

Traceability of TASA. Figure 2 makes strategy selections and subsequent score improvements traceable in a representative VRP run. Rebuild precedes improvements near evaluations 8 and 28, and escape near 16 and 49.

4.3 EFFECT OF THE TOOL PLANNER.

To evaluate the effectiveness of the tool-planning mechanism, we compare our strategy-guided adaptive tool planner with random selection and UCB1. As shown in Figure 3, our planner achieves the highest final scores on both TSP and VRP. On TSP, it rapidly reaches 14.92, whereas Random and UCB1 converge to only 13.88 and 13.27. These results support using historical tool gains and consecutive invocations without improvement to select effective tools for the intended optimization strategy.

4.4 EFFECT OF TOOL LIBRARY SIZE.

To evaluate the effect of tool-library size, we compare TASA using all tools with variants retaining one-half or one-quarter of the library. As shown in Figure 4, the full library achieves the best final scores on both JSSP and VRP, reaching 7.01 and 5.63, respectively. The advantage is especially pronounced on VRP, where using half and one-quarter of the tools yields only 4.42 and 2.95. The larger tool library provides more problem-specific tools for executing the selected strategies, supporting the contribution of tool diversity to solution quality.

4.5 EFFECT OF FEEDBACK GRANULARITY.

To evaluate the effect of feedback granularity, we compare Full Feedback with Solution-Level Feedback. As shown in Figure 5, Full Feedback achieves higher scores on both BGP and MaxCut. On BGP, Solution-Level Feedback plateaus by 20th evaluation, whereas Full Feedback continues to improve in subsequent evaluations. On MaxCut, both variants improve until around 40th evaluation and then change little, but Full Feedback consistently maintains higher scores. These results support using the optimization trajectory to provide the LLM strategy planner with information about search progress and stagnation.

5 CONCLUSION

In this paper, we propose TASA, which shifts the role of the LLM from directly generating solutions to planning optimization strategies based on optimization trajectories and executing them through a strategy-guided adaptive tool planner. Experimental results on eight benchmark problems demonstrate that TASA provides an effective and traceable framework for LLM-based combinatorial optimization.

REFERENCES

- Ali Ahmaditeshnizi, Wenzhi Gao, and Madeleine Udell. OptiMUS: Scalable optimization modeling with (MI)LP solvers and large language models. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pp. 577–596. PMLR, 21–27 Jul 2024. URL <https://proceedings.mlr.press/v235/ahmaditeshnizi24a.html>.
- James Bergstra and Yoshua Bengio. Random search for hyper-parameter optimization. *Journal of Machine Learning Research*, 13(10):281–305, 2012. URL <http://jmlr.org/papers/v13/bergstra12a.html>.
- Tianle Cai, Xuezhi Wang, Tengyu Ma, Xinyun Chen, and Denny Zhou. Large language models as tool makers. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net, 2024. URL <https://openreview.net/forum?id=qV83K9d5WB>.
- Francesca Da Ros, Michael Soprano, Luca Di Gaspero, and Kevin Roitero. Large language models for combinatorial optimization: A systematic review. *ACM Comput. Surv.*, 58(11), April 2026. ISSN 0360-0300. doi: 10.1145/3801961. URL <https://doi.org/10.1145/3801961>.
- Luyu Gao, Aman Madaan, Shuyan Zhou, Uri Alon, Pengfei Liu, Yiming Yang, Jamie Callan, and Graham Neubig. PAL: Program-aided language models. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 10764–10799. PMLR, 23–29 Jul 2023. URL <https://proceedings.mlr.press/v202/gao23f.html>.
- Shen Gao, Zhengliang Shi, Minghang Zhu, Bowen Fang, Xin Xin, Pengjie Ren, Zhumin Chen, Jun Ma, and Zhaochun Ren. Confucius: Iterative tool learning from introspection feedback by easy-to-difficult curriculum. In *Thirty-Eighth AAAI Conference on Artificial Intelligence, AAAI 2024, Thirty-Sixth Conference on Innovative Applications of Artificial Intelligence, IAAI 2024, Fourteenth Symposium on Educational Advances in Artificial Intelligence, EAAI 2024, February 20-27, 2024, Vancouver, Canada*, pp. 18030–18038. AAAI Press, 2024. doi: 10.1609/AAAI.V38I16.29759. URL <https://doi.org/10.1609/aaai.v38i16.29759>.
- Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Peiyi Wang, Qihao Zhu, Runxin Xu, Ruoyu Zhang, Shirong Ma, Xiao Bi, et al. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.
- Pei-Fu Guo, Ying-Hsuan Chen, Yun-Da Tsai, and Shou-De Lin. Towards optimizing with large language models. *CoRR*, abs/2310.05204, 2023. doi: 10.48550/ARXIV.2310.05204. URL <https://doi.org/10.48550/arXiv.2310.05204>.
- Shibo Hao, Tianyang Liu, Zhen Wang, and Zhiting Hu. Toolkengpt: Augmenting frozen language models with massive tools via tool embeddings. In *Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 - 16, 2023*, 2023. URL http://papers.nips.cc/paper_files/paper/2023/hash/8fd1a81c882cd45f64958da6284f4a3f-Abstract-Conference.html.
- Xia Jiang, Yaoxin Wu, Minshuo Li, Zhiguang Cao, and Yingqian Zhang. Large language models as end-to-end combinatorial optimization solvers. In *Advances in Neural Information Processing Systems*, volume 38, pp. 164787–164826. Curran Associates, Inc., 2025. URL https://proceedings.neurips.cc/paper_files/paper/2025/file/f0c6c93e1dbff84daf6082fef7e1a094-Paper-Conference.pdf.
- Ehud Karpas, Omri Abend, Yonatan Belinkov, Barak Lenz, Opher Lieber, Nir Ratner, Yoav Shoham, Hofit Bata, Yoav Levine, Kevin Leyton-Brown, Dor Muhlgay, Noam Rozen, Erez Schwartz, Gal

- Shachaf, Shai Shalev-Shwartz, Amnon Shashua, and Moshe Tennenholtz. MRKL systems: A modular, neuro-symbolic architecture that combines large language models, external knowledge sources and discrete reasoning. *CoRR*, abs/2205.00445, 2022. doi: 10.48550/ARXIV.2205.00445. URL <https://doi.org/10.48550/arXiv.2205.00445>.
- Yilun Kong, Jingqing Ruan, Yihong Chen, Bin Zhang, Tianpeng Bao, Shiwei Shi, Du Qing, Xiaoru Hu, Hangyu Mao, Ziyue Li, Xingyu Zeng, Rui Zhao, and Xueqian Wang. Tptu-v2: Boosting task planning and tool usage of large language model-based agents in real-world industry systems. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing: EMNLP 2024 - Industry Track, Miami, Florida, USA, November 12-16, 2024*, pp. 371–385. Association for Computational Linguistics, 2024. doi: 10.18653/V1/2024.EMNLP-INDUSTRY.27. URL <https://doi.org/10.18653/v1/2024.emnlp-industry.27>.
- Beibin Li, Konstantina Mellou, Bo Zhang, Jeevan Pathuri, and Ishai Menache. Large language models for supply chain optimization. *CoRR*, abs/2307.03875, 2023. doi: 10.48550/ARXIV.2307.03875. URL <https://doi.org/10.48550/arXiv.2307.03875>.
- Fei Liu, Tong Xialiang, Mingxuan Yuan, Xi Lin, Fu Luo, Zhenkun Wang, Zhichao Lu, and Qingfu Zhang. Evolution of heuristics: Towards efficient automatic algorithm design using large language model. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235, pp. 32201–32223. PMLR, 21–27 Jul 2024a. URL <https://proceedings.mlr.press/v235/liu24bs.html>.
- Shengcai Liu, Caishun Chen, Xinghua Qu, Ke Tang, and Yew-Soon Ong. Large language models as evolutionary optimizers. In *IEEE Congress on Evolutionary Computation, CEC 2024, Yokohama, Japan, June 30 - July 5, 2024*, pp. 1–8. IEEE, 2024b. doi: 10.1109/CEC60901.2024.10611913. URL <https://doi.org/10.1109/CEC60901.2024.10611913>.
- Pan Lu, Baolin Peng, Hao Cheng, Michel Galley, Kai-Wei Chang, Ying Nian Wu, Song-Chun Zhu, and Jianfeng Gao. Chameleon: Plug-and-play compositional reasoning with large language models. In *Advances in Neural Information Processing Systems*, volume 36, pp. 43447–43478. Curran Associates, Inc., 2023. doi: 10.52202/075280-1882. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/871ed095b734818cfba48db6aeb25a62-Paper-Conference.pdf.
- Bhargavi Paranjape, Scott M. Lundberg, Sameer Singh, Hannaneh Hajishirzi, Luke Zettlemoyer, and Marco Túlio Ribeiro. ART: automatic multi-step reasoning and tool-use for large language models. *CoRR*, abs/2303.09014, 2023. doi: 10.48550/ARXIV.2303.09014. URL <https://doi.org/10.48550/arXiv.2303.09014>.
- Shishir G. Patil, Tianjun Zhang, Xin Wang, and Joseph E. Gonzalez. Gorilla: Large language model connected with massive apis. In *Advances in Neural Information Processing Systems 37: Annual Conference on Neural Information Processing Systems 2024, NeurIPS 2024, Vancouver, BC, Canada, December 10 - 15, 2024*, 2024. URL http://papers.nips.cc/paper_files/paper/2024/hash/e4c61f578ff07830f5c37378dd3ecb0d-Abstract-Conference.html.
- Laurent Perron, Frédéric Didier, and Steven Gay. The CP-SAT-LP Solver. In *29th International Conference on Principles and Practice of Constraint Programming (CP 2023)*, volume 280 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pp. 3:1–3:2, Dagstuhl, Germany, 2023. Schloss Dagstuhl – Leibniz-Zentrum für Informatik. ISBN 978-3-95977-300-3. doi: 10.4230/LIPIcs.CP.2023.3. URL <https://drops.dagstuhl.de/entities/document/10.4230/LIPIcs.CP.2023.3>.
- Cheng Qian, Chi Han, Yi Ren Fung, Yujia Qin, Zhiyuan Liu, and Heng Ji. CREATOR: tool creation for disentangling abstract and concrete reasoning of large language models. In *Findings of the Association for Computational Linguistics: EMNLP 2023, Singapore, December 6-10, 2023*, volume EMNLP 2023 of *Findings of ACL*, pp. 6922–6939. Association for Computational Linguistics, 2023. doi: 10.18653/V1/2023.FINDINGS-EMNLP.462. URL <https://doi.org/10.18653/v1/2023.findings-emnlp.462>.

- Yujia Qin, Shihao Liang, Yining Ye, Kunlun Zhu, Lan Yan, Yaxi Lu, Yankai Lin, Xin Cong, Xian-an Tang, Bill Qian, Sihan Zhao, Lauren Hong, Runchu Tian, Ruobing Xie, Jie Zhou, Mark Gerstein, Dahai Li, Zhiyuan Liu, and Maosong Sun. Toolllm: Facilitating large language models to master 16000+ real-world apis. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net, 2024. URL <https://openreview.net/forum?id=dHng200Jjr>.
- Bernardino Romera-Paredes, Mohammadamin Barekatain, Alexander Novikov, Matej Balog, M Pawan Kumar, Emilien Dupont, Francisco JR Ruiz, Jordan S Ellenberg, Pengming Wang, Omar Fawzi, et al. Mathematical discoveries from program search with large language models. *Nature*, 625(7995):468–475, 2024. URL <https://doi.org/10.1038/s41586-023-06924-6>.
- Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language models can teach themselves to use tools. In *Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 - 16, 2023*, 2023. URL http://papers.nips.cc/paper_files/paper/2023/hash/d842425e4bf79ba039352da0f658a906-Abstract-Conference.html.
- Yongliang Shen, Kaitao Song, Xu Tan, Dongsheng Li, Weiming Lu, and Yueting Zhuang. Hugginggpt: Solving AI tasks with chatgpt and its friends in hugging face. In *Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 - 16, 2023*, 2023. URL http://papers.nips.cc/paper_files/paper/2023/hash/77c33e6a367922d003ff102ffb92b658-Abstract-Conference.html.
- Yifan Song, Weimin Xiong, Dawei Zhu, Cheng Li, Ke Wang, Ye Tian, and Sujian Li. Rest-gpt: Connecting large language models with real-world applications via restful apis. *CoRR*, abs/2306.06624, 2023. doi: 10.48550/ARXIV.2306.06624. URL <https://doi.org/10.48550/arXiv.2306.06624>.
- Zayne Rea Sprague, Fangcong Yin, Juan Diego Rodriguez, Dongwei Jiang, Manya Wadhwa, Prasann Singhal, Xinyu Zhao, Xi Ye, Kyle Mahowald, and Greg Durrett. To cot or not to cot? chain-of-thought helps mainly on math and symbolic reasoning. In *The Thirteenth International Conference on Learning Representations, ICLR 2025, Singapore, April 24-28, 2025*, 2025. URL <https://openreview.net/forum?id=w6nlcS8Kkn>.
- Qiaoyu Tang, Ziliang Deng, Hongyu Lin, Xianpei Han, Qiao Liang, Boxi Cao, and Le Sun. Toolalpaca: Generalized tool learning for language models with 3000 simulated cases, 2023. URL <https://arxiv.org/abs/2306.05301>.
- Gemini Team, Petko Georgiev, Ving Ian Lei, Ryan Burnell, Libin Bai, Anmol Gulati, Garrett Tanzer, Damien Vincent, Zhufeng Pan, Shibo Wang, et al. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context. *arXiv preprint arXiv:2403.05530*, 2024.
- Niki van Stein and Thomas Bäck. Llamea: A large language model evolutionary algorithm for automatically generating metaheuristics. *IEEE Trans. Evol. Comput.*, 29(2):331–345, 2025. doi: 10.1109/TEVC.2024.3497793. URL <https://doi.org/10.1109/TEVC.2024.3497793>.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed H. Chi, Quoc V. Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models. In *Proceedings of the 36th International Conference on Neural Information Processing Systems, NIPS ’22*, Red Hook, NY, USA, 2022. Curran Associates Inc. ISBN 9781713871088.
- Qinzhao Wu, Wei Liu, Jian Luan, and Bin Wang. Toolplanner: A tool augmented LLM for multi granularity instructions with path planning and feedback. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing, EMNLP 2024, Miami, FL, USA, November 12-16, 2024*, pp. 18315–18339. Association for Computational Linguistics, 2024. doi: 10.18653/V1/2024.EMNLP-MAIN.1018. URL <https://doi.org/10.18653/v1/2024.emnlp-main.1018>.

- Binfeng Xu, Zhiyuan Peng, Bowen Lei, Subhabrata Mukherjee, Yuchen Liu, and Dongkuan Xu. Re-woo: Decoupling reasoning from observations for efficient augmented language models. *CoRR*, abs/2305.18323, 2023. doi: 10.48550/ARXIV.2305.18323. URL <https://doi.org/10.48550/arXiv.2305.18323>.
- An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025.
- Chengrun Yang, Xuezhi Wang, Yifeng Lu, Hanxiao Liu, Quoc V Le, Denny Zhou, and Xinyun Chen. Large language models as optimizers. In *International Conference on Learning Representations*, volume 2024, pp. 12028–12068, 2024. URL https://proceedings.iclr.cc/paper_files/paper/2024/file/3339f19c5fcee3ad74502947a32be9e6-Paper-Conference.pdf.
- Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Tom Griffiths, Yuan Cao, and Karthik Narasimhan. Tree of thoughts: Deliberate problem solving with large language models. In *Advances in Neural Information Processing Systems*, volume 36, pp. 11809–11822. Curran Associates, Inc., 2023a. doi: 10.52202/075280-0517. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/271db9922b8d1f4dd7aaef84ed5ac703-Paper-Conference.pdf.
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik R Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models. In *The Eleventh International Conference on Learning Representations*, 2023b. URL https://openreview.net/forum?id=WE_vluYUL-X.
- Huigen Ye, Hua Xu, An Yan, and Yaoyang Cheng. Large language model-driven large neighborhood search for large-scale MILP problems. In *Forty-second International Conference on Machine Learning, ICML 2025, Vancouver, BC, Canada, July 13-19, 2025*, volume 267 of *Proceedings of Machine Learning Research*. PMLR / OpenReview.net, 2025. URL <https://proceedings.mlr.press/v267/ye25j.html>.
- Lifan Yuan, Yangyi Chen, Xingyao Wang, Yi Fung, Hao Peng, and Heng Ji. CRAFT: customizing llms by creating and retrieving from specialized toolsets. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net, 2024. URL <https://openreview.net/forum?id=G0vdDSt9XM>.
- Zhi Zheng, Changliang Zhou, Xialiang Tong, Mingxuan Yuan, and Zhenkun Wang. Udc: A unified neural divide-and-conquer framework for large-scale combinatorial optimization problems. In *Advances in Neural Information Processing Systems*, volume 37, pp. 6081–6125. Curran Associates, Inc., 2024. doi: 10.52202/079017-0197. URL https://proceedings.neurips.cc/paper_files/paper/2024/file/0b8e4c8468273ee3bafb288229c0acbc-Paper-Conference.pdf.
- Zhi Zheng, Zhuoliang Xie, Zhenkun Wang, and Bryan Hooi. Monte carlo tree search for comprehensive exploration in llm-based automatic heuristic design. In *Forty-second International Conference on Machine Learning, ICML 2025, Vancouver, BC, Canada, July 13-19, 2025*, volume 267 of *Proceedings of Machine Learning Research*. PMLR / OpenReview.net, 2025. URL <https://proceedings.mlr.press/v267/zheng25o.html>.
- Andy Zhou, Kai Yan, Michal Shlapentokh-Rothman, Haohan Wang, and Yu-Xiong Wang. Language agent tree search unifies reasoning, acting, and planning in language models. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pp. 62138–62160. PMLR, 21–27 Jul 2024. URL <https://proceedings.mlr.press/v235/zhou24r.html>.