

FARL: A FULLY AUTOMATED PIPELINE OF RL INTERFACE AND SOLVER DESIGN

Tianyu Jin Liuyu Xiang* Chaowen Yang
 Xingyang Chang Pei Pei Li Zhaofeng He
 Beijing University of Posts and Telecommunications, Beijing, China

ABSTRACT

Existing reinforcement learning (RL) largely focuses on optimizing learning algorithms within a pre-defined task formulation, while applying RL to new tasks still relies heavily on human expertise to design the learning pipeline: what an agent observes, how it is rewarded, which algorithm it uses, and how training is configured. Automating these choices is challenging because they are tightly coupled. We introduce FARL (Fully Automated Reinforcement Learning), a framework that automates RL design by jointly searching observation and reward programs, learning algorithms, and training settings. FARL uses training statistics and observed behavior to diagnose failures, propose changes, and test whether they improve learning. Its search preserves diverse candidates and the controls needed for these tests, using a staged budget to screen designs before investing in longer training. Experimental memory records each finding together with its conditions, so an unsuccessful component can be reconsidered in a different combination. Across expert-withheld and expert-available settings, FARL outperforms the evaluated automated baselines on challenging navigation, locomotion, and manipulation tasks. On Adroit Hand Relocate, FARL achieves 97.1% success at 5M training steps per policy, compared with 0% for Eureka and LiMEN and 1.0% for native Proximal Policy Optimization (PPO) under the same policy training budget.

1 INTRODUCTION

Applying reinforcement learning to a new task requires decisions about observations, rewards, learning algorithms, and training settings. These choices still depend heavily on task-specific expertise. Automated reinforcement learning (AutoRL) aims to reduce this dependence by designing the learning setup as well as training the policy (Parker-Holder et al., 2022).

The difficulty becomes apparent when training fails. A low task score does not reveal whether the reward encourages the wrong behavior, the observations omit useful information, or the learner cannot exploit the interface. Changing one component may alter the value of the others. Early scores can also be misleading: a slowly learning design may eventually outperform an early leader. Training every combination to completion is too expensive, yet rejecting weak early candidates can remove useful alternatives. An automated designer must therefore decide what to change and how much training is needed to assess that change.

Existing methods automate several of these choices. Eureka generates reward programs, while LiMEN searches observations and rewards (Ma et al., 2024; Jaswal et al., 2026). Other systems use behavioral feedback to revise rewards and training settings, or automate task formulation followed by algorithm optimization (Lee et al., 2026; Chung et al., 2026; Wei et al., 2025). We study how to revisit these choices together when failure leaves several plausible explanations.

We introduce FARL, which designs an RL learning setup from a task’s application programming interface (API) and evaluator (Figure 1). **Interface–Solver Co-Design** keeps observations, rewards, learners, and training settings open to revision. **Falsifiable Diagnosis** uses training and trajectory evidence to propose changes, predicts their effects, and tests them by comparing the resulting policies.

*Corresponding author: xiangliuyu@bupt.edu.cn.

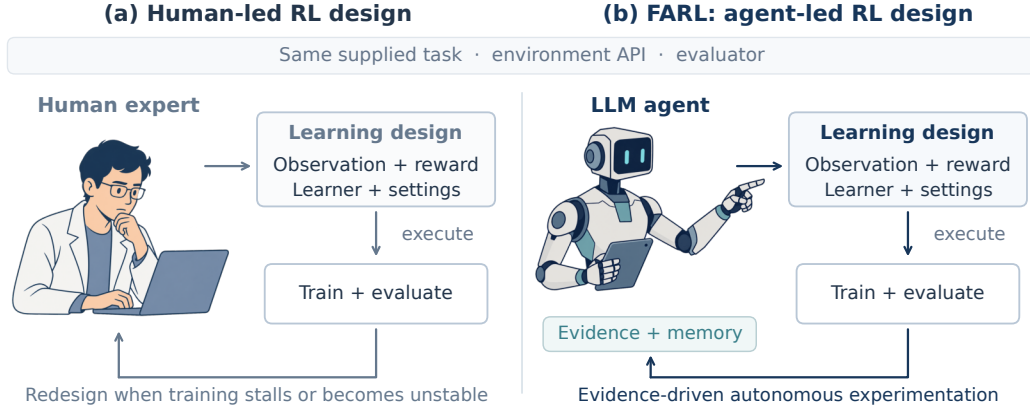


Figure 1: Automating the RL design loop. (a) An expert revisits the learning setup when training stalls or becomes unstable. (b) FARL’s LLM agent designs and directs experiments using behavioral evidence and scientific memory. Both receive the same task interface and evaluator.

Diversity-Preserving Search keeps promising candidates and the controls needed for these comparisons. Short trials screen a broad set of designs before selected candidates receive longer training. Scientific memory records each result with its test conditions, so a component that failed in one combination can be reconsidered in another. This allows the search to correct earlier decisions as new results become available.

Our contributions are as follows.

- (1) We introduce FARL, a framework for fully automated RL interface and solver design. It combines joint design, falsifiable diagnosis, and diversity-preserving search in a closed loop, using experimental findings to revise candidates and allocate training.
- (2) We address the difficulty of diagnosing failures across coupled design choices under limited training budgets. FARL tests specific changes while retaining alternative configurations and records the conditions of each result. The search can then revisit unsuccessful combinations and continue training candidates whose progress emerges later.
- (3) Experiments show that FARL discovers effective designs without native expert guidance and improves difficult manipulation: it solves DoorKey where Eureka and LiMEN fail, reaches 3.3 times Eureka’s Ant displacement at 5M steps, and achieves 97.1% Hand relocation success versus 0% for both automated baselines at 5M steps per policy. Search histories, controlled comparisons, and ablations examine how its design and selection decisions contribute to these results (Section 5).

2 COMPARISON TO PRIOR WORK

Eureka generates reward programs (Ma et al., 2024). LiMEN searches observations and rewards using a quality-diversity archive and increasing training budgets, with a fixed learner and training configuration (Jaswal et al., 2026). Agent² first models the MDP and then optimizes the algorithm, network, and hyperparameters using training feedback (Wei et al., 2025). FARL keeps both the interface and solver open to revision, so the same observation and reward programs can be tested with different learners and training settings throughout search.

MAP-Elites maintains diverse solutions, while successive-halving methods devote more training to promising candidates (Mouret & Clune, 2015; Li et al., 2018; 2020). FARL also retains candidates whose behavior is still improving or whose comparison can test a diagnosis. Their components remain available for new combinations even if the original design is unsuccessful.

Reward Design Agent (RDA) uses visual subtask diagnosis to revise rewards (Lee et al., 2026). Prompt-to-Policy combines behavioral feedback, training analysis, and previous lessons to revise rewards and hyperparameters (Chung et al., 2026). RHyVE tests reward hypotheses through short

training forks from shared checkpoints and uses their phase-dependent effects to guide reward deployment (Wu et al., 2026). FARL tests changes to the interface or solver, specifying what changes, what stays fixed, and what behavioral improvement is expected. It records the actual outcome and test conditions for use in later design and training decisions. Appendix H gives the broader comparison.

3 PROBLEM AND INFORMATION SETTINGS

FARL receives a task description, an environment with documented observation and action fields, a task evaluator $\mathcal{F}$, and resource limits and stopping rules B . It constructs a learning design

$$h = (\underbrace{\phi, r}_{\text{learning interface}}, \underbrace{L, \lambda, e, b}_{\text{solver configuration}}),$$

where ϕ maps observations to policy inputs, r is a reward program, L a supported learner, λ its hyperparameters, e its exploration procedure, and b the number of training steps per policy. Exploration may include temporary assistance from a previously trained policy (Section 4.2). For an evaluation episode τ , $\mathcal{F}(\tau)$ is the task outcome; $\mathcal{F}_s(h)$ averages this outcome over episodes for independently initialized training run s . Evaluation starts from the original reset distribution with the trained policy acting alone. FARL uses these measurements to select designs and decide which to train further.

The evaluator and optional milestone rules are fixed before search and applied to every method. Milestones measure intermediate behaviors, such as picking up a key or lifting an object. They let FARL identify where behavior breaks down and test whether a design change addresses that failure. Appendix A.2 gives their exact definitions.

Information settings and their purpose. Mature benchmarks package a task together with expert-designed rewards and learning interfaces. We vary access to this prior design work while keeping the task dynamics, reset distribution, and evaluator fixed. *Expert-withheld* (EW) removes native rewards and additional engineered or privileged inputs from candidate training, retaining the public API, observations, actions, goal, and descriptions of the available fields. This setting tests whether a method can design a learning setup without those expert choices. *Expert-available* (EA) allows native rewards, observations, and other permitted task information, asking whether automated design can improve on the available starting point. We use *stress test* (ST) for the difficult EA case where native designs still perform poorly: the challenge is to make existing information useful for learning. Adroit Hand Relocate serves this role. Task-specific interfaces and access rules are detailed in Appendix A.1.

4 FARL: A SCIENTIFIC DESIGN–TRAIN–DIAGNOSE LOOP

FARL repeatedly proposes learning designs, trains policies, and uses the results to decide what to test next (Figure 2). A *candidate bank* stores reusable programs and configurations. *Scientific memory* stores the explanations tested, the outcomes, and the settings under which they were obtained.

4.1 INTERFACE–SOLVER CO-DESIGN

Collect initial task experience. FARL obtains a reset/step API from a registered environment constructor or a tested adapter. Field definitions and access permissions specify what candidate programs may use. Random actions and a short exploratory learner, miniRL, collect trajectories that reveal which effects the agent can produce and which events are difficult to reach. miniRL uses permitted task feedback or a novelty reward (Appendix B.1).

From task evidence to an executable learning design. The generator receives the task goal, permitted inputs, trajectories, candidate results, and relevant findings from earlier experiments. It outputs an observation program ϕ , a reward program r , and compatible solver settings (L, λ, e, b) , together forming a learning design h . Observation programs select coordinates or compute features such as differences and distances. Reward programs use transitions, actions, and episode-local

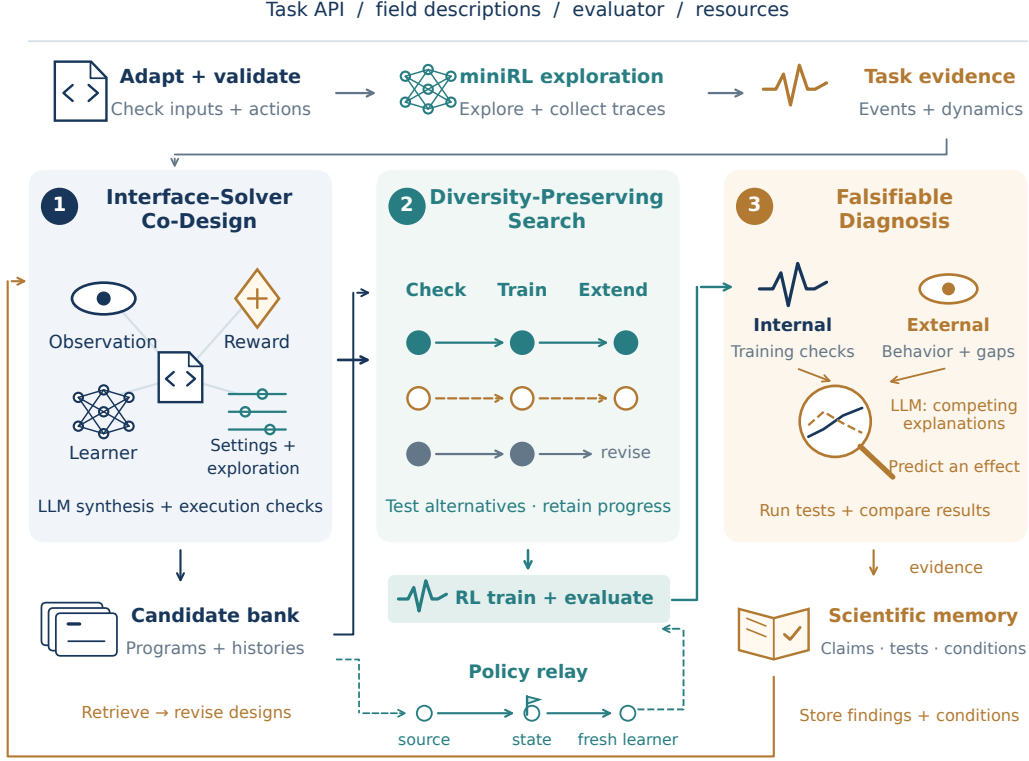


Figure 2: FARL’s architecture. An adapter exposes the task API, and miniRL collects initial experience. (1) LLMs propose observations, rewards, and solver configurations. (2) Search screens diverse candidates at short budgets and trains selected designs and controls for longer. (3) Diagnosis uses training statistics and behavior to propose the next experiment. Programs enter the candidate bank; findings and test conditions enter scientific memory. A trained policy may help a new learner reach an intermediate state during training. Final evaluation uses the new policy alone from the original resets.

memory to encourage progress or penalize setbacks. Proposals can explain the learning difficulty they address and predict how behavior should change. Separate policy and reward interfaces allow the same reward to be tested with different observation maps.

Make solver choice part of that same design. Solver proposals specify the learner, network, hyperparameters, and exploration procedure. Exploration choices include entropy settings, random-action warmup, and training-only novelty rewards; hyperparameter search follows the requirements of the chosen learner. The generator can revise a component, combine earlier proposals, or introduce a new design. Programs are checked for compatibility and execution errors before training. A reward that fails with one solver remains available for testing with another (Appendices B and D).

4.2 DIVERSITY-PRESERVING SEARCH

Cover alternative ways to learn. The bank defines a space of compatible observation–reward–learner–exploration combinations,

$$\mathcal{Q} = \{(\phi, r, L, e) : \phi \in \mathcal{C}_\phi, r \in \mathcal{C}_r, L \in \mathcal{C}_L, e \in \mathcal{C}_e, \text{compatible}(\phi, r, L, e)\}.$$

Here $\mathcal{C}_\phi, \mathcal{C}_r, \mathcal{C}_L, \mathcal{C}_e$ are the observation, reward, learner, and exploration components currently in the bank.

FARL first selects candidates needed for diagnostic comparisons, including their controls. It then uses the remaining budget to cover more components and component pairs. This avoids exhaustively

training the full space. Candidates are grouped by learner, observation type, reward construction, and exploration procedure using their definitions and proposal labels.

Give promising designs more training. FARL follows a successive-halving-style budget schedule (Li et al., 2018; 2020). The first short trial checks whether a design runs correctly; zero task success at this stage is not enough to reject it. Later trials use longer training and, where specified, more seeds. A candidate can be retained for three reasons: *competitiveness*, indicated by strong task results; *learning potential*, indicated by improving milestones or variation across runs; and *experimental value*, such as serving as a control. When progress stalls, FARL can revise the design, repeat an uncertain comparison, or train another candidate. The fixed evaluator allows comparisons across reward programs, whose training returns need not be comparable (Appendix C.1). The bank also preserves programs from unsuccessful combinations so they can be tested with new learners or training settings.

Use learned behaviors to explore later task stages. FARL can freeze a policy that reaches an intermediate goal and let a fresh learner take control from there. This *policy relay* lets a lifting policy, for example, help a new learner practice transport. The new learner has its own parameters and optimizer. Assisted episodes start from ordinary resets and are gradually replaced by unassisted episodes. Final evaluation uses the new policy alone from the original resets (Appendix C.2).

4.3 FALSIFIABLE DIAGNOSIS

Examine training and behavior together. The diagnostic LLM examines learning curves, optimizer statistics, and whether higher reward corresponds to better task performance. It checks which milestones the policy reaches, where progress stops, and whether individual trajectories contradict an apparent improvement. Execution and optimizer checks help separate implementation faults from learning difficulties. These observations guide the choice between revising a design, extending training, and running a controlled comparison. Task performance is measured by the fixed evaluator (Pan et al., 2022; Skalse et al., 2022).

State what a proposed change should improve. A diagnosis proposes an explanation for a failure and predicts the effect of a change. A policy that touches an object but rarely moves it toward the target, for example, may be rewarded for approach without maintaining contact. Alternatively, its observations may make the target relation difficult to learn. The first explanation suggests changing the reward and testing whether the policy holds the object longer; the second suggests changing the observations and testing for more target-directed movement. FARL chooses the training budget and measurements needed for the test. It can change several components when searching for better performance, or hold the others fixed to examine a specific explanation.

Test the prediction and retain the result. For each comparison, the controller specifies the changed and fixed components, the predicted effect, the seeds, and the training budget. It checks that the intended programs and settings were executed before interpreting the outcome. An inconclusive comparison may lead to more training, another seed, or a different test.

Scientific memory records the explanation, experiment, outcome, and test conditions. When proposing later designs, FARL retrieves relevant results, including those that contradicted earlier predictions. A failure with one learner or budget can therefore inform a new comparison without ruling out the component in every setting. The candidate bank keeps those components available. Appendix D describes the controller and memory rules; Algorithm 1 summarizes the procedure.

5 EXPERIMENTS

We test whether FARL can construct effective designs when expert guidance is withheld and improve on native configurations that struggle to learn. We use learning curves, controlled comparisons, and ablations to examine how FARL finds and improves these designs.

Tasks and implementation. We evaluate 5×5 DoorKey navigation, MuJoCo Ant locomotion, Meta-World Door-Open as a manipulation calibration task, and Adroit Hand Relocate as a stress

Table 1: Task outcomes (mean $\pm$ SD) and costs (tokens / training steps, both in M). Ant uses meters, Hand percent, other tasks completion rates. Ant entries use 10M for FARL/LiMEN and 5M for Eureka/native PPO. All Hand policies use 5M steps. Ant and Hand costs cover one complete search. Bold marks the highest outcome or lowest cost in each column, including ties. ‘/’ means inapplicable. *Estimated tokens; [†]trimmed statistic; [‡]episode SD. Policy horizons and accounting: Appendices A.3 and G.

Method	DoorKey		Ant (m)		Door	Hand (%)
	EW	EA	EW	EA	EW	ST
FARL	1.00 $\pm$ 0.00	1.00 $\pm$ 0.00	345.8 $\pm$ 14.2	281.1 $\pm$ 74.4	1.00	97.11 $\pm$ 2.99
Eureka	0.00 $\pm$ 0.00	0.92 $\pm$ 0.06	94.1 $\pm$ 50.9	110.8 $\pm$ 39.5	1.00	0.00 $\pm$ 0.00
LiMEN	0.00 $\pm$ 0.00 [‡]	1.00 $\pm$ 0.00	89.9 $\pm$ 20.4	144.2 $\pm$ 4.7 [†]	1.00	0.00 $\pm$ 0.00
Native design	/	1.00 $\pm$ 0.00	/	81.9 $\pm$ 19.8	/	1.00 $\pm$ 1.00
Costs (M)	DoorKey EW		Ant EW		Door EW	Hand ST
FARL	2.834 / 82.3		0.2* / 1,900.7		0.874 / 9.1	2.58* / 408.4
Eureka	0.249 / 85		0.152 / 425		0.015 / 82.5	0.284 / 110.4
LiMEN	1.095 / 30		0.429 / 900		0.577 / 195	0.607 / 55.0

test (Yu et al., 2020; Chevalier-Boisvert et al., 2023; Todorov et al., 2012; Rajeswaran et al., 2018; de Lazcano et al., 2024). Appendices A.1 and I give the interfaces and compare native designs with the programs and solver settings selected by each method. Inner learners use Stable-Baselines3 (SB3) (Raffin et al., 2021); the EW searches use gateway model alias `gpt-5.4`. Appendix G gives the LLM settings and recorded expenditure.

Measurement and computation. DoorKey reports task completion; Hand requires the native relocation-success predicate for five consecutive steps. Ant reports $\mathcal{F}(\tau) = x_T - x_0$ in meters, the signed change in the root position along the forward axis, where T is environment termination or 1,000 control steps, whichever comes first. Like Eureka and LiMEN, we evaluate locomotion by forward progress (Ma et al., 2024; Jaswal et al., 2026), using the units and horizon defined here. Each training seed initializes an independent policy run. We average its evaluation episodes, then report the mean and sample standard deviation (SD) across runs (Agarwal et al., 2021). Table 1 reports outcomes and costs; Appendices A.3 and G detail evaluation and expenditure. Policy training budgets describe the selected designs; total search costs include the experiments used to find them. DoorKey EW uses 100k screening and 300k comparisons before a separate 1M evaluation; Ant and Hand budgets are detailed below.

5.1 DISCOVERING EFFECTIVE LEARNING DESIGNS

Door: calibrating design without expert guidance. All three automated methods achieve 100% completion on Door under EW (Table 1), confirming that existing methods can construct successful designs without native expert rewards on this calibration task.

DoorKey: finding a design that completes the task. Table 1 shows 100% EW completion for FARL versus zero for Eureka and LiMEN at 1M steps. Figure 3a shows where each method stops making progress. Eureka acquires the key in 88.0% and opens the door in 84.8% of episodes, but never exits; LiMEN’s selected design completes none of these stages. FARL carries progress through all three. Under EA, completion is 1.00 for FARL and LiMEN and 0.92 for Eureka: withholding expert design therefore separates methods that succeed when that guidance is available.

The three candidates in Figure 3b show why early scores can be misleading. All are trained for 300k steps with the same five seed IDs; C1 and C2 use PPO, while C3 uses Advantage Actor-Critic (A2C). The curves report exit frequency in 25k-step windows. C1 reaches 79.9% at 75k but falls to 5.2% by 300k. C2 remains near 60%, with large differences across seeds. C3 starts at only 8.0%, then reaches 99.5% at 150k and remains close to complete success. Selecting only the early leader would miss this more reliable design.

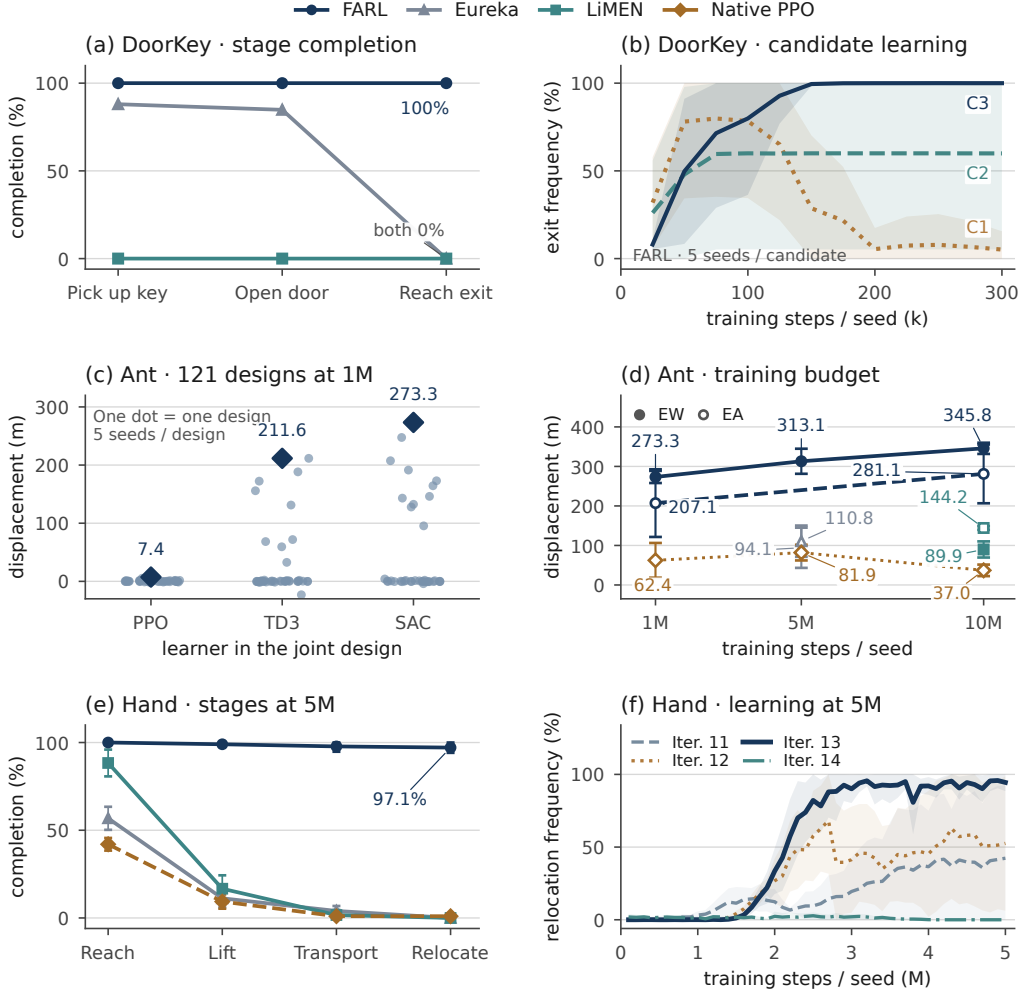


Figure 3: Outcomes, design diversity, and learning dynamics. (a) DoorKey stage completion. (b) Curve 1 (C1), Curve 2 (C2), and Curve 3 (C3) track three FEARL candidates at 300k: C1/C2 use PPO, C3 uses A2C; lines are five-seed mean exit frequencies in 25k-step windows. (c) All 121 Ant designs at 1M: dots are five-seed means; diamonds mark each learner’s best design. (d) Ant outcomes by budget; filled/open markers denote EW/EA. (e) Hand stage completion at 5M steps per policy. (f) The 111-dimensional SAC design across Hand iterations 11–14; lines average relocation frequencies across three training runs in 100k-step windows. Bars and bands show seed SD, clipped to $[0, 100]\%$ for completion. Appendices F.3 and F.4 give candidate identities and final-evaluation protocols.

A separate comparison keeps observations, reward, and exploration fixed while changing the learner and its hyperparameters. Final completion changes from 20% to 100% at 300k (Appendix F.2). The design comparison in Appendix I.2 shows that FEARL retains the raw input and finds a count-based reward with A2C. An interface that fails with one training configuration can therefore work with another.

Ant: finding useful combinations and training them further. At 5M training steps per policy, FEARL’s EW design reaches 313.1 ± 31.7 meters, compared with Eureka’s 94.1 ± 50.9 and native PPO’s 81.9 ± 19.8 (Figure 3d). Its forward displacement is thus 3.3 times Eureka’s at this budget. The design reaches 273.3 ± 15.4 meters at 1M and 345.8 ± 14.2 at 10M. At 10M, LiMEN reaches 89.9 ± 20.4 , while native PPO falls to 37.0. More training benefits FEARL’s design, whereas extending the native configuration does not recover comparable locomotion.

FARL searches Ant at budgets of 5k, 50k, 300k, and 1M steps, introducing new combinations as the search proceeds (Appendix F.1). Among 121 five-seed designs, the best of 42 PPO, 42 Twin Delayed Deep Deterministic Policy Gradient (TD3), and 37 Soft Actor-Critic (SAC) configurations reaches 7.4, 211.6, and 273.3 meters, respectively. Even within SAC, results range from -4.0 to 273.3 meters. Choosing SAC alone is therefore insufficient: its performance also depends on the observations, reward, and training settings. With expert guidance available, FARL reaches 281.1 meters at 10M, compared with Eureka’s 110.8 at 5M and LiMEN’s 144.2 at 10M (Table 1).

An unexpected result is that the stronger Ant design is found without expert guidance: 345.8 versus 281.1 meters at 10M, a 23% increase. The winning programs reveal different approaches. EA retains the native 27-dimensional observation and rewards forward speed using the supplied control-cost term. EW adds 30 coordinate-difference features and rewards forward motion together with differentiated actuator commands; both use SAC. Appendix I.3 contrasts these programs with the native speed–effort reward and the posture-based shaping found by the baselines. This contrast shows that expert design need not set the limit of what automated search can discover.

Hand: from occasional success to reliable relocation. At 5M training steps per policy, FARL achieves $97.11 \pm 2.99\%$ sustained relocation, compared with $1.00 \pm 1.00\%$ for native PPO and zero for Eureka, LiMEN, native SAC, and native TD3 (Table 1). FARL completes reach, lift, transport, and relocation at 100.0%, 99.0%, 97.8%, and 97.1%, respectively (Figure 3e). LiMEN reaches the object in 88.3% of episodes, lifts it in 16.7%, and transports it in 1.7%.

Earlier Hand experiments screen candidates at 5k steps and test smaller sets at 100k and 500k. One candidate is retained despite zero success at 5k; with further training, it learns to reach and lift the object (Appendix F.4). In the later run that produces the final design, iterations 0–10 use 1M steps per policy and iterations 11–15 use 5M. The search retains programs and experimental findings between iterations, but each policy is trained from scratch.

By iteration 8, FARL has found a generated reward and 111-dimensional representation that achieve 4.17% success with SAC. The representation includes palm–object and object–target distances computed from public inputs. At iteration 11, longer training with revised SAC settings raises success to 40.89%, although results vary widely across seeds. Policies can reach and lift the object, but transport remains unreliable. Comparisons of successful and failed trajectories suggest testing whether a simpler representation would improve this stage.

Iteration 12 tests that prediction by removing seven relational features. The resulting 104D alternative keeps the same 84 public inputs and 20 other derived features. Both representations use the same reward, learner, training settings, budget, and seeds. Transport reaches 38.44% with 104D, compared with 60.11% with 111D: the proposed simplification does not provide the predicted improvement. FARL records this result and keeps both representations available for further experiments.

Iteration 13 tests new SAC settings. Final success rises to 90.89% with 104D and 97.11% with 111D, whose seed SD falls from about 51 percentage points at iteration 11 to 2.99. The selected policies reach 90.07% relocation frequency in the training window ending at 3M (Figure 3f). Later iterations do not improve on this design, which remains the best at the end of iteration 15. The search thus corrects an unsuccessful representation change while continuing to improve the training configuration (Appendix F.4).

Search expenditure. FARL uses 82.3M training interactions on DoorKey, 1,900.7M on Ant, and 408.4M on Hand. Ant and Hand costs record one complete search. DoorKey requires slightly less training than Eureka’s 85M and reaches 100% success versus zero. Ant and Hand use more search training and produce substantially better policies. Appendix G details the expenditure.

5.2 CORE COMPONENT ABLATIONS

We remove one mechanism group at a time (Table 2). Ablation 1 (A1) searches observations and rewards with a fixed learner, hyperparameters, and exploration procedure. Ablation 2 (A2) retains all design choices but uses basic feedback without rich execution evidence or experimental memory. Ablation 3 (A3) retains joint design and diagnosis but replaces diversity coverage, protected reten-

Table 2: Three core ablations in EW and frozen FARL design references. DoorKey/Ant policy horizons are 300k/1M; task success (%) or signed displacement, mean $\pm$ sample SD. References use five seeds, ablations three. Search protocols are given in Appendix E. [†]Door reference: 50k, two seeds; ablations: 1M, three seeds.

Condition	DoorKey (%)	Ant (disp.)	Door (%) [†]
FARL (fixed reference)	100.00 $\pm$ 0.00	273.35 $\pm$ 15.35	100.00
A1: obs.-reward search only	0.00 $\pm$ 0.00	-3.09 $\pm$ 5.38	0.00 $\pm$ 0.00
A2: no rich evidence / memory	0.00 $\pm$ 0.00	-0.10 $\pm$ 0.39	0.00 $\pm$ 0.00
A3: no diversity / preservation	100.00 $\pm$ 0.00	2.40 $\pm$ 2.93	0.00 $\pm$ 0.00

tion, and revival with ordinary sampling and task-score selection. We compare these searches with previously selected FARL designs; Appendix E reports all nine cohorts and their search budgets.

Joint design and evidence-informed revision. A1 and A2 both achieve zero DoorKey completion, compared with 100% for FARL. Their intermediate behavior reveals different remaining failures: A1 acquires the key in 18.0% and opens the door in 1.0% of episodes; A2 reaches 46.7% and 34.3%, but still never exits (Table A12). Allowing more design choices gives A2 a broader search, yet basic feedback does not lead it to a design that completes the sequence. On Ant, A1/A2 yield -3.09/-0.10 meters, versus 273.35 for the reference. In these searches, neither observation-reward design with a fixed solver nor joint design with basic feedback recovers FARL’s behavior.

Keeping alternatives available. A3 retains 100% DoorKey completion but reaches only 2.40 meters on Ant. Its simpler selection rule finds a complete navigation strategy, while the Ant search misses the effective designs found by the full framework. On Door, all three restricted searches yield zero at 1M, versus 100% for the 50k reference. The role of each mechanism thus depends on the task: among the restricted searches, only A3 on DoorKey matches the corresponding FARL reference. The ablations, learning curves, and controlled Hand comparison together show how the search depends on the designs it retains and the feedback used to revise them (Figure 3b,f).

6 DISCUSSION AND FUTURE WORK

The 104D Hand representation performs worse than 111D at iteration 12, but both improve under the training settings of iteration 13 (Appendix F.4). This is why FARL records test conditions and keeps components available after an unsuccessful comparison.

Deciding how much training a candidate deserves remains difficult: DoorKey includes a slow learner that becomes reliable, whereas native Ant performance declines with longer training (Figure 3b,d). Better estimates of learning potential and reuse of findings across tasks could reduce repeated or unproductive training. Extending FARL to visual tasks will also require diagnosis when relevant state variables and milestones are not directly available.

7 CONCLUSION

We introduced FARL, a framework that automates the joint design of RL interfaces and solvers. FARL diagnoses learning failures, tests proposed changes, and uses the results to decide which designs to revise or train further. By retaining alternatives and the conditions of earlier findings, it can revisit unsuccessful combinations without exhaustively training the full design space. Experiments demonstrate successful design without native expert guidance and substantial gains on locomotion and dexterous manipulation, including 97.1% Hand relocation success at 5M training steps per policy. These results extend automated RL design to the experimental decisions needed to develop effective learning setups.

AI USE STATEMENT

Generative AI assisted manuscript drafting and revision, literature search and related-work discovery, framework and method development, implementation and debugging, experimental-design feedback, and interpretation of experimental records. Figure 1 includes AI-generated illustration elements. LLMs also form part of FARL itself, as described in Section 4. The authors are responsible for the paper’s content, results, and artifacts.

REPRODUCIBILITY STATEMENT

Appendix A.1 specifies task interfaces; Appendix A.3 identifies outcome cohorts and evaluation denominators. Appendices B–D give construction, allocation, and diagnostic rules. Appendix E reports intervention definitions, seed-level outcomes, and native-control settings; Appendix F links executed designs to measurements. Appendix G describes resource accounting and the records needed to reconstruct the results. Source code and recorded experiment results are included in the ancillary materials accompanying this preprint.

REFERENCES

- Rishabh Agarwal, Max Schwarzer, Pablo Samuel Castro, Aaron C. Courville, and Marc G. Bellemare. Deep reinforcement learning at the edge of the statistical precipice. In *Advances in Neural Information Processing Systems*, volume 34, pp. 29304–29320, 2021.
- Maxime Chevalier-Boisvert, Bolun Dai, Mark Towers, Rodrigo de Lazcano, Lucas Willems, Salem Lahlou, Suman Pal, Pablo Samuel Castro, and Jordan Terry. Minigrid & miniworld: Modular & customizable reinforcement learning environments for goal-oriented tasks. In *Advances in Neural Information Processing Systems*, volume 36, pp. 73383–73394, 2023. doi: 10.52202/075280-3209. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/e8916198466e8ef218a2185a491b49fa-Paper-Datasets_and_Benchmarks.pdf.
- Wooseong Chung, Taegwan Ha, Yunhyeok Kwak, Taehwan Kwon, Jeong-Gwan Lee, Kangwook Lee, and Suyoung Lee. Prompt-to-policy: Agentic engineering for reinforcement learning. Software project, 2026. URL <https://github.com/krafton-ai/Prompt2Policy>.
- Rodrigo de Lazcano, Kallinteris Andreas, Jun Jet Tai, Seungjae Ryan Lee, and Jordan Terry. Gymnasium robotics. Farama Foundation, 2024. https://robotics.farama.org/envs/adroit_hand/adroit_relocate/.
- Adrien Ecoffet, Joost Huizinga, Joel Lehman, Kenneth O. Stanley, and Jeff Clune. First return, then explore. *Nature*, 590:580–586, 2021.
- Qian Huang, Jian Vora, Percy Liang, and Jure Leskovec. MLAGentBench: Evaluating language agents on machine learning experimentation. In *International Conference on Machine Learning (ICML)*, volume 235 of *Proceedings of Machine Learning Research*, pp. 20271–20309, 2024.
- Max Jaderberg, Valentin Dalibard, Simon Osindero, Wojciech M. Czarnecki, Jeff Donahue, Ali Razavi, Oriol Vinyals, Tim Green, Iain Dunning, Karen Simonyan, Chris Fernando, and Koray Kavukcuoglu. Population based training of neural networks. *arXiv preprint arXiv:1711.09846*, 2017.
- Amit Jain and Richard Linares. Agentic autoresearch for space autonomy: An auditable, LLM-driven research agent for aerospace control problems, 2026. URL <https://arxiv.org/abs/2606.20394>.
- Akshat Singh Jaswal, Ashish Baghel, and Paras Chopra. Discovering reinforcement learning interfaces with large language models. *Reinforcement Learning Journal*, 7, 2026. URL <https://rlj.cs.umass.edu/2026/papers/Paper93.html>.
- Hojoon Lee, Ajay Subramanian, Ben Abbatematteo, Vijay Veerabadran, Pedro Matias, Karl Ridgeway, and Nitin Kamra. RDA: Reward design agent for reinforcement learning. In *Reinforcement Learning Conference (RLC)*, 2026. URL <https://arxiv.org/abs/2606.01672>. arXiv:2606.01672.
- Liam Li, Kevin Jamieson, Afshin Rostamizadeh, Ekaterina Gonina, Jonathan Ben-tzur, Moritz Hardt, Benjamin Recht, and Ameet Talwalkar. A system for massively parallel hyperparameter tuning. In *Proceedings of Machine Learning and Systems*, volume 2, pp. 230–246, 2020.
- Lisha Li, Kevin Jamieson, Giulia DeSalvo, Afshin Rostamizadeh, and Ameet Talwalkar. Hyperband: A novel bandit-based approach to hyperparameter optimization. *Journal of Machine Learning Research*, 18(185):1–52, 2018.
- Yecheng Jason Ma, William Liang, Guanzhi Wang, De-An Huang, Osbert Bastani, Dinesh Jayaraman, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Eureka: Human-level reward design via coding large language models. In *International Conference on Learning Representations (ICLR)*, 2024. URL <https://arxiv.org/abs/2310.12931>.
- Jean-Baptiste Mouret and Jeff Clune. Illuminating search spaces by mapping elites. *arXiv preprint arXiv:1504.04909*, 2015.
- Marco Mussi, Davide Lombarda, Alberto Maria Metelli, Francesco Trovò, and Marcello Restelli. ARLO: A framework for automated reinforcement learning. *Expert Systems with Applications*, 224:119883, 2023.

- Alexander Pan, Kush Bhatia, and Jacob Steinhardt. The effects of reward misspecification: Mapping and mitigating misaligned models. In *International Conference on Learning Representations*, 2022.
- Jack Parker-Holder, Raghu Rajan, Xingyou Song, André Biedenkapp, Yingjie Miao, Theresa Eimer, Baohe Zhang, Vu Nguyen, Roberto Calandra, Aleksandra Faust, Frank Hutter, and Marius Lindauer. Automated reinforcement learning (AutoRL): A survey and open problems. *Journal of Artificial Intelligence Research*, 74:517–568, 2022. doi: 10.1613/jair.1.13596. URL <https://arxiv.org/abs/2201.03916>.
- Antonin Raffin, Ashley Hill, Adam Gleave, Anssi Kanervisto, Maximilian Ernestus, and Noah Dornmann. Stable-baselines3: Reliable reinforcement learning implementations. *Journal of Machine Learning Research*, 22(268):1–8, 2021.
- Aravind Rajeswaran, Vikash Kumar, Abhishek Gupta, Giulia Vezzani, John Schulman, Emanuel Todorov, and Sergey Levine. Learning complex dexterous manipulation with deep reinforcement learning and demonstrations. In *Robotics: Science and Systems (RSS)*, 2018.
- Bernardino Romera-Paredes, Mohammadamin Barekatain, Alexander Novikov, Matej Balog, M. Pawan Kumar, Emilien Dupont, Francisco J. R. Ruiz, Jordan S. Ellenberg, Pengming Wang, Omar Fawzi, Pushmeet Kohli, and Alhussein Fawzi. Mathematical discoveries from program search with large language models. *Nature*, 625(7995):468–475, 2024. doi: 10.1038/s41586-023-06924-6. URL <https://www.nature.com/articles/s41586-023-06924-6>.
- Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. In *Advances in Neural Information Processing Systems*, volume 36, 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/hash/1b44b878bb782e6954cd888628510e90-Abstract-Conference.html.
- Joar Skalse, Nikolaus H. R. Howe, Dmitrii Krashenninikov, and David Krueger. Defining and characterizing reward gaming. In *Advances in Neural Information Processing Systems*, volume 35, pp. 9460–9471, 2022.
- Emanuel Todorov, Tom Erez, and Yuval Tassa. MuJoCo: A physics engine for model-based control. In *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pp. 5026–5033, 2012.
- Rodrigo Toro Icarte, Toryn Q. Klassen, Richard Valenzano, and Sheila A. McIlraith. Reward machines: Exploiting reward function structure in reinforcement learning. *Journal of Artificial Intelligence Research*, 73:173–208, 2022.
- Yuan Wei, Xiaohan Shan, Ran Miao, and Jianmin Li. Agent²: An agent-generates-agent framework for reinforcement learning automation, 2025. URL <https://arxiv.org/abs/2509.13368>.
- Feiyu Wu, Xu Zheng, Zhuocheng Wang, Yi ming Dai, and Hui Li. RHyVE: Competence-aware verification and phase-aware deployment for LLM-generated reward hypotheses, 2026. URL <https://arxiv.org/abs/2604.28056>.
- Wenli Xiao, Jia Xie, Tonghe Zhang, Haotian Lin, Letian Fu, Haoru Xue, Jalen Lu, Yi Yang, Cunxi Dai, Zi Wang, Jimmy Wu, Guanzhi Wang, S. Shankar Sastry, Ken Goldberg, Linxi Fan, Yuke Zhu, and Guanya Shi. ENPIRE: Agentic robot policy self-improvement in the real world, 2026. URL <https://arxiv.org/abs/2606.19980>.
- Tianbao Xie, Siheng Zhao, Chen Henry Wu, Yitao Liu, Qian Luo, Victor Zhong, Yanchao Yang, and Tao Yu. Text2Reward: Reward shaping with language models for reinforcement learning. In *International Conference on Learning Representations (ICLR)*, 2024. URL <https://arxiv.org/abs/2309.11489>.
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models. In *International Conference on Learning Representations*, 2023. URL <https://arxiv.org/abs/2210.03629>.

Haoran Ye, Jiarui Wang, Zhiguang Cao, Federico Berto, Chuanbo Hua, Haeyeon Kim, Jinkyoo Park, and Guojie Song. ReEvo: Large language models as hyper-heuristics with reflective evolution. In *Advances in Neural Information Processing Systems*, volume 37, 2024. URL https://proceedings.neurips.cc/paper_files/paper/2024/hash/4ced59d480e07d290b6f29fc8798f195-Abstract-Conference.html.

Tianhe Yu, Deirdre Quillen, Zhanpeng He, Ryan Julian, Karol Hausman, Chelsea Finn, and Sergey Levine. Meta-world: A benchmark and evaluation for multi-task and meta reinforcement learning. In *Proceedings of the Conference on Robot Learning*, volume 100 of *Proceedings of Machine Learning Research*, pp. 1094–1100, 2020. URL <https://proceedings.mlr.press/v100/yu20a.html>.

Table A1: Task interfaces. EW means expert-withheld; EA means expert-available. Hand is the stress test (ST) under EA permissions.

Task	Benchmark identifier	Observation / action interface
DoorKey	MiniGrid-DoorKey-5x5-v0	EW: 148 inputs, 7 discrete actions; EA: 83 inputs, 7 actions.
Ant	Ant-v4	27 raw inputs, 8 continuous actions; derived features are design choices.
Door	door-open-v3-goal-observable	Meta-World; 39 inputs, 4 continuous actions.
Hand	AdroitHandRelocate-v2	ST: 84 inputs, 30 continuous actions; native control: 39 inputs.

A TASK INTERFACES AND EVALUATION

The appendix describes the task interfaces and evaluation (A), design generation (B), search and exploration (C), diagnosis and memory (D), ablations and native controls (E), learning curves and search histories (F), resource use and reproducibility (G), related work (H), and native and discovered learning designs (I).

A.1 INPUTS AND ACCESS SETTINGS

The user supplies an executable task, its intent, observation/action semantics, a task evaluator, and a resource protocol. Optional milestone predicates are specified before search. FARL (Fully Automated Reinforcement Learning) uses LLM-generated proposals and execution feedback to construct a learning design $h = (\phi, r, L, \lambda, e, b)$: policy observation map, reward, learner, hyperparameters, exploration, and learner-training depth. It does not change the benchmark dynamics or redefine the task outcome.

EW candidate programs consume the public transition, actions, time, and bounded episode memory, but not native reward, privileged step metadata, or hidden state. Task intent and field semantics remain available: withholding Ant’s native shaping does not withhold its forward-displacement objective. EA/ST permits native feedback and the expanded task interface. In EW, the evaluator returns aggregate outcomes during search without exposing its episode labels to the policy or generated reward at each step. The same separation applies to Hand’s evaluation milestones. DoorKey EA additionally exposes benchmark key-possession, door-open, and terminal-success fields; its selected reward uses those fields (Appendix I.2). The initial sensing feedback is specified separately in Section B.1.

DoorKey EW flattens a $7 \times 7 \times 3$ egocentric symbolic image, divides its categorical codes by 10, and appends direction divided by three. EA instead exposes the entire $5 \times 5 \times 3$ grid with normalized channels, plus eight values for agent position/direction, carried-object attributes, elapsed time, and a constant. The smaller EA vector therefore reveals more global information. EW–EA comparisons include this observability change, rather than isolating native-reward access.

Hand ST appends 36 generalized velocities and the three-dimensional absolute palm, object, and target positions to the native 39 inputs. Native controls use only the original 39. The selected Hand policy transforms the public 84-dimensional input into 111 features; the matched comparison uses 104 (Appendix F.4). EA baselines retain their declared wrappers: LiMEN’s DoorKey bridge exposes the full-grid vector, native reward, and time; Eureka can receive the environment object. Hand LiMEN receives selected numeric metadata, whereas Eureka can access the benchmark and filtered step metadata. These are the task-specific access paths used in the EA comparisons.

All experiments use numerical observations. MiniGrid encodes object categories, colors, and door states; locomotion and manipulation expose physical coordinates and velocities. EW withholds the additional expert learning artifacts, not the public observation API itself. EA/ST admits the task-specific training feedback described above.

A.2 OUTCOME AND MILESTONE DEFINITIONS

For a fixed design and training seed s , evaluation begins from the task’s original reset distribution with all source-policy assistance disabled. With episode outcomes $\mathcal{F}(\tau_{s,j})$, the reported seed score is

$$\mathcal{F}_s(h) = \frac{1}{n_s} \sum_{j=1}^{n_s} \mathcal{F}(\tau_{s,j}(h)).$$

We report the equal-seed mean and sample SD, with evaluation episodes nested within policy-training seeds. Evaluations may participate in adaptive design selection; separately reserved fixed-design cohorts are identified below.

DoorKey and Door report task completion. Ant reports signed root displacement until standard health termination, truncation, or 1,000 control steps. This continuous metric measures net forward progress from the initial root position.

Each Hand milestone must hold for five consecutive steps and is then latched for that episode: reach requires palm–object distance < 0.10 m; controlled lift requires object height > 0.04 m and palm–object distance < 0.12 m; transport adds object–target distance < 0.15 m to the lift conditions; relocate requires the native success predicate, also used for Final. These are marginal episode events; each is scored over all evaluated episodes. The supplied predicates specify task decomposition and thresholds. Formally, the optional milestone set is $\mathcal{S} = \{S_1, \dots, S_K\}$. For binary completion tasks, its terminal predicate equals the task outcome, $S_K(\tau) \equiv \mathcal{F}(\tau)$. Earlier predicates localize partial competence without imposing an additional ordered-prefix condition on completion. Ant’s continuous displacement objective needs no milestone or binary completion threshold. Candidate-generated progress proxies are learning hypotheses; they do not change these supplied evaluation functions. Figure 3e uses one fixed design and one cohort per method for every stage.

A.3 COHORTS BEHIND THE MAIN RESULTS

Table A2 specifies training replication and evaluation denominators. Horizons describe the reported policies; search costs are additional and are accounted separately in Appendix G. Seeds replicate policy training for a selected design.

LiMEN DoorKey EW reports 0.00 ± 0.00 over its 20 zero-success evaluation episodes from one trained candidate; its SD describes episodes. Other reported SDs summarize training-seed means unless explicitly marked.

Door’s ceiling values are reported as completion rates. Eureka’s 75/75 summarizes three selected successful designs. DoorKey EA is a positive reference at its recorded depth, using its native completion measure. For DoorKey’s fixed 1M cohort, episode $j = 0, \dots, 24$ resets with seed $s + j$; the five policy seeds therefore share some reset IDs.

External Ant aggregation. LiMEN’s supplied Ant EA statistic removes one minimum and one maximum of six seed means, then reports the central-four mean and population SD: 144.23 ± 4.65 displacement. The same six recorded values give 142.85 ± 10.91 under equal-seed averaging and sample SD. The main table marks the supplied statistic explicitly. Seed IDs and 10M budgets are in the original CSV; its evaluation script specifies 20 episodes per seed.

B INTERFACE–SOLVER CO-DESIGN: CONSTRUCTION AND EXECUTION

B.1 ADAPTATION AND EXPLORATORY LEARNING

FARL uses an existing environment constructor or validated adapter when available. Otherwise, it inspects candidate packages and callable signatures, tests reset and step calls, and generates a Gymnasium-compatible adapter. When a call fails, it uses the traceback to attempt a bounded repair. Before generating designs, it checks observation shapes, action validity, finite values, and short rollouts. The task must provide a usable non-visual API. Ant EW used package discovery and adapter generation with `gymnasium[mujoco]`; DoorKey EW, Ant EA, and Hand ST used existing benchmark adapters.

Table A2: Outcome cohorts: runs $\times$ evaluation episodes/run $\times$ training steps/run. Unless noted, runs train one selected design.

Task	Method	Cohort	Selection and replication
DoorKey EW	FARL	$5 \times 25 \times 1\text{M}$	Seeds 200–204; the same design has five 300k runs, seeds 100–104.
	Eureka	$5 \times 25 \times 1\text{M}$	Seeds 0–4, fixed selected reward.
	LiMEN	$1 \times 20 \times 1\text{M}$	Selected short-stage run; the full-stage threshold was not reached.
DoorKey EA	FARL	$3 \times 5 \times 100\text{k}$	Seeds 0–2; completed early-saturation cohort.
	Eureka	$2 \times 25 \times 500\text{k}$	Seeds 101–102; 22/25 and 24/25 successes.
	LiMEN	$3 \times 20 \times 2\text{M}$	Seeds 42–44; aggregate also used in selection.
Ant EW	FARL	$5 \times 5 \times 10\text{M}$	Seeds 42–46; independent 5M training uses these same IDs.
	Eureka	$5 \times 25 \times 5\text{M}$	Seeds 0–4, fixed selected reward.
	LiMEN	$3 \times 20 \times 10\text{M}$	Seeds 42–44; aggregate also used in selection.
Ant EA	FARL	$7 \times 3 \times 10\text{M}$	Seeds 0–6, one fixed configuration.
	Eureka	$5 \times 25 \times 5\text{M}$	Five independent runs of the selected reward.
	LiMEN	$6 \times 20 \times 10\text{M}$	Seeds 100–105; external aggregation described below.
Door EW	FARL	$2 \times 5 \times 50\text{k}$	One selected design.
	Eureka	$3 \times 25 \times 10\text{M}$	Three successful generated designs, not seeds of one recipe.
Hand ST	LiMEN	$3 \times 20 \times 5\text{M}$	One selected design.
	FARL	$3 \times 300 \times 5\text{M}$	Seeds 0–2; Iteration-13 selected design, also evaluated during search.
	Eureka	$5 \times 25 \times 5\text{M}$	Seeds 0–4; fixed champion stage profile.
	LiMEN	$3 \times 20 \times 5\text{M}$	Seeds 42–44; fixed champion stage profile.

Table A3: Executed initial sensing. Follow-up steps collect generator input with the probe policy; they are not extra optimizer updates.

Task	Learner	Permitted probe feedback	Learning	Follow-up
DoorKey EW	DQN	Aggregate native scalar	30k	2k
Ant EW	SAC	Controllable novelty	30k	5k
Ant EA	SAC	Native scalar	30k	5k
Hand ST	SAC	Native scalar	100k	5k

A 500-step random probe supplies initial ranges and action responsiveness. When enabled, a fresh miniRL policy then collects behavior: a deep Q-network (DQN) for discrete actions and SAC for continuous actions. It trains in 10k chunks, using an initial plan based on interface dimensions and probe statistics. After three chunks, stabilization of observation ranges, reward summaries, or information trigger rates can stop sensing. A failed learner falls back to random sampling. This stopping rule tracks the stability of the collected evidence. Candidate policies subsequently train with fresh weights and replay.

DoorKey’s EW sensing phase permits aggregate native scalar feedback, while its solving-design programs cannot consume native reward. Ant EW also withholds that scalar from sensing and diagnosis; its probe uses novelty, state change, and event bonuses on action-responsive public coordinates. Thus the exact probe channel is task-specific and declared before search. The collected transitions, value ranges, actions, and feedback guide the first feature and reward proposals, before any successful behavior is available.

B.2 CANDIDATE INTERFACES AND VALIDATION

Observation proposals select semantic coordinate groups or append deterministic expressions to the full raw vector. LLM-derived and typed-combinator expressions can expose differences, distances, norms, ratios, or predicates. Each carries source coordinates, type, formula, and relevance rationale. Probe checks test numerical execution and prioritize comparisons; short-run constancy does not justify permanently discarding a rare-event feature. These are structured feature maps, not arbitrary stateful observation programs. For raw observation O_t , the two forms are

$$\phi_{\text{sub}}(O_t) = O_t[M], \quad \phi_{\text{aug}}(O_t) = [O_t, f_1(O_t), \dots, f_m(O_t)],$$

where the ordered subset M is nonempty and augmentation preserves all raw coordinates. The original raw view is a separate reference alternative.

Reward proposals provide a complete transition function and can attach a mechanism claim, predicted behavior, a distinguishing observation, risks, and a falsifier, as detailed below. The runtime function reads the canonical observations before policy feature selection, actions, time, and episode-local memory, returning scalar reward and optional named diagnostics/memory updates. EA/ST may additionally read native artifacts. Acquisition, persistence, regression, and event sequences can therefore be expressed as programs, rather than coefficients in one fixed template. Later proposal batches condition on existing families and evidence; exact-source deduplication and bounded unproductive batches control expansion.

Learner proposals select supported implementations compatible with the action space, together with architectures and conditional configuration domains. Before training, the executor checks input dependencies, dimensions, action compatibility, and valid learner parameters. Each training record identifies the observation program, reward, learner, hyperparameters, and exploration settings it used.

The executor requests a repair when a program misuses a declared input or reverses its intended reward direction. It checks the relevant changes together before training the revised design. Term weights must preserve the declared incentive sign; named diagnostics are treated as separate outputs unless the program explicitly includes them in its reward. Completed seed records are retained across retries, and unfinished runs remain marked as incomplete.

B.3 WHAT INTERFACE-SOLVER CO-DESIGN GENERATES

Interface-Solver Co-Design makes two coupled choices: what the policy sees and is rewarded for, and how a learner acquires behavior from that interface. Table A4 gives the inputs and outputs of each generator. LLMs produce observation and reward programs and propose compatible learners and exploration settings. The executor checks these components, combines them into a complete design, and trains a policy with the selected RL algorithm. Recording the components separately allows later experiments to identify exactly which choice changed.

Table A4: Executable objects in joint design. Inputs follow the task’s declared access setting; available execution evidence informs later proposals.

Design axis	Evidence supplied	Generated output
Observation	Coordinate meanings/types, task relations, probe transitions, and earlier feature comparisons	Ordered field selections or raw inputs augmented by deterministic expressions, with source dependencies and formulas.
Reward	Task intent, transition interface, observed behavior, current incentives, and retrieved explanations	Complete transition-reward source and a testable account of its proposed behavioral mechanism.
Learner	Action-space type, representation, supported implementations, and learning-health evidence	Compatible algorithm and network alternatives with learner-conditioned configuration domains.
Training	Selected interface/learner, exploration alternatives, completed learning evidence, and resource protocol	Instantiated hyperparameters, exploration settings, and requested training depth for each execution.

Observation construction retains raw inputs as an explicit alternative. The generator groups coordinates by meaning and proposes both small subsets and broader selections. LLM proposals and combinations of typed expressions add features such as displacement, distance, and threshold events. Each expression is tested on collected samples before it is added to a candidate. These checks help prioritize tests, while retaining features that may matter only during rare events. Reward programs continue to receive the original transition observations regardless of the policy’s feature map.

A reward program carries a prediction. Reward programs can encourage reaching a useful state, remaining there, avoiding a reversal, or completing a sequence of events. Episode-local memory allows rewards to depend on earlier events. A proposal can also state why its program should help and what behavior would test that explanation (Table A5). Explanatory fields are optional; the generated source defines the reward actually used in training.

Table A5: The prediction record attached to a reward proposal. Source code defines the executed incentive; the other fields guide subsequent tests.

Record	Question it makes explicit
Program and family	What incentive is executed, and which proposed mechanism distinguishes this alternative?
Mechanism and behavior	Why might it help, and which events or behavior should change if it works?
Distinguishing prediction	Which observation separates this explanation from a competing explanation?
Falsifier and proxy risks	Which result would challenge the mechanism, and how might reward improve without the intended behavior?
Temporal role	Does the proposal emphasize acquisition, maintenance, regression prevention, or their interaction?
Compatibility and depth	Which learner properties and minimum training duration are proposed for an informative test?

For example, consider a hand that sometimes lifts an object but never completes relocation. It may need to lift more reliably or to hold the object longer after lifting. A reward for initiating a lift predicts more lifts; a reward for maintaining the grasp predicts longer holds. Measuring both would distinguish these explanations even before either policy completes the task. This illustrative test specifies the behavior to compare when the final score alone gives little guidance.

C DIVERSITY-PRESERVING SEARCH AND FRONTIER EXPLORATION

C.1 CONTROLLER AND ALLOCATION RULES

The scheduler uses a successive-halving-style budget ladder, with the retention rules below preserving learning potential and required comparisons. A valid initial probe is not a sufficient basis for rejecting a design’s learning quality. Greater depth can be assigned to a new training run of a retained design; promotion does not require continuation of its earlier policy parameters. The ladder and stopping protocol are declared separately: training depth alone does not determine whether an entire search has ended.

Coverage uses keys for learner identity, observation and exploration types, reward programs or primitives, and component families. Required controls enter first. Greedy selection then adds candidates covering the largest number of previously uncovered components and pairs, breaking ties deterministically. Remaining slots go to underrepresented families. The records distinguish proposed combinations from those actually trained.

At a validity rung, valid low-scoring designs receive no learning-quality pruning. Later bounded-task retention considers alternative reasons: any positive final score ($> 10^{-12}$), positive milestone evidence ($> 10^{-6}$) with rising/inconclusive/high-variance dynamics, improving training, unavailable curves, or a required control/protected incumbent. For at least four finite returns, let a, b be first-/last-quarter means and $R_{\min}, R_{\max}$ the sequence extrema. Training improvement is

$$g_s = (b - a) / \max(1, |a|, |b|, R_{\max} - R_{\min}), \quad \text{median}_s g_s > 10^{-3}.$$

Algorithm 1 FARL’s experimental loop

Require: task/interface, fixed outcome evaluator, optional milestones, budget ladder with seed allocations, and stopping protocol

- 1: adapt the environment; collect permitted exploratory evidence
- 2: initialize executable component pools, candidate bank, experimental memory, and cost ledger
- 3: **while** the stopping protocol permits another experiment **do**
- 4: retrieve relevant findings, unresolved tests, and candidate learning evidence
- 5: propose and validate components; resolve required construction/learner repairs
- 6: reserve diagnostic comparisons and controls; fill remaining capacity by component-family and pair coverage
- 7: assign new designs a validity or learning rung; select retained designs for deeper trials or replication using outcomes, learning dynamics, and experimental need
- 8: bind any frontier sources, reset mixture, withdrawal schedule, and additional interaction cost
- 9: fix exact designs, conditional hyperparameters, seeds, and training budgets for each comparison
- 10: train independent learners; evaluate task outcomes and milestones; record effective settings and costs
- 11: check executed changes and conditions against the requested experiments
- 12: update conditional findings; retain competitive, improving, uncertain, or experimentally necessary designs and reusable components
- 13: use these findings to request the next comparison, component revision, or budget promotion
- 14: **end while**
- 15: select using the declared task-outcome statistic; execute any reserved fixed-design cohort
- 16: **return** selected design, seed outcomes, experimental records, stopping reason, and accounted cost

Unavailable data are not negative evidence. Returns are compared within a program, not used to rank different reward programs.

Milestone dynamics use early/late windows of width $q = \min\{\max(10, \lfloor N/4 \rfloor), \max(1, \lfloor N/2 \rfloor)\}$. Fewer than 40 episodes is inconclusive. Otherwise, for rates p_a, p_b , $\Delta = p_b - p_a$ has diagnostic band $\Delta \pm 1.96\sqrt{[p_a(1-p_a) + p_b(1-p_b)]/q}$, clipped to $[-1, 1]$. A lower endpoint above 0.05 is rising; an upper endpoint below -0.05 is collapse; $|\Delta| \leq 0.05$ with zero in the band is plateau; other cases are inconclusive. Across seeds, a rate range of at least 0.35 takes priority as high variance; otherwise a strict majority determines the state. These normal-approximation bands diagnose learning behavior, not an exact sequential test. A requested target stage takes precedence over the first available stage. Plateau/collapse can end unchanged milestone-based continuation at a completed learning rung, while other retention reasons remain applicable.

For unbounded outcomes with $n \geq 3$ scores, scheduling uses $\ell_i = \mu_i - 0.5s_i/\sqrt{n}$ and $u_i = \mu_i + 0.5s_i/\sqrt{n}$. The largest- ℓ candidate, candidates with $u_i \geq \max_j \ell_j$, and required controls remain. With fewer than three scores, the mean is retained but variance is unreliable, giving temporary protection. These bands are allocation heuristics, not calibrated confidence intervals; screening may pool multiple configurations and repeated seed IDs. Bounded reward–outcome pathology checks additionally route completed high-return/zero-outcome designs without stage or learning improvement to revision. Their return-sign test is scale-dependent, so the behavioral evidence is essential to interpretation.

The hyperparameter optimization (HPO) incumbent uses the arithmetic mean for fewer than four scores. Otherwise, it averages sorted zero-based indices $\lfloor n/4 \rfloor$ through $\lfloor 3n/4 \rfloor$ inclusive. Round ties retain the first eligible design; later rounds replace it only on strict improvement. Final reporting still uses the equal-seed mean and sample SD. Explicit comparison protocols may specify another selection statistic; DoorKey’s three-design promotion used a normal-approximation lower bound, then its recorded trimmed statistic and mean. Archived components can replenish depleted pools without transferring policy parameters, optimizer state, or replay to new training units.

C.2 PREDICATE-GUIDED FRONTIER EXPLORATION

A policy that reaches part of the task can help another learner explore the next stage. The controller first verifies its saved checkpoint and compatible action and observation interfaces. Occasional success is enough to try it as a source policy; routine reuse requires the specified evidence across seeds and checkpoints.

Before handing control to the learner, the controller checks the current state and remaining episode time against the source’s readiness condition. Each source policy is assessed separately. If its condition cannot be evaluated from available quantities, the handoff does not proceed.

One frozen source acts from an ordinary reset through legal environment steps. On current readiness, control passes to the fresh trial learner; source actions do not enter the learner’s rollout or replay and no parameters are fused. For u learner steps completed of b , the default assistance probability is $p_{\text{assist}}(u) = 0.5 \max\{0, 1 - u/(0.8b)\}$. The final training tail therefore uses only original resets. At most three source attempts are made per reset, and a handoff must leave at least one quarter of the original horizon. The horizon is not restarted or extended. Sources and schedule are fixed within a worker; completed waves can inform subsequent candidates.

If the source fails to reach the required state, training falls back to a fresh reset and the source remains available. Invalid actions, corrupt checkpoints, and incompatible inputs require repair. All source interactions, successful or not, count in addition to learner steps. Final evaluation disables assistance and evaluates one learner from original resets, with freshly initialized stage detectors. The reported champions train from ordinary resets.

C.3 PRESERVING OPTIONS BEYOND ONE UNSUCCESSFUL PAIRING

Diversity-Preserving Search retains both complete designs and reusable components. A poor result applies to the tested combination at its training budget and initialization; the reward may still work with another learner. Diagnosis can therefore propose a different pairing or further training. The scheduler uses these requests and the observed learning progress to allocate the available budget.

The scheduler first reserves required controls and protected designs. It then favors candidates containing component families or pairs that have not yet been covered, and fills any remaining capacity from less represented families. Thus two candidates sharing a reward can receive training with different learners. Their measured behavior determines which combinations merit further search.

The bank stores each component’s source, parent, status, and test results. Retained components can be recombined; when an active component pool falls below its configured minimum, archived bank entries can replenish it. The default minimum population and maximum revival count are both two. This replenishment makes earlier components available for new combinations. Ablation 3 disables it. Recombined designs retain their component history and train fresh policies.

C.4 USING INTERMEDIATE BEHAVIORS TO SUPPORT EXPLORATION

A policy that occasionally reaches a milestone can help another learner explore what comes next. It need not yet be reliable enough for repeated reuse. Table A6 separates these uses of partial behaviors. Final evaluation always starts from the task’s original resets with assistance disabled.

Table A6: Different evidence warrants different uses of partial competence.

Available evidence	Next use	Question for the next experiment
No compatible source with usable readiness	Joint design or exploration from original resets	Observe partial competence and identify a testable frontier opportunity.
Positive local signal; checkpoint and runtime interface verifiable	Exploratory source-policy attempts mixed with original resets	Whether the source can reliably create that opportunity and the new learner can use it.
The same source also satisfies its declared repeated-use checks	Qualified reuse under the recorded checkpoint/interface and scope	Whether the complete learner succeeds without assistance.
Completed whole-task evidence for one learner	Deeper training of the selected recipe or reserved fixed-design evaluation	Performance at the newly evaluated depth and replication level.

Choosing source policies. Some candidates always train from original resets. Others receive assistance from compatible source policies, with priority given to sources that more reliably reach the target milestone. Rotation among source families, every four allocations by default, also gives

Table A7: Examples of observations and the comparisons they motivate.

Observed discrepancy	Next comparison	Discriminating observation
Frontier event never observed	Exploration change with design basis fixed	Increased event coverage or frontier entry.
Useful events observed but poorly represented	Public feature/observation comparison	Better separation of relevant states and subsequent behavior.
Reward improves without task progression	Alternative incentive or learner test	Predicted behavioral transition, not merely larger return.
Behavior improves but varies across seeds	Replication or greater depth	Consistent progress under the stated conditions.
Training progress is absent from saved evaluation	Same-checkpoint, same-episode evaluator check; then retention test	Separate measurement disagreement from irreproducible behavior.
Declared learner updates do not occur	Learner/exploration repair	Changed effective settings and measured optimizer activity.

weaker policies further opportunities. Controlled comparisons use a fixed source plan across the compared designs.

Appendix C.2 specifies when control passes from the source policy to the learner, how assistance decreases during training, and how the additional environment interactions are counted.

D FALSIFIABLE DIAGNOSIS AND MEMORY

D.1 FROM OBSERVATION TO AN EXECUTABLE TEST

Diagnosis considers the training return, task score, milestones, trajectories, and optimizer activity together. A failed evaluation first needs repair. A completed evaluation with zero success raises a different question: whether the policy needs more exploration, a different representation, or longer training. Table A7 gives examples of such decisions.

A hypothesis names supporting observations, scope, alternatives, a predicted effect, a falsifier, and the component to change. The trajectory planner, internal diagnosis, and critic submit proposals to one controller; disagreement can request a distinguishing experiment. A controlled comparison binds an unchanged reference and a changed-axis design, common seed sets and depth, and compatible non-target components. The executor can use a verified paired-seed schedule or repeated matched trial groups. Within-learner comparisons share their declared base hyperparameters; an exploration treatment transforms its compatible settings. Learner changes use typed, algorithm-specific domains, not an identical-hyperparameter claim across different algorithms.

Before interpreting a comparison, the controller checks the executed components, seeds, interface, evaluation status, and training steps. A missing comparison or a revision that makes no change leaves the hypothesis unresolved. Construction repairs do not require training a known-invalid control. When the learner is not updating correctly, the controller checks its settings and optimizer steps, repairs the fault, and retains any valid behavioral observations. Repaired candidates can re-enter search after satisfying the same checks as other designs.

D.2 RETRIEVAL, UPDATING, AND TEST PRIORITY

Experimental memory stores explanations, predictions, scope, evidence, and unresolved comparisons; the candidate bank separately stores trainable components. Retrieval deduplicates hypothesis IDs in stored traversal order, selects the same access setting, and orders states as supported, suspected, proposed, inconclusive, falsified, and exhausted, with recency breaking ties. The controller lesson view admits up to 12 entries and the generator view up to 16 within its context envelope. Current designs and recent trial summaries occupy separate context sections. Retrieving a falsified explanation preserves its scope rather than banning every use of its underlying program family.

Observational support can make a hypothesis suspected. Stronger ledger states require the appropriate claim type, linked comparison cohorts, valid information use, and repeated directional agree-

ment. A complete paired-seed execution record admits actual outcomes from at least two distinct paired seeds. Without that record, the bound-trial producer averages seeds within matched trial groups and requires at least two groups. A higher treatment mean and a strict majority of positive differences support the local prediction; reverse evidence contradicts it. Reusing a seed across groups does not create new independent seeds. Conflicting or missing comparisons remain inconclusive. These are operational evidential states, not calibrated posterior probabilities. Public-event association with a milestone and the effect of rewarding that event are separate hypotheses.

The trajectory planner ranks admissible tests lexicographically by summed discriminating-value score (default one per addressed explanation), number of explanations addressed, and lower ordinal cost; exact ties keep library order. A concrete public-goal-interface alternative receives a priority bonus of 100 over a generic perturbation of the same goal. A minimum-learning-depth guard prevents treating a validity probe as a sufficient performance test.

When no authoritative request is available, a compact-memory fallback uses $q(h) = g(h)f(h)[0.5 + u(h)]v(h)/c(h)$: recorded discriminating value g and positive cost c default to one; f is one with a falsifier and 0.25 without; $u = \max(0.1, 1 - \text{confidence})$. State weights are 1.2 (supported), 0.9 (suspected), 0.75 (proposed/live), 0.65 (inconclusive), and 0.6 (weakened). Testing, dormant, falsified, and exhausted entries are not actionable in this fallback. These planning scores are heuristics. Neither route bypasses execution checks or revives a consumed request through an older memory view.

D.3 CONDITIONAL TRAINING CONFIGURATION

Optuna’s tree-structured Parzen estimator (TPE) uses sampler seed $42 + t$ at controller iteration t . The learner- conditioned domain can be proposed from task evidence. Fallback on-policy domains are log learning rate $[10^{-4}, 3 \times 10^{-3}]$, discount $[0.95, 0.999]$, log entropy coefficient $[10^{-4}, 0.05]$, and generalized advantage estimation (GAE) parameter $[0.9, 0.99]$; off-policy fallbacks use log learning rate $[10^{-4}, 10^{-3}]$, the same discount range, log target-update rate $[0.005, 0.02]$, and batch size $\{128, 256, 512\}$. Each value must belong to the selected learner’s executable domain; a cached proposal for another learner is not a valid configuration.

Local contraction requires an explicit optimization request and healthy completed evidence from the same executable recipe and training conditions. It halves support in the parameter’s linear or logarithmic sampling coordinate around the compatible best trial, clipped to the original domain; discrete domains remain unchanged. A flat nonpositive outcome field preserves support, as do new designs, unresolved frontier exploration, health repairs, and missing compatible evidence. Iteration number is not a shrink factor. Exploration’s learner-specific effects and executable warmup rules are detailed in Appendix D.5.

D.4 CONNECTING DIAGNOSIS, EXPERIMENTS, AND MEMORY

Falsifiable Diagnosis tests an explanation before recording it as a finding. The candidate bank stores reusable programs, configurations, and their history. Scientific memory stores explanations together with their predictions, results, and test conditions. The LLM uses behavioral summaries and earlier findings to propose a comparison; the controller selects its components, runs it, and checks the outcome. Table A8 follows these steps from the proposal to the memory update.

A controlled comparison changes one design choice while holding the other compatible components fixed. Exploration variants can modify a shared set of base hyperparameters. Comparisons between different learners instead use each algorithm’s valid hyperparameter domain. The recorded constructor settings identify the configuration actually used in training.

A verified paired-seed schedule can use one matched trial group with at least two distinct paired seeds. It requires completed arms, design and interface identities that match the declared comparison, and actual per-seed outcomes; a trial average cannot be expanded into artificial seed observations. Without this complete record, the bound-trial producer uses at least two matched trial groups and their seed means. The recorded replication unit governs interpretation; reusing a seed across groups does not create another independent seed. Optional frontier initialization is bound with the comparison rather than rotated between arms. Repairs of proved construction errors follow a separate path: a known-invalid control need not consume a learning budget.

Table A8: From a proposed diagnostic test to a result that can guide later experiments.

Object	Required content	Role in the next decision
Proposed test	Explanation, competing account, changed axis, prediction, falsifier, and requested depth	Select a comparison that can discriminate between explanations.
Bound comparison	Exact reference and treatment artifacts, compatible non-target stack, seed IDs, and declared replication unit	Reserve executable arms and bind learner-appropriate hyperparameter settings.
Completed evidence	Materialized settings, actual updates/depth, evaluation validity, and outcomes attached to the bound arms	Determine whether the requested contrast actually occurred and has interpretable results.
Memory update	Local prediction verdict, its scope, and links to the comparison and observations	Inform subsequent retrieval, revision, or another discriminating test.

Observed behavior can mark an explanation as *suspected* and prompt a test. Supporting a prediction requires the completed comparison to agree both in its average effect and in a strict majority of paired seeds or matched trial groups. An effect in the opposite direction contradicts the prediction. Missing comparisons, a revision that changes nothing, or conflicting outcomes leave the question unresolved. These memory states summarize the experiments; they are not posterior probabilities.

Retrieval keeps the test conditions with each finding. A reward that fails with one learner can still be tried with another. Similarly, accepting a repair or allocating more training is a search decision; the resulting experiment determines whether it supports the explanation.

D.5 EXPLORATION SETTINGS

Interface–Solver Co-Design chooses exploration settings alongside the learner. Table A9 lists the supported options. Execution records contain the resulting training configuration.

Table A9: Supported exploration settings for each learner. Here b is the requested number of learner-training steps.

Choice	Executed effect and eligibility
Native exploration	No additional modification to algorithm-native behavior.
Entropy profile	PPO entropy coefficient at least 0.005; SAC selects adaptive-entropy initialization 0.1 or 0.2.
Coverage profile	PPO entropy coefficient at least 0.01; SAC adaptive-entropy initialization 0.2 or 0.5; compatible off-policy warmup proposal $\max(1000, 0.25b)$.
Long warmup	SAC/TD3 or deep deterministic policy gradient (DDPG) warmup proposal $\max(5000, 0.20b)$, subject to the executable learning-start guard.
Controllable novelty	Training-only bonus over measured action-responsive observation coordinates; a targeted variant uses available candidate-goal coordinates.
Public-goal replay descriptor	Requires public goal atoms; the recorded implementation does not activate SB3 hindsight experience replay (HER) merely by selecting this descriptor.

SAC values initialize an adaptive coefficient rather than impose an entropy floor. A profile with no implementation branch for the selected learner has no extra effect; for example, the coverage profile does not impose an A2C entropy floor. Valid explicit warmup values below b are honored. Missing values or settings leaving no update opportunity invoke the short-rung fallback; invalid values require correction. Intrinsic bonuses modify training incentives; evaluation always uses the original task metric.

Table A10: Recorded search training for the ablation comparisons, in millions of interactions; final fixed-design training is accounted separately. Each column uses independently run searches with the indicated allocations.

Condition	DoorKey	Ant	Door
FARL reference	72.800	1,825.735	9.100
A1	21.960	56.860	64.055
A2	17.760	8.460	3.060
A3	5.560	51.960	10.060

E COMPONENT ABLATIONS AND NATIVE CONTROLS

E.1 THREE CORE INTERVENTIONS

Ablation 1: restrict search to observations and rewards. Observation/reward generation, diagnosis, and candidate management remain. The learner is fixed to PPO with two 64-unit layers, default hyperparameters, native exploration, and a predefined training ladder. Its configuration is fixed independently of the optimized FARL champion. This comparison tests the benefit of searching over learner and training choices alongside the observation and reward.

Ablation 2: remove rich evidence and experimental memory. All design axes and diversity management remain. Diagnosis, planning, arbitration, and revision receive the task, public interface, current design, execution status, and basic training/Final feedback. Detailed trajectories, milestone changes, coverage analyses, reward–outcome consistency, causal-comparison records, and retrieved experimental lessons are excluded, including derived summaries. Initial public-interface perception and independent audit logging remain available. This tests rich evidence and memory as one mechanism group.

Ablation 3: remove diversity and conditional preservation. All design axes and evidence-informed diagnosis remain. Novelty-oriented generation, family/pair coverage, protected lineages, and historical revival are removed. Candidates are sampled from current component pools without diversity quotas. All valid candidates remain eligible at the validity rung; at learning rungs, the ordinary bank retains the top $\lceil n/3 \rceil$ of n eligible candidates by its task-outcome commitment score. Required experimental controls remain. A family may recur by chance, but discarded candidates cannot be deliberately revived through history.

E.2 SEARCH AND EVALUATION PROTOCOL

Each condition searches with its specified mechanism group enabled or removed, then fixes one selected design for independent policy training. DoorKey and Ant use seeds 200–202 at 300k and 1M steps per seed, respectively, with five final evaluation episodes per seed. Door uses the same three seeds at 1M steps and 25 evaluation episodes per seed. Tables A10 and A11 report search allocations and all final seed outcomes.

The FARL references use the selected designs in Appendix A.3. DoorKey and Ant align the policy-training horizon across conditions; references use five training seeds and ablations three. DoorKey’s reference uses 25 evaluation episodes per seed and its ablations five. Door’s reference uses two 50k policies; its ablations use three 1M policies. Ant A2 retains its existing reward program at the revision step. These comparisons evaluate the designs found by each mechanism configuration under the reported search allocations.

Where zero completion arises. The final DoorKey policies also have a separate 100-episode stage evaluation per seed (Table A12). These are marginal rates over all episodes, not conditional on completing earlier stages. A1 seldom opens the door; A2 more often acquires the key and opens the door but never reaches the exit. Their zero final scores therefore arise from different remaining transitions. A3 completes the sequence in 98.67% of this stage-evaluation sample and 100% of the five-episode final evaluation.

Table A11: All final seed-level outcomes underlying Table 2. DoorKey and Door entries are percent; Ant entries are signed displacement.

Task	Intervention	Seed 200	Seed 201	Seed 202
DoorKey	A1	0.00	0.00	0.00
	A2	0.00	0.00	0.00
	A3	100.00	100.00	100.00
Ant	A1	-6.7831	3.0899	-5.5665
	A2	-0.3452	0.3557	-0.3055
	A3	5.7242	1.2957	0.1823
Door	A1	0.00	0.00	0.00
	A2	0.00	0.00	0.00
	A3	0.00	0.00	0.00

Table A12: DoorKey ablation stage diagnostics, percent, mean $\pm$ seed SD. All three seeds train for 300k; each stage evaluation uses 100 episodes.

Intervention	Pick up key	Open door	Reach exit
A1	18.00 $\pm$ 17.09	1.00 $\pm$ 1.73	0.00 $\pm$ 0.00
A2	46.67 $\pm$ 7.23	34.33 $\pm$ 17.67	0.00 $\pm$ 0.00
A3	98.67 $\pm$ 2.31	98.67 $\pm$ 2.31	98.67 $\pm$ 2.31

Table A13: Fixed native-control learner settings. Unlisted settings retain the version-pinned library defaults; full constructor receipts are supplied.

Setting	PPO	SAC	TD3
Hidden layers	64, 64 (Tanh)	256, 256 (ReLU)	400, 300 (ReLU)
Learning rate / discount	0.0003/0.99	0.0003/0.99	0.001/0.99
Batch size	64	256	256
Rollout / epochs	2048 / 10	—	—
Replay / warmup	—	10 ⁶ /100	10 ⁶ /100
Train frequency / gradient steps	—	1/1	1/1
Entropy coefficient	0	automatic	—
Target-update rate	—	0.005	0.005
Action noise	policy sampling	policy sampling	Gaussian, $\sigma = 0.1$

Door uses the 5k/50k/300k/1M search ladder. Final training keeps the selected observation map, reward, learner, and hyperparameters fixed. All three interventions complete their final evaluations, with zero successful episodes in each seed. The separate DoorKey stage evaluation describes behavior after search and is not used to select the final design.

E.3 HAND NATIVE-INTERFACE LONG TRAINING

This control uses native 39-dimensional observations and canonical dense reward with fixed SB3 2.8.0 configurations (Table A13), without search, normalization, added features, demonstrations, or source-policy assistance. The environment is `AdroitHandRelocate-v2`, 30 actions, 200-step horizon; its implementation is pinned to upstream commit `62640af45fc1` (full identity in the manifest). Results are given in Table A14. PPO and SAC use library defaults; TD3 additionally uses the official example’s independent Gaussian action noise with standard deviation 0.1. These are standard library configurations, not an Adroit-specific tuned preset.

Each learner has three independently initialized trajectories (seeds 0–2), trained continuously through nominal 1M and 5M checkpoints. These are two measurements of the same trajectories, not six independent seeds. Each checkpoint is evaluated deterministically on 100 episodes per seed, reset with $500000 + 1000s + j$, $j = 0, \dots, 99$. PPO checkpoints follow completed rollout updates

Table A14: Completed native Hand controls; the PPO 5M stage profile is plotted in Figure 3e. Stage and Final entries are percent, equal-seed mean $\pm$ sample SD. Final requires five consecutive native-success steps; Any is at least one successful step in the episode.

Learner	Steps	Reach	Lift	Transport	Final	Any
PPO	1M	70.67 $\pm$ 9.45	26.00 $\pm$ 6.93	1.67 $\pm$ 1.53	0.67 $\pm$ 1.15	1.67 $\pm$ 2.89
	5M	42.00 $\pm$ 3.61	9.33 $\pm$ 4.04	1.00 $\pm$ 1.00	1.00 $\pm$ 1.00	3.00 $\pm$ 1.00
SAC	1M	25.33 $\pm$ 8.02	4.00 $\pm$ 2.00	0.00 $\pm$ 0.00	0.00 $\pm$ 0.00	0.00 $\pm$ 0.00
	5M	18.00 $\pm$ 9.54	5.33 $\pm$ 4.16	0.67 $\pm$ 1.15	0.00 $\pm$ 0.00	0.67 $\pm$ 1.15
TD3	1M	8.00 $\pm$ 10.39	0.67 $\pm$ 1.15	0.00 $\pm$ 0.00	0.00 $\pm$ 0.00	0.33 $\pm$ 0.58
	5M	0.00 $\pm$ 0.00	0.00 $\pm$ 0.00	0.00 $\pm$ 0.00	0.00 $\pm$ 0.00	0.00 $\pm$ 0.00

Table A15: Native-reward PPO on Ant. Per-seed means use 25 evaluation episodes; the aggregate is the equal-seed mean $\pm$ sample SD.

Steps/seed	Seed 0	Seed 1	Seed 2	Displacement
1M	113.08	37.57	36.41	62.36 $\pm$ 43.93
5M	96.86	59.41	89.40	81.89 $\pm$ 19.82
10M	21.45	50.34	39.17	36.99 $\pm$ 14.57

at 1,001,472 and 5,001,216 actual steps; SAC/TD3 use exact 1M/5M. The nine trajectories consume 45,003,648 training interactions.

The corresponding native returns at 1M/5M are $-1.60 \pm 3.84/-10.49 \pm 5.29$ (PPO), $-14.69 \pm 4.03/-11.42 \pm 0.72$ (SAC), and $-9.95 \pm 0.48/-7.82 \pm 1.45$ (TD3). PPO’s Final successes at 1M are 0/100, 0/100, and 2/100; at 5M they are 0/100, 2/100, and 1/100. SAC and TD3 have zero Final successes in every seed at both checkpoints. PPO’s lift rate falls from 26.00% to 9.33% while transport remains near 1%; additional optimization does not steadily accumulate the required behaviors. TD3’s improving native return likewise does not imply relocation success.

These paired training-depth controls use the native 39-dimensional interface and a fixed configuration. FARL constructs a 111-dimensional policy input from its 84-dimensional public interface and performs design search. At 5M, its selected design reaches $97.11 \pm 2.99\%$ sustained relocation, compared with native PPO’s $1.00 \pm 1.00\%$. The stage profiles compare the resulting behaviors (Figure 3e).

E.4 ANT NATIVE-REWARD TRAINING

The Ant native control uses PPO with the environment’s native dense reward and 27-dimensional observations. Three independent policy seeds (0–2) follow one training trajectory each, with evaluation checkpoints at 1M, 5M, and 10M environment steps. Each checkpoint is evaluated deterministically on 25 episodes per seed using the same signed root-displacement metric as Figure 3d: final minus initial root position, to termination or the 1,000-step cap. Reset seeds are $10000 + 100s + j$, $j = 0, \dots, 24$.

Table A15 reports the outcomes. The fixed PPO configuration uses eight environments, 256 steps per environment per rollout, batch size 64, ten optimization epochs, learning rate 3×10^{-4} , $\gamma = 0.99$, GAE $\lambda = 0.95$, clipping 0.2, entropy coefficient 0, and separate 64×64 Tanh policy and value networks. There is no observation/reward normalization, interface search, or policy assistance. Table A15 reports completed checkpoint evaluations; all model hashes, constructor settings, and episode outcomes are retained.

F EXECUTED SEARCH AND DESIGN CASES

This section describes the designs found in search, how their policies learn, and how the Hand representation experiment changes the controller’s next decision.

Table A16: Selected Ant designs and their complete EW/EA configurations.

Component	EW	EA
Policy input	27 raw + 30 difference features	27 raw coordinates
Reward	Forward-motion credit, action-diversity terms, coordinate-norm penalties	Speed/control-cost bands plus continuous velocity and cost terms
Learner / network	SAC / 256, 256	SAC / 256, 256, 128
Optimizer learning rate	2.5981×10^{-4}	3×10^{-4}
Entropy / warmup	Automatic, initial 0.2 / 10k	Automatic, default / 20k
Replay	Ordinary replay	Ordinary replay

F.1 ANT: DESIGN DIVERSITY AND PERFORMANCE

The executed search inventory counts distinct component artifacts at each training depth using all 1,554 completed valid worker results from the frozen EW archive. It excludes proposed-but-untrained combinations. At 5k, 50k, 300k, and 1M steps per seed, respectively, the numbers of completed design evaluations are 27, 56, 1,350, and 121. The corresponding distinct counts are (6, 6, 5, 5) observations, (18, 18, 18, 18) rewards, (3, 3, 3, 3) learners, and (6, 6, 5, 4) exploration artifacts. An artifact may occur at several depths; these counts should not be summed into a unique-design total. These counts describe the alternatives that receive training at each budget.

Figure 3c shows *every* completed five-seed 1M design in the final search cohort: 42 PPO, 42 TD3, and 37 SAC configurations. A dot is a design’s equal-seed mean displacement. Horizontal jitter only separates overlapping dots. Diamonds mark the highest mean within each learner, 7.40, 211.56, and 273.35. Observation, reward, exploration, and hyperparameters also vary within learner groups; the plot therefore exposes the range of joint-design outcomes. All 121 designs use 1M per seed and five evaluation episodes per seed, including designs with zero or negative displacement.

Table A17 lists the budget-specific outcomes. The EA design retains the native 27-dimensional observation and reuses forward-velocity and control-cost metadata. With v denoting $x_velocity$ and $c = -reward_ctrl$, its reward is

$$r_{EA} = 0.8b(v, c) + 0.2v - 0.15c, \quad b(v, c) = \begin{cases} 1 & v > 1.0, c < 0.9, \\ 0.5 & v > 0.6, c < 0.7 \text{ otherwise}, \\ 0 & \text{otherwise.} \end{cases}$$

Thus, EA builds on native reward components without copying the native total reward. EW instead adds 30 coordinate-difference features and computes reward from the public observation and actions. Its terms credit forward motion, variance across actuator commands, and differences between two groups of actuator commands, with penalties on selected coordinate norms. These programs express different objectives: EA rewards speed within a control-cost budget, whereas EW directly encourages differentiated actuation alongside forward motion. Both selected designs use SAC and ordinary replay, with the network and training settings in Table A16.

The search histories also differ. EA iterations 1–5 retain this same observation–reward pair while testing learners and hyperparameters. EW continues to evaluate five observation artifacts and 18 reward artifacts at 1M. Its stronger final result therefore comes from a design that departs from the supplied speed–effort reward structure.

EW rows train the selected design independently at each budget. The five 10M-minus-5M differences average 32.72. The EA 1M point aggregates 30 configuration–seed results from six hyperparameter settings of the selected structural family; EA 10M uses the final selected configuration. Lines in Figure 3d summarize outcomes by budget.

F.2 DOORKEY: ONE REWARD, DIFFERENT TRAINING CONFIGURATIONS

The frozen selected program reads the 49 object-category slots in the public 148-dimensional input. For category code c , its smooth visible count is $C_c(O) = \sum_{i \in \{0, 3, \dots, 144\}} \max(0, \min(1, 1 - 10|O_i -$

Table A17: Ant outcomes by training budget in Figure 3d. Rows summarize recorded training cohorts; EA 1M includes six search configurations.

Setting	Steps/seed	Seeds	Episodes/seed	Displacement
EW	1M	0–4	5	273.3 ± 15.4
EW	5M	42–46	5	313.1 ± 31.7
EW	10M	42–46	5	345.8 ± 14.2
EA	1M	$6 \times (0\text{--}4)$	5	207.1 ± 85.6
EA	10M	0–6	3	281.1 ± 74.4

Table A18: Same observation, reward, and exploration artifacts; different training configurations. Both use five seeds (100–104), 300k steps and 25 evaluation episodes per seed.

Setting	Selected A2C	PPO comparison
Learning rate	$1.8485447659 \times 10^{-4}$	$1.3505226478 \times 10^{-4}$
Discount	0.9957992252	0.9974352405
Entropy coefficient	0.00022588495	0.02108114065
GAE parameter	0.9032534459	0.9120453326
Success by seed	(1, 1, 1, 1, 1)	(0, 1, 0, 0, 0)

c)). The codes 0.5/0.4/0.8 denote key/door/goal. Pickup can earn 2.0 when the visible key count drops by more than 0.6 from above 0.8; otherwise it receives 0.05 times the count decrease. Toggle earns 0.15 times the absolute door-count change. Forward movement with a goal-count increase above 0.6 earns 0.8; otherwise the goal term is 0.04 times its count increase. Each step also incurs -0.0015 . This is a visibility-based shaping program, not an oracle for key possession, door opening, or exit completion. The exact generated source (SHA-256 prefix 07251b7d0ca4) is included in the artifact package.

Both algorithm artifacts declare 128,128 ReLU actor/critic networks. The learner and the four listed hyperparameters change together, so this evidence concerns the training configuration, not the update rule alone. In particular, the shared coverage-profile artifact does not impose an A2C entropy floor.

F.3 POLICY LEARNING AND CANDIDATE SELECTION

Figure 3b shows how DoorKey candidates learn as policy-training steps increase. Figure 4 expands this view and records Ant candidate comparisons at a fixed training budget. The Hand learning trajectories are detailed in Appendix F.4.

DoorKey: three candidates at the same training depth. Curve 1 (C1) tracks design 17728f964a0e203d, Curve 2 (C2) design 449c5b344a476e98, and Curve 3 (C3) design 9a831d11e7f30408. All use five training seeds (100–104) and 300k steps per seed. C1/C2 use PPO and C3 uses A2C. The accompanying records contain each candidate’s complete configuration. C1–C3 identify candidates, not search iterations.

DoorKey ends an episode when the agent reaches the goal or after 250 steps. The episode logs therefore identify goal-reaching episodes shorter than this limit. We assign completed episodes to nonoverlapping 25k-step windows, count episodes shorter than 250 steps, and average within each seed. Curves show the equal-seed mean; shading shows sample SD across the five seed means, clipped to the possible frequency range $[0, 1]$. An exit exactly at step 250 is conservatively counted as timeout because the monitor does not distinguish it from truncation. The first plotted measurement covers the first 25k training steps. Table 1 reports a separate evaluation of C3 after 1M steps, using five independently trained policies.

Ant: candidate comparison within the 1M allocation. The controller uses iteration indices 0, 1, 2, and 3 for the 5k, 50k, 300k, and 1M allocations, respectively. All 121 five-seed 1M designs belong to iteration 3. Each dot in Figure 4b is the fixed-evaluator mean for one completed design, ordered by worker completion time; parallel workers can finish in a different order from their launch. The

step line shows the largest candidate mean observed so far, and its band is that candidate’s sample SD over five policy-training seeds.

The eventual champion, `e24e4c2fa358fdcf`, is the eleventh completed evaluation and reaches 273.35 ± 15.35 meters. It remains the incumbent through all 121 evaluations. All candidate outcomes, including zero and negative displacement, are plotted. Ant displacement is measured after each policy finishes training, so the horizontal axis counts completed candidate evaluations. Figure 3d separately compares the outcomes at 1M, 5M, and 10M steps per policy.

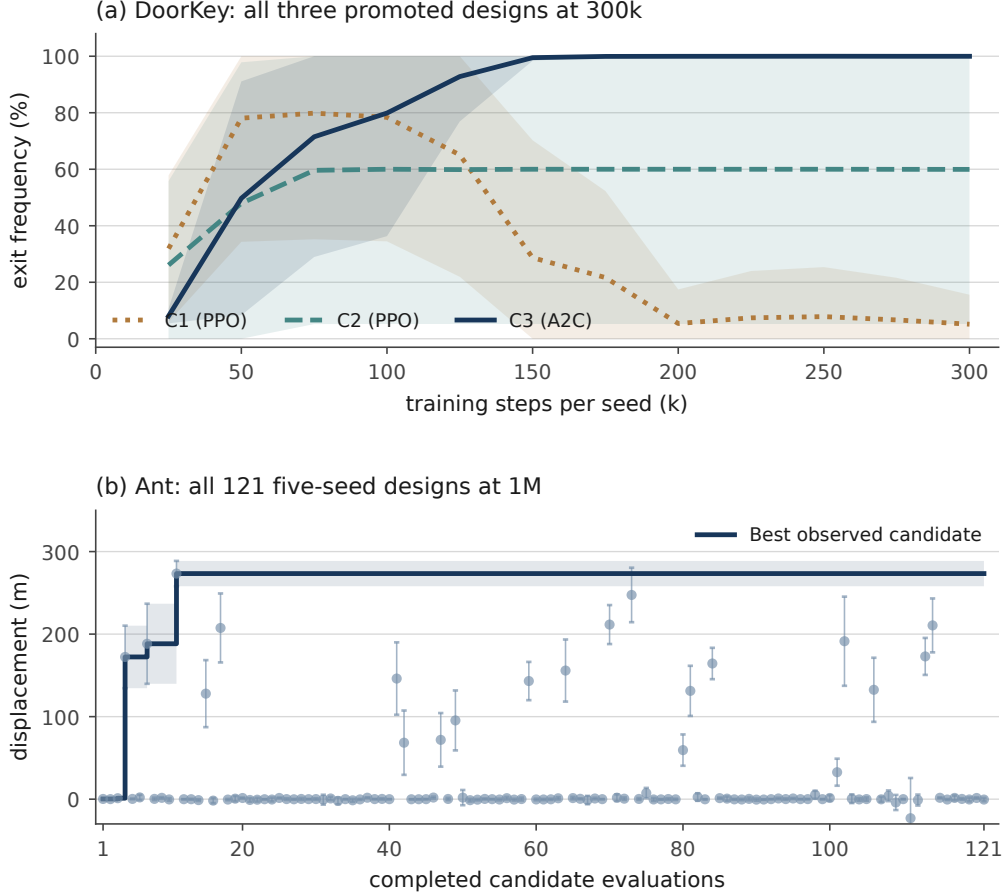


Figure 4: Candidate learning and selection at fixed training budgets. (a) DoorKey: five-seed mean exit frequency and sample SD for each of three 300k candidates. (b) Ant: all 121 candidate evaluations at 1M, with their five-seed SDs; the step line tracks the incumbent. The horizontal axes are policy-training steps in (a) and completed candidate evaluations in (b).

Additional baseline search records. Figure 5 gives all 30 LiMEN search evaluations for Ant and DoorKey, together with the best result found by each iteration. Ant evaluates each candidate after 10M steps per seed and DoorKey after 1M. The Ant incumbent reaches the 89.9-meter result reported in Table 1.

F.4 HAND: RELIABLE RELOCATION THROUGH SUCCESSIVE EXPERIMENTS

Earlier Hand search at shorter budgets. Hand investigations include candidate training below 1M steps. In the August 29 search archive, the controller first evaluates a broad population at 5k steps, then runs smaller sets of experiments at 100k and 500k (Table A19). These are executed candidate-training budgets, distinct from the environment-sensing phase. The counts below come

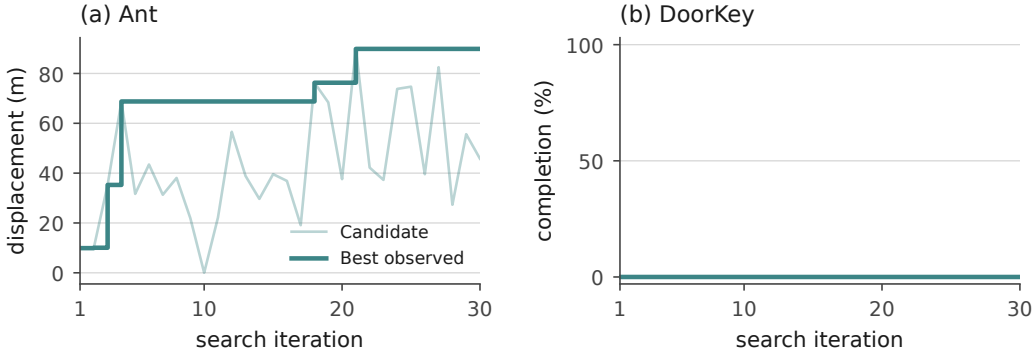


Figure 5: All 30 LiMEN search evaluations in Ant and DoorKey. Faint lines connect candidate results; dark lines show the best observed result. The horizontal axis counts search iterations.

from completed worker results and their per-seed interaction receipts, rather than from the configured maximum training depth.

Table A19: Completed short-budget Hand experiments in the August 29 archive. A design evaluation is one candidate configuration trained on its assigned seeds; repeated evaluations of a component combination are counted separately. The 500k row contains 26 completed evaluations across three rounds. Training steps exclude evaluation interactions.

Steps/seed	Design evaluations	Seeds/design	Seed runs	Search role
5k	256	1	256	Broad executable-design probe
100k	12	2	24	Short-budget learning comparisons
500k	26	3	78	Deeper tests of retained designs

One retained design, 031b6a159bb610d7, appears at all three depths and subsequently at 1M. After its zero-success 5k evaluation, the scheduler records that a valid probe should be retained without judging its eventual learning quality. Its completed 100k evaluations also have zero final success, while later 500k evaluations record occasional relocation. Thus the archive documents an actual decision to give an initially unsuccessful design further training opportunities. The respective 5k, 100k, and 500k evaluations use 3, 30, and 100 episodes per seed; their scores are not joined into a single policy-learning curve.

This archive belongs to an earlier search with different generated component recipes. The September 13 run that produces the reported 97.11% champion starts without importing earlier candidates, frontiers, experimental memory, or policy-training state. Within that later run, the designs and evidence found at 1M are retained for the 5M experiments described below, while the selected policies are initialized independently. The early archive therefore establishes the use of short-budget Hand search; the 1M-to-5M case establishes the development of the reported champion.

Figure 6 shows partial competence emerging before reliable task completion. In the final 25k-step window of the 500k cohort, reach and lift occur in 95.5% and 58.7% of training episodes, whereas transport and relocation remain at 10.4% and 1.6%. These distinct stages give subsequent diagnosis more information than the low final success frequency alone.

From early search to the selected design. The run that produces the reported design uses 1M training steps per policy at iterations 0–10, followed by 5M steps at iterations 11–15. At iteration 8, the 111-dimensional representation, generated reward, and SAC learner achieve 4.17% mean success across two seeds. Later iterations reuse these programs and the findings from earlier experiments, while each policy starts with new weights and an empty replay buffer.

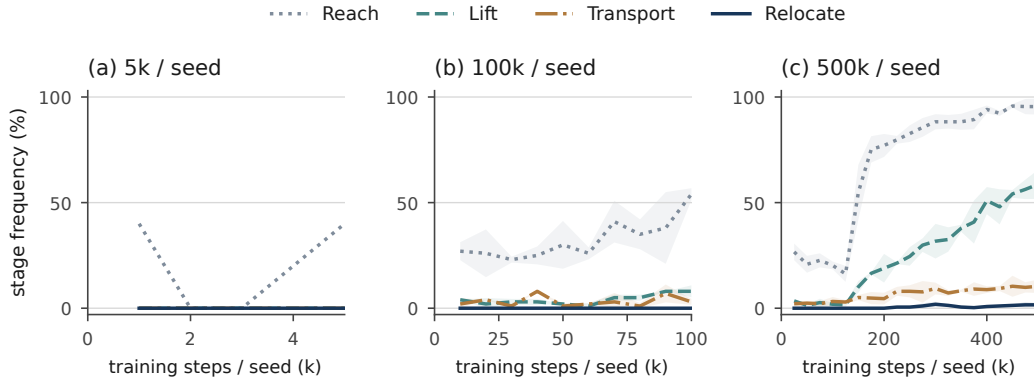


Figure 6: Early Hand learning within three independently trained cohorts of the retained design 031b6a159bb610d7: iteration/trial 0/165 at 5k, 1/1 at 100k, and 4/1 at 500k. Curves are marginal stage-completion frequencies from all recorded training episodes, using nonoverlapping 1k-, 10k-, and 25k-step windows, respectively. Each seed contributes 25, 500, or 2,500 episodes in the corresponding panel. Lines average equally across the one, two, or three training seeds; bands show sample SD where multiple seeds are available. Each panel starts with a fresh policy and uses its own executed training configuration. The panels are separate training histories, rather than checkpoints of one continuously trained policy; saved-policy evaluations are reported separately.

Table A20: Hand outcomes and expenditure. A successful seed has at least one successful evaluation episode. Success is the equal-seed mean $\pm$ SD; policy depth is per seed. FARL costs cover the complete search; * denotes estimated tokens.

Method	Policy depth	Successful seeds	Success (%)	Tokens / steps (M)
FARL	5M	3/3	97.11 $\pm$ 2.99	2.58* / 408.4
Eureka	5M	0/5	0.00 $\pm$ 0.00	0.284 / 110.4
LiMEN	5M	0/3	0.00 $\pm$ 0.00	0.607 / 55.0
Native PPO	5M	2/3	1.00 $\pm$ 1.00	0 / 15.0
Native SAC	5M	0/3	0.00 $\pm$ 0.00	0 / 15.0
Native TD3	5M	0/3	0.00 $\pm$ 0.00	0 / 15.0

Each of iterations 11–15 tests two configurations on seeds 0–2, with 300 final evaluation episodes per seed. All ten configurations and thirty policy-training runs are complete. The prescribed search ends after iteration 15 without a further 10M stage. Table A21 reports every configuration. The best is trial 0 of iteration 13, genome 1b3455f44977bd4d; its three policies each train for 5M steps from ordinary resets. Table A20 compares their performance and the search cost with the automated baselines and native learners.

The selected policies complete 297, 296, and 281 of their 300 evaluation episodes, respectively: $97.11 \pm 2.99\%$ across seeds. Evaluation starts from the original reset distribution and uses one saved policy per seed. The final milestone uses the native sustained-success criterion. These evaluations also guide candidate selection (Appendix A.2); Table A22 reports the corresponding milestone completion rates.

Learning configurations. The 111D representation contains 84 public input coordinates, twenty generated distance features, and seven additional relational features. The 104D alternative removes the last seven while keeping the others. Both use the same generated transition-reward program.

The seven features include palm–object, object–target, and palm–target distances, their sum, difference, and ratio, and a coordinate difference. For the public input vector x , the three distances are $\|(x_{30}, x_{31}, x_{32})\|_2$, $\|(x_{36}, x_{37}, x_{38})\|_2$, and $\|(x_{33}, x_{34}, x_{35})\|_2$, respectively, using zero-based indices. They make approach and target relations explicit using existing inputs. The comparison

Table A21: All ten Hand configurations evaluated at iterations 11–15 with 5M training steps per policy. Each row uses three training seeds and 300 final evaluation episodes per seed. Values are sustained relocation percentages; SD is across training seeds. The 104D and 111D designs use SAC; the 84D designs use PPO except iteration 15 / trial 1, which uses SAC.

Iteration/trial	Input dim.	Seed 0	Seed 1	Seed 2	Mean $\pm$ SD
11/0	104	4.00	98.67	0.33	34.33 $\pm$ 55.74
11/1	111	98.00	0.00	24.67	40.89 $\pm$ 50.97
12/0	111	0.67	97.33	74.67	57.56 $\pm$ 50.55
12/1	104	1.33	92.33	12.33	35.33 $\pm$ 49.67
13/0	111	99.00	98.67	93.67	97.11 $\pm$ 2.99
13/1	104	87.33	94.00	91.33	90.89 $\pm$ 3.36
14/0	111	0.00	0.00	0.00	0.00 $\pm$ 0.00
14/1	84	0.00	0.00	0.00	0.00 $\pm$ 0.00
15/0	84	0.00	0.00	0.00	0.00 $\pm$ 0.00
15/1	84	0.00	0.33	0.00	0.11 $\pm$ 0.19

Table A22: The selected Hand cohort: marginal completion of each milestone over all 300 evaluation episodes per seed. These are not conditional transition probabilities.

Evidence	Reach	Lift	Transport	Final
Seed 0	100.00	100.00	100.00	99.00
Seed 1	100.00	99.67	99.00	98.67
Seed 2	100.00	97.33	94.33	93.67
Mean $\pm$ SD	100.00 $\pm$ 0.00	99.00 $\pm$ 1.45	97.78 $\pm$ 3.02	97.11 $\pm$ 2.99

Table A23: SAC settings at iterations 11–13. Within each iteration, the two representations share the listed SAC settings.

Setting	Iteration 11	Iteration 12	Iteration 13
Network	384, 384, 256	384, 384, 256	384, 384, 256
Learning rate	1.21296×10^{-4}	1.96651×10^{-4}	1.23911×10^{-4}
Discount	0.987555	0.982773	0.987258
Target update τ	0.003684	0.005543	0.009802
Warmup steps	200k	1M	1M
Batch size / replay capacity	256/10 ⁶	256/10 ⁶	256/10 ⁶
Entropy coefficient	Automatic	Automatic	Automatic
Learner steps / seed	5M	5M	5M

therefore changes how information is represented without adding new sensory information. Table A23 lists the SAC settings at iterations 11–13.

The representation, reward program, and network remain fixed while the controller tests different SAC hyperparameters. Final success increases from $40.89 \pm 50.97\%$ to $57.56 \pm 50.55\%$ to $97.11 \pm 2.99\%$. At iterations 12 and 13, both representations use the same training settings and ordinary-reset procedure, yielding direct comparisons.

Testing a proposed representation change. After iteration 11, policies reliably reach and lift the object, but transport remains the first unresolved stage. The diagnostic record compares fourteen trajectories with higher task outcomes and two with lower outcomes. Their minimum values of obs[85] differ, with the same direction observed in two seeds. Transport completion in this diagnostic cohort is 43.67%. This small observational comparison suggests testing the representation; it does not establish the cause of the failure.

The proposed change removes seven relational features, predicting that the simpler representation will improve transport. Iteration 12 compares the 104D alternative with the 111D reference using the same reward, learner, hyperparameters, exploration, budget, and seed IDs. Transport completion

Table A24: The Hand representation experiment, from its initial prediction to the measured outcome and the resulting memory update.

Record	Observed content
Diagnosis	Transport is the earliest unresolved stage; an observation-feature contrast motivates a representation test.
Experiment	Iteration 12 tests two representations with identical reward, learner, training settings, exploration, 5M depth, and seeds 0–2.
Prediction	The proposed representation improves transport completion.
Measurement	Reference/alternative transport: 60.11/38.44%; final success: 57.56/35.33%.
Conclusion	The result contradicts the predicted improvement; the reference remains champion.
Memory	The associated hypothesis changes from testing to falsified, citing the matched experimental contradiction.

Table A25: Executed settings for the later completed Hand candidates. Every policy trains for 5M learner steps. The generated reward program is shared; prefix interactions are summed over three seeds. A dash marks a setting that does not apply to the learner. Column headings give iteration/trial.

Setting	14/0	14/1	15/0	15/1
Learner / input dimension	SAC / 111	PPO / 84	PPO / 84	SAC / 84
Network	384, 384, 256	512, 512, 256	512, 512, 256	384, 384, 256
Learning rate	4.87439×10^{-4}	1.95026×10^{-4}	1.10072×10^{-4}	1.17979×10^{-4}
Discount	0.990106	0.967368	0.994906	0.994028
Batch size	256	64	128	128
Entropy coefficient	Automatic	0.032534	0.005	Automatic
SAC target update τ	0.005334	—	—	0.008957
SAC warmup / replay capacity	$10^6/10^6$	—	—	$10^4/10^6$
PPO rollout length / epochs	—	2048/10	4096/5	—
PPO clipping / trace decay λ	—	0.2/0.922306	0.191816/0.962284	—
Prefix interactions	245,787	0	0	0

is 38.44% for 104D and 60.11% for 111D; final success is 35.33% and 57.56%, respectively. The transport difference is -21.67 percentage points, with two of three paired seeds showing a decline. The change therefore fails to produce the predicted improvement under these settings. This comparison tests the seven features as a group; it neither establishes that each is necessary nor refutes the original observational association. Table A24 summarizes the comparison and the resulting memory update.

The controller marks the prediction as falsified in memory and retains both representations for further tests. At iteration 13, new SAC settings raise success to 97.11% with 111D and $90.89 \pm 3.36\%$ with 104D. The earlier comparison favors 111D under its tested settings, while the later result shows that the lower-scoring representation can also learn with a different configuration.

Later search and the retained design. Iteration 14 tests a new training configuration for the 111-dimensional SAC design and a raw-input PPO design; both complete with zero final success. Iteration 15’s raw-input PPO and SAC candidates reach zero and $0.11 \pm 0.19\%$ final success, respectively. The iteration 13 policies remain the selected cohort after iteration 15 at $97.11 \pm 2.99\%$. These later candidates are independent training runs; the saved selected policies are retained throughout the search. Table A25 lists their training settings. The completed search through iteration 15 accounts for 408.45M environment interactions, including 26.78M prefix interactions. The 135 recorded LLM calls use approximately 2.58M tokens. Table A20 reports expenditure through selection of the iteration 13 design.

Learning curves. The curves shown here cover twenty-seven 5M policy-training runs from nine configurations. We order the training episodes by their recorded sequence and assign completed episodes to nonoverlapping 100k-step windows. For each seed and window, the metric is the fraction of episodes satisfying the sustained-relocation criterion. Lines show the equal-seed mean; bands show sample SD, clipped to $[0, 100]\%$. The first point covers the first 100k training steps. Table A21 separately evaluates the saved policies after training.

Figure 3f follows the 111-dimensional SAC design across iterations 11–14, including the unsuccessful configuration at iteration 14. Figure 7 shows these nine configurations and their seeds; Table A21 additionally reports the final raw-input SAC configuration and covers all configurations through iteration 15. The first three 111-dimensional cohorts train from ordinary resets. iteration 11’s 104-dimensional candidate additionally uses 1,251,980 source-policy prefix interactions across its three seeds; search expenditure includes these interactions, while the learning curves count learner steps. The iteration 14 SAC candidate uses another 245,787 prefix interactions; all final evaluations use the original reset distribution.

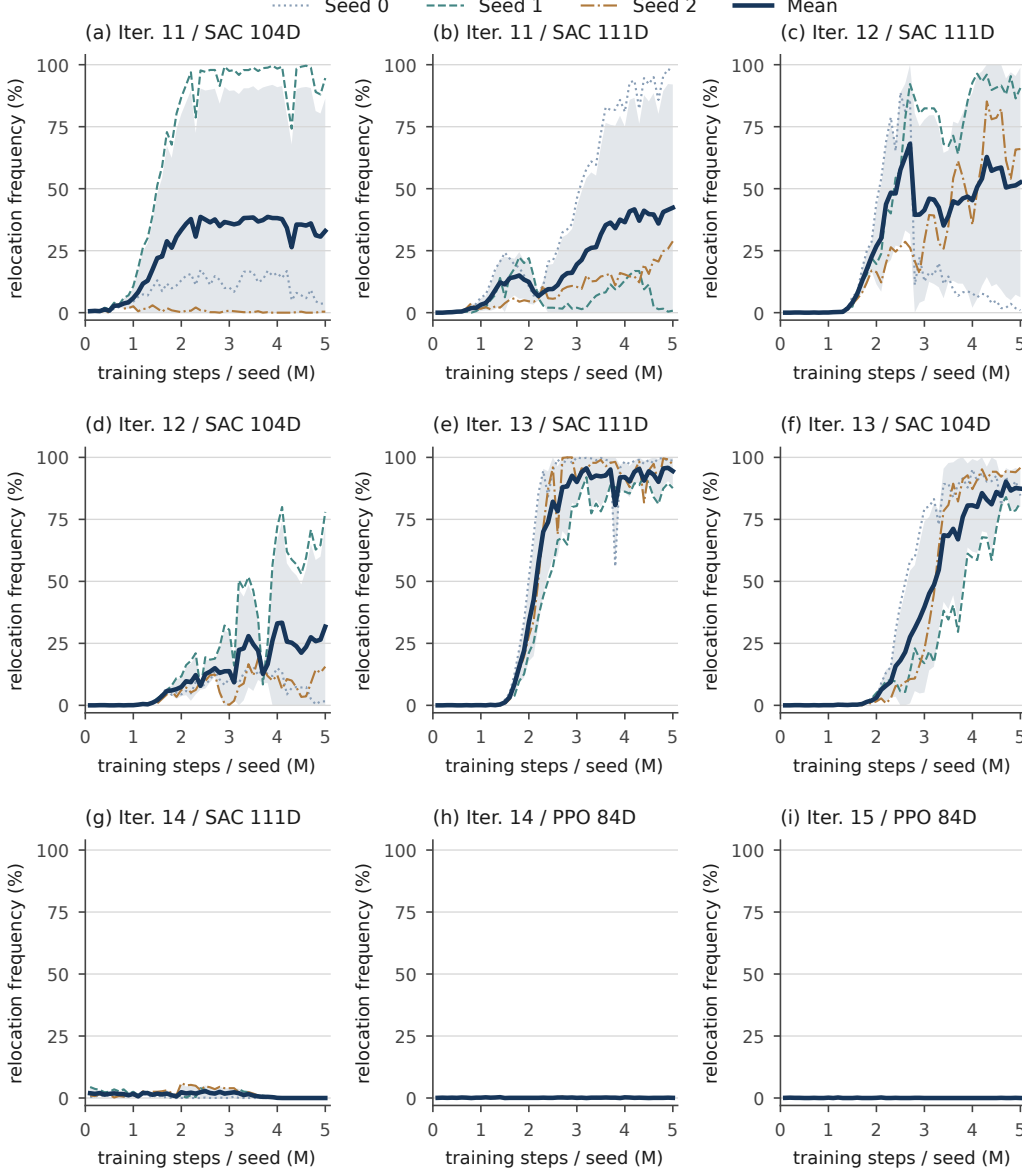


Figure 7: Learning curves for nine of the ten completed 5M Hand configurations. The final raw-input SAC configuration is reported in Table A21. Thin curves are the three training seeds, the thick curve is their mean, and shading is sample SD. Each point aggregates a 100k-step training window. Iteration 12 panels (c–d) form the matched representation experiment. Panel (e) is the selected design; panels (g–i) show the later completed alternatives.

Table A26: Selected Hand design during training. Each row summarizes the 100k-step window ending at the indicated budget, as a percentage averaged equally over three seeds. Final evaluation uses 300 episodes per seed.

Window ending	Reach	Lift	Transport	Final
1M	22.40	2.27	2.53	0.07
2M	100.00	99.20	60.13	33.47
3M	98.80	97.20	91.40	90.07
4M	99.53	98.13	93.53	92.07
5M	99.40	97.33	95.53	94.47
Final evaluation	100.0	99.0	97.8	97.1

The design selected at iteration 13 reaches 90.07% mean relocation frequency by the window ending at 3M steps and 94.47% in the final 100k window. The last window’s seed frequencies are 98.8%, 87.6%, and 97.0%. The separate saved-policy evaluation reaches 97.1% (Table A26). Figure 8 shows learning extending from reach and lift to transport and sustained relocation.

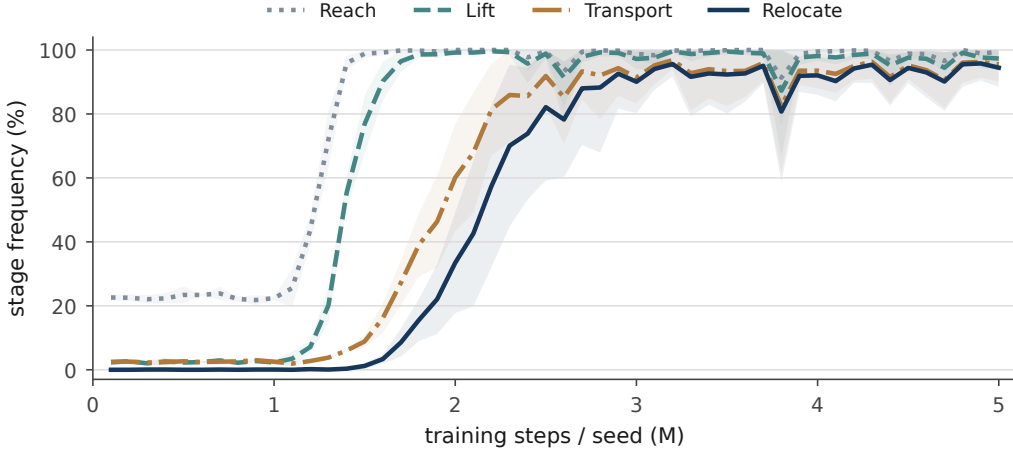


Figure 8: Learning progress of the Hand design selected at iteration 13. Lines and bands are three-seed means and SDs of 100k-step training frequencies. The objective completion curve shows how training extends beyond lifting and transport to sustained relocation.

Earlier independent experiment. An earlier 1M experiment retrieved 14 lessons and generated a proximity-gated palm-to-target reward. Its three policies achieved 5/300, 10/300, and 3/300 final successes ($2.00 \pm 1.20\%$). This result comes from a separate, earlier run. Its generated program and experiment records are retained with the project history.

G REPRODUCIBILITY AND RESOURCE ACCOUNTING

G.1 SEARCH COSTS AND LANGUAGE-MODEL CONFIGURATION

Table 1 combines task outcomes with EW and Hand ST expenditure. Table A27 gives the corresponding accounting. Training counts use distinct FARL training receipts, baseline completed-unit budgets, or actual recorded steps where available; evaluation rollouts are separate.

Ant token estimate. The retained usage JSONL contains one late 1,150-token request; launcher and resume logs preserve 40 earlier successful requests without usage fields. We assign these events to their surrounding module and estimate input plus output tokens using module-specific mean usage from the Ant EA and DoorKey EW archives. Three adapter calls use the mean task-construction

Table A27: EW and Hand ST resource accounting. Training steps are in millions. Tokens are recorded input/output usage, except the rounded Ant FARL total estimate. Hand FARL’s main-table estimate additionally accounts for one missing request.

Task	Method	Search steps	Extra training	Input tokens	Output tokens
DoorKey	FARL	72.800	9.500	2,629,000	205,025
	Eureka	80.000	5.000	78,116	170,675
	LiMEN	30.000	0	983,594	111,566
Ant	FARL	1,825.735	75.000	$\approx 0.2\text{M}$ total (estimated)	
	Eureka	400.000	25.000	47,112	104,420
	LiMEN	900.000	0	376,478	52,042
Door	FARL	9.100	0	795,008	78,751
	Eureka	82.510	0	4,252	11,224
	LiMEN	195.000	0	512,873	64,043
Hand ST	FARL	408.447	0	2,328,957	229,031
	Eureka	80.249	30.147	108,732	175,236
	LiMEN	31.000	24.041	536,643	70,776
	Native PPO	0	15.000	0	0
	Native SAC	0	15.000	0	0
	Native TD3	0	15.000	0	0

cost. The resulting estimate rounds to 0.2M tokens; the artifact package records all assignments and calibration values. Deterministic per-trial diagnoses incur no LLM token charge.

Hand search expenditure. The main table reports the complete Hand search through iteration 15, including the preceding 1M candidates at iterations 0–10 and all ten 5M configurations at iterations 11–15. Its 126 worker files contain 262 distinct seed receipts: 381,664,696 learner steps plus 26,781,982 source-policy prefix interactions, totaling 408,446,678 training interactions. The ten 5M configurations account for 150M learner steps and 1,497,767 prefix interactions within this total. The selected iteration 13 design uses 15M learner steps across its three seeds, with no prefix interactions.

The 135 recorded LLM requests contain 2,328,957 measured input and 229,031 output tokens. One request lacks usage metadata; estimating it at 26,050 tokens from measured requests to the same module gives approximately 2.58M tokens overall. The search ends at the prescribed iteration 15 with the iteration 13 design still selected.

Eureka’s five generation rounds record 283,968 total tokens. Subtracting the 175,236 completion tokens from the totals gives 108,732 input tokens; the log’s individual prompt field is not the sum over all requests in a round. Its 79 candidate-training logs and five selected-reward retraining logs record 80,248,832 and 5,079,040 steps, respectively, including PPO rollout rounding. LiMEN’s controller records 607,419 tokens. Its program archive contains 31 completed single-seed short-training runs at 1M; the selected interface has a separate three-seed 3M retraining, totaling 40M nominal steps. The reported 5M evaluations of the same selected designs add 25,067,520 steps across five Eureka seeds and 15,040,512 across three LiMEN seeds. These completed runs bring their total training costs to 110.395M and 55.041M steps, including the earlier confirmations. Fixed-design training makes no additional LLM calls. The native PPO/SAC/TD3 controls each train three seeds to 5M; their 1M checkpoints belong to the same trajectories and add no extra training.

Training and cohort accounting. FARL DoorKey includes 728 distinct 100k receipts, three designs on five 300k seeds, and five selected-design 1M runs. Ant includes 4,794 training receipts in 1,554 completed worker results, plus five-seed 5M and 10M cohorts. Its retained receipts sum to 1,900.735M steps. Eureka DoorKey/Ant use 80 candidates plus five selected-reward runs; LiMEN uses 30 candidates. The selected LiMEN Ant cohort is already included in its search total. FARL Door records 182 trial–seed receipts of 50k steps. Eureka Door includes 80.085M steps in eight completed candidates and 2.425M in two interrupted candidates at their last log entries. LiMEN Door’s completed 30-round process allocates $30 \times 2\text{M}$ short training plus $27 \times 5\text{M}$ full training. The earlier interrupted process in the same log is kept separately. Search counts exclude miniRL sens-

Table A28: Reconstructing the paper’s mechanisms and measurements. The records distinguish a proposed design, its executed configuration, and the evidence used to report its outcome.

Paper object	Reconstruction materials	Check
Task and interface	Environment/dependency identities, field meanings, adapter and evaluator definitions	Dynamics, input permissions, and success criteria agree with the declared task.
Co-designed recipe	Observation/reward source, learner constructor, hyperparameters, exploration profile	The reported candidate is one complete executable combination.
Diagnostic test	Generation context, reference/treatment artifacts, prediction, bound arms, and outcomes	A planned intervention can be distinguished from an executed comparison.
Preserved alternatives	Component identities, family keys, selection and retention records, actual training depths	Coverage and continued training refer to actual designs, not only proposed pools.
Reported outcome	Fixed-design seeds, checkpoint identity, evaluation episodes, and aggregation script	Equal-seed means and SD reproduce the tables without candidate or checkpoint splicing.
Figures and controls	Plotting scripts, frozen result registries, native-control checkpoint evaluations	All plotted cohorts and axis units are recoverable from their recorded observations.

ing, separate evaluation rollouts, and unrecorded interactions; mirrored logs and repeated receipts are deduplicated.

The available EW logs identify gateway model alias `gpt-5.4`, with one FARL DoorKey learner-selection call to `gpt-5.4-mini`. Aliases do not pin immutable upstream snapshots. FARL records requested temperatures 0–0.4, Eureka 1.0, and LiMEN 0.7; the GPT-5 request paths omit temperature and `top_p`, so those configured values are not effective sampling temperatures. LiMEN’s completion cap is 16,384; Eureka sets no explicit cap. FARL’s reasoning-model request builder enforces at least 16,000 completion tokens, but historical per-call caps are not fully retained. Preserved prompts, responses, generated source, and constructor receipts support reconstruction at the available level of detail.

G.2 ARTIFACT PACKAGE

The artifact package contains task definitions, dependency versions, generated programs, available training configurations, seeds, and per-seed evaluation results. Checkpoint identities are retained where available; model weights are not required to regenerate the figures. Result files and plotting scripts reproduce the reported comparisons, including all 121 qualifying Ant designs. Hand result records cover the earlier search and all ten configurations from the completed 5M iterations 11–15, including thirty per-seed evaluations and the completed-search receipt. The plotted learning curves cover nine configurations and twenty-seven episode logs; the complete result table additionally includes the final raw-input SAC configuration. The representation experiment records its prediction, result, and memory update. Language models propose programs and configurations; reported measurements come from executed experiments or identified external records. The authors are responsible for the analyses and conclusions.

H EXTENDED COMPARISON TO PRIOR WORK

Section 2 compares the most closely related interface-search and diagnostic agents. Here we discuss connections to AutoRL, experimental search, and exploration.

H.1 MODULAR AUTO RL AND EXECUTABLE PROGRAM SEARCH

AutoRL encompasses representation, algorithm, architecture, hyperparameter, reward, and hybrid optimization (Parker-Holder et al., 2022); ARLO organizes such choices into modular

pipelines (Mussi et al., 2023). Eureka and Text2Reward demonstrate executable reward generation (Ma et al., 2024; Xie et al., 2024). LiMEN extends interface search to observations and rewards while preserving diverse candidates (Jaswal et al., 2026). FARL jointly revises interface programs, learners, and training settings. Diagnosis uses the resulting behavior to decide which component or combination to change next.

H.2 DIVERSITY, TRAINING FIDELITY, AND EXPLORATION FRONTIERS

MAP-Elites preserves diverse solutions (Mouret & Clune, 2015); population-based training (PBT) adapts training populations (Jaderberg et al., 2017); Hyperband and asynchronous successive halving (ASHA) allocate fidelity through successive halving (Li et al., 2018; 2020). FARL uses a successive-halving-style budget ladder, but also reserves training for required comparisons, designs that are still improving, and alternatives that short runs cannot yet distinguish. Diagnosis can therefore affect which candidates receive more training even when their current scores are low.

Go-Explore returns to promising states before exploring further, while reward machines represent task progress (Ecoffet et al., 2021; Toro Icarte et al., 2022). FARL uses task milestones to identify where progress stops and where an existing policy could help a new learner begin exploration. Final evaluation starts from the original reset distribution with assistance disabled (Appendix C.2).

H.3 BEHAVIORAL DIAGNOSIS AND EXPERIMENTAL MEMORY

RDA uses visual subtask analysis to revise subtask specifications and reward code under a fixed learning procedure (Lee et al., 2026). Prompt-to-Policy combines code/video judgment, training-dynamics analysis, reward and hyperparameter revision, and lessons from prior iterations (Chung et al., 2026). FARL uses numeric trajectories and available predicates, and records each explanation with the tested design and conditions.

ReAct interleaves reasoning and environment actions (Yao et al., 2023); Reflexion uses verbal feedback and episodic memory to improve subsequent attempts (Shinn et al., 2023). FunSearch, ReEvo, and MAgentBench likewise connect execution to search or accumulated feedback (Romera-Paredes et al., 2024; Ye et al., 2024; Huang et al., 2024). In RL, the same design can behave differently across training seeds, initializations, and budgets. FARL records these conditions when it tests an explanation. Its memory keeps proposed explanations separate from experimental findings, allowing later search to revise components and allocate training using the appropriate evidence.

ENPIRE enables coding agents to revise policy-training code through real-robot experiments after constructing fixed reset and verification interfaces (Xiao et al., 2026). Agentic AutoResearch for Space Autonomy searches a predefined configuration space and subjects its selected configuration to an offline audit using reseeded evaluation and leave-one-out pruning (Jain & Linares, 2026). These works share the goal of autonomous experimentation; FARL focuses on retaining interface-solver alternatives for diagnostic comparisons and using their outcomes to guide subsequent design and training allocation.

I NATIVE AND DISCOVERED LEARNING DESIGNS

This section compares what the benchmark supplies with what each method actually selects. We use the six design axes from Section 3: observations ϕ , reward r , learner L , training parameters λ , exploration e , and policy training budget b . The environment defines observations, rewards, actions, and termination. A learning algorithm, optimizer, and training budget must be chosen for the experiment. “Native control” below pairs the benchmark interface and reward with the specified fixed learner. The comparisons describe complete designs. They do not attribute a performance difference to one component unless that component was tested while the others were held fixed.

I.1 WHAT THE NATIVE BENCHMARKS PROVIDE

Table A29: Native observations and expert-designed reward terms. The public wrappers used in our experiments are specified separately below.

Task	Native observation	Native reward and episode horizon
DoorKey	Symbolic $7 \times 7 \times 3$ egocentric image (object, color, state), direction, and a textual mission. The numeric EW wrapper uses 147 normalized image entries plus direction, giving 148 inputs.	Zero until reaching the exit, then $1 - 0.9t/T$. The 5×5 task has $T = 250$ steps. Pickup and door opening receive no separate native reward.
Ant	27 coordinates: torso height, quaternion, eight joint angles, three root linear velocities, three angular velocities, and eight joint velocities. Global root x, y are excluded. Contact-force features are disabled.	Forward velocity plus a survival term, minus $0.5\ a\ _2^2$; contact cost is inactive in this configuration. Episodes end on unhealthy state or at 1,000 steps. The 27D vector is already the benchmark’s chosen representation; EW retains it while withholding native reward and reward metadata.
Door	39 coordinates: two 18D frames of hand/gripper and object state, followed by the 3D goal. This includes supplied object and goal geometry, even when native shaping is withheld.	Meta-World’s dense reward combines grasp/readiness shaping with door-opening progress, using gripper effort, hand-handle geometry, and door angle; success sets reward to 10 in the v2 reward implementation. The experimental horizon is 500 steps.
Hand	39 coordinates: 30 hand positions and three 3D relative vectors (palm-object, palm-target, object-target). The experiment’s 84D ST wrapper adds 36 velocities and absolute palm, object, and target positions.	Dense reward is $-0.1d_{po} + \mathbb{K}_{h>0.04}(1 - 0.5d_{pt} - 0.5d_{ot}) + 10\mathbb{K}_{d_{ot}<0.1} + 20\mathbb{K}_{d_{ot}<0.05}$. Here h is object height and d denotes Euclidean distance. Episodes last 200 steps. Evaluation additionally requires five consecutive successful steps.

Native Hand controls retain 39D inputs and train PPO, SAC, or TD3 to 5M; their complete settings are in Table A13. Native Ant uses 27D inputs and PPO, with the settings and 1M/5M/10M evaluations in Appendix E.4. No native Door control is reported. DoorKey’s native completion rate is a supplied reference, for which a full learner configuration and seed-level training archive were not recovered; it is not used as a controlled comparison of training efficiency.

I.2 DOORKEY: RAW INPUTS CAN SUFFICE WITH A SUITABLE SOLVER

The designs differ in more than reward length or observation dimension. Eureka explicitly encourages moving through the doorway and approaching the exit, yet its selected policy stops short of task completion. LiMEN constructs a larger representation but also retains PPO. FARL selects a simpler public-input design with A2C. The controlled comparison in Table A18 is the evidence that the solver configuration matters: the same observation and reward reach 100% completion with the selected A2C configuration and 20% with the compared PPO configuration.

Under EA, the public wrapper instead exposes the 83D full-grid state. FARL’s selected PPO design expands it to 115D and uses an event-based reward: 3 for first key acquisition, 6 for subsequent door opening, and 12 for terminal success after those events, with a 0.5 penalty for dropping the key before opening the door. Episode memory prevents repeated collection of the first two bonuses. This EA program reads the wrapper’s key-possession, door-open, and terminal-success fields. Its information access therefore differs from EW’s visibility-based program: EA uses directly available task events, while EW must work from the partial observation. The retained selection receipt verifies

Table A30: Selected DoorKey EW designs. All reported policies use 1M steps. Exact programs are included in the code supplement.

Axis	Eureka	LiMEN	FARL
ϕ	Unchanged 148D public input.	188D: public input plus visible-object counts, nearest-object offsets, front-cell flags, time, and inferred key possession.	Unchanged 148D public input.
r	Key pickup/approach, door opening and doorway crossing, goal approach and an exit proxy, with small action/time penalties.	Visible key/door/goal changes and geometry-based shaping computed alongside the expanded observation.	Changes in soft counts of visible key, door, and goal categories, conditioned on pickup/toggle/forward actions; step penalty 0.0015.
L, λ	Fixed PPO; settings in Table A34.	Fixed PPO; settings in Table A34.	A2C with selected learning rate, discount, entropy and GAE parameters (Table A18).
e	PPO policy sampling.	PPO policy sampling with entropy coefficient 0.01.	Policy sampling; the selected coverage profile adds no intrinsic reward or A2C entropy floor.
b	$5 \times 1\text{M}$ selected-reward runs.	One 1M selected run; no candidate passes the full-training threshold.	$5 \times 1\text{M}$ evaluation runs, following 100k screening and five-seed 300k comparisons.

115D inputs, PPO, three seeds and 100k steps, but does not retain the selected trial’s complete optimizer configuration. The artifact package identifies this missing record explicitly.

Eureka EA retains the 83D input and fixed PPO, combining native reward with key/door/goal geometry and a strong exact-goal-occupancy bonus. Its reported cohort trains for 500k steps. LiMEN EA creates 273 features from the full grid, object-relative coordinates, direction, front-cell contents and task phase, while its selected reward is exactly the native reward. It uses fixed PPO and three 2M runs. These programs make the role of expert information concrete: the EA designs can directly use state and event information that EW must work without.

I.3 ANT: DIFFERENT REWARDS, REPRESENTATIONS, AND LEARNERS

The selected EW reward encourages forward velocity and variation across actuator commands. Its two action terms measure variance across all eight action coordinates and the difference between the means of the first and last four coordinates. The exact program also specifies the coordinate-norm penalties and numerical bounds.

These design differences help explain what FARL searches, but the strongest performance evidence remains the complete configurations and their training cohorts. The 121-design comparison shows large variation even within SAC; it does not establish that the action-diversity term alone causes the gain.

Under EA, FARL keeps the native 27D input and constructs the speed/control-cost reward given in Appendix F.1. The saved SAC model uses 256, 256, 128 hidden layers, learning rate 3×10^{-4} , $\gamma = 0.990520$, $\tau = 0.005448$, automatic entropy, and 20k warmup. These are the effective settings recovered from the saved model. Eureka EA retains 27D inputs and PPO; its reward adds linear and exponential forward-speed terms to native reward, with lateral-drift and unhealthy-state penalties. LiMEN’s supplied EA program uses 30 features (scaled native coordinates and three motion summaries) and PPO, with forward velocity, a falling penalty, angular/joint-motion penalties and a healthy-height bonus. Their reported policy budgets are 10M, 5M and 10M for FARL, Eureka and LiMEN, respectively.

Table A31: Selected Ant EW designs. Native input and reward are in Table A29; fixed baseline solvers are in Table A34.

Axis	Eureka	LiMEN	FARL
ϕ	Unchanged 27D input.	80D: orientation axes, bounded joint/velocity features, pairwise joint coordination, summaries, and time.	57D: all 27 public coordinates plus 30 pairwise coordinate differences.
r	Forward velocity gated by height/uprightness, small posture bonuses, and lateral, vertical, angular, joint-motion and action penalties.	Forward velocity with posture-dependent scaling, small upright/facing bonuses and motion/action penalties.	$0.8v_x + 0.12 \text{Var}(a) + 0.08 \bar{a}_{0:4} - \bar{a}_{4:8} $, minus coordinate-norm penalties.
L, λ	Fixed PPO.	Fixed PPO.	SAC; 256, 256 network, learning rate 2.5981×10^{-4} , $\gamma = 0.991472$, $\tau = 0.007961$.
e	PPO policy sampling.	PPO policy sampling; entropy 0.01.	Automatic SAC entropy initialized at 0.2; 10k random-action warmup.
b	$5 \times 5\text{M}$ reported runs.	$3 \times 10\text{M}$ reported runs.	Five runs per budget at 1M, 5M, and 10M; search first tests designs at 5k, 50k, 300k, and 1M.

I.4 DOOR: SEVERAL DIFFERENT DESIGNS REACH THE CEILING

Table A32: Door EW designs. Eureka’s reported 75/75 outcomes cover three generated rewards, so all three programs are preserved.

Axis	Eureka	LiMEN	FARL
ϕ	Unchanged 39D input.	121D: public-state transformations, hand/object/ goal relative vectors, opening-direction projections, alignment features, state summaries and time.	47D: 39 public coordinates plus eight generated distance, offset, magnitude and configuration features.
r	Three rewards combine reaching and opening progress, proximity bonuses and action penalties. Two additionally gate opening or motion by proximity to the handle.	Reaching progress, proximity-gated and alignment-weighted opening progress, goal proximity, relative progress and a small action penalty.	Negative hand-goal, object-goal and hand-handle distances; vertical-offset and gripper terms; mean squared-action penalty.
L, λ	Fixed PPO.	Fixed PPO.	SAC; 256, 256 network, learning rate 4.0943×10^{-4} , $\gamma = 0.981102$, $\tau = 0.009037$.
e	PPO policy sampling.	PPO policy sampling; entropy 0.01.	Automatic SAC entropy; 10k warmup.
b	Three designs, each 10M.	Three seeds, each 5M.	Two seeds, each 50k.

All three methods complete this task. FARL reaches that ceiling with a shorter trained policy, but the comparison does not identify one uniquely correct reward or representation. It provides a useful contrast to Hand: Door admits several effective geometric designs, whereas reaching and lifting the object in Hand do not by themselves produce reliable transport.

I.5 HAND: PRESERVE CONTACT WHILE IMPROVING THE TRAINING CONFIGURATION

Table A33: Selected Hand ST designs. Native controls use 39D inputs; all three automated methods receive the 84D public wrapper. Policy budgets refer to completed cohorts.

Axis	Eureka	LiMEN	FARL
ϕ	Unchanged 84D public input.	396D: native/public inputs, scaled joint and velocity features, relative vectors in several frames, distances, alignments, geometry summaries, time and native feedback.	111D: 84 public inputs, 20 other derived features and seven selected relational features.
r	Native reward plus smooth reach, lift, controlled-lift, target-proximity, transport and late-placement terms, with a small action penalty.	Half native reward plus reach/lift/transport changes normalized by scene scale, contact-weighted progress and state-quality terms.	Half native reward plus bonuses for maintaining control after lifting and bringing the lifted object near target; penalty for losing contact.
L, λ	Fixed PPO.	Fixed PPO.	SAC; 384, 384, 256 network, learning rate 1.2391×10^{-4} , $\gamma = 0.987258$, $\tau = 0.009802$.
e	PPO policy sampling.	PPO policy sampling; entropy 0.01.	Automatic entropy, target -30 , and 1M random-action warmup.
b	Five seeds, each 5M.	Three seeds, each 5M.	Three seeds, each 5M.

Let d_{po} and d_{ot} denote next-state palm–object and object–target distance, h object height, and r_N native reward. FARL’s selected program is

$$r = 0.5r_N + 3\mathbb{I}_{h>0.04}\mathbb{I}_{d_{po}<0.10} + 2\mathbb{I}_{h>0.04}(0.15 - d_{ot})_+ - 2.5\mathbb{I}_{h>0.04}(d_{po} - 0.12)_+.$$

It keeps native feedback during approach and adds explicit incentives for controlled transport after lifting. Eureka and LiMEN also contain transport shaping, so the result cannot be explained by claiming that only FARL rewards the later stage. The distinguishing evidence is the search over the whole configuration. The same generated reward and 111D representation achieve only 4.17% at iteration 8; longer training and revised SAC settings eventually raise the selected design to 97.11%. The matched 104D/111D test and the subsequent solver revisions are detailed in Appendix F.4.

I.6 LEARNER SETTINGS AND EXACT PROGRAM RECORDS

Table A34: Fixed automated-baseline PPO settings. These are experiment settings, not hyperparameters supplied by the environments.

Setting	Eureka	LiMEN
Policy / value hidden layers	64, 64 / 64, 64	64, 64 / 64, 64
Activation	Tanh	Tanh
Learning rate	3×10^{-4}	3×10^{-4}
Discount / GAE	0.99/0.95	0.99/0.95
Clipping / value coefficient	0.2/0.5	0.2/0.5
Batch size / optimization epochs	64/10	256/10
Entropy coefficient	0	0.01
Gradient norm limit	0.5	0.5 (Ant: 1.0)
Replay / random-action warmup	None	None

Eureka uses eight parallel environments and 2,048 steps per environment per rollout. LiMEN uses eight environments with 2,048 steps each for Hand, 32 with 2,048 for Door, 48 with 1,365 for Ant, and eight with 8,192 for DoorKey. These are the SB3 rollout lengths derived from the task

configurations. FARL’s selected SAC designs use a replay capacity of 10^6 , batch size 256, and one gradient update per environment step. The effective parameters listed above are taken from saved models where available, rather than assuming that every field in an LLM proposal was accepted by the learner.

The supplement pairs each retained program with its task, method, candidate identity, observation dimension, training budget, and available constructor or selection records. It includes executable baseline reward/interface programs and FARL observation/reward specifications. This makes it possible to inspect what was designed, as well as compare the final scores.