

WORK2SKILL: CAPTURING HUMAN GUI EXPERIENCE FOR REUSABLE AGENT SKILL INDUCTION

Yuqi Huang^{1,‡} Hui Li^{2,‡} Yifei Cao² Zikun Cai³ Tianci Xie⁴ Yangfan Gao²
 Pinxue Guo^{5,†} Chaoyun Zhang^{5,†} Bingxuan Li⁵ Rui Zheng⁵ Hang Yan⁵ Ning Liao^{1,*}

¹Shanghai Jiao Tong University ²Fudan University ³Nanyang Technological University

⁴Zhejiang University ⁵Shanghai Qiji Zhifeng Co., Ltd

[‡]Equal contribution [†]Project Leaders ^{*}Corresponding Author

ABSTRACT

Computer-use agents can perform increasingly complex GUI tasks, yet unfamiliar software and workflows requiring human domain knowledge remain challenging. Human demonstrations convey procedural knowledge through the same GUI interaction space, but reuse requires interpreting actions in context and separating workflow rules from task-specific details. We thus introduce Work2Skill, a framework that captures human GUI experience for reusable agent skill induction. WorkRecorder provides the framework’s infrastructure for collecting this experience, aligning screen recordings, mouse and keyboard events, and available accessibility-tree information. Using WorkRecorder, we construct WorkDemo-350, the first synchronized multimodal dataset of human desktop GUI demonstrations for reusable agent skill induction and downstream evaluation. Its 350 demonstrations are screened for completeness and task success. We then propose an agentic skill-induction method that inspects evidence on demand to produce reusable skills capturing workflow rules, step dependencies, and completion checks. When the same four execution models are equipped with skills induced by each method under shared execution settings, Work2Skill achieves the highest scores and success rates. Mean score improvements over the corresponding No Skill baseline are 4.67–10.54 points on MyPCBench Bounded Action and 3.11–7.50 points on a 286-task subset of OSWorld-Verified. Our code and data are available at <https://github.com/china-qijizhifeng/Work2Skill>.

1 INTRODUCTION

Computer-use agents can perform increasingly complex desktop and web tasks, supported by advances in GUI grounding and planning (Qin et al., 2025; Agashe et al., 2025; Wang et al., 2025a). Yet agents still struggle with unfamiliar software and workflows that require domain knowledge, where successful execution depends on procedures not spelled out in the user’s request (Zhang et al., 2026e; Jang et al., 2026). For example, “submit my reimbursement” does not specify which internal portal to use, which receipts to attach, or what to check before submission. Agents need this user- or organization-specific procedural knowledge to translate a user’s goal into GUI actions.

Human demonstrations offer a direct source of this knowledge because humans and computer-use agents share the same GUI interaction space. Demonstrated controls, action sequences, and visible outcomes can therefore guide an agent’s own execution. Prior work converts demonstrations into expert instructions and semantic action traces (Li et al., 2025; Zhang et al., 2026e), multimodal tutorials (Bai et al., 2026), or reusable skills

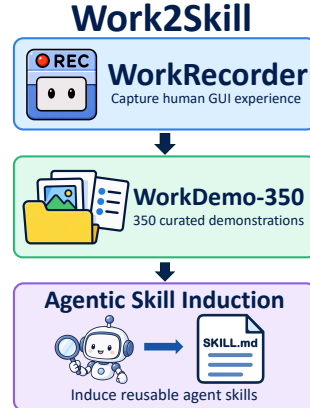


Figure 1: Work2Skill framework: WorkRecorder, WorkDemo-350, and Agentic Skill Induction.

(Yang et al., 2026a; Xiao et al., 2026). OpenAI’s Record & Replay (OpenAI, 2026b) and Claude’s Record a skill (Anthropic, 2026b) bring this approach to user-facing tools. We thus introduce Work2Skill, a framework that captures human GUI experience for reusable agent skill induction (Figure 1). Its three components address the following challenges in action grounding, method comparison, and evidence inspection.

First, action coordinates reveal where an operation occurred but not what the target control means. ShowUI-Aloha interprets actions from full-screen frames and target crops (Zhang et al., 2026e), while Demo2Tutorial uses before-and-after screenshots (Bai et al., 2026). Without accessibility-tree (AX) evidence, these parsers depend on visual grounding to infer target semantics; selected frames can also miss transient states and intermediate operations. WorkRecorder addresses this ambiguity by aligning screen recordings, mouse and keyboard events, and available AX information. Recorded element names and roles provide explicit control semantics, while linked video preserves the surrounding state changes. The induction agent can thus interpret an operation using both its visual context and available structured UI evidence.

Second, representative desktop GUI studies use different demonstrations, task sets, and execution protocols (Zhang et al., 2026e; Bai et al., 2026). Their results mix differences in induction with differences in source experience and evaluation conditions. WorkDemo-350 provides a common demonstration resource for skill induction in desktop environments. Collected with WorkRecorder, it contains 350 human GUI demonstrations covering 64 MyPCBench Bounded Action tasks (Jang et al., 2026) and a 286-task OSWorld-Verified subset (Xie et al., 2024). Each demonstration is screened for completeness and task success and packaged with synchronized visual and action evidence, plus available AX information. This shared evidence and a controlled downstream protocol support comparisons of induction methods using the same task evaluators and execution conditions.

Third, representative pipelines prescribe an order for action parsing and procedure abstraction, even when individual stages refine their outputs (Zhang et al., 2026e; Bai et al., 2026). This couples evidence inspection to predefined stages. Loading a long recording into context at once also creates context pressure, while selecting a fixed subset can omit details needed later. Our agentic skill-induction method addresses both constraints by interleaving on-demand evidence inspection with skill writing and revision. Drawing on active evidence acquisition in agentic video understanding (Yuan et al., 2025; Wang et al., 2026; Li et al., 2026), the agent selects linked files, images, and video intervals to resolve questions as they arise. It can revisit the source after drafting without loading the entire recording at once. During skill writing, we guide the agent to generalize demonstration-specific inputs into task-dependent descriptions while preserving procedural rules, step dependencies, and completion checks. The skills guide execution without the source recording.

We evaluate the resulting skills through downstream execution on the WorkDemo-350 tasks. Using official evaluators and a shared text-guidance interface, we compare Work2Skill with No Skill and text-adapted versions of ShowUI-Aloha and Demo2Tutorial. Across four execution models, Work2Skill improves mean evaluation scores over No Skill by 4.67–10.54 points on MyPCBench Bounded Action and 3.11–7.50 points on the evaluated OSWorld-Verified subset. Further experiments test reuse under changed requirements within the same application (MyPCBench Jitter) and transfer between two execution models. Evidence ablations and the Pipeline Prompt comparison examine the roles of input modalities and induction-prompt design. Our contributions are threefold:

- 1) We introduce **WorkRecorder**, the human GUI experience collection infrastructure of Work2Skill, which aligns recorded inputs with visual and available AX evidence to clarify demonstrated actions.
- 2) We construct **WorkDemo-350**, the first synchronized multimodal dataset of human desktop GUI demonstrations for reusable agent skill induction and downstream evaluation.
- 3) We propose an **agentic skill induction method** that interleaves on-demand evidence inspection with skill writing and revision. Across two benchmarks and four execution models, it achieves the highest scores and success rates among the evaluated methods.

2 RELATED WORK

Learning from Human GUI Demonstrations. Human demonstrations provide experience for GUI agents across desktop, web, and mobile environments (Nguyen et al., 2025; Tang et al., 2025;

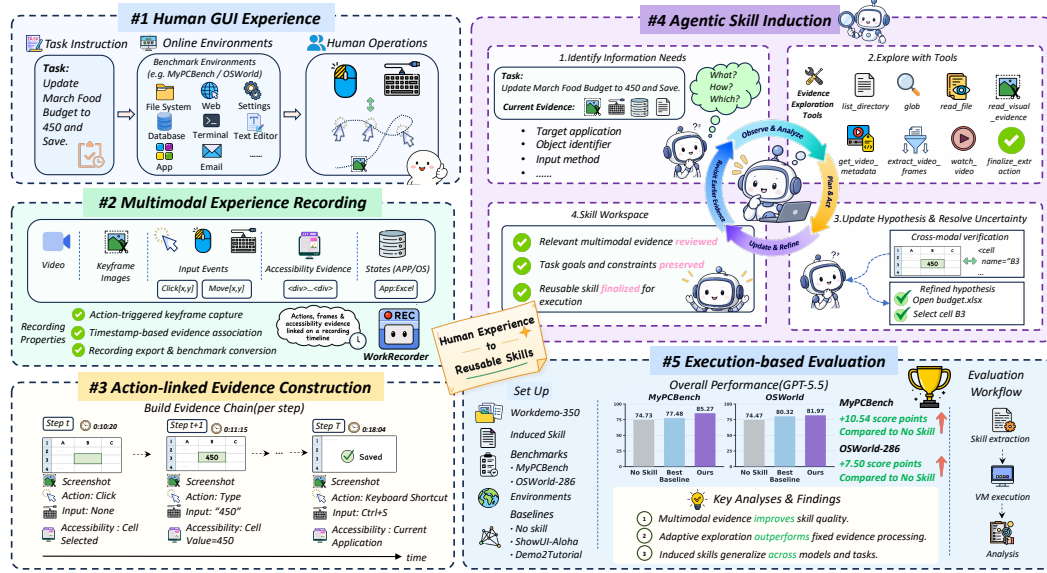


Figure 2: Overview of Work2Skill. WorkRecorder aligns human GUI actions with visual and available accessibility evidence to build WorkDemo-350. An agent inspects evidence on demand and revises reusable skills for downstream GUI execution. Downstream evaluation compares these skills with guidance from the fixed workflows of ShowUI-Aloha and Demo2Tutorial.

Qin et al., 2025). They support data collection, grounding, model training (Wang et al., 2025a; Nayak et al., 2025; Feizi et al., 2026) and agent efficiency evaluation (Abhyankar et al., 2026). Demonstration structure can also influence task execution (Xing et al., 2026). Procedural representations include expert instructions (Li et al., 2025), task graphs (Yin et al., 2025), and parameterized workflows for robust replay (Zhao et al., 2026). LearnAct also introduces LearnGUI for evaluating demonstration-based learning on mobile devices (Liu et al., 2026). More recent work includes semantic action traces, multimodal tutorials, natural-language skill graphs, and standard operating procedure (SOP) skills (Zhang et al., 2026e; Bai et al., 2026; Yang et al., 2026a; Xiao et al., 2026).

Skill Induction and Active Evidence Acquisition. Reusable guidance draws on experience organization and evidence selection. Skill-induction methods learn procedures through autonomous interaction (Wang et al., 2025b; Zheng et al., 2025) or distill execution and user traces (Mi et al., 2026; Ni et al., 2026; Yang et al., 2026c), with environment feedback and policy learning supporting further refinement (Xia et al., 2026; Yang et al., 2026b). Adaptive memories, contextual playbooks, and learned memory-management routines retain experience (Suzgun et al., 2026; Zhang et al., 2026c;a), while experience-based evaluation examines its downstream value (Peng et al., 2026). Guidance from multimodal demonstrations requires choosing what to inspect. Agentic video methods retrieve and examine relevant segments iteratively (Ma et al., 2025; Yang et al., 2025; Yuan et al., 2025; Wang et al., 2026; Li et al., 2026). In GUI settings, CUADebug inspects traces and screenshots to diagnose execution failures (Zhang et al., 2026d), while MMSkills packages textual procedures, state cards, and keyframes for selective inspection during execution (Zhang et al., 2026b).

3 WORK2SKILL FRAMEWORK

Work2Skill connects human demonstrations to reusable procedural guidance (Figure 2). WorkRecorder preserves actions together with their visual and semantic context; WorkDemo-350 organizes the collected demonstrations into a curated evidence resource. An induction agent inspects this evidence, revisits unclear steps, and writes skills for downstream GUI execution.

3.1 WORKRECORDER

WorkRecorder collects the evidence needed to interpret human actions in context. Given a task instruction, a human demonstrator performs the task in the benchmark’s official environment.



Figure 3: Human GUI experience collection with WorkRecorder. A demonstrated workflow (left) is captured and reviewed through the recorder interface (center), then organized into an evidence episode with task metadata, action traces, and available multimodal evidence (right).

WorkRecorder captures screen video, keyframe images, mouse and keyboard activity, and available UI information as multimodal evidence (Figure 3). An action trace links each recorded operation to its supporting evidence so that the induction agent can inspect individual steps. Task setup and outcome evaluation follow the corresponding benchmark procedures.

A macOS interface records local workflows or interactions with a remote Linux desktop. For remote tasks, the Mac captures the displayed workflow and local inputs, while a collector in the target environment supplies UI evidence. Platform-specific collectors provide target-element metadata, accessibility-tree (AX) snapshots, and application or window context when available. Coverage depends on the recording configuration and the application’s accessibility support.

Multimodal Capture and Alignment. WorkRecorder aligns input events and visual observations on a common video-relative timeline. It groups timestamped events into actions such as clicks, drags, scrolling, and hotkeys, then links these actions to keyframes. An agent can therefore inspect a click alongside its screen image, available target information, and surrounding video to determine what changed. Target-element association uses pointer location and event timing, with window context and control semantics helping select among candidates. On Linux, AT-SPI point queries and nearby accessibility events supply available names, roles, and bounds for click and drag records. UI annotations are derived from the corresponding target elements in the AX tree. AX snapshots provide additional interface context but need not reflect the exact action-time state. Appendix A details the recording architecture, capture policies, target-matching rules, and time alignment.

Evidence Representation and Packaging. Each demonstration becomes an evidence episode containing the task instruction and metadata, an ordered action trace, and the available multimodal evidence. A manifest indexes these resources; action records link to keyframes and video times. These links support targeted inspection without processing the recording sequentially. Descriptions help locate operations; linked recordings let the agent verify their interpretation. The available evidence depends on capture and export settings. Appendix B provides details.

3.2 WORKDEMO-350

WorkDemo-350 provides a common evidence resource for studying skill induction. Collected with WorkRecorder, it contains 350 human GUI demonstrations: 64 MyPCBench Bounded Action tasks and a fixed 286-task OSWorld-Verified subset. The two benchmarks provide complementary settings. MyPCBench (Jang et al., 2026) covers personal office and everyday workflows with user-specific context; its Bounded Action tasks offer scoped GUI workflows suited to human demonstra-

tion. OSWorld-Verified (Xie et al., 2024) adds general computer-use tasks across desktop and web applications, broadening the range of workflows available for skill induction and evaluation.

We screen tasks and recordings to retain successful, high-quality demonstrations. For OSWorld-Verified, we first exclude infeasible tasks for which a valid human demonstration cannot be completed. Across both benchmarks, demonstrators follow valid GUI workflows and verify the final state without being restricted to a prescribed action sequence. We then review task success and recording completeness, discarding demonstrations that omit key operations or end in an incorrect state (Appendix E). Each episode links task and action records to available visual and UI evidence.

Episodes are organized by benchmark and task so that methods can draw on the same demonstrations while choosing which modalities and time intervals to inspect. The collection contains approximately 8.48 hours of recorded experience, accompanied by action traces and evidence images. Table 1 summarizes the dataset’s size and multimodal evidence statistics.

Table 1: Statistics of WorkDemo-350: 350 human GUI demonstrations covering 64 MyPCBench Bounded Action tasks and a 286-task subset of OSWorld-Verified, with aligned multimodal evidence.

Statistic	MyPCBench	OSWorld-Verified
Number of tasks	64	286
Total video duration (s)	7623.02	22890.18
Mean episode duration (s)	119.11	80.04
Mean actions per episode	32.23	34.57
Mean evidence images	24.20	23.91

3.3 AGENTIC SKILL INDUCTION

Skill induction turns an evidence episode into reusable procedural guidance. Given the task instruction and recorded evidence, a NexAU tool-using agent (Nex-AGI, 2026) generates skills in an output directory separate from the recordings. The default system prompt is concise: it sets evidence-access boundaries, prerequisite checks, and completion requirements while leaving the detailed exploration and revision sequence to the agent. A bundled `skill-creator` policy guides skill authoring. After reading this policy and the task definition in `task.json`, the agent alternates evidence inspection with skill writing and revision. Appendix D provides the prompts and authoring policy.

Evidence Exploration Tools. We select file, image, and video tools that expose complementary views of a demonstration at different granularities. File discovery and reading provide task definitions, manifests, action traces, key logs, and available structured UI evidence. Traces and indices link operations to their supporting media, while AX records supply available control names and roles. `read_visual_evidence` returns selected images with source-path labels, exposing visible controls and entered or selected values. Video tools provide access to states and transitions beyond the indexed images. After reading video metadata, the agent can sample an interval with `watch_video` or request individual timestamps with `extract_video_frames`; both return timestamp-labeled frames. Source-path and timestamp labels preserve the correspondence between returned observations and source artifacts. Appendix C details the interfaces, and Section 4.5 evaluates the contribution of the available evidence to downstream execution.

Active Evidence Acquisition. The agent chooses its next observation according to the task and unresolved questions in the evidence, following iterative inspection in agentic video understanding (Yang et al., 2025; Wang et al., 2026; Li et al., 2026). The prompt requires representative initial, critical, and final-state images to be inspected when indexed images are available; the agent otherwise determines the inspection sequence and level of detail. For example, an ambiguous click can prompt inspection of the target frame to identify the control, followed by a later video frame to check the resulting state. Tool guidance encourages coarse video sampling followed by closer examination of relevant actions. Evidence inspection and skill writing share one conversation, so a draft can expose missing constraints or unverified transitions. The agent can then return to the relevant evidence and revise the procedure to incorporate supported dependencies and completion checks. Candidate skills are not executed during induction, and downstream evaluation results are not used as revision feedback. When the available observations do not resolve an uncertainty, the authoring policy requires an observable conditional check or an explicit limitation in the skill. Section 4.5 compares this prompt with Pipeline Prompt, which sets exploration order but allows further inspection.

Skill Generation. The agent expresses each coherent reusable capability in a `SKILL.md`, with YAML frontmatter containing its name and description, following the Agent Skills file convention (Zhang et al., 2025). Through the authoring policy, we guide the agent to generalize demonstration-specific inputs into task-dependent descriptions and describe UI targets semantically. The policy instructs the agent to keep phases together when they share state, task-derived data, quantities, or required ordering, and to retain selection rules, calculations, dependencies, requested scope, stop conditions, visible completion checks, and supported recovery. Skills must preserve visible GUI interaction and include all instructions needed for execution without the source recording. Before completion, the agent calls `finalize_extraction` to validate output structure and required tool use. Checks cover task-file access, required skill structure, a recorded write followed by a read of each final skill, and metadata inspection before video sampling. Successful finalization records skill hashes, inspected source paths, validation results, and run provenance. These checks verify output structure and required tool use; they do not verify skill correctness or task success. For downstream evaluation, the executor receives the target task instruction and generated skill. It selects GUI actions using this guidance together with its observations and action history, without accessing the source recording. Sections 4.4 and 4.3 evaluate reuse across execution models and task instances. Appendix D.4 details the authoring policy and output requirements.

4 EXPERIMENTS

We organize our experiments around the following four research questions. RQ1 tests whether the induced skills improve execution on the demonstrated tasks. RQ2 and RQ3 then examine two dimensions of reuse: changes to task requirements and changes to the execution model, respectively. RQ4 investigates how the available evidence and induction prompt affect downstream utility. A case study illustrates how induced skills handle dependent subgoals in a multistep workflow.

4.1 EXPERIMENTAL SETUP

Benchmarks. We evaluate on the 64 MyPCBench Bounded Action tasks and 286 OSWorld-Verified tasks in WorkDemo-350 using official task evaluators. On MyPCBench, the execution agent has access to both GUI actions and Bash commands. Benchmark selection and demonstration screening are described in Section 3.2. OSWorld results apply to this curated subset. Appendix E.3 describes our OSWorld execution harness and evaluator configuration.

Skill-based Evaluation. We evaluate skills as plug-in guidance by appending their text as a clearly delimited block to the end of the executor’s base system prompt. All text-guidance methods use the same `<task_skills>` wrapper; Appendix D.5 gives the template and injected contents. Separating procedural guidance from the execution loop supports reuse across execution models and integration with different agent harnesses. We therefore use shared execution settings for each model and benchmark, varying only the appended guidance to control for differences in native agent pipelines. We compare Work2Skill with No Skill, action semantics from ShowUI-Aloha (Aloha) (Zhang et al., 2026e), and tutorial text from Demo2Tutorial (D2T) (Bai et al., 2026). The demonstration-based methods use the same source episodes, while their input modalities and evidence representations follow each method’s design. RQ1 thus compares their overall ability to produce useful guidance under shared execution conditions; RQ4 separately examines evidence and induction-prompt choices within Work2Skill while holding the model and skill-authoring policy fixed.

Models and Metrics. We use GPT-5.5 (OpenAI, 2026a), Opus-4.8 (Anthropic, 2026a), Qwen3.5-35B-A3B, and Qwen3.5-9B (Qwen Team, 2026). By default, the same model induces skills and executes tasks with them; RQ3 varies this pairing. We report mean evaluation score (Score, 0–100), full-credit success rate (SR), mean execution steps, and mean skill-induction token usage. Appendix E details task selection, metrics, baseline adaptations, and execution settings.

4.2 RQ1: DOES WORK2SKILL IMPROVE DOWNSTREAM GUI EXECUTION?

To evaluate the effectiveness of induced skills in downstream GUI execution, we compare Work2Skill with No Skill and the text-adapted ShowUI-Aloha and D2T baselines on the demonstrated tasks under shared execution settings (Table 2). Relative to the higher-scoring of the two

Table 2: Performance and efficiency on MyPCBench and the evaluated OSWorld-Verified subset. Bold indicates the best Score or SR within each model and benchmark, and blue shading denotes our method. Score is the mean evaluation score (0–100), and SR is the percentage of tasks receiving full credit on either benchmark. Steps denotes average execution steps, and Tok. (k) denotes average token usage for skill induction, in thousands. Aloha denotes ShowUI-Aloha.

Method	GPT-5.5				Opus-4.8				Qwen3.5-35B-A3B				Qwen3.5-9B			
	Score	SR (%)	Steps	Tok. (k)	Score	SR (%)	Steps	Tok. (k)	Score	SR (%)	Steps	Tok. (k)	Score	SR (%)	Steps	Tok. (k)
<i>MyPCBench (N = 64)</i>																
No Skill	74.73	23.44	40.89	–	81.53	42.19	40.58	–	38.38	9.38	56.28	–	24.27	6.25	70.92	–
Aloha	77.48	37.50	41.33	170.65	79.27	34.38	37.94	256.23	37.69	12.50	67.47	243.86	26.61	3.13	79.77	235.36
D2T	75.25	37.50	46.13	177.32	81.28	42.19	36.84	234.73	40.61	9.38	63.45	211.98	27.75	6.25	70.84	180.48
Ours	85.27	48.44	47.38	334.52	86.20	50.00	36.03	300.21	44.56	20.31	46.69	245.63	34.11	12.50	69.30	249.87
<i>OSWorld-Verified (N = 286)</i>																
No Skill	74.47	70.98	19.05	–	79.23	77.97	26.37	–	32.52	32.17	66.61	–	27.48	26.92	70.02	–
Aloha	72.57	69.93	21.61	146.98	78.91	76.57	18.04	132.24	31.08	30.42	58.01	369.27	24.81	24.13	72.51	319.98
D2T	80.32	76.22	21.46	134.93	80.66	78.67	17.65	165.80	33.93	32.52	65.52	219.82	26.45	25.52	73.84	175.27
Ours	81.97	78.67	25.78	185.19	82.34	79.37	20.15	238.66	36.36	36.01	65.89	218.88	33.41	32.52	68.13	261.08

demonstration-based baselines for each execution model, Work2Skill improves Score by 3.95–7.79 points on MyPCBench and 1.65–6.96 points on the evaluated OSWorld-Verified subset. For GPT-5.5 on MyPCBench, SR reaches 48.44%, compared with 37.50% for both Aloha and D2T. Compared with No Skill, Work2Skill improves the average score by 4.67–10.54 points and the success rate by 6.25–25.00 percentage points on MyPCBench. On the evaluated OSWorld-Verified subset, the corresponding gains are 3.11–7.50 score points and 1.40–7.69 percentage points.

Efficiency gains depend on the model: Work2Skill uses fewer execution steps than No Skill for Opus-4.8 and both Qwen models, but more for GPT-5.5. Skill-induction token usage is also not consistently lower than that of the demonstration-based baselines. Thus, Work2Skill achieves the highest Score and SR among the compared methods across both task sets and all four executors, with model-dependent execution and induction costs.

4.3 RQ2: DO SKILLS GENERALIZE TO NEW TASK INSTANCES?

To assess whether induced skills generalize beyond the demonstrated instance, we evaluate the original skills on tasks with changed requirements within the same application, without further induction. MyPCBench Jitter contains one paired variant of each of the 64 original tasks, changing entities, parameters, or constraints within the same application context. For example, a flight-booking variant changes the destination, travel date, and seat preference. GPT-5.6-sol assists in revising task instructions and evaluation criteria, followed by human verification (Appendix E.1). Each of the four models directly reuses the skills induced for the original tasks on their paired variants.

Table 3: Performance on 64 MyPCBench Jitter tasks. Bold indicates the best Score or SR within each execution model, and blue shading denotes our method. Smaller annotations report changes relative to No Skill, computed from the displayed two-decimal values. For Score and SR, upward arrows indicate improvements; for Steps, downward arrows indicate fewer execution steps.

Method	GPT-5.5			Opus-4.8			Qwen3.5-35B-A3B			Qwen3.5-9B		
	Score	SR (%)	Steps	Score	SR (%)	Steps	Score	SR (%)	Steps	Score	SR (%)	Steps
No Skill	73.45	37.50	52.41	83.30	45.31	51.97	42.94	12.50	67.66	27.80	6.25	82.33
Aloha	75.50 _{↑2.05}	42.19 _{↑4.69}	51.45 _{↓0.96}	82.66 _{↓0.64}	43.75 _{↓1.56}	48.17 _{↓3.80}	41.19 _{↓1.75}	12.50 _{→0.00}	63.14 _{↓4.52}	31.97 _{↑4.17}	10.94 _{↑4.69}	78.63 _{↓3.70}
D2T	73.03 _{↓0.42}	35.94 _{↓1.56}	51.94 _{↓0.47}	81.44 _{↓1.86}	45.31 _{→0.00}	48.48 _{↓3.49}	46.92 _{↑3.98}	14.06 _{↑1.56}	66.31 _{↓1.35}	30.66 _{↑2.86}	12.50 _{↑6.25}	81.66 _{↓0.67}
Ours	81.75 _{↑8.30}	46.88 _{↑9.38}	49.78 _{↓2.63}	87.23 _{↑3.93}	54.69 _{↑9.38}	46.53 _{↓5.44}	51.58 _{↑8.64}	21.88 _{↑9.38}	65.17 _{↓2.49}	36.25 _{↑8.45}	12.50 _{↑6.25}	79.53 _{↓2.80}

In Table 3, Work2Skill improves the average score over No Skill by 3.93–8.64 points and the success rate by 6.25–9.38 percentage points. Compared with the stronger demonstration-based baseline for each executor, the Score advantage is 4.28–6.25 points. Work2Skill also achieves the highest success rate for three executors, while tying D2T for Qwen3.5-9B. Average execution steps also decrease by 2.49–5.44 relative to No Skill across the four execution models. These gains across all four

executors support reuse beyond the demonstrated instance: the induced skills remain useful when entities, parameters, or constraints change within the tested applications.

4.4 RQ3: DO SKILLS TRANSFER ACROSS MODELS?

To evaluate whether induced skills transfer across models, we separate induction from execution and test guidance produced by one model with a different executor. We cross GPT-5.5 and Qwen3.5-9B as induction and execution models, freezing each induced skill before downstream evaluation (Figure 4).

Skills induced by GPT-5.5 outperform those induced by Qwen3.5-9B under both executors. The advantage is larger with GPT-5.5 execution, reaching 9.46 score points and 9.38 percentage points in success rate, but remains positive after transfer to Qwen3.5-9B. All four pairings improve on the No Skill baseline for the same executor. Performance remains substantially lower with Qwen3.5-9B execution regardless of the induction model. Thus, the skills transfer usefully between these two models, but stronger induction does not close the performance gap between executors on these tasks.

Execution Induction	Score		Success Rate (%)	
	GPT-5.5	Qwen3.5-9B	GPT-5.5	Qwen3.5-9B
GPT-5.5	85.27 $\Delta +10.54$	36.66 $\Delta +12.39$	48.44 $\Delta +25.00$	14.06 $\Delta +7.81$
Qwen3.5-9B	75.81 $\Delta +1.08$	34.11 $\Delta +9.84$	39.06 $\Delta +15.62$	12.50 $\Delta +6.25$

Figure 4: Cross-model skill transfer on 64 MyPCBench tasks. Rows denote induction models; columns denote executors. Δ denotes the gain over the same executor’s No Skill baseline, in Score points or SR percentage points, calculated from displayed two-decimal values.

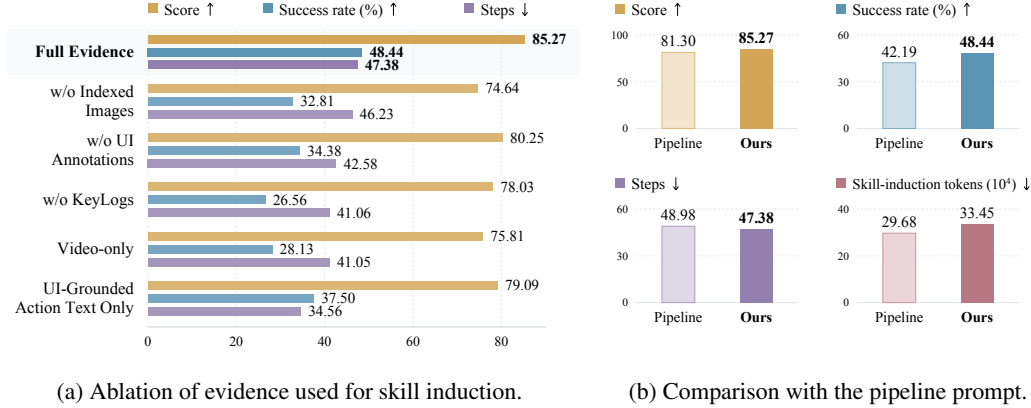


Figure 5: Ablation and pipeline-prompt comparison on 64 MyPCBench tasks using GPT-5.5 with high reasoning effort. In (a), Full Evidence uses all available modalities; UI-Grounded Action Text Only combines recorded actions with target UI descriptions. w/o KeyLogs also removes overlays from indexed images. Score, SR, and Steps measure downstream execution; Tokens reports mean skill-induction token usage per task in units of 10^4 .

4.5 RQ4: HOW DO EVIDENCE AND INDUCTION PROMPTS AFFECT SKILL INDUCTION?

To assess how evidence and prompts affect downstream skill utility, we ablate the available input modalities and separately compare the Work2Skill and Pipeline Prompt system prompts. For the evidence ablation, we vary induction evidence on 64 MyPCBench tasks with GPT-5.5, keeping reasoning effort (high) and the iteration limit fixed. UI annotations contain metadata and descriptions derived from the corresponding action targets in the AX tree. The w/o KeyLogs condition removes both raw logs and added image overlays while retaining the action trace and its UI target information. Appendix E.6 details the inputs and prompt adaptations. Full Evidence scores 85.27 and fully solves 31 tasks (Figure 5a). Removing indexed images, UI annotations, or KeyLogs reduces Score by 5.02–10.63 points and SR by 14.06–21.88 percentage points. The largest drops are in Score without indexed images and SR without KeyLogs. UI-Grounded Action Text Only uses ordered action descriptions with target UI semantics. It outperforms Video-only and uses the fewest steps; both trail Full Evidence in Score and SR. Fewer steps do not necessarily indicate better task completion; Score and SR remain essential for interpreting execution efficiency.

With the evidence held fixed, we next test whether a prescribed sequence of induction stages helps the agent use it. Our concise default prompt leaves detailed evidence exploration and skill revision to the agent. Pipeline Prompt specifies the induction stages and their order: read the task and artifacts, inspect images and video, then write, review, and finalize skills. Only the system prompt changes; the model, evidence, tools, authoring policy, and output format remain fixed (Appendix D.3). Both prompts allow further evidence inspection. In Figure 5b, Work2Skill improves Score by 3.97 points and SR by 6.25 percentage points, while reducing average execution steps from 48.98 to 47.38, at 12.7% higher skill-induction token usage. In this setting, Full Evidence yields the best Score and SR among the tested input configurations, while the Work2Skill prompt outperforms the prescribed pipeline at higher induction cost. Together, these comparisons show how evidence and prompt design affect the downstream utility of generated skills.

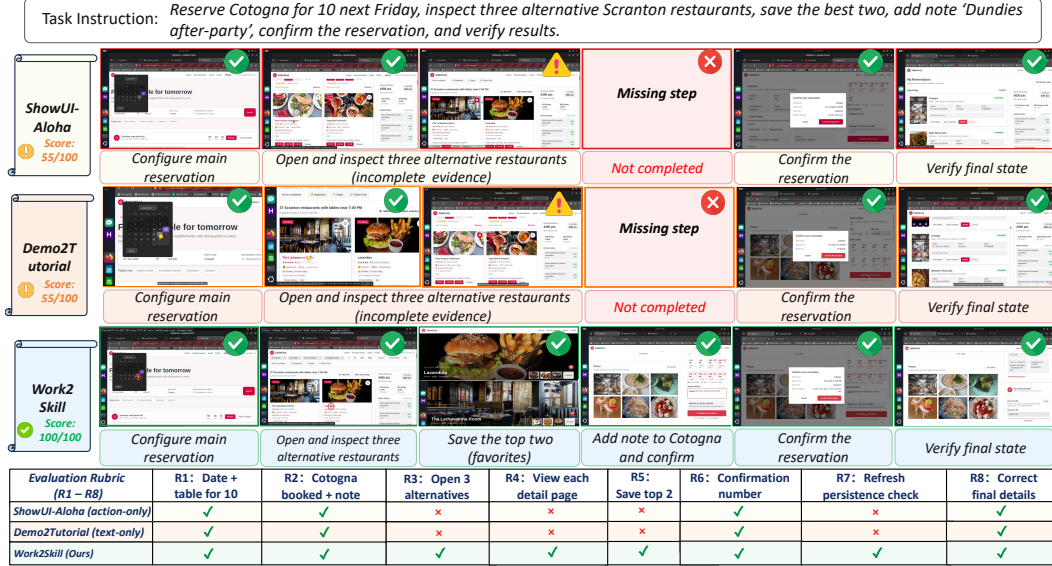


Figure 6: Execution trajectories (top) and rubric outcomes (bottom) for a TableFind reservation with fallbacks, using GPT-5.5 with each method’s extracted guidance. Both baselines leave fallback handling and persistence checks incomplete (55/100); Work2Skill satisfies all eight requirements (100/100). Appendix F.2 provides the detailed rubric and execution analysis.

4.6 CASE STUDY

To illustrate how extracted skill guidance affects execution, we compare GPT-5.5 supplied with outputs from ShowUI-Aloha, D2T, or Work2Skill through the shared text interface (Section 4.1). Each method extracts its guidance from the same human demonstration. Figure 6 shows a Cotogna booking for ten people with three fallback restaurants and two favorites. The fallbacks must be handled before confirmation, while preserving the date, party size, and requested note. With ShowUI-Aloha or D2T guidance, the executor completes the primary booking but leaves fallback inspection, favoriting, and persistence checks incomplete, scoring 55/100 in both conditions. With the skill induced by Work2Skill, it satisfies all eight rubric items (100/100). The generated skill makes intermediate requirements explicit: it rechecks fields that may reset during navigation, excludes the primary restaurant from the fallback set, and defers final confirmation until the fallback steps are complete. The skill preserves dependent subgoals across navigation and checks both the reservation and saved favorites before declaring completion (Appendix F.2).

5 CONCLUSION

We presented Work2Skill, a framework for capturing human GUI experience and converting it into reusable agent skills. WorkRecorder collects aligned multimodal evidence, WorkDemo-350 organizes 350 curated demonstrations, and agentic skill induction combines on-demand evidence inspection with iterative skill writing and revision. Across four execution models, Work2Skill achieves the

highest scores and success rates among the compared methods on MyPCBench Bounded Action and the evaluated OSWorld-Verified subset. Further experiments support reuse under changed task requirements within the same application and transfer between the tested models. These results highlight the value of aligned human demonstrations and flexible evidence exploration for building reusable procedural guidance that computer-use agents can apply through a shared text interface without accessing the original recordings or other demonstration evidence.

REFERENCES

- Reyna Abhyankar, Qi Qi, and Yiyang Zhang. Oworld-human: Benchmarking the efficiency of computer-use agents. *Proceedings of Machine Learning and Systems*, 8:482–494, 2026.
- Saaket Agashe, Kyle Wong, Vincent Tu, Jiachen Yang, Ang Li, and Xin Eric Wang. Agent S2: A Compositional Generalist-Specialist Framework for Computer Use Agents. *CoRR*, abs/2504.00906, 2025. doi: 10.48550/ARXIV.2504.00906.
- Anthropic. Introducing Claude Opus 4.8, May 2026a. URL <https://www.anthropic.com/news/claude-opus-4-8>. May 28, 2026. Accessed September 22, 2026.
- Anthropic. How to create custom skills, 2026b. URL <https://support.claude.com/en/articles/12512198-how-to-create-custom-skills>. Online documentation, “Record a skill” section. Accessed September 20, 2026.
- Zechen Bai, Zhiheng Chen, Yiqi Lin, Kevin Qinghong Lin, Difei Gao, Xiangwu Guo, Xin Wang, and Mike Zheng Shou. Demo2Tutorial: From Human Experience to Multimodal Software Tutorials. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition, CVPR 2026, Denver, CO, USA, June 3-7, 2026*, pp. 29588–29597, 2026. URL https://openaccess.thecvf.com/content/CVPR2026/html/Bai_Demo2Tutorial_From_Human_Experience_to_Multimodal_Software_Tutorials_CVPR_2026_paper.html.
- Aarash Feizi, Shravan Nayak, Xiangru Jian, Kevin Qinghong Lin, Kaixin Li, Rabiul Awal, Xing Han Lù, Johan S Obando Ceron, Juan A Rodriguez, Nicolas Chapados, et al. Grounding computer use agents on human demonstrations. In *International Conference on Learning Representations*, volume 2026, pp. 5181–5215, 2026.
- Lawrence Keunho Jang, Andrew Keunwoo Jang, Jing Yu Koh, and Ruslan Salakhutdinov. MyPCBench: A Benchmark for Personally Intelligent Computer-Use Agents. *CoRR*, abs/2606.16748, 2026. doi: 10.48550/ARXIV.2606.16748.
- Keliang Li, Yansong Li, Hongze Shen, Mengdi Liu, Hong Chang, and Shiguang Shan. LensWalk: Agentic Video Understanding by Planning How You See in Videos. *CoRR*, abs/2603.24558, 2026. doi: 10.48550/ARXIV.2603.24558.
- Yinheng Li, Hailey Hultquist, Justin Wagle, and Kazuhito Koishida. Instruction Agent: Enhancing Agent with Expert Demonstration. *CoRR*, abs/2509.07098, 2025. doi: 10.48550/ARXIV.2509.07098.
- Guangyi Liu, Pengxiang Zhao, Liang Liu, Zhiming Chen, Yuxiang Chai, Yaozhen Liang, Wen-Hao Wang, Siheng Chen, Zhengxi Lu, Shuai Ren, Hao Wang, Shibo He, Yong Liu, and Wen-chao Meng. LearnAct: Few-shot mobile GUI agent with a unified demonstration benchmark. In Maria Liakata, Viviane P. Moreira, Jiajun Zhang, and David Jurgens (eds.), *Findings of the Association for Computational Linguistics: ACL 2026*, pp. 29820–29843, San Diego, California, United States, July 2026. Association for Computational Linguistics. ISBN 979-8-89176-395-1. doi: 10.18653/v1/2026.findings-acl.1491. URL <https://aclanthology.org/2026.findings-acl.1491/>.
- Ziyu Ma, Chenhui Gou, Hengcan Shi, Bin Sun, Shutao Li, Hamid Reza Tofighi, and Jianfei Cai. DrVideo: Document Retrieval Based Long Video Understanding. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition, CVPR 2025, Nashville, TN, USA, June 11-15, 2025*, pp. 18936–18946, 2025. doi: 10.1109/CVPR52734.2025.01764.

- Qirui Mi, Zhijian Ma, Mengyue Yang, Haoxuan Li, Yisen Wang, Haifeng Zhang, and Jun Wang. ProcMEM: Learning Reusable Procedural Memory from Experience via Non-Parametric PPO for LLM Agents. *CoRR*, abs/2602.01869, 2026. doi: 10.48550/ARXIV.2602.01869.
- Shravan Nayak, Xiangru Jian, Kevin Qinghong Lin, Juan A. Rodríguez, Montek Kalsi, Nicolas Chapados, M. Tamer Özsu, Aishwarya Agrawal, David Vázquez, Christopher Pal, Perouz Taslakian, Spandana Gella, and Sai Rajeswar. UI-Vision: A Desktop-centric GUI Benchmark for Visual Perception and Interaction. In *Forty-second International Conference on Machine Learning, ICML 2025, Vancouver, BC, Canada, July 13-19, 2025*, 2025. URL <https://proceedings.mlr.press/v267/nayak25a.html>.
- Nex-AGI. NexAU, 2026. URL <https://github.com/nex-agi/NexAU>. GitHub repository. Accessed September 20, 2026.
- Dang Nguyen, Jian Chen, Yu Wang, Gang Wu, Namyong Park, Zhengmian Hu, Hanjia Lyu, Junda Wu, Ryan Aponte, Yu Xia, Xintong Li, Jing Shi, Hongjie Chen, Viet Dac Lai, Zhouhang Xie, Sungchul Kim, Ruiyi Zhang, Tong Yu, Mehrab Tanjim, Nesreen K. Ahmed, Puneet Mathur, Seunghyun Yoon, Lina Yao, Branislav Kveton, Jihyung Kil, Thien Huu Nguyen, Trung Bui, Tianyi Zhou, Ryan A. Rossi, and Franck Dernoncourt. GUI agents: A survey. In Wanxiang Che, Joyce Nabende, Ekaterina Shutova, and Mohammad Taher Pilehvar (eds.), *Findings of the Association for Computational Linguistics: ACL 2025*, pp. 22522–22538, Vienna, Austria, July 2025. Association for Computational Linguistics. ISBN 979-8-89176-256-5. doi: 10.18653/v1/2025.findings-acl.1158. URL <https://aclanthology.org/2025.findings-acl.1158/>.
- Jingwei Ni, Yihao Liu, Xinpeng Liu, Yutao Sun, Mengyu Zhou, Pengyu Cheng, Dexin Wang, Erchao Zhao, Xiaoxi Jiang, and Guanjuan Jiang. Trace2Skill: Distill Trajectory-Local Lessons into Transferable Agent Skills. *CoRR*, abs/2603.25158, 2026. doi: 10.48550/ARXIV.2603.25158.
- OpenAI. Introducing GPT-5.5, April 2026a. URL <https://openai.com/index/introducing-gpt-5-5/>. April 23, 2026. Accessed September 22, 2026.
- OpenAI. Record & Replay, 2026b. URL <https://learn.chatgpt.com/docs/extend/record-and-replay>. Online documentation. Accessed September 20, 2026.
- Zhiyuan Peng, Xin Yin, Chenhao Ying, Zhe Cui, Zixiang Ding, Zhenhua Liu, Jiang Wu, and Yuan Luo. EvoClawBench: Can Agents Learn Reusable Skills from Their Own Runs? *CoRR*, abs/2607.09711, 2026. doi: 10.48550/ARXIV.2607.09711.
- Yujia Qin, Yining Ye, Junjie Fang, Haoming Wang, Shihao Liang, Shizuo Tian, Junda Zhang, Jiahao Li, Yunxin Li, Shijue Huang, Wanjuan Zhong, Kuanye Li, Jiale Yang, Yu Miao, Woyu Lin, Longxiang Liu, Xu Jiang, Qianli Ma, Jingyu Li, Xiaojun Xiao, Kai Cai, Chuang Li, Yaowei Zheng, Chaolin Jin, Chen Li, Xiao Zhou, Minchao Wang, Haoli Chen, Zhaojian Li, Haihua Yang, Haifeng Liu, Feng Lin, Tao Peng, Xin Liu, and Guang Shi. UI-TARS: Pioneering Automated GUI Interaction with Native Agents. *CoRR*, abs/2501.12326, 2025. doi: 10.48550/ARXIV.2501.12326.
- Qwen Team. Qwen3.5: Towards native multimodal agents, February 2026. URL <https://qwen.ai/blog?id=qwen3.5>.
- Mirac Suzgun, Mert Yüksekönül, Federico Bianchi, Dan Jurafsky, and James Zou. Dynamic Cheatsheet: Test-Time Learning with Adaptive Memory. In *Proceedings of the 19th Conference of the European Chapter of the Association for Computational Linguistics, EACL 2026 - Volume 1: Long Papers, Rabat, Morocco, March 24-29, 2026*, pp. 7080–7106, 2026. doi: 10.18653/V1/2026.EACL-LONG.333.
- Fei Tang, Haolei Xu, Hang Zhang, Siqi Chen, Xingyu Wu, Yongliang Shen, Wenqi Zhang, Guiyang Hou, Zeqi Tan, Yuchen Yan, Kaitao Song, Jian Shao, Weiming Lu, Jun Xiao, and Yueting Zhuang. A Survey on (M)LLM-Based GUI Agents. *CoRR*, abs/2504.13865, 2025. doi: 10.48550/ARXIV.2504.13865.
- Xinyuan Wang, Bowen Wang, Dunjie Lu, Junlin Yang, Tianbao Xie, Junli Wang, Jiaqi Deng, Xiaole Guo, Yiheng Xu, Chen Henry Wu, Zhennan Shen, Zhuokai Li, Ryan Li, Xiaochuan Li, Junda Chen, Boyuan Zheng, Peihang Li, Fangyu Lei, Ruisheng Cao, Yeqiao Fu, Dongchan

- Shin, Martin Shin, Jiarui Hu, Yuyan Wang, Jixuan Chen, Yuxiao Ye, Danyang Zhang, Yipu Wang, Heng Wang, Diyi Yang, Victor Zhong, Y. Charles, Zhilin Yang, and Tao Yu. Open-*CUA*: Open Foundations for Computer-Use Agents. In *Advances in Neural Information Processing Systems 38: Annual Conference on Neural Information Processing Systems 2025, NeurIPS 2025, San Diego, CA, USA, December 2-7, 2025 / Mexico City, Mexico, November 30 - December 5, 2025*, 2025a. URL http://papers.nips.cc/paper_files/paper/2025/hash/cc7ae529e945226b0d52ea4ac478c4f3-Abstract-Conference.html.
- Ziyang Wang, Honglu Zhou, Shijie Wang, Junnan Li, Caiming Xiong, Silvio Savarese, Mohit Bansal, Michael S Ryoo, and Juan Carlos Niebles. Active video perception: Iterative evidence seeking for agentic long video understanding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 9088–9099, 2026.
- Zora Zhiruo Wang, Apurva Gandhi, Graham Neubig, and Daniel Fried. Inducing Programmatic Skills for Agentic Tasks. *CoRR*, abs/2504.06821, 2025b. doi: 10.48550/ARXIV.2504.06821.
- Peng Xia, Jianwen Chen, Hanyang Wang, Jiaqi Liu, Kaide Zeng, Yu Wang, Siwei Han, Yiyang Zhou, Xujiang Zhao, Haifeng Chen, Zeyu Zheng, Cihang Xie, and Huaxiu Yao. SkillRL: Evolving Agents via Recursive Skill-Augmented Reinforcement Learning. *CoRR*, abs/2602.08234, 2026. doi: 10.48550/ARXIV.2602.08234.
- Yixiong Xiao, Lang An, Hucheng Yang, Pinxue Ma, Yongquan Chen, Jingjia Cao, Yusai Zhao, Ting Wang, Ting Liu, Siqi Bao, et al. Omegause-sop: Sop engineering for professional computer use from human demonstrations. *arXiv preprint arXiv:2609.02149*, 2026.
- Tianbao Xie, Danyang Zhang, Jixuan Chen, Xiaochuan Li, Siheng Zhao, Ruisheng Cao, Toh Jing Hua, Zhoujun Cheng, Dongchan Shin, Fangyu Lei, Yitao Liu, Yiheng Xu, Shuyan Zhou, Silvio Savarese, Caiming Xiong, Victor Zhong, and Tao Yu. OSWorld: Benchmarking Multimodal Agents for Open-Ended Tasks in Real Computer Environments. In *Advances in Neural Information Processing Systems 37: Annual Conference on Neural Information Processing Systems 2024, NeurIPS 2024, Vancouver, BC, Canada, December 10 - 15, 2024*, 2024. URL http://papers.nips.cc/paper_files/paper/2024/hash/5d413e48f84dc61244b6be550f1cd8f5-Abstract-Datasets_and_Benchmarks_Track.html.
- Honjar Xing, Jefferson Lin, and Henry Lieberman. How Should Agents Read Demonstrations? Hierarchical Structure Beats Flat Action Logs. *CoRR*, abs/2606.20978, 2026. doi: 10.48550/ARXIV.2606.20978.
- Kaisen Yang, Zheng Jiang, Yuzhao Peng, Houde Qian, Boshi Zhang, Youjie Zheng, Shijin Hong, Qingle Liu, Ruoyu Han, Bohan Lyu, Bingxiang He, Eren Cai, Calvin Xiao, and Qinhuai Na. Scalable Behaviour Cloning on Browser Using via Skill Distillation. *CoRR*, abs/2606.32014, 2026a. doi: 10.48550/ARXIV.2606.32014.
- Shidong Yang, Ziyu Ma, Tongwen Huang, Xucong Wang, Renda Li, Yiming Hu, Yong Wang, and Xiangxiang Chu. SkillForge: Evolving Verifiable Skills for Reinforcement Learning Agents. *CoRR*, abs/2608.24747, 2026b. doi: 10.48550/ARXIV.2608.24747.
- Yutao Yang, Junsong Li, Qianjun Pan, Bihao Zhan, Yuxuan Cai, Lin Du, Jie Zhou, Kai Chen, Qin Chen, Xin Li, Bo Zhang, and Liang He. AutoSkill: Experience-Driven Lifelong Learning via Skill Self-Evolution. *CoRR*, abs/2603.01145, 2026c. doi: 10.48550/ARXIV.2603.01145.
- Zeyuan Yang, Delin Chen, Xueyang Yu, Maohao Shen, and Chuang Gan. VCA: Video Curious Agent for Long Video Understanding. In *IEEE/CVF International Conference on Computer Vision, ICCV 2025, Honolulu, HI, USA, October 19-25, 2025*, pp. 20168–20179, 2025. doi: 10.1109/ICCV51701.2025.01876.
- Yiwen Yin, Yu Mei, Chun Yu, Toby Jia-Jun Li, Aamir Khan Jadoon, Sixiang Cheng, Weinan Shi, Mohan Chen, and Yuanchun Shi. From Operation to Cognition: Automatic Modeling Cognitive Dependencies from User Demonstrations for GUI Task Automation. In *Proceedings of the 2025 CHI Conference on Human Factors in Computing Systems, CHI 2025, Yokohama, Japan, 26 April 2025- 1 May 2025*, pp. 684:1–684:24, 2025. doi: 10.1145/3706598.3713356.

- Huaying Yuan, Zheng Liu, Junjie Zhou, Hongjin Qian, Ji-Rong Wen, and Zhicheng Dou. VideoDeepResearch: Long Video Understanding With Agentic Tool Using. *CoRR*, abs/2506.10821, 2025. doi: 10.48550/ARXIV.2506.10821.
- Barry Zhang, Keith Lazuka, and Mahesh Murag. Equipping agents for the real world with Agent Skills, 2025. URL <https://www.anthropic.com/engineering/equipping-agents-for-the-real-world-with-agent-skills>. Anthropic Engineering, October 16, 2025. Accessed September 21, 2026.
- Haozhen Zhang, Quanyu Long, Jianzhu Bao, Tao Feng, Weizhi Zhang, Haodong Yue, and Wenya Wang. MemSkill: Learning and Evolving Memory Skills for Self-Evolving Agents. *CoRR*, abs/2602.02474, 2026a. doi: 10.48550/ARXIV.2602.02474.
- Kangning Zhang, Shuai Shao, Qingyao Li, Jianghao Lin, Lingyue Fu, Shijian Wang, Wenxiang Jiao, Yuan Lu, Weiwen Liu, Weinan Zhang, and Yong Yu. MMSkills: Towards Multimodal Skills for General Visual Agents. *CoRR*, abs/2605.13527, 2026b. doi: 10.48550/ARXIV.2605.13527.
- Qizheng Zhang, Changran Hu, Shubhangi Upasani, Boyuan Ma, Fenglu Hong, Vamsidhar Kamanuru, Jay Rainton, Chen Wu, Mengmeng Ji, Hanchen Li, et al. Agentic context engineering: Evolving contexts for self-improving language models. In *International Conference on Learning Representations*, volume 2026, pp. 86069–86100, 2026c.
- Weijia Zhang, Kunlun Zhu, Zeyi Liu, Yinting Chen, Tianyi Ma, Jiateng Liu, Jiaxun Zhang, Bingxuan Li, Xiangru Tang, Heng Ji, and Jiaxuan You. CUADebug: Diagnosing and Repairing Computer-Use Agent Failures. *CoRR*, abs/2608.02643, 2026d. doi: 10.48550/ARXIV.2608.02643.
- Yichun Zhang, Xiangwu Guo, Yauhong Goh, Jessica Hu, Zhiheng Chen, Xin Wang, Difei Gao, and Mike Zheng Shou. ShowUI-Aloha: Human-Taught GUI Agent. *CoRR*, abs/2601.07181, 2026e. doi: 10.48550/ARXIV.2601.07181.
- Zirui Zhao, Jun Hao Liew, Yan Yang, Wenzhuo Yang, Ziyang Luo, Doyen Sahoo, Silvio Savarese, and Junnan Li. GPA: Learning GUI Process Automation from Demonstrations. *CoRR*, abs/2604.01676, 2026. doi: 10.48550/ARXIV.2604.01676.
- Boyuan Zheng, Michael Y. Fatemi, Xiaolong Jin, Zora Zhiruo Wang, Apurva Gandhi, Yueqi Song, Yu Gu, Jayanth Srinivasa, Gaowen Liu, Graham Neubig, and Yu Su. SkillWeaver: Web Agents can Self-Improve by Discovering and Honing Skills. *CoRR*, abs/2504.07079, 2025. doi: 10.48550/ARXIV.2504.07079.

A RECORDER IMPLEMENTATION

A.1 ARCHITECTURE AND DEPLOYMENT

WorkRecorder consists of a native macOS recording application, a local service for capture coordination and storage, and accessibility providers. In local macOS mode, the application records the selected screen region and input activity, with available accessibility evidence supplied by the macOS provider. For a remote Linux workflow, recording remains on the Mac, while an AT-SPI collector runs inside the target desktop session. The Linux launcher connects this collector to the local service through an SSH tunnel; the remote-desktop client supplies the displayed workflow. Task initialization and official benchmark evaluation are handled separately from recording.

Video and input capture. The macOS application records a selected screen region through ScreenCaptureKit and encodes video with H.264. CoreGraphics event taps supply mouse and keyboard activity, which is also grouped into semantic operations. The operator can pause, resume, stop, and review a recording. Full keystroke capture is disabled by default; when enabled, it records key presses and releases, characters, modifiers, and timestamps. Otherwise, ordinary typing is represented through aggregate typing events. The capture policy therefore determines the detail available in the input stream.

Accessibility evidence. The Linux collector supports X11/Xorg desktops and uses AT-SPI to obtain Accessibility Trees, interface events, and target UI elements. Its default periodic tree sampler runs every two seconds, with limits of six levels and 400 nodes; these are implementation defaults rather than dataset collection settings. Events may reference the latest completed tree snapshot, with its sampling timestamps. Target-element queries return available names, roles, and bounds at a screen location. The recorder maps positions in the displayed remote-desktop region to Linux desktop coordinates for these queries. Availability depends on application accessibility support and sampling limits.

Target-element association. When resolving clicks from accessibility snapshots, the resolver considers nodes whose bounds contain the click coordinate. It ranks these candidates by node confidence and interactive role, with an area penalty favoring smaller controls. Resolution records retain the selected source, confidence, and evidence anchor; uncertain cases can remain flagged for review.

The remote Linux probing path is triggered by clicks and drags. Configured remote-display geometry maps local pointer positions to Linux desktop pixels; positions outside the displayed desktop do not trigger a point probe. The AT-SPI watcher combines bounded point queries with nearby focus, selection, and state-change events. Its point-query ranking prioritizes active windows, named interactive controls, other named nodes, greater depth, and smaller area, in that order. Event correlation normally checks whether the target bounds contain the pointer position, with additional handling for transient controls such as menus that disappear after selection. Pointer-resolution records retain the originating pointer sequence identifier and distinguish resolved, coarse, unresolved, and error or timeout outcomes.

During export, recorded probe results are associated with actions using their trigger’s monotonic timestamp and action kind, with a nearest-action fallback within 2.5 seconds. In normal export mode, a missing click or drag target can also be recovered from the nearest specific accessibility event within a 3-second window. This backfill excludes generic page or window focus and uses each candidate event at most once. For drags, the matching anchor is the drag start, computed from the release time and recorded duration. Backfilled records retain their source, event identifier, and time offset. These are heuristic temporal associations; the matching windows are implementation tolerances, not measured accuracy bounds. Keyboard input does not trigger this Linux target probe. AX snapshots are attached independently as interface context.

A.2 KEYFRAME SELECTION

Capture triggers. WorkRecorder selects keyframes primarily around recorded operations and interface transitions. Recording start, stop, pause, and resume provide boundary frames, while users can explicitly mark additional frames. Routine candidates are triggered by clicks, drag releases,

scroll completion, recognized hotkeys, command submission, and window or tab switches. A typing pause can trigger a frame when text is submitted or a typing milestone is reached; the default milestone requires at least eight characters or input events in the typing segment. Individual key presses and releases do not independently trigger screenshots. Additional enabled policies can request frames at scroll milestones or when a provider reports an error or warning surface.

Action context and capture timing. For clicks, hotkeys, and window or tab switches, the recorder can reuse a recent preceding keyframe as before-action context, with a default freshness limit of 1.5 seconds. A new before-action capture requires an explicit pre-action event; otherwise this context can remain unavailable. Result frames use a bounded settling window to allow the interface to respond. With adaptive polling enabled, capture can proceed when a provider reports readiness or when visual or text observations stabilize after a detected change; the default stability rule requires two consecutive stable samples. Waiting limits depend on the action type. If settling times out, the policy can capture the available state and flag it for review, or suppress the candidate. Thus, a result-frame link does not by itself establish that the interface has finished updating.

Candidate filtering. The planner removes duplicate triggers within an action’s timing plan. The scheduler applies a minimum gap between separate plans, limits result frames per action, and enforces capture budgets. When change or quality signals are available, it can also reject candidates with insufficient change or information gain. Defaults include a 500-ms gap, at most two result-related candidates per action, and a session budget of 64 keyframes; required boundary frames and explicit user marks have exemptions. These are implementation defaults, not verified settings for every collected demonstration. Retained keyframes carry identifiers and timestamps, while trigger decisions retain acceptance or rejection reasons. Frame reuse and candidate filtering mean that actions and keyframes need not have a one-to-one correspondence. Exported image counts are distinguished from recorded keyframe counts in Appendix B.

A.3 TIME ALIGNMENT

The recorder maps evidence onto the stitched video’s timeline. Native input uses a monotonic timestamp anchored to the first captured frame of each recording segment, rather than the time at which recording was requested. Remote Linux events use wall-clock timestamps, which are projected onto the same timeline using the corresponding first-frame wall-clock anchors and segment durations. Segment offsets account for pause/resume boundaries; remote events falling within a pause have no corresponding video frame. The Linux launcher checks host clock agreement before recording and rejects a difference greater than two seconds. This check is a deployment condition, not a measured alignment-error bound. Legacy recordings without first-frame wall-clock anchors use the session start as a fallback.

B EVIDENCE SCHEMA

B.1 EPISODE FILES FOR SKILL INDUCTION

The induction agent reads a per-task episode directory containing the task and its recorded evidence. The benchmark converter creates three core files: `task.json`, `episode.json`, and `trace/actions.jsonl`. Input logs, video, summaries, and images are included when available (Table 4). The task file must contain the authoritative instruction and task inputs; a placeholder with only an inferred task ID is insufficient for induction. The converter excludes the `grading` field from this file.

The `episode.json` manifest identifies the task and recording, records duration and evidence counts, and indexes the available files. Evidence paths are relative to the episode directory. Its `source` entry records the original export location for provenance; that location is not an additional input root for the agent.

Table 4: Files exposed to the induction agent in a converted episode. The first three files form the core structure; the remaining artifacts are included when available.

File or directory	Content
<code>task.json</code>	Task instruction and associated task metadata.
<code>episode.json</code>	File references, recording metadata, and counts.
<code>trace/actions.jsonl</code>	Normalized action records in temporal order.
<code>trace/keylog.jsonl</code>	Recorded input-event log.
<code>video.mp4</code>	Recording video.
<code>summary.md</code>	Textual operation summary.
<code>evidence/</code>	Evidence images, with available image manifests and action-association indices.

B.2 ACTION RECORDS AND IMAGE ASSOCIATIONS

Each line of `trace/actions.jsonl` describes a recorded action, with its identifier, sequence index, action kind, video-relative timestamp, and caption. Coordinates and target information are retained when available. The following excerpt reproduces selected fields from the first action in the `hard_app-f016` episode used in Appendix F:

```
{
  "sequence_index": 0,
  "action_id": "act_OJYEZK480Ta_81AR",
  "kind": "click",
  "media_time_ms": 3908,
  "caption": "Left Click push button - Calendar",
  "target_label": "push button - Calendar"
}
```

When present, `evidence/manifest.json` and `evidence/image_actions.jsonl` provide the image index and its input-event and trajectory associations. In this episode, the first image-index record references the same `action_id`, with `frame_time_ms` = 3908 and `action_delta_ms` = 0. These fields let the agent locate the corresponding event frame and nearby video observations. A nonzero `action_delta_ms` indicates an approximate temporal match. An event frame captures the interface near the input event; verifying its effect may require a subsequent observation.

B.3 EVIDENCE AVAILABILITY AND COUNTS

The schema describes the files available within an episode, rather than guaranteeing every modality for every demonstration. Target metadata in an action record does not imply that a complete accessibility-tree sequence is included. In Linux mode, the continuous tree sequence remains in the Linux evidence directory, while the Mac export can preserve snapshots received with events. The induction agent can inspect only the evidence provided within its exposed input directory.

The manifest distinguishes action records, input events, recorded keyframes, and exported evidence images. Table 1 reports mean counts of action records and exported images per episode. The `hard_app-f016` episode, for example, contains 37 action records and 23 evidence images, alongside 176 input events and 29 recorded keyframes.

Action and image counts differ because they use separate grouping rules. Image export pairs key presses with releases, groups double clicks, and merges adjacent typing evidence into one image with the last frame and a combined text annotation. Scroll records do not independently generate images, while action preprocessing merges adjacent typing and scroll records.

The converter sets `counts.keyframes` from the recording’s keyframe count, falling back to the number of loaded keyframe records; `counts.evidence_images` counts images copied into the main evidence collection. Exporting all available keyframe screenshots is a separate option that creates `evidence/all_keyframes/` and its own manifest. Recorded keyframes thus reflect the capture policies in Appendix A.2; exported images reflect subsequent evidence processing.

C EVIDENCE-EXPLORATION TOOL DEFINITIONS

Table 5: Implemented induction tools. NexAU additionally provides LoadSkill for loading the bundled authoring policy.

Tool	Capability
<code>list_directory</code>	List files and subdirectories within an exposed directory.
<code>glob</code>	Find files matching a glob pattern within the exposed input or output directory.
<code>read_file</code>	Read text and structured evidence with line numbers and pagination.
<code>read_visual_evidence</code>	Return an ordered batch of 1–20 images labeled with their source paths.
<code>get_video_metadata</code>	Inspect video duration, dimensions, frame rate, codec, and file size.
<code>watch_video</code>	Sample timestamped frames over a selected interval, subject to a frame limit.
<code>extract_video_frames</code>	Request frames at selected millisecond timestamps.
<code>write_file</code>	Create or replace a complete output file.
<code>finalize_extraction</code>	Check output structure and tool-use requirements, then write the extraction manifest on success.

The input directory is exposed as `.` and generated files as `output/`. File tools resolve paths within these roots; writes are limited to the output directory and cannot replace runtime-owned manifests or logs. Task interpretation, action selection, and comparisons between observations are performed by the agent using the returned evidence. The following descriptions summarize the registered tools and their principal arguments.

File discovery and reading. `list_directory` takes `dir_path`; `glob` takes a pattern and optional `dir_path`. Both support filtering options. `read_file` takes `file_path`, with optional zero-based line offset and limit. It handles text, JSON, JSONL, YAML, and Markdown as text, returns numbered lines and continuation guidance, and directs image and video requests to the corresponding visual tools. A response is limited to 20,000 characters of numbered content; individual long lines are truncated. This interface provides access to task metadata, action traces, input logs, image indices, and any exported structured UI artifacts.

Image inspection. `read_visual_evidence` takes an ordered `file_paths` list containing 1–20 distinct images. Optional `image_detail` and `image_max_size` control detail and resizing. Returned images preserve the requested order and have source-path labels, allowing the agent to compare selected states while retaining their file identities.

Video inspection. `get_video_metadata` takes `file_path` and reports metadata obtained with `ffprobe`. `watch_video` takes the video path and optional `start_ms`, `end_ms`, `interval_ms`, `max_frames`, and `frame_width`. It returns sampled images; defaults are a 5,000-ms interval, at most 12 frames, and a width of 1,280 pixels. The interval must be at least 100 ms and each call can request at most 20 frames. `extract_video_frames` instead takes a list of 1–20 `timestamps_ms` and an optional `frame_width`. Both use `ffmpeg` and return timestamp labels. Near the video end, the requested time can be adjusted backward to obtain a decodable frame; the label reports the sampling time used and the original request when adjusted. Finalization checks that metadata inspection preceded sampling for the same video path.

Writing and finalization. `write_file` takes `file_path` and the complete content, creating or replacing a file. `finalize_extraction` takes no required arguments. It requires at least one skill, a recorded read of an input task, json, valid skill frontmatter and a nonempty body, a `write_file` call and a subsequent `read_file` call for every final skill, and the video-metadata ordering described above. The skill name must use lowercase hyphen-case and match its folder; its description must

be nonempty. Heuristic checks for fixed coordinates, local paths, and timestamps produce warnings rather than semantic correctness guarantees.

C.1 EXAMPLE EXPLORATION TRACE

An illustrative sequence using these tools is:

1. load `skill-creator`, locate the authoritative `task.json`, and read it with `read_file`;
2. discover evidence files with `list_directory` and `glob`, then read relevant traces and image indices;
3. inspect representative initial, critical, and final-state images with `read_visual_evidence`;
4. if a transition remains unclear, read the video’s metadata and use `watch_video` or `extract_video_frames` to examine it;
5. write a skill with `write_file`, inspect further evidence if needed, and revise the draft; and
6. read the final `SKILL.md` after its last write and call `finalize_extraction`.

This is an example, not a prescribed sequence of all tool calls. The system prompt sets the task-first and representative-image requirements; the agent chooses the detailed exploration and revision sequence. On successful finalization, the runtime manifest records skill hashes, inspected source paths, validation results, and provenance. Separate run logs capture tool activity and available usage information. These records provide run-level provenance without asserting a source citation for every generated skill statement.

D PROMPTS

D.1 INDUCTION SYSTEM PROMPT

The induction system prompt sets the task, evidence-access boundaries, and completion requirements. Its instructions are reproduced below.

Induction System Prompt

You extract reusable NexAU skills from one recorded computer-use benchmark episode.

- Stay within the exposed input and output roots. Never seek grading rubrics, judge output, reference answers, or files outside them.
- First load `skill-creator`; it is the sole authority for Skill boundaries and content. Do not restate, shorten, or weaken its authoring rules.
- Read the authoritative `task.json` before interpreting the trajectory. Treat traces and recordings as fallible evidence; recording completion is not task success.
- When indexed evidence images exist, inspect representative initial, critical, and final-state frames. Before sampling any video, call `get_video_metadata` for that exact path.
- Write generated Skill folders only under the output root. Do not create or edit runtime-owned `extraction-manifest.json`, `run-events.jsonl`, `run-metadata.json`, or `run-summary.json`.
- Read each final `SKILL.md` after its last write, then call `finalize_extraction`. Correct every reported error and retry. Only successful finalization completes the task.

D.2 NEXAU AGENT CONFIGURATION AND COMPLETION

The launcher creates one NexAU agent with the system prompt, registered tools, and bundled `skill-creator` policy. Its initial message directs the agent to load that policy, read the task, create skills under the output root, read back each final skill, and finalize. The implementation uses

structured tool calls; it does not prescribe a separate controller state or a numerical information-gain objective. Evidence inspection and skill authoring occur in the same agent conversation.

The model and endpoint are supplied at launch, with configurable iteration, context, output, temperature, and reasoning settings. Our experiment settings are reported in Appendix E.5. Provider-request retries in the supplied implementation are configured with 30 attempts, a maximum backoff of 30 seconds, and a 900-second request timeout.

The prompt instructs the agent to correct finalization errors and retry. `finalize_extraction` returns diagnostics on failure and atomically writes `extraction-manifest.json` on success. The launcher checks that finalization succeeded after the agent returns; an ordinary text response alone leaves the run incomplete. The runtime also writes configuration provenance, event logs, and a summary of status, timing, tool activity, and available token usage. Structural validation and recorded call ordering are enforced by code; the authoring policy’s requirements for evidence grounding, workflow completeness, and appropriate generalization remain instructions to the model.

D.3 PIPELINE PROMPT

The Pipeline Prompt baseline changes only the induction system prompt, keeping the model, input evidence, tools, skill-authoring policy, and output format the same as Work2Skill. It expands the concise bootstrap prompt into an explicit workflow for reading the task, inventorying artifacts, inspecting structured evidence and images, sampling video, and authoring and validating skills. Both conditions load the same `skill-creator` policy, read back final skill files, and call `finalize_extraction`.

The detailed prompt prescribes an inspection order and frame-selection rules, including a focused initial image batch and further inspection when ambiguity remains. One possible explanation for the prompt-ablation results (Section 4.5) is that a predefined exploration route may narrow the range of evidence the model considers. The baseline prompt is reproduced below, with formatting adapted for readability.

Pipeline Prompt

You extract reusable NexAU skills from recorded computer-use benchmark artifacts.

Boundaries

- The tools expose one logical input root and one logical output root. Treat those boundaries as absolute.
- Never seek grading rubrics, judge output, reference answers, or files outside the exposed roots.
- The runtime owns `extraction-manifest.json`, `run-events.jsonl`, `run-metadata.json`, and `run-summary.json`. Never create, edit, or overwrite those files.
- A normal text response does not complete the task. Only a successful `finalize_extraction` call completes it.
- The task instruction is authoritative. Recording status only means recording finished; it does not prove task success.
- Read the authoritative task instruction before interpreting the trajectory. Preserve its goals, quantities, exclusions, ordering constraints, and requested scope while parameterizing episode-specific values.
- A demonstrated state change teaches interface mechanics but does not authorize a broader goal or an additional persistent mutation.
- Treat screenshots, action logs, key logs, summaries, and video as fallible evidence that must be reconciled.
- Before the first `watch_video` or `extract_video_frames` call for any video path, call `get_video_metadata` for that exact path. This ordering is irreversible within a run: calling metadata after sampling cannot repair it, and runtime event logs must never be edited.

Pipeline Prompt (continued)

Image Evidence

- Files under an episode's `evidence/` directory are event-aligned evidence frames, not arbitrary screenshots. They are decoded from the episode video at `frame_time_ms`, which is derived from a grouped key or pointer event after applying `frame_offset_ms`.
- Read `evidence/manifest.json` or `evidence/image_actions.jsonl` before selecting images. These indexes connect each image to its event kind, event time or interval, pointer points, and the nearest trajectory `action_id` and caption. A nonzero `action_delta_ms` means the event and trajectory action were only approximately aligned.
- The image annotation is generated evidence metadata, not part of the recorded application UI. Its top banner describes the input event and matched trajectory action. Click and double-click frames mark the pointer target; drag frames show the recorded path; typing frames are taken at the end of the grouped typing interval and describe the recorded keys.
- Use these full-resolution frames to identify visible labels and semantic controls, verify which item or field was targeted, read entered or selected values, understand drag endpoints, and compare UI state across important actions. They are especially useful where coarse video sampling makes text or state changes ambiguous.
- An event frame shows the UI at or near the input event. Do not assume it proves the action's resulting state. Verify cause and effect by comparing the next relevant evidence frame or by extracting a video frame shortly after the event. Because images are event-triggered, the final successful state may require inspection near the end of the video.
- Pointer coordinates, timestamps, generated crosshairs or paths, and one episode's action caption are trace evidence only. Convert them into semantic targets and observable state; never copy them into a reusable skill as fixed instructions.
- If an episode contains evidence images, inspect 1–20 representative images together with `read_visual_evidence`. Cover the initial state, critical choices or inputs, important transitions, and the final observable outcome. `watch_video` samples do not replace this full-resolution inspection.

Workflow

1. Locate and read the authoritative `task.json` before interpreting the trajectory, then inventory the input recursively with `list_directory` and `glob`. Pass `dir_path: "."` for the logical input root; use `dir_path: "output"` for generated files.
2. Read textual and structured artifacts with `read_file`. The same tool handles text, JSON, JSONL, YAML, and Markdown.
3. Read the evidence index, select representative initial, critical, and final event frames, and inspect them with `read_visual_evidence`. Prefer one focused batch and inspect more only when ambiguity remains. A one-item `file_paths` list reads a single frame; the tool accepts up to 20 paths.
4. For video, call `get_video_metadata` for the exact video path before any sampling. Only then use `watch_video` for coarse or local interval sampling and `extract_video_frames` at exact action timestamps when details matter.
5. Load `skill-creator` before authoring output.
6. Infer reusable procedures, semantic target-selection rules, observable completion checks, and supported recovery behavior. Separate these from episode-specific values and incidental human actions. Keep phases in one composite Skill when they share state, task-derived data, requested counts, or required order. Split only independently invocable capabilities.
7. Write each skill as `<skill-name>/SKILL.md` under the output root. Add references or scripts only when they directly improve reuse.
8. Before finalizing, read every final `SKILL.md` back with `read_file` after its last write and self-review it:
 - `SKILL.md` starts with YAML frontmatter containing a lowercase hyphen-case `name` matching its folder and a non-empty `description`.
 - The body is non-empty, reusable, and uses semantic targets rather than fixed coordinates.

Pipeline Prompt (continued)

- Every explicit task goal, constraint, requested quantity, selection rule, scope, and required ordering relationship needed at runtime is present in the Skill.
 - Every persistent state change instructed by the skill is authorized by the task.
 - It contains no machine paths, episode-specific timestamps, action indexes, session IDs, or instance values presented as general procedure.
 - Any material uncertainty is expressed in the Skill as an observable conditional check or limitation.
9. Call `finalize_extraction`. It confirms that `task.json` was read, every final Skill was read back after its last write, video metadata ordering was respected, and all final Skill files are valid. It writes the runtime-owned manifest. If it reports any problem, correct the output and call it again. Do not finish with an ordinary text response.

Quality Rules

- Do not encode fixed screen coordinates, action sequence indexes, timestamps, local machine paths, session IDs, or one recording's dates, names, booking IDs, and other instance values as general procedure.
- Prefer semantic UI roles, visible labels, relative state, and task-derived selection criteria.
- Omit actions that appear to be retries, misclicks, idle behavior, or exploratory scrolling unless they reveal a reusable recovery strategy.
- State only what the instruction or observable artifacts support. Express material uncertainty as an observable check instead of inventing hidden success criteria.
- Use the minimum sufficient operational detail. The Skill must remain executable without the source recording or extraction manifest.

D.4 SKILL-CREATOR**Skill-Creator**

```

---
name: skill-creator
description: Create self-contained, operationally complete skills from
inspected computer-use benchmark evidence. Use when an extractor must convert
task instructions, action traces, screenshots, and video observations into
portable skill folders without copying episode-specific details.
---
```

Create Reusable Skills

Convert observed task behavior into instructions that another agent can execute with fresh task inputs. Describe stable decisions, semantic targets, visible state, completion checks, and supported recovery rather than replaying the recorded trajectory. This Skill is the authoring policy for generated Skills; do not replace its requirements with a shorter summary.

Runtime Contract

The execution agent receives the generated Skill and its bundled resources, not the source recording, action trace, or extraction manifest. Put every correctness-critical instruction in `SKILL.md`; supporting references must not be required to reconstruct an omitted workflow, formula, selection rule, quantity, ordering constraint, stop condition, or completion check.

For a graphical computer-use task, preserve the interaction modality. Instruct the agent to make task-state changes through visible application controls and verify them in the visible application. Never substitute an API, database edit, script, browser console, developer tool, or other hidden state mutation unless the authoritative task explicitly requires that mechanism.

Skill-Creator (continued)

Length is not a quality target. Remove generic explanation and trace provenance, not operational invariants. If removing a detail could change the selected target, computed value, action order, affected quantity, visible success state, or recovery behavior, retain it.

Define the Skill Boundary

Create one Skill for each coherent reusable capability. Keep phases together when they exchange task-derived data, share application state or counts, or must execute in a particular order. Split Skills only when each capability is independently invocable and useful; do not fragment one workflow merely to make individual files shorter.

Choose a short lowercase hyphen-case name under 64 characters. Use the same name for the output folder and the frontmatter `name`.

Separate Procedure from Trace

Treat the task instruction as the goal and the recording as fallible evidence. Read the task first, then reconcile task data, action logs, evidence images, and video before stating the reusable procedure. Recording completion alone does not prove task success.

A recorded state change demonstrates interface mechanics but does not authorize an extra persistent mutation. Preserve only state changes required by the task, and retain:

- semantic application, page, dialog, field, item, and control names;
- rules for choosing the correct target from changing task inputs;
- exact formulas, operands, units, basis, thresholds, rounding rules, and where each computed result is used;
- requested quantities and scope, including per-item repetition and count-based stop conditions;
- dependencies, required order, and data or state passed between phases;
- visible checks after critical mutations and a final observable completion check, including refresh or reopen checks when persistence matters;
- evidence-supported recovery from loading delays, stale searches, hidden controls, misclicks, dialogs, validation errors, and partial completion.

Remove screen coordinates, action indexes, timestamps, session identifiers, local machine paths, and retries or idle actions that do not teach recovery. Replace one episode's names, dates, IDs, routes, values, filenames, and messages with task-derived parameters when they are inputs rather than reusable constants.

Parameterize episode-specific values without abstracting away the formula, threshold, relationship between inputs, requested count, ordering constraint, selection rule, or visible verification that makes the procedure correct. Do not promote one observed layout, value, or incidental action into a universal requirement.

When evidence is incomplete, state an observable conditional check or supported limitation in the Skill. Never invent a hidden rubric or success condition.

Write the Skill

Create `<skill-name>/SKILL.md` with `write_file`. Start with exactly this frontmatter shape:

```
---
name: skill-name
description: Explain what the skill does and the situations that should
trigger it.
---
```

Write the body in clear imperative language. Include the complete workflow, selection and calculation rules, scope and count constraints, phase handoffs, visible completion checks, and only recovery guidance supported by evidence. Avoid introductory material a capable execution agent already knows, but never remove a step, dependency, decision, stop condition, or recovery check that can affect correctness.

Skill-Creator (continued)

Use semantic UI targets instead of fixed coordinates. When labels or layouts may vary, give a stable visible role or relationship that identifies the target without guessing. For persistent changes, verify the resulting visible state; refresh, revisit, or reopen the relevant view when the observed workflow shows that this is necessary to distinguish a saved result from a transient one.

Add `references/` only for genuinely supporting knowledge, never as a place to hide required runtime instructions. Add `scripts/` or `assets/` only when they are essential to reuse and their correctness can be established from the available evidence. Do not initialize templates, run packaging scripts, or create archives.

Self-Review

Before finalization, read every final `SKILL.md` back with `read_file` after its last write and verify:

- the folder name and frontmatter name match, the description identifies the right trigger, and the body is non-empty;
- an execution agent can complete the workflow without the source recording, trace, extraction manifest, or unstated episode knowledge;
- graphical tasks make state changes through visible UI actions and do not offer backend or developer shortcuts unless the task explicitly requires one;
- every explicit goal, formula, operand, unit, quantity, scope, selection rule, ordering relationship, phase handoff, and count-based stop condition needed at runtime is present;
- semantic targets replace coordinates and incidental layout;
- critical mutations and the final result have observable UI checks, including persistence checks where required;
- every instructed persistent mutation is authorized by the task;
- supported failure modes retain their recovery and stop conditions;
- episode-specific values are parameterized without erasing the relationships that govern their use;
- material uncertainty is an observable conditional check or limitation, not an invented action or hidden success criterion;
- every bundled file is referenced, necessary, and contains no core instruction that belongs in `SKILL.md`.

Call `finalize_extraction`. The runtime writes the extraction manifest. Treat the finalizer result as authoritative: correct every reported issue and call it again. Do not finish with an ordinary text response.

D.5 DOWNSTREAM EXECUTION PROMPT

We append the following shared wrapper to the executor’s base system prompt for Work2Skill, ShowUI-Aloha, and D2T. Only the guidance text changes between methods, as detailed in Table 6; No Skill adds no guidance block. The wrapper directs the executor to adapt the guidance to the current task and screen and to verify the result in the live environment.

Shared Downstream Guidance Wrapper

<task_skills>

The following reusable skills are advisory guidance for this task. Adapt them to the live screen and current task values. The user’s task instruction remains authoritative. Do not assume recorded coordinates, timestamps, identities, instance values, or completion state. Verify the requested result in the live environment before finishing.

[guidance_text]

</task_skills>

Table 6: Method-specific contents inserted into the shared `<task_skills>` wrapper at the end of the system prompt. No Skill adds no block.

Method	Retained content	Text format
No Skill	None	No appended block.
Work2Skill	Complete task-matched <code>SKILL.md</code> files, including their frontmatter and instructions.	Each file follows a skill-directory heading. Multiple files are concatenated in the task map’s order, separated by blank lines.
ShowUI-Aloha	Each trajectory step’s <code>caption.action</code> text.	A task heading followed by <code>Step 1: ...</code> , <code>Step 2: ...</code> , and subsequent actions in trajectory order.
D2T	Tutorial prose after removing frontmatter, image-containing lines, and link destinations.	Original section and step headings and remaining prose; ordinary hyperlink labels are preserved.

E BENCHMARK TASKS AND EVALUATION

Task screening and demonstration review. We first exclude infeasible tasks for which a valid human demonstration cannot be completed. We then review the human recordings and discard demonstrations that are incomplete, omit key operations, or fail to complete the task correctly. Only tasks and their associated demonstrations that pass this screening and review are retained.

E.1 MYPCBENCH TASKS AND JITTER PERTURBATIONS

We use the 64-task MyPCBench Bounded Action task set. Each task is paired with a recorded human demonstration and its exported multimodal evidence for skill induction.

Perturbation construction. We construct one Jitter variant for each original task, yielding 64 source-variant pairs. GPT-5.6-sol assists in generating the revised task instructions and corresponding evaluation criteria, followed by human verification. The perturbations modify task requirements within the original application context: target entities and source materials; numerical and temporal parameters; selection and ranking rules; and operation constraints or required final states. Table 7 gives representative examples.

Evaluation criteria and skill reuse. All 64 task instructions are revised. Across the 366 paired rubric items, 331 criteria are updated to match the perturbed requirements and 35 generic criteria are retained. All rubric weights and evaluator types remain unchanged. Each Jitter task retains the skill-file mapping of its paired original task, so the evaluation measures reuse of the existing skill guidance on a changed task instance. Figure 7 illustrates paired changes to a SprintBoard task and its evaluation criteria.

Table 7: Representative changes in the paired MyPCBench Jitter tasks. Descriptions summarize the changed requirements.

Application	Original requirements	Jitter requirements
Dinoco Airlines	Book an AVP-JFK flight for next Friday evening or night with a left-side seat.	Book an AVP-PHL flight for next Tuesday morning with a right-side seat.
OddsMarket	Select the three largest positions by share count; break ties by higher cost basis, then alphabetically.	Select the two smallest positions by share count; break ties by lower cost basis, then alphabetically.
SpeedTax	Advance the in-progress current-year return to the review step without submitting it.	Audit the filed 2024 return read-only and report refunds, confirmation number, and accepted status.

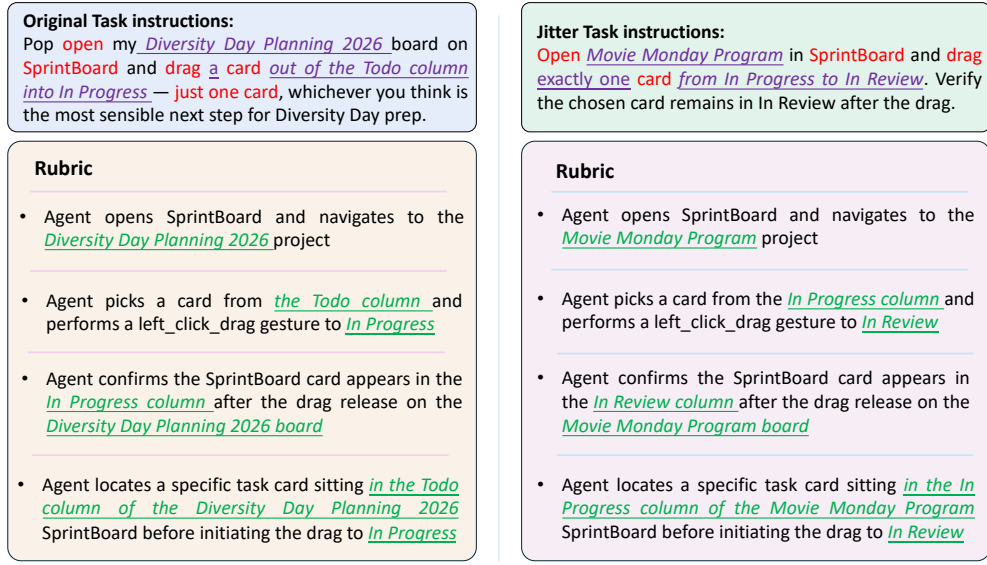


Figure 7: A paired SprintBoard task and its evaluation rubric before (left) and after (right) Jitter perturbation. The variant changes the target board and the required card transition, with rubric items revised to match the new requirements.

E.2 OSWORLD-VERIFIED TASK DISTRIBUTION

The curated OSWorld-Verified subset contains 286 tasks across ten categories. Figure 8 summarizes the category distribution. Percentages are calculated over the 286 retained tasks. The complete task-ID list appears in Table 12 in Appendix H.

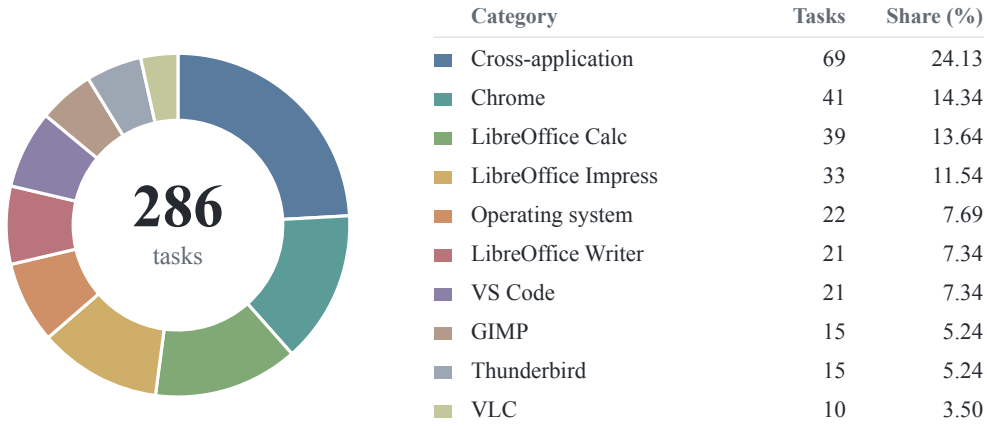


Figure 8: Category distribution of the 286 retained OSWorld-Verified tasks. The legend gives the task count and percentage for each category.

E.3 EXECUTION HARNESS AND EVALUATOR CONFIGURATION

OSWorld execution harness. We use a tool-calling desktop agent connected to OSWorld’s official DesktopEnv. Each task is initialized from its benchmark configuration. Given the task instruction, the agent uses the current screenshot and action history to select its next GUI actions, with guidance

appended as described in Appendix D.5. Its tools support screenshots, pointer movement, clicks, drags, scrolling, text entry, key presses, and waiting. A desktop adapter maps screenshot-relative pixel coordinates to the VM and executes GUI actions through PyAutoGUI, returning post-action screenshots and textual results. Each execution step is one model iteration and may contain multiple tool calls. The loop stops on a terminal decision or at the step limit specified in Appendix E.5.

Evaluation and metrics. For MyPCBench, we use the official environment setup and evaluator. For OSWorld-Verified, we reuse the official task-specific evaluators to score the resulting environment states. Evaluators run after the agent terminates or reaches the maximum action budget. For partial MyPCBench rubrics, the task score is the fraction or weighted fraction of satisfied items according to the official implementation. Full score requires all rubric conditions. OSWorld-Verified evaluators can return partial scores. For both benchmarks, Score averages the evaluator outputs and scales the result to 0–100, while SR counts only tasks receiving full credit. This SR corresponds to MyPCBench’s perfect rate; OSWorld’s official mean-score aggregation, called “success rate” in its reporting script, is reported as Score in our tables. We store evaluator logs and final-state artifacts for every rollout.

Let $g_i \in [0, 1]$ denote the normalized evaluator output for task i , where 1 indicates full credit. For a task set $\mathcal{D}$, we compute the mean Score and full-credit success rate SR (%) as follows:

$$\text{Score} = \frac{100}{|\mathcal{D}|} \sum_{i \in \mathcal{D}} g_i, \quad \text{SR} = \frac{100}{|\mathcal{D}|} \sum_{i \in \mathcal{D}} \mathbf{1}[g_i = 1]. \quad (1)$$

E.4 BASELINE ADAPTATION FOR FAIR COMPARISON

No Skill (also labeled Baseline) provides no additional guidance. We evaluate ShowUI-Aloha and D2T as sources of guidance for the same downstream execution agent. For ShowUI-Aloha, we retain each trajectory step’s `caption.action` field and concatenate the actions in their original order; observation, reasoning, and expectation fields are excluded. For D2T, we read the generated tutorial’s `index.md`, remove frontmatter and image-containing lines, and strip link destinations and bare URLs while preserving ordinary hyperlink labels. The remaining tutorial headings and prose retain their original order. All retained text is supplied through the same wrapper as our skills (Appendix D.5), with the method-specific contents summarized in Table 6.

For a given execution model, all methods share the base prompt, observations, action interface, step limit, termination policy, and evaluator. On MyPCBench, this shared action interface includes both GUI actions and Bash commands. When their required modalities are available, they use the same source demonstration. The reported results measure how effectively these adapted guidance outputs support task execution under the same downstream conditions.

E.5 MODEL PAIRING AND RUNTIME SETTINGS

The default pairing uses the same model for skill induction and downstream execution: each of the four execution models uses its own induced skills. The cross-model experiment explicitly varies this pairing (Section 4.4). Tables 8 and 9 report our settings for skill induction and downstream execution, respectively. The induction limit counts agent iterations; the execution limit counts steps. The execution history and screenshot windows are configured separately from token limits.

Table 8: Our skill-induction settings.

Setting	Value
Reasoning effort	high
Temperature	0
Context limit (tokens)	200,000
Output limit per model call (tokens)	16,000
Induction iteration limit	100

Table 9: Our downstream-execution settings.

Setting	Value
Reasoning effort	high
Temperature	0
Output limit per model call (tokens)	16,000
History window (turns)	100
Screenshot window (images)	3
Execution step limit	100

Execution context management. When a downstream model request exceeds the context limit, the system retains the task instruction, skill guidance, and most recent screenshot, clears the historical interaction messages, and retries the request. This shortens the context while preserving the task requirements and visual evidence of the current interface.

E.6 EVIDENCE-MODALITY ABLATION SETTINGS

The ablations in Section 4.5 vary the recording evidence available to the induction agent. The task instruction remains available in every condition. Table 10 lists the retained evidence and visual tools. We remove only tools that have no applicable input under a condition. File discovery, text reading, skill authoring, and finalization use the same tools described in Appendix C.

Table 10: Evidence and visual tools available for skill induction in each modality condition. Task instructions and common file-reading and skill-authoring tools remain available. UI annotations denote metadata and descriptions derived from each action’s target element in the AX tree.

Setting	Retained recording evidence	Visual tools
Full Evidence	Actions with UI annotations, KeyLogs, indexed images, video	Image and video
w/o Indexed Images	Actions with UI annotations, KeyLogs, video	Video
w/o UI Annotations	Actions with generic captions, KeyLogs, images with UI target annotations removed, video	Image and video
w/o KeyLogs	Actions with UI annotations, event frames without added overlays, video	Image and video
Video-only	Raw video	Video
UI-Grounded Action Text Only	Ordered text describing recorded actions and their target UI elements	None

In Table 10, the image tool is `read_visual_evidence`; video tools are `get_video_metadata`, `watch_video`, and `extract_video_frames`. Removing UI annotations or KeyLogs does not require removing `read_file`, which still serves the remaining textual evidence and task instruction.

Image and video access. **w/o Indexed Images** removes the exported `evidence/` directory and the image-reading tool, while retaining the video and all video tools. The agent can therefore still inspect video frames; this condition tests the contribution of indexed, event-aligned images when video remains available. **Video-only** exposes only `task.json` and `video.mp4`. Video metadata and frame timestamps remain available through the video tools; no action trace or precomputed image index is supplied.

Removing derived annotations. The condition labeled **w/o UI Annotations** corresponds to the implementation’s `without_dom` protocol. It removes AX-derived target-element fields from actions and replaces the corresponding target descriptions with generic action captions. Image indices are sanitized, and the top annotation bar is replaced with raw-video pixels from the same timestamp, preserving click and drag highlights.

w/o KeyLogs removes `trace/keylog.jsonl` and keylog-derived image metadata, including input-event labels, raw messages, and source-image references. Indexed frames are re-extracted from raw video at their original timestamps, removing all added image overlays, including the top caption bar and click/drag highlights. The action trace and its AX-derived target information remain unchanged, as do the action captions in the image index. Thus, this condition measures the joint effect of removing the raw log and the annotated image presentation; it does not isolate the log file’s contribution or remove all keyboard information from the retained actions.

UI-grounded action text only. This condition retains only the task instruction and ordered action captions in `task.json` and `trace/actions.jsonl`, respectively. The captions combine recorded actions with available target UI descriptions, such as “click the Search button.” Target descriptions

can include control names and roles from the corresponding target elements in the AX tree. Each action row retains only its original `caption`; coordinates, timestamps, action IDs, structured target metadata, and other action metadata are removed. Raw keylogs, images, and video are absent, and all image and video tools are disabled. Thus, UI target semantics are preserved in text rather than supplied as a full AX Tree. This condition evaluates skill induction from these descriptions; ShowUI-Aloha instead supplies action semantics directly as downstream guidance.

Prompt adaptation. The five ablations share a prompt instructing the agent to inspect the available evidence, followed by a condition-specific statement listing the exposed modalities. This adapts the full-evidence prompt’s requirement to inspect representative initial, critical, and final-state images to the available inputs. Task-first reading, the skill-authoring policy, output validation, and finalization requirements are retained.

F CASE STUDY AND SKILL INDUCTION EXAMPLE

F.1 TASK AND INDUCTION TRACE

We present the generated skill for MyPCBench Bounded Action task `hard_app-f016`, a TableFind reservation task also used in the main-text case study (Section 4.6). The task instruction is:

Book me Cotogna for ten people for the Dundies after-party next Friday. While you’re in TableFind, pull up three other Scranton-area restaurants as a fallback plan in case Cotogna is full, and favorite the top two. Once that’s done, confirm the Cotogna reservation with a note that it’s the Dundies after-party so they can prep the vibe.

The recorded induction run uses GPT-5.5 with high reasoning effort and makes 30 tool calls. It reads the task, episode metadata, summary, evidence indices, action trace, and key log; inspects 22 distinct evidence images in two batches of 14 and eight; and samples the 156.47-second video in two calls to `watch_video`, after reading its metadata. The video calls return 13 and eight frames, respectively, with one shared timestamp. The agent writes a draft, reads it back, revises it, and reads the final skill before successful `finalize_extraction`. This record documents the induction output; we do not assign a downstream execution score to this listing.

F.2 DETAILED EXECUTION ANALYSIS

Figure 6 shows GPT-5.5’s execution trajectories for the case in Section 4.6. Table 11 reports all eight rubric outcomes under ShowUI-Aloha, D2T, and Work2Skill guidance.

Task dependencies. The instruction combines a primary reservation with a fallback workflow: inspect three other Scranton-area restaurants and favorite the top two before confirming Cotogna with the requested note. Completing this workflow requires carrying the date and party size across searches, distinguishing the primary restaurant from alternatives, and returning to the primary booking after handling the fallbacks. The evaluation checks both the reservation itself and these additional requirements, including persistence after a refresh.

Where the baselines fall short. Both baselines pass R1, R2, R6, and R8: they configure the booking, include the note, obtain confirmation, and verify the final reservation details. Their trajectories reach alternative-restaurant views, but the rubric outcomes do not establish that all three alternatives and their detail pages were inspected (R3–R4). Saving the top two alternatives is also incomplete (R5). Both fail the separate persistence check (R7), despite passing the check of final details (R8). A visible confirmation and a correct reservation display therefore cover only part of the required workflow. Each baseline receives 55/100.

Table 11: Rubric-level outcomes for the TableFind case in Figure 6. Requirement descriptions summarize R1–R8; Aloha denotes the adapted ShowUI-Aloha baseline. Scores are the reported evaluator outputs.

Item	Requirement	Aloha	D2T	Work2Skill
R1	Set the requested date and a table for ten.	Pass	Pass	Pass
R2	Book Cotogna with the requested note.	Pass	Pass	Pass
R3	Open three alternative restaurants.	Fail	Fail	Pass
R4	View each alternative’s detail page.	Fail	Fail	Pass
R5	Save the top two alternatives.	Fail	Fail	Pass
R6	Obtain a reservation confirmation number.	Pass	Pass	Pass
R7	Check persistence after a refresh.	Fail	Fail	Pass
R8	Verify the correct final details.	Pass	Pass	Pass
Evaluator score		55/100	55/100	100/100

What the successful trajectory preserves. Work2Skill passes all eight items and receives 100/100. Its four additional passed criteria concern alternative-restaurant coverage, saving the preferred options, and persistence after refresh. Figure 6 shows these steps alongside the primary booking and confirmation. The comparison pinpoints the benefit in this case: completing the secondary subgoals and verification requirements that remain unfinished in the baseline trajectories.

Connection to the generated procedure. The full skill in Appendix F.3 makes several relevant dependencies explicit. It carries booking values across searches, rechecks fields that may reset, excludes the primary restaurant from the fallback set, and selects the first two qualifying alternatives under the active ranking. It also defers final confirmation until the fallback steps are complete and checks both the reservation details and the saved favorites. These instructions organize the task into dependent stages with observable completion checks and explicit reminders of the secondary requirements across the primary reservation and fallback searches.

F.3 COMPLETE GENERATED SKILL

The skill below is reproduced in full, with only Markdown presentation adapted to the appendix format. It carries the date, time, party size, and note across the primary and fallback searches; checks for search-field resets; excludes the primary restaurant from the fallback set; and preserves the ordering of fallback selection, favoriting, and final confirmation. Restaurant names and booking values are taken from the task, while the generated procedure retains the Scranton-area scope. Its final checks use visible reservation and favorite states.

Generated Skill: TableFind Reservation with Fallbacks

name: tablefind-reservation-with-fallbacks

description: Use TableFind to reserve a requested restaurant for a specified party/date/time, identify fallback Scranton-area restaurants, favorite the requested top fallback choices, and verify the confirmed reservation details.

Use this workflow when a task asks for a TableFind restaurant reservation plus fallback restaurants and favorites.

Inputs to carry through the workflow

- Primary restaurant name.
- Party size.
- Reservation date expression or exact date. Resolve relative dates such as "next Friday" before interacting with the calendar; if the task is based on the current TableFind/session date, use that context to choose the next matching weekday.
- Reservation time. If the task does not specify a time and TableFind already provides a default time in the search form, leave the default time unchanged rather than inventing a different one.
- Reservation note or special-request text.
- Fallback scope, count, and favorite rule, such as "three other Scranton-area restaurants" and "favorite the top two."

Keep the same date, time, and party size for fallback searches unless the task explicitly gives different fallback criteria. Fallback restaurants must be different from the primary restaurant.

Set the primary search criteria

1. Open TableFind and use the visible Search page or TableFind logo/home link to reach the main search form.
2. Set the Date field to the task date. Use the calendar picker and select the resolved day; verify the date field updates to the intended date.
3. Leave or set the Time field to the task time. If no time is specified, keep TableFind's visible default time.
4. Open the Party Size combo box and choose the requested party size, e.g. the menu item labeled with the required number of people/guests. Verify the party-size field shows the requested count.
5. Click the Restaurant or Cuisine entry, type the primary restaurant name, and click Search.
6. On the results page, verify the heading matches the requested party size, date, and time, and select the result whose visible name exactly matches the primary restaurant.

Check and prepare the primary reservation without losing task details

1. On the primary restaurant detail page, verify the restaurant name, cuisine/location summary, booking panel date, party size, and available time slots are visible.
2. Select the requested time slot if it is not already selected. The selected summary should show the intended date and time and indicate remaining tables, not sold out or waitlist. If the exact requested/default time is unavailable, do not confirm an alternate unless the task authorizes alternatives.
3. Enter the task's note in the Special requests field exactly enough to communicate the requested purpose or constraint. Verify the note text is visible in the field.
4. If the task says to gather/favorite fallbacks before confirming the primary reservation, do not click the final Confirm Reservation yet. You may leave the primary detail page and return later, carrying forward the restaurant name, date, time, party size, and note.

Pull up fallback restaurants and favorite the top choices

1. Navigate back to the TableFind Search/results view using the TableFind logo, Search link, or Back to search control.

Generated Skill: TableFind Reservation with Fallbacks (continued)

2. Clear the primary restaurant-name search if necessary so that the page shows general Scranton-area restaurant results for the same date, time, and party size. Keep or choose a ranking such as Sort: Top Rated when the task asks for "top" restaurants and no other ranking is specified.
3. Verify the results heading still reflects the intended date, time, and party size. If the page has reverted to default values, reset the date, time, and party size before relying on the fallback list.
4. Starting from the top of the ranked Scranton-area results, identify fallback restaurants that are not the primary restaurant. Count only distinct restaurant cards/pages with Scranton-area neighborhood or address information.
5. Pull up the requested number of fallback restaurants by opening each qualifying restaurant's detail page or otherwise bringing its card/details into view. For each one, confirm it is a different Scranton-area restaurant and that it has availability for the carried date/time/party criteria or a visible set of usable time slots for those criteria. Return to the results list after inspecting each fallback.
6. Favorite the requested top count according to the active ranking. For "favorite the top two," favorite the first two qualifying fallback restaurants in the ranked list, not arbitrary later restaurants. Use each restaurant card's heart / Save to favorites toggle.
7. After each favorite action, verify visible confirmation: the heart becomes filled/active or the card text changes to "Saved to Favorites." Do not toggle an already-saved heart off; if it is already active, count it as favorited and leave it active.

Confirm the primary reservation

1. Return to the primary restaurant detail page using Search, the primary restaurant name, browser history, or a saved/open page. Re-check the restaurant name, date, time, party size, and special-request note.
2. Click Complete reservation only when the booking panel shows the intended selected date/time and party size and the special-request note is present.
3. In the confirmation dialog, compare every visible row with the task requirements:
 - Restaurant: primary restaurant name.
 - Date & time: resolved task date and intended time.
 - Party size: requested number of guests/people.
 - Special requests: the requested note text.
4. If any row is wrong, cancel the dialog and correct the visible fields before trying again. If all rows are correct, click Confirm Reservation.

Final verification

1. Open My Reservations after confirming.
2. Find the newly created primary reservation. Verify it is marked Confirmed and shows the correct restaurant, date/time, party size, and special-request note. A confirmation code may also be present, but the visible restaurant/date/party/note/status are the essential checks.
3. Verify the requested number of fallback favorites remain active. If still on the results page, check the filled hearts or "Saved to Favorites" labels for the top fallback restaurants. If needed, open the Saved page from the header and confirm those fallback restaurants appear there.
4. Stop only after the primary reservation is confirmed and the required top fallback restaurants are visibly favorited.

G TOOL USAGE DURING SKILL INDUCTION

Figure 9 summarizes tool usage during skill induction by four models on 64 MyPCBench Bounded Action tasks and the 286-task OSWorld-Verified subset. Each value is the aggregate invocation count divided by the dataset’s task count; the summary row includes all ten tools.

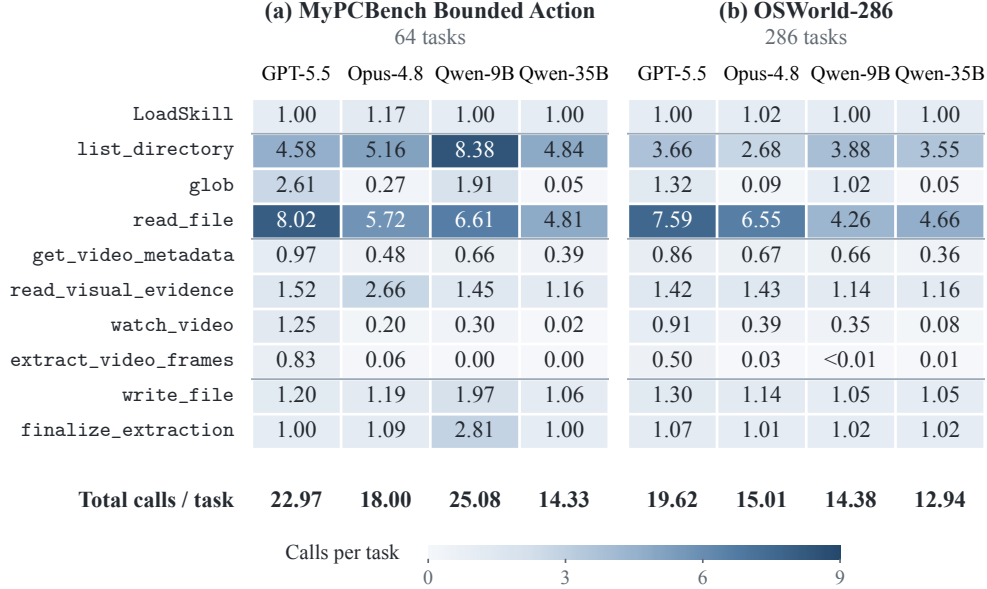


Figure 9: Mean tool calls per task during skill induction, using a shared linear color scale. Values are rounded to two decimals; positive values that would round to zero are shown as < 0.01 . Horizontal rules separate tool groups; the bold row reports mean total calls per task. Qwen-9B and Qwen-35B denote Qwen3.5-9B and Qwen3.5-35B-A3B, respectively.

GPT-5.5 invokes `watch_video` and `extract_video_frames` most frequently on both datasets, while Qwen3.5-35B-A3B makes the fewest total calls per task (14.33 and 12.94). Invocation counts alone do not establish evidence coverage or skill quality: a call can return multiple images or varying amounts of text. Repeated `finalize_extraction` calls also do not by themselves identify failed induction runs. When validation fails, the tool returns diagnostics so the agent can address the reported issues and retry. The run can still complete successfully after these intermediate attempts.

H COMPLETE OSWORLD-VERIFIED TASK LIST

Table 12 lists all 286 OSWorld-Verified tasks used for demonstration collection and evaluation. Task IDs are preserved in full and ordered lexicographically, read left to right across each row.

Table 12: Complete task IDs for the 286-task OSWorld-Verified subset.

No.	Task ID	No.	Task ID
1	00fa164e-2612-4439-992e-157d019a8436	2	01b269ae-2111-4a07-81fd-3fcd711993b0
3	02ce9a50-7af2-47ed-8596-af0c230501f8	4	030eeff7-b492-4218-b312-701ec99ee0cc
5	0326d92d-d218-48a8-9ca1-981cd6d064c7	6	035f41ba-6653-43ab-aa63-c86d449d62e5
7	04d9aeaf-7bed-4024-bedb-e10e6f00eb7f	8	0512bb38-d531-4acf-9e7e-0add90816068
9	06ca5602-62ca-47f6-ad4f-da151cde54cc	10	06fe7178-4491-4589-810f-2e2bc9502122
11	0810415c-bde4-4443-9047-d5f70165a697	12	08aced46-45a2-48d7-993b-ed3fb5b32302
13	08c73485-7c6d-4681-999d-919f5c32dcfa	14	0a0faba3-5580-44df-965d-f562a99b291c
15	0a211154-fda0-48d0-9274-eaac4ce5486d	16	0a2e43bf-b26c-4631-a966-af9dfa12c9e5
17	0b17a146-2934-46c7-8727-73ff6b6483e8	18	0bf05a7d-b28b-44d2-955a-50b41e24012a
19	0cecd4f3-74de-457b-ba94-29ad6b5dafb6	20	0d8b7de3-e8de-4d86-b9fd-dd2dce58a217
21	0e47de2a-32e0-456c-a366-8c607ef7a9d2	22	0e763496-b6bb-4508-a427-fad0b6c3e195
23	0ed39f63-6049-43d4-ba4d-5fa2fe04a951	24	0f84bef9-9790-432e-92b7-eece357603fb
25	10a730d5-d414-4b40-b479-684bed1ae522	26	12086550-11c0-466b-b367-1d9e75b3910e
27	121ba48f-9e17-48ce-9bc6-a4fb17a7ebba	28	1273e544-688f-496b-8d89-3e0f40aa0606
29	1334ca3e-f9e3-4db8-9ca7-b4c653be7d17	30	13584542-872b-42d8-b299-866967b5c3ef
31	15aace23-a215-4579-91b4-69eec72e18da	32	15c3b339-88f7-4a86-ab16-e71c58dcb01e
33	1704f00f-79e6-43a7-961b-cedd3724d5fd	34	1954cced-e748-45c4-9c26-9855b97fbc5e
35	1d17d234-e39d-4ed7-b46f-4417922a4e7c	36	1de60575-bb6e-4c3d-9e6a-2fa699f9f197
37	1e8df695-bd1b-45b3-b557-e7d599cf7597	38	1f18aa87-af6f-41ef-9853-cdb8f32ebdea
39	20236825-b5df-46e7-89bf-62e1d640a897	40	215dfd39-f493-4bc3-a027-8a97d72c61bf
41	21760ecb-8f62-40d2-8d85-0cee5725cb72	42	21ab7b40-77c2-4ae6-8321-e00d3a086c73
43	227d2f97-562b-4ccb-ae47-a5ec9e142fbb	44	23393935-50c7-4a86-aeaa-2b78fd089c5c
45	236833a3-5704-47fc-888c-4f298f09f799	46	2373b66a-092d-44cb-bfd7-82e86e7a3b4d
47	26150609-0da3-4a7d-8868-0faf9c5f01bb	48	26660ad1-6ebb-4f59-8cba-a8432dfe8d38
49	26a8440e-c166-4c50-aef4-bfb77314b46b	50	276cc624-87ea-4f08-ab93-f770e3790175
51	2888b4e6-5b47-4b57-8bf5-c73827890774	52	28cc3b7e-b194-4bc9-8353-d04c0f4d56d2
53	2ad9387a-65d8-4e33-ad5b-7580065a27ca	54	2ae9ba84-3a0d-4d4c-8338-3a1478dc5fe3
55	2b9493d7-49b8-493a-a71b-56cd1f4d6908	56	2b94c692-6abb-48ae-ab0b-b3e8a19cb340
57	2c9fc0de-3ee7-45e1-a5df-c86206ad78b5	58	2cd43775-7085-45d8-89fa-9e35c0a915cf
59	2fe4b718-3bd7-46ec-bdce-b184f5653624	60	3299584d-8f11-4457-bf4c-ce98f7600250
61	337d318b-aa07-4f4f-b763-89d9a2dd013f	62	347ef137-7eeb-4c80-a3bb-0951f26a8aff
63	35253b65-1c19-4304-8aa4-6884b8218fc0	64	357ef137-7eeb-4c80-a3bb-0951f26a8aff
65	36037439-2044-4b50-b9d1-875b5a332143	66	3680a5ee-6870-426a-a997-eba929a0d25c
67	368d9ba4-203c-40c1-9fa3-da2f1430ce63	68	3720f614-37fd-4d04-8a6b-76f54f8c222d
69	37608790-6147-45d0-9f20-1137bb35703d	70	37887e8c-da15-4192-923c-08fa390a176d
71	386dbd0e-0241-4a0a-b6a2-6704fba26b1c	72	39be0d19-634d-4475-8768-09c130f5425d
73	3a7c8185-25c1-4941-bd7b-96e823c9f21f	74	3a93cae4-ad3e-403e-8c12-65303b271818
75	3aaa4e37-dc91-482e-99af-132a612d40f3	76	3c8f201a-009d-4bbe-8b65-a6f8b35bb57f
77	3ce045a0-877b-42aa-8d2c-b4a863336ab8	78	3e3fc409-bff3-4905-bf16-c968eee3f807
79	3ef2b351-8a84-4ff2-8724-d86eae9b842e	80	3f05f3b9-29ba-4b6b-95aa-2204697ffc06
81	3f28fe4f-5d9d-4994-a456-efd78cfae1a3	82	3f49d2cc-f400-4e7d-90cc-9b18e401cc31
83	4127319a-8b79-4410-b58a-7a151e15f3d7	84	415ef462-bed3-493a-ac36-ca8c6d23bf1b
85	4172ea6e-fb77-4edb-a9cc-c0014bd1603b	86	4188d3a4-077d-46b7-9c86-23e1a036f6c1
87	42d25c08-fb87-4927-8b65-93631280a26f	88	42e0a640-4f19-4b28-973d-729602b5a4a7
89	44ee5668-ecd5-4366-a6ce-c1c9b8d4e938	90	455d3c66-7dc6-4537-a39a-36d3e9119df7
91	47543840-672a-467d-80df-8f7c3b9788c9	92	47f7c0ce-a5fb-4100-a5e6-65cd0e7429e5
93	480bcfea-d68f-4aaa-a0a9-2589ef319381	94	48c46dc7-fe04-4505-ade7-723cba1aa6f6
95	48d05431-6cd5-4e76-82eb-12b60d823f7d	96	4bcb1253-a636-4df4-8cb0-a35c04dfef31

Table 12: Complete task IDs for the 286-task OSWorld-Verified subset (continued).

No.	Task ID	No.	Task ID
97	4c26e3f3-3a14-4d86-b44a-d3cedebbb487	98	4d117223-a354-47fb-8b45-62ab1390a95f
99	4e60007a-f5be-4bfc-9723-c39affa0a6d3	100	4ed5abd0-8b5d-47bd-839f-cacfa15ca37a
101	4f07f9e9-70de-4927-a4d5-bb28bc12c52c	102	510f64c8-9bcc-4be1-8d30-638705850618
103	51719eea-10bc-4246-a428-ac7c433dd4b3	104	51b11269-2ca8-4b2a-9163-f21758420e78
105	5203d847-2572-4150-912a-03f062254390	106	535364ea-05bd-46ea-9937-9f55c68507e8
107	53ad5833-3455-407b-bbc6-45b4c79ab8fb	108	550ce7e7-747b-495f-b122-acdc4d0b8e54
109	554785e9-4523-4e7a-b8e1-8016f565f56a	110	57242fad-77ca-454f-b71b-f187181a9f23
111	57667013-ea97-417c-9dce-2713091e6e2a	112	5812b315-e7bd-4265-b51f-863c02174c28
113	58565672-7bfe-48ab-b828-db349231de6b	114	59155008-fe71-45ec-8a8f-dc35497b6aa8
115	5990457f-2adb-467b-a4af-5c857c92d762	116	5ac2891a-eacd-4954-b339-98abba077adb
117	5bc63fb9-276a-4439-a7c1-9dc76401737f	118	5c1075ca-bb34-46a3-a7a0-029bd7463e79
119	5ca86c6f-f317-49d8-b6a7-b527541caae8	120	5ced85fc-fa1a-4217-95fd-0fb530545ce2
121	5cfb9197-e72b-454b-900e-c06b0c802b40	122	5d901039-a89c-4bfb-967b-bf66f4df075e
123	5df7b33a-9f77-4101-823e-02f863e1c1ae	124	5e2d93d8-8ad0-4435-b150-1692aaca994
125	5ea617a3-0e86-4ba6-aab2-dac9aa2e8d57	126	6054afcb-5bab-4702-90a0-b259b5d3217c
127	62f7fd55-0687-4a43-b6e1-3eda16fc6252	128	66399b0d-8fda-4618-95c4-bfc6191617e9
129	6766f2b8-8a72-417f-a9e5-56fcaa735837	130	67890eb6-6ce5-4c00-9e3d-fb4972699b06
131	68a25bd4-59c7-4f4d-975e-da0c8509c848	132	6a33f9b9-0a56-4844-9c3f-96ec3ffb3ba2
133	6ada715d-3aae-4a32-a6a7-429b2e43fb93	134	6c4c23a1-42a4-43cc-9db1-2f86ff3738cc
135	6e99a1ad-07d2-4b66-a1ce-ece6d99c20a5	136	6f4073b8-d8ea-4ade-8a18-c5d1d5d5aa9a
137	6f56bf42-85b8-4fbb-8e06-6c44960184ba	138	6f81754e-285d-4ce0-b59e-af7edb02d108
139	70745df8-f2f5-42bd-8074-fbc10334fcc5	140	72b810ef-4156-4d09-8f08-a0cf57e7cefe
141	72f83cdc-bf76-4531-9a1b-eb893a13f8aa	142	734d6579-c07d-47a8-9ae2-13339795476b
143	73c99fb9-f828-43ce-b87a-01dc07faa224	144	74d5859f-ed66-4d3e-aa0e-93d7a592ce41
145	7767eef2-56a3-4cea-8c9f-48c070c7d65b	146	778efd0a-153f-4842-9214-f05fc176b877
147	77b8ab4d-994f-43ac-8930-8ca087d7c4b4	148	788b3701-3ec9-4b67-b679-418bfa726c22
149	7a4e4bc8-922c-4c84-865c-25ba34136be1	150	7a5a7856-f1b6-42a4-ade9-1ca81ca0f263
151	7ae48c60-f143-4119-b659-15b8f485eb9a	152	7aeae0e2-70ee-4705-821d-1bba5d5b2ddd
153	7b1e1ff9-bb85-49be-b01d-d6424be18cd0	154	7b6c7e24-c58a-49fc-a5bb-d57b80e5b4c3
155	7b7617bd-57cc-468e-9c91-40c4ec2bcb3d	156	7c4cc09e-7a92-40dd-8338-b2286535c4ed
157	7e287123-70ca-47b9-8521-47db09b69b14	158	7e429b8d-a3f0-4ed0-9b58-08957d00b127
159	7f52cab9-535c-4835-ac8c-391ee64dc930	160	7ff48d5b-2df2-49da-b500-a5150ffc7f18
161	81c425f5-78f3-4771-afd6-3d2973825947	162	82279c77-8fc6-46f6-9622-3ba96f61b477
163	82bc8d6a-36eb-4d2d-8801-ef714fb1e55a	164	82e3c869-49f6-4305-a7ce-f3e64a0618e7
165	841b50aa-df53-47bd-a73a-22d3a9f73160	166	8472fece-c7dd-4241-8d65-9b3cd1a0b568
167	873cafdd-a581-47f6-8b33-b9696ddb7b05	168	881deb30-9549-4583-a841-8270c65f2a17
169	88fe4b2d-3040-4c70-9a70-546a47764b48	170	8979838c-54a5-4454-a2b8-3d135a1a5c8f
171	8ba5ae7a-5ae5-4eab-9fcc-5dd4fe3abf89	172	8f080098-ddb1-424c-b438-4e96e5e4786e
173	91190194-f406-4cd6-b3f9-c43fac942b22	174	9195653c-f4aa-453d-aa95-787f6ccfaae9
175	930fdb3b-11a8-46fe-9bac-577332e2640e	176	936321ce-5236-426a-9a20-e0e3c5dc536f
177	937087b6-f668-4ba6-9110-60682ee33441	178	9439a27b-18ae-42d8-9778-5f68f891805e
179	94d95f96-9699-4208-98ba-3c3119edf9c2	180	9656a811-9b5b-4ddf-99c7-5117bcef0626
181	971cbb5b-3cbf-4ff7-9e24-b5c84fcebfa6	182	982d12a5-beab-424f-8d38-d2a48429e511
183	99146c54-4f37-4ab8-9327-5f3291665e1e	184	9b7bc335-06b5-4cd3-9119-1a649c478509
185	9bc3cc16-074a-45ac-9bdc-b2a362e1daf3	186	9cf05d24-6bd9-4dae-8967-f67d88f5d38a
187	9d425400-e9b2-4424-9a4b-d4c7abac4140	188	9ec204e4-f0a3-42f8-8458-b772a6797cab
189	9f3bb592-209d-43bc-bb47-d77d9df56504	190	9f935cce-0a9f-435f-8007-817732bfc0a5
191	a01fbce3-2793-461f-ab86-43680ccbae25	192	a097acff-6266-4291-9fbd-137af7ecd439

Table 12: Complete task IDs for the 286-task OSWorld-Verified subset (continued).

No.	Task ID	No.	Task ID
193	a10b69e1-6034-4a2b-93e1-571d45194f75	194	a1af9f1c-50d5-4bc3-a51e-4d9b425ff638
195	a434992a-89df-4577-925c-0c58b747f0f4	196	a462a795-fdc7-4b23-b689-e8b6df786b78
197	a4d98375-215b-4a4d-aee9-3d4370fccc41	198	a503b07f-9119-456b-b75d-f5146737d24f
199	a53f80cd-4a90-4490-8310-097b011433f6	200	a669ef01-ded5-4099-9ea9-25e99b569840
201	a728a36e-8bf1-4bb6-9a03-ef039a5233f0	202	a74b607e-6bb5-4ea8-8a7c-5d97c7bbcd2a
203	a82b78bb-7fde-4cb3-94a4-035baf10bcf0	204	a96b564e-dbe9-42c3-9ccf-b4498073438a
205	a9f325aa-8c05-4e4f-8341-9e4358565f4f	206	aa3a8974-2e85-438b-b29e-a64df44deb4b
207	aa4b5023-aef6-4ed9-bdc9-705f59ab9ad6	208	aad10cd7-9337-4b62-b704-a857848cedf2
209	abed40dc-063f-4598-8ba5-9fe749c0615d	210	ac1b39ff-ee4d-4483-abce-c117e98942f0
211	acb0f96b-e27c-44d8-b55f-7cb76609dfcd	212	aceb0368-56b8-4073-b70e-3dc9aee184e0
213	adf5e2c3-64c7-4644-b7b6-d2f0167927e7	214	af23762e-2bfd-4a1d-aada-20fa8de9ce07
215	af630914-714e-4a24-a7bb-f9af687d3b91	216	b070486d-e161-459b-aa2b-ef442d973b92
217	b148e375-fe0b-4bec-90e7-38632b0d73c2	218	b337d106-053f-4d37-8da0-7f9c4043a66b
219	b3d4a89c-53f2-4d6b-8b6a-541fb5d205fa	220	b4f95342-463e-4179-8c3f-193cd7241fb2
221	b5062e3e-641c-4e3a-907b-ac864d2e7652	222	b6781586-6346-41cd-935a-a6b1487918fc
223	b7895e80-f4d1-4648-bee0-4eb45a6f1fa8	224	bb5e4c0d-f964-439c-97b6-bdb9747de3f4
225	bb83cab4-e5c7-42c7-a67b-e46068032b86	226	bba3381f-b5eb-4439-bd9e-80c22218d5a7
227	bc2b57f3-686d-4ec9-87ce-edf850b7e442	228	bf4e9888-f10f-47af-8dba-76413038b73c
229	c1fa57f3-c3db-4596-8f09-020701085416	230	c288e301-e626-4b98-a1ab-159dcb162af5
231	c59742c0-4323-4b9d-8a02-723c251deaa0	232	c6bf789c-ba3a-4209-971d-b63abf0ab733
233	c7c1e4c3-9e92-4eba-a4b8-689953975ea4	234	c82632a4-56b6-4db4-9dd1-3820ee3388e4
235	c867c42d-a52d-4a24-8ae3-f75d256b5618	236	ce2b64a2-ddc1-4f91-8c7d-a88be7121aac
237	ce88f674-ab7a-43da-9201-468d38539e4a	238	d1acdb87-bb67-4f30-84aa-990e56a09c92
239	d38192b0-17dc-4e1d-99c3-786d0117de77	240	d52d6308-ec58-42b7-a2c9-de80e4837b2b
241	d53ff5ee-3b1a-431e-b2be-30ed2673079b	242	d681960f-7bc3-4286-9913-a8812ba3261a
243	d9b7c649-c975-4f53-88f5-940b29c47247	244	da46d875-6b82-4681-9284-653b0c7ae241
245	da52d699-e8d2-4dc5-9191-a2199e0b6a9b	246	da922383-bfa4-4cd3-bbad-6bebab3d7742
247	dcbe20e8-647f-4f1d-8696-f1c5bbb570e3	248	dd60633f-2c72-42ba-8547-6f2c8cb0fdb0
249	dd84e895-72fd-4023-a336-97689ded257c	250	df67aebb-fb3a-44fd-b75b-51b6012df509
251	dfac9ee8-9bc4-4cdc-b465-4a4bfd2f397	252	e0df059f-28a6-4169-924f-b9623e7184cc
253	e135df7c-7687-4ac0-a5f0-76b74438b53e	254	e1e75309-3ddb-4d09-92ec-de869c928143
255	e246f6d8-78d7-44ac-b668-fcf47946cb50	256	e2b5e914-ffe1-44d2-8e92-58f8c5d92bb2
257	e2dd0213-26db-4349-abe5-d5667bfd725c	258	e528b65e-1107-4b8c-8988-490e4fece599
259	ea98c5d7-3cf9-4f9b-8ad3-366b58e0fcae	260	eabc805a-bfcf-4460-b250-ac92135819f6
261	eb03d19a-b88d-4de4-8a64-ca0ac66f426b	262	eb303e01-261e-4972-8c07-c9b4e7a4922a
263	ec4e3f68-9ea4-4c18-a5c9-69f89d1178b3	264	ec71221e-ac43-46f9-89b8-ee7d80f7e1c5
265	ecb0df7a-4e8d-4a03-b162-053391d3afaf	266	ecc2413d-8a48-416e-a3a2-d30106ca36cb
267	ed43c15f-00cb-4054-9c95-62c880865d68	268	ee9a3c83-f437-4879-8918-be5efbb9fac7
269	ef9d12bd-bcee-4ba0-a40e-918400f43ddf	270	f0b971a1-6831-4b9b-a50e-22a6e47f45ba
271	f178a4a9-d090-4b56-bc4c-4b72a61a035d	272	f201fbc3-44e6-46fc-bcaa-432f9815454c
273	f23acfd2-c485-4b7c-a1e7-d4303ddfe864	274	f3977615-2b45-4ac5-8bba-80c17dbe2a37
275	f4aec372-4fb0-4df5-a52b-79e0e2a5d6ce	276	f5d96daf-83a8-4c86-9686-bada31fc66ab
277	f723c744-e62c-4ae6-98d1-750d3cd7d79d	278	f79439ad-3ee8-4f99-a518-0eb60e5652b0
279	f7dfbef3-7697-431c-883a-db8583a4e4f9	280	f8cfa149-d1c1-4215-8dac-4a0932bad3c2
281	f9584479-3d0d-4c79-affa-9ad7afdd8850	282	f9be0997-4b7c-45c5-b05c-4612b44a6118
283	fa2c100-79e8-42df-ae74-b592418d54f4	284	fb548ca-c2a6-4601-9204-e39a2efc507b
285	fc6d8143-9452-4171-9459-7f515143419a	286	fe41f596-a71b-4c2f-9b2f-9dcd40b568c3