

What to Preserve in Recursive Computation: A Local Predictive Sufficiency Principle

Peilin Wang^{1,*}, Feng Shiyang^{1,*}, Hongfu Gao²,
Cencheng Zhao¹, Di Yuan¹, Hui Chen³, Guiguang Ding³

¹Shandong University ²National University of Singapore

³Tsinghua University

*Equal contribution.

Abstract

Recursive computation repeatedly compresses or reuses intermediate states, creating a simple tension: information that must remain useful across longer recursive paths is also exposed to more opportunities for loss before reaching the final prediction. Existing reconstruction or local-prediction objectives provide tractable supervision, but do not ensure that the retained information remains sufficient for subsequent recursive computation. We identify local predictive sufficiency with recursive predictive closure: controlling local predictive deficiencies at individual interfaces controls the resulting discrepancy at the root. We then turn this principle into a tractable training procedure. Starting from a variational characterization, we derive finite predictive tests and an empirical predictive deficiency that measures predictive value retained across compression. Its predictive sensitivities define margin-relaxed half-space constraints on parameter updates, and we project the host optimizer’s proposed update onto their intersection only when predictive preservation would otherwise be violated. Across temporal graphs, language memory, vision-language-action control, and recursive self-improvement, the method matches or improves the corresponding host models under matched compression budgets, with larger gains under heavier recursive or memory demands, while better preserving predictive information across successive transformations. Crucially, the same task-agnostic predictive-preservation principle is instantiated across all four settings through host-compatible interventions while keeping the endpoint task, backbone, and evaluation protocol fixed. These results establish predictive preservation at recursive interfaces as a general training principle for recursive compression.

1 Introduction

Recursive computation is widely used across modern learning systems, including graph and tree-structured propagation (Goller and Küchler, 1996; Scarselli et al., 2009; Tai et al., 2015; Wang et al., 2025; Feng et al., 2025; Guo et al., 2025), recurrent context compression, embodied memory, and recursive self-improvement (Kim et al., 2024; Shi et al., 2026; Kim et al., 2026). Despite their different implementations, these systems share a common structure: information is repeatedly summarized into an intermediate state, passed through a recursive interface, and reused by subsequent computation. Earlier information therefore undergoes more rounds of aggregation and compression, and long-range information must pass through more recursive interfaces before affecting the final prediction. Thus, the information that must remain useful over longer paths is exposed to more opportunities for loss along the way. Compression may attenuate information (Alon and Yahav, 2021; Topping et al., 2022; Banerjee et al., 2022).

At each recursive interface, the model therefore faces a concrete question: what should the intermediate state retain? Reconstruction objectives encourage it to preserve information needed to recover its input (Socher et al., 2011), while predictive-state approaches represent state through predictions of future observations (Littman et al., 2001; Kulesza et al., 2015; Hefny et al., 2018). Information-theoretic criteria characterize predictive information more directly (Tishby et al., 1999; Tishby and Zaslavsky, 2015; Aguerri and Zaidi, 2018; Poole et al., 2019), but are difficult to estimate and optimize for high-dimensional intermediate states. Recursive computation therefore calls for a tractable criterion that specifies what each interface should preserve for subsequent prediction.

Local Predictive Sufficiency. A natural approach is to ask every intermediate state to preserve information about the final prediction. Yet the states most exposed to repeated compression are also those for which the final target is separated from the recursive interface by more subsequent transformations, making this preservation signal increasingly

indirect (Polyanskiy and Wu, 2017). We instead assess preservation where compression occurs. At each recursive interface, we ask whether the compressed state retains the predictive information available before compression for the adjacent predictive pair at that interface. We call this property *local predictive sufficiency*. Under the recursive model in Sec. 2, recursive predictive closure connects these local conditions to protection of the root target. We then derive an empirical predictive deficiency that approximates the predictive value lost across compression. In projection-based instantiations, the optimizer first produces a task-driven proposal, and predictive feasibility projection modifies that proposal only when it violates the margin-relaxed predictive constraints. The broader framework changes how information is retained at recursive interfaces while leaving the endpoint task and evaluation protocol unchanged.

We evaluate the framework in four settings where recursive state compression arises naturally: temporal graphs, language memory, vision-language-action control, and recursive self-improvement. Across these settings, preserving predictive structure at recursive interfaces consistently improves downstream performance, with larger gains when relevant information must survive longer recursive chains. On DailyDialog, our method consistently improves over the corresponding CCM-merge host across the tested memory depths. On LIBERO-Mem T3, it increases full-task success from $1.7 \pm 2.9\%$ to $11.7 \pm 2.9\%$ across three independently trained seeds. Similar depth-dependent gains appear in temporal graphs and across recursive self-improvement iterations. Mechanism analyses further show slower attenuation of the predictive statistic across successive recursive interfaces.

Our contributions are threefold. (1) *Theory*. We formulate local predictive sufficiency and establish recursive predictive closure and root predictive stability. (2) *Learning*. We derive an empirical predictive deficiency and use its predictive sensitivities to constrain task proposals that would degrade predictive structure across recursive interfaces. (3) *Evaluation*. We validate the principle in four recursive settings and show that its benefits become more pronounced as information must survive longer recursive chains. Together, these contributions provide a common view of what recursive intermediate states should preserve and a practical mechanism for protecting it during learning.

2 Preliminaries and Problem Formulation

2.1 Recursive Compression Setup

Recursive setting. We unroll recursive computation over time into a finite rooted tree with node set V and root ρ , where each $v \in V \setminus \{\rho\}$ denotes a recursive interface and ρ denotes the root target site. We write $\text{pa}(v)$ for the next interface receiving information from v . At each non-root interface v , U_v denotes the state assembled from the information available in the corresponding subtree immediately before compression. The variable C_v denotes the observed interface information that is retained directly across this update without passing through the compression map, and $C := (C_v)_{v \in V}$ collects these retained contexts. A measurable compression map Γ produces the width- r representation $Z_v^\Gamma := \Gamma(U_v)$, which is then passed to the remaining recursive computation.

Predictive task. Each recursive interface v is associated with an observed predictive event $Y_v \in \mathcal{Y}$,¹ with Y_ρ denoting the root target. Our goal is to learn Γ such that repeated compression preserves the predictive information required for Y_ρ . The Information Bottleneck frames compression relative to a relevance variable (Tishby et al., 1999; Tishby and Zaslavsky, 2015), and future outcomes provide a natural choice for predictive representations (Still, 2014; Marzen and Crutchfield, 2016). We formalize this requirement through predictive sufficiency.

Definition 2.1 (Predictive Sufficiency). Following statistical sufficiency (Cover and Thomas, 2006), Z_v^Γ is *predictively sufficient* for target Y given C if

$$\mathcal{L}(Y \mid U_v, C) = \mathcal{L}(Y \mid Z_v^\Gamma, C) \quad \text{a.s.,}$$

or equivalently,

$$I(Y; U_v \mid Z_v^\Gamma, C) = 0.$$

2.2 Predictive Preservation under Recursive Structure

For each $v \in V$, let Y_v denote the predictive event associated with that recursive stage, with Y_ρ denoting the root target. The root target Y_ρ is the global relevance variable, since it is ultimately the prediction that compression should

¹Examples include interaction outcomes, subsequent responses, and recorded actions. The same observed event may be associated with multiple recursive interfaces, while intermediate transformations without an associated event are included in the recursive transition between adjacent recursive interfaces.

preserve. For a deeper state, however, its relation to Y_ρ is mediated by a longer sequence of recursive transformations. By the data-processing principle, mutual information cannot increase along such a chain and may contract under repeated transformations (Polyanskiy and Wu, 2017). Hence, as recursive depth grows, the root target can become an increasingly indirect guide for deciding what information an intermediate state should retain.

Recursive computation provides a way to exploit nearby predictive events. Once unrolled as a rooted tree, information from a subtree reaches the rest of the computation through successive parent–child interfaces, connecting nearby predictive events along the same rootward path. Proximity alone does not determine relevance to the root target. Conditional on C , the tree structure induces a local separation: subtrees that branch apart interact only through their shared ancestral path (Lauritzen, 1996). At each recursive interface, incoming child representations are aggregated into U_v before recursive propagation. We require the pre-compression interface state to screen the adjacent predictive events from those incoming child states once (U_v, C) is given. Appendix F.1 states this condition as (M3), together with the predictive-tree condition (M1) and recursive host construction (M2). When the complete interface record U_v contains the incoming child tuple, (M3) holds automatically. This naturally motivates using adjacent predictive events along each rootward path. For every non-root recursive interface v , define the adjacent predictive pair $S_v := (Y_v, Y_{\text{pa}(v)})$. Applying Definition 2.1 to S_v gives local predictive sufficiency. Consecutive pairs share an intermediate predictive event, allowing predictive sufficiency to compose recursively toward the root.

Proposition 1 (Recursive Predictive Closure). *Suppose the recursive computation satisfies (M1)–(M3) of Appendix F.1. Let $U := (U_v)_{v \neq \rho}$ and $Z^\Gamma := (Z_v^\Gamma)_{v \neq \rho}$. Then*

$$[I(S_v; U_v \mid Z_v^\Gamma, C) = 0, \quad \forall v \in V \setminus \{\rho\}] \implies I(Y_\rho; U \mid Z^\Gamma, C) = 0.$$

Proposition 1 shows that root-target sufficiency follows from local predictive sufficiency at the recursive interfaces. If Z_v^Γ preserves the information in U_v required for S_v at every recursive interface, the shared predictive events allow these conditions to compose toward Y_ρ . The proof is given in Appendix F.1. This motivates the local predictive deficiency $I(S_v; U_v \mid Z_v^\Gamma, C)$ under a prescribed compression width. Driving these local predictive deficiencies to zero recovers the root-level guarantee. Since the criterion depends on unknown conditional laws, direct estimation is difficult for finite, high-dimensional representations. Section 3 develops a tractable empirical realization.

3 Learning for Predictive Preservation

3.1 Predictive Deficiency Estimation

Local predictive sufficiency specifies what compression should preserve: replacing the pre-compression state U_v with Z_v^Γ should retain the information needed to predict the adjacent predictive pair S_v . The exact variational criterion $\inf_{q_v} \mathcal{V}_v(\Gamma, q_v)$ captures this requirement, but depends on an unknown conditional law and is unavailable during training. We make it tractable by restricting prediction to finite tests, profiling the predictive readout, and estimating the resulting population quantity from finite samples. Figure 1 summarizes this construction; formal derivations and approximation bounds are given in Appendices F.2 and F.3.




Figure 1: **From the exact predictive criterion to empirical predictive deficiency.** The construction uses finite tests, covariance-balanced readouts, and estimates the population quantity.

Restricting to finite predictive tests. Because the conditional law of S_v is unavailable, we replace the full-law comparison by the fixed test representation $P_v := T_S(\chi(C_v) \otimes \phi(Y_v, Y_{\text{pa}(v)}))$, where χ and ϕ are fixed feature maps and T_S is a bounded-width sketch. For a candidate representation X_v , let $\mathcal{R}_v^*(P_v \mid X_v, C_v) := \inf_g \mathbb{E}[\|P_v - g(X_v, C_v)\|_2^2]$ denote its optimal predictive risk. The finite-test predictive risk gap $\Delta_v^{\text{test}}(\Gamma) := \mathcal{R}_v^*(P_v \mid Z_v^\Gamma, C_v) - \mathcal{R}_v^*(P_v \mid U_v, C_v)$ measures the predictive loss induced by compression on this fixed test family. The localization from the retained global context C to the visible C_v is characterized in Appendix F.3.

Profiling the predictive readout. The finite-test risk still optimizes over unrestricted measurable predictors. We therefore restrict the readout to ridge regression and profile out its parameters analytically. Full-covariance balancing then yields the profiled balanced predictive value $J_{\text{bal},v}$, giving $\Delta_v^{\text{bal}}(\Gamma) := J_{\text{bal},v}(U_v | C_v) - J_{\text{bal},v}(Z_v^\Gamma | C_v)$. Here $\mathcal{R}_v^*$ is a risk to be minimized, whereas $J_{\text{bal},v}$ is a predictive value to be maximized, hence the reversed difference.

Estimating predictive deficiency from finite samples. We replace the remaining population covariance operators by regularized empirical estimates over an optimization window $\mathcal{B}$, so that the predictive geometry is estimated from a shared set of recursive realizations, which then yields $\hat{\mathcal{D}}_{\mathcal{B}}(\Gamma) := \hat{J}_{\text{bal},\mathcal{B}}(U) - \hat{J}_{\text{bal},\mathcal{B}}(Z^\Gamma)$. The pre-compression term is treated as a stop-gradient reference, so the first-order sensitivities used for optimization are taken through Z^Γ while the reference predictive value remains fixed within the window. Full-covariance balancing is used in the main method, while the diagonal form is evaluated only as a covariance approximation in the ablation study. Section 3.2 uses these predictive sensitivities to constrain task proposals.

3.2 Margin-Relaxed Predictive Constraints

Task optimization may improve the root-target objective while increasing empirical predictive deficiency at intermediate recursive interfaces. We therefore constrain task proposals using these predictive sensitivities, with a margin for task adaptation. For a realized compressed state z_i^Γ , let $a_i := \nabla_{z_i^\Gamma} \hat{\mathcal{D}}_{\mathcal{B}}(\Gamma)$ denote its predictive sensitivity in representation space. It describes how the empirical predictive deficiency changes under a perturbation of that compressed state. Pulling this sensitivity back through the compressor Jacobian gives $q_i := (\nabla_\Gamma z_i^\Gamma)^\top a_i$ in the trainable parameter space. For a small update d , $q_i^\top d$ measures first-order contribution to the change in empirical predictive deficiency. Thus, a_i identifies the predictive sensitivity of the compressed representation, while q_i is the corresponding predictive sensitivity in the trainable parameter space. Because all sensitivities are differentiated from the same window-level statistic $\hat{\mathcal{D}}_{\mathcal{B}}$, they reflect a shared empirical surrogate, not distinct population δ_v values.

We aggregate these local directions at the granularity of the predictive constraints within the current optimization window. For group $\mathcal{G}_g$, let $\bar{q}_g := \sum_{i \in \mathcal{G}_g} q_i$ and $h_g := \bar{q}_g / \|\bar{q}_g\|_2$ when $\bar{q}_g \neq 0$; zero groups impose no constraint. In temporal graphs, each group contains realizations from one computation tree and one interface type, so each constraint captures their joint first-order effect without introducing additional depth-dependent weighting. Stacking $h_g^\top$ gives $H_t \in \mathbb{R}^{m \times p}$. For the task proposal t_t , define $b_t := \kappa \|t_t\|_2 \mathbf{1}_m$ and $\mathcal{F}_t := \{d : H_t d \leq b_t\}$. Each row of H_t limits motion along one predictive sensitivity, and their intersection defines the predictive-feasible region. The tolerance $\kappa \geq 0$ controls the allowed first-order increase in predictive deficiency. Figure 2 shows how the margin-relaxed predictive constraints restrict the task proposal to yield a predictive-feasible update.

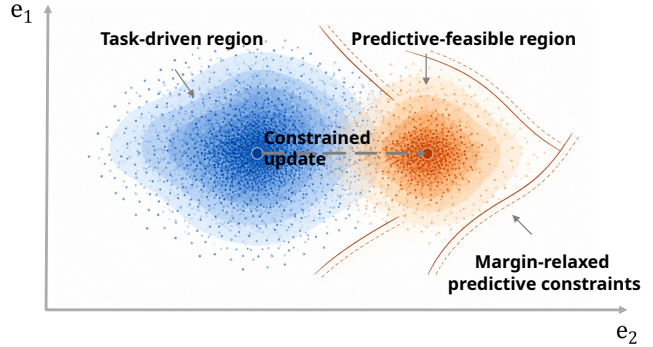


Figure 2: **Margin-relaxed predictive constraints.** Task proposal and constrained update in the predictive-feasible region.

Proposition 2 (Dual Characterization of Predictive Feasibility Projection). *The predictive feasibility projection of the task proposal onto $\mathcal{F}_t$ has a unique constrained update d_t^* . There exists a nonnegative dual optimal multiplier, and every dual optimum yields the same d_t^* . Moreover, the predictive correction lies in the span of the predictive constraint directions. Specifically,*

$$\alpha_t^* \in \operatorname{argmax}_{\alpha \geq 0} \left\{ -\frac{1}{2} \alpha^\top (H_t H_t^\top) \alpha + \alpha^\top (H_t t_t - b_t) \right\}, \quad d_t^* = t_t - H_t^\top \alpha_t^*.$$

Proposition 2 gives a tractable characterization of the constrained update. The correction is restricted to the span of the predictive constraint directions, while the dual optimization is carried out in the m -dimensional constraint space rather than the full p -dimensional parameter space. The primal–dual derivation, feasibility properties, and computational complexity are given in Appendix F.3; solver and feasibility settings are reported in Appendix E. The dual characterization permits any nonnegative b_t ; $b_t = \kappa \|t_t\|_2 \mathbf{1}_m$ is our full-covariance choice.

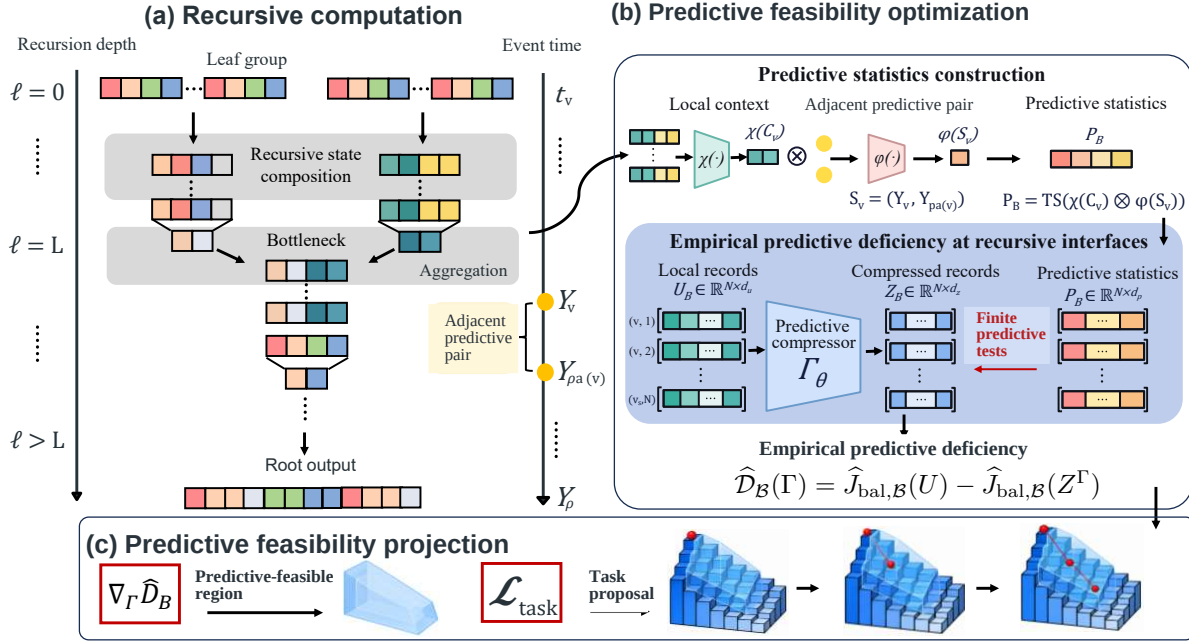


Figure 3: **Predictive feasibility optimization for recursive compression.** Predictive sensitivities constrain the task proposal before parameter write-back.

3.3 Predictive Feasibility Optimization

Algorithm 1 summarizes the training procedure. Within each optimization window, the host forward pass provides the predictive statistics, from which the interface sensitivities are pooled into the grouped constraint matrix H_t defined in Section 3.2. The host optimizer produces the task proposal t_t on the trainable compressor parameters. Proposition 2 then maps (H_t, t_t) to the constrained update d_t^* , which is written back to Γ . The host forward computation and task objective remain unchanged.

Optimization procedure. The optimizer preview constructs the task proposal t_t without advancing its state. Predictive feasibility projection then returns the closest constrained update in the predictive-feasible region defined by (H_t, b_t) . The optimizer state is advanced once per window, and the resulting constrained update d_t^* is written back to the compressor parameters.

Algorithm 1: Predictive Feasibility Optimization

Require:

Window B , compressor Γ_t , optimizer $\mathcal{O}$ with state s_t , tolerance κ

Ensure: Updated compressor Γ_{t+1}

1. Run the host forward pass and cache (P, U, Z^Γ)
2. Construct the grouped predictive constraints (H_t, b_t) from the window statistics and tolerance κ
3. Obtain the task proposal $t_t \leftarrow \Delta_{\mathcal{O}}(\Gamma_t, s_t, \nabla_\Gamma \mathcal{L}_{\text{task}})$
4. Solve for d_t^* using Proposition 2
5. Advance s_t once and set $\Gamma_{t+1} \leftarrow \Gamma_t + d_t^*$

3.4 Properties and Predictive Guarantees

Local predictive deficiencies admit a quantitative global consequence. We now relate accumulated local predictive deficiencies to the predictive law of the root target.

Proposition 3 (Root Predictive Stability). *Under (M1)–(M3) of Appendix F.1, with C the full retained context and*

$Z_v^\Gamma = U_v$ at any uncompressed interface,

$$\mathbb{E}[\text{TV}(\mathcal{L}(Y_\rho | U, C), \mathcal{L}(Y_\rho | Z^\Gamma, C))] \leq \left\{ \frac{1}{2} \sum_{v \neq \rho} I(S_v; U_v | Z_v^\Gamma, C) \right\}^{1/2}.$$

Proposition 3 provides a quantitative local-to-global guarantee. It shows that the change in the root predictive law is controlled by the local predictive deficiencies at the individual recursive interfaces, so small local predictive deficiencies imply a small global predictive discrepancy. When every local predictive deficiency vanishes, the compressed computation preserves the root target exactly, recovering the conclusion of Proposition 1. This guarantee concerns the population-level local predictive deficiencies and applies when its stated local predictive deficiencies are controlled. The local calibration in Corollary F.1 requires additional test-coverage, readout, context-localization, and independent-sample conditions; the projection bounds only a first-order change in the pooled training statistic. Appendix F.4 further shows that the projected updates bound the finite-horizon change of the pooled empirical predictive deficiency, up to the relaxation margin and residual higher-order terms. Combined with the local calibration above, this connects the quantity controlled during training to the population deficiencies in Proposition 3; details are given in the appendix. The complete proof is given in Appendix F.5.

Local supervision beyond the root target. Root-target supervision identifies intermediate states through their root-target posterior. Appendix F.6 shows that this quotient may merge states with distinct recursive posteriors: root-target sufficiency can hold while $I(S_v; U_v | Z_v^\Gamma, C)$ remains positive. Hence root-target sufficiency alone does not imply local predictive sufficiency. Our update constrains the grouped first-order change of the predictive surrogate. At zero margin, each grouped constraint has a non-positive linearized contribution, while a feasible task proposal is unchanged. Appendix F.3.5 proves this guarantee, Appendix F.3 quantifies the approximation to the local predictive criterion, and Appendix F.5 relates the local predictive deficiencies to root predictive stability.

4 Experiments

Datasets and tasks. We evaluate our method across four recursive settings. For temporal graph learning, we use Wikipedia (Kumar et al., 2019) for node classification and UCI (Panzarasa et al., 2009) for link prediction, with propagation depths controlling recursive neighborhood expansion. For language memory, we use DailyDialog (Li et al., 2017) for response prediction across increasing conversation histories and Multi-Session Chat (MSC) (Xu et al., 2022) for long-term response prediction across increasing session histories. For vision-language-action control, we use LIBERO-Mem (Chung et al., 2026) to evaluate memory during multi-stage manipulation under the T3 setting. For each training run, checkpoint selection uses an internal 20-demonstration development split from the released refined training data; the selected checkpoint is then frozen and evaluated on a separate set of 20 official held-out evaluation initializations. For SRI, we use a six-task cohort from CO-Bench (Sun et al., 2026) as a mechanism-level evaluation of predictive preservation, where optimization candidates are recursively generated and refined from earlier candidates and execution feedback, and retained history conditions subsequent strategy updates. Detailed dataset statistics and matched evaluation protocols across all four domains are provided in Appendix C.

Models and baselines. Across all four domains, we instantiate our method on a representative recursive model: TGN (Rossi et al., 2020) for temporal graphs, CCM-merge (Kim et al., 2024) for language memory, MemoryVLA (Shi et al., 2026) for vision-language-action control, and Metaⁿ (Kim et al., 2026) for SRI. For temporal graphs, we compare against TGN (Rossi et al., 2020), TGAT (Xu et al., 2020), TCL (Wang et al., 2021), CTAN (Gravina et al., 2024), and DyGFormer (Yu et al., 2023). For language memory, we compare directly against the corresponding CCM-merge host under the same backbone, memory depth, and evaluation protocol. For vision-language-action control, we compare against MemoryVLA (Shi et al., 2026) and report prior-work results for π_0 , SlotVLA, and E-SlotSSM on the same LIBERO-Mem T3 benchmark as contextual references. For SRI, we compare against Metaⁿ (Kim et al., 2026) with the same backbone, task cohort, recursive search procedure, and optimization budget. Ours changes the historical-trace retention rule used for subsequent recursive updates. Unless otherwise specified, our method modifies only the compression, memory, or recursive-context retention mechanism of the corresponding host while keeping the underlying backbone and evaluation protocol fixed.

Table 1: **Main results across recursive systems.** Results span temporal graphs, language memory, VLA control, and SRI; best results appear bold.

(a) Temporal Graph Learning <i>Prediction across propagation depths; AP/AUC in %</i>							
Dataset / Task	Setting	TGN	TGAT	TCL	CTAN	DyGFormer	Ours
Wikipedia	Depth 2 AUC ↑	83.61	85.45	85.64	87.31	82.90	88.81
Node Classification	Depth 3 AUC ↑	87.47	82.08	81.26	87.38	87.00	89.17
UCI Link Prediction	Depth 3 AP ↑	93.04	86.08	86.35	–	95.47	94.14
	Depth 3 AUC ↑	92.79	85.44	85.95	–	94.52	93.73
	Depth 4 AP ↑	94.07	84.14	83.78	–	94.92	94.89
	Depth 4 AUC ↑	93.73	83.09	83.20	–	94.14	94.47
(b) Language Memory <i>Performance under increasing memory depth</i>							
Dataset / Metric	Depth	LLaMA-7B			Gemma-4-E4B-It		
		CCM-M	Ours	Δ (%)	CCM-M	Ours	Δ (%)
DailyDialog PPL ↓	4	5.98	5.86	-1.98	7.00	6.97	-0.54
	6	5.85	5.71	-2.51	6.84	6.78	-0.80
	8	5.80	5.65	-2.56	6.85	6.77	-1.05
	11	5.72	5.55	-2.91	6.77	6.66	-1.64
	13	5.63	5.38	-4.53	6.73	6.58	-2.24
MSC PPL ↓	3	6.82	6.77	-0.84	7.96	7.96	0.00
	4	7.02	6.95	-1.09	8.23	8.22	-0.12
	5	7.03	6.93	-1.39	8.16	8.14	-0.25
(c) Vision-Language-Action <i>Persistent control under T3; SR/SGC in %</i>							
Benchmark	Setting	π_0^*	SlotVLA* $h=1$	SlotVLA* $h=8$	E-SlotSSM* [†]	MemoryVLA	Ours
LIBERO-Mem	T3 SR ↑	0.00	0.00	0.00	–	1.67	11.67
	T3 SGC ↑	0.00	0.00	0.00	33.30	20.00	27.22
(d) Self-Recursive Improvement <i>Predictive preservation in recursive strategy refinement</i>							
Benchmark	Backbone	Dev Gain ↑		Held-out Score ↑			Ours
		Meta ⁿ	Ours	Task	Meta ⁿ	Ours	
CO-Bench	gpt-5.5	81.72	82.79	Assortment	45.98	49.37	92.34
	gemini-3.1-pro	90.01	95.47	Aircraft	83.89	92.34	
	DeepSeek-V4.1-Flash	80.70	86.00	Assignment	82.92	100.00	
				Capacitated	68.73	70.91	

Note. For temporal graphs, depth denotes propagation layers. DailyDialog reports dialogue-equal PPL under the matched protocol. For MSC, depth denotes preceding session history. * Results are from prior work. [†] E-SlotSSM uses oracle object-level subgoal representations. For SRI, Metaⁿ and Ours share the backbone, task cohort, recursive search procedure, and optimization budget; they differ only in the historical traces retained for recursive updates. We report Dev Gain from one paired run and three-evaluation mean held-out scores for tasks modified during development. The modified-task set is fixed before held-out evaluation. Complete six-task results and repeat-level variability are provided in Appendix D.4.

Metrics. We use task-specific metrics across the four domains. For temporal graphs, we report average precision (AP) and ROC-AUC. For language memory, we report dialogue-equal perplexity (PPL) on DailyDialog and session-opening PPL on MSC. For vision-language-action control, we report task success rate (SR) and sequential-goal completion (SGC) under T3. For SRI, we report Dev Gain from one paired recursive-search run and, for each task modified during development-side recursive refinement, the mean held-out score over three matched evaluations of each frozen strategy. The complete six-task task-wise results and cohort-level average from one fixed held-out evaluation are reported in Appendix D.4. Together, these metrics measure task-level predictive or control quality under each recursive setting and across different forms of recursion.

Main Findings. As summarized in Table 1, our method consistently improves the corresponding host across four substantially different recursive systems by modifying only how intermediate information is retained. A particularly informative pattern emerges as recursive dependence becomes more demanding. In language memory, the improvement over the compressed host is largest at longer histories, where information must survive repeated compression. In temporal graphs, although our TGN-based method trails the strong DyGFormer baseline at shallower propagation on UCI, this gap closes as propagation deepens, reaching comparable AP and higher AUC at the deepest setting. The VLA and SRI results extend this observation beyond explicit depth axes: the same preservation mechanism remains effective in long-horizon closed-loop execution and recursive strategy refinement, where retained information is reused in later computation. Complete depth- and history-resolved results are provided in Appendices D.1 and D.2, with additional long-horizon VLA and recursive-strategy analyses in Appendices D.3 and D.4.

(1) *Are the end-task gains consistent with the predictive-preservation mechanism?* End-task improvements alone do not identify why the method works. We therefore use Fig. 4 as a mechanism-consistency analysis. In temporal graphs, Fig. 4(a) shows that our method retains stronger finite-test predictive value J across recursive interfaces than TGN and task-only training, including predictive information originating from deeper sources. In SRI, Fig. 4(b) shows that information retained from earlier executions remains more useful when reused during subsequent strategy refinement. The same association also appears during language-memory training: Appendix D.2, Fig. 6, shows that the predictive-preservation signal ΔJ and validation PPL improvement evolve broadly in the same direction over the training trajectory. These diagnostics do not directly estimate the population deficiency δ_v ; together, they provide mechanism-level evidence linking task gains to stronger predictive preservation and downstream reuse.

(2) *Does the optimization actually enforce the intended preservation constraint?* The mechanism diagnostics above characterize the learned representations, but do not by themselves show whether the constraint is active during optimization. Appendix D.1, Fig. 5, directly examines this behavior: unconstrained task proposals continue to violate a nonzero fraction of the grouped predictive constraints throughout training, although the violation density decreases as optimization progresses. Thus, the projection is not vacuous; task optimization continues to propose directions that can interfere with predictive preservation. Moreover, Table 9 shows that the constrained first-order quantity closely tracks the actual change in the corresponding window-level predictive statistic, validating the local bridge used by the projection. Table 2 further separates this constrained update from task-only training, an additive predictive-gradient update, and a single global predictive constraint, while the complete controlled ablations are reported in Appendix E.7. Their degradation relative to the full method supports the role of interface-wise constrained optimization beyond merely adding predictive supervision.

Ablation studies. Table 2 isolates the main design choices under the same UCI depth-3 setting. Task-Only Training controls for the shared host, compressor, and trainable parameterization, testing whether additional learnability alone explains the improvement. Direct Future Prediction asks whether a conventional future-prediction objective can replace the proposed predictive criterion, while the Single-Event Predictive Criterion directly tests the adjacent predictive pair S_v underlying our theoretical formulation. Additive Predictive-Gradient Update uses the same predictive supervision as an auxiliary gradient, separating the contribution of predictive supervision from its constrained parameter-space realization. Global Predictive Constraint further tests whether an aggregated constraint can replace the interface-wise structure used by our method. Across these controls, the observed performance degradations are substantial, supporting the respective roles of the predictive criterion, adjacent predictive pair, and constrained update. Additional ablations on statistical realization and supervision alignment are reported in Appendix E.7.

Robustness and efficiency. We further examine the two choices that most directly control the constraint. The feasibility tolerance κ exhibits a clear interior optimum: overly small values restrict the task proposal too strongly, whereas larger values weaken predictive preservation. Increasing the eligible-interface fraction improves test AP and then approaches saturation, indicating that the pooled statistic benefits from broader interface coverage once sufficient support is available. We therefore select κ by a small validation sweep and retain broad eligible-interface coverage. The

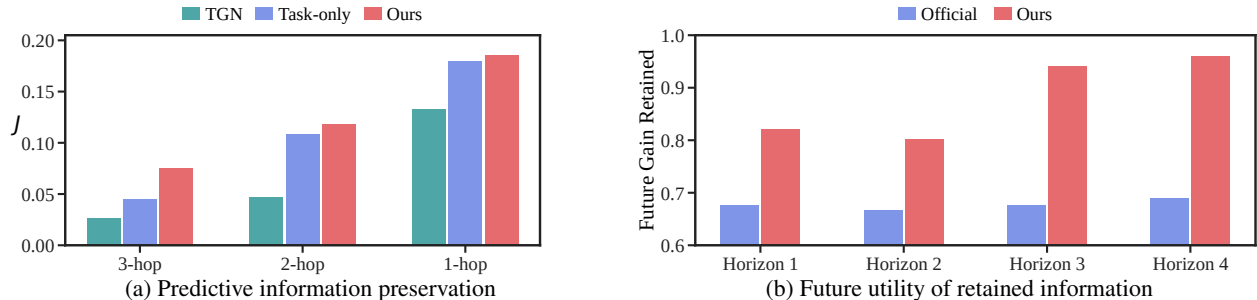


Figure 4: **Mechanism analysis.** (a) The finite-test predictive value J tracks predictive distinctions retained across recursive interfaces. (b) Future gain retained measures whether retained information remains useful when reused in later recursive updates. Together, the two diagnostics test whether end-task improvements are accompanied by stronger predictive preservation and downstream reuse.

Table 2: **Single-seed diagnostic ablation on UCI at depth 3.** We isolate the roles of the predictive target, the adjacent predictive pair, and the way predictive supervision constrains updates.

Variant	AP $\uparrow$	AUC $\uparrow$
Task-Only Training	92.62	92.13
Direct Future Prediction	92.76	92.24
Single-Event Predictive Criterion	92.41	91.93
Additive Predictive-Gradient Update	92.64	92.18
Global Predictive Constraint	90.32	89.88
Our Method	94.52	94.25

method acts only during training; its additional computation consists of pooled minibatch statistics, predictive sensitivities, and the predictive feasibility projection, while test-time computation remains that of the host. The complete sensitivity curves are reported in Appendix E.8.

5 Conclusion

We study how to learn compact states for recursive computation without losing information required by prediction. Our approach builds on local predictive deficiency and recursive predictive closure, and uses predictive feasibility projection to constrain the task proposal. Across temporal graphs, language memory, vision-language-action control, and recursive self-improvement, the method improves host models under matched compression budgets. Mechanistic analyses show preservation of predictive information from deeper sources, while ablations confirm the roles of alignment, conditioning, and constrained optimization. These results support predictive preservation at recursive interfaces as a principle for compact states across domains.

Limitations. Our formulation relies on statistical support for estimating local predictive constraints, which may become less stable in data-sparse regimes. The feasibility tolerance κ also requires validation-based calibration and may vary across tasks and domains. Developing more data-efficient estimators and adaptive calibration strategies, including transfer across related tasks, remains a direction for future work. The VLA evidence is restricted to the held-out LIBERO-Mem T3 evaluation initializations and should therefore be interpreted as held-out closed-loop performance under this benchmark setting rather than as broad out-of-distribution generalization.

References

Islam Abdelaleem, Ilya Nemenman, and K. Michael Martini. Deep variational multivariate information bottleneck - a framework for variational losses. *Journal of Machine Learning Research*, 26(140):1–50, 2025.

- Inaki Estella Aguerri and Abdellatif Zaidi. Distributed information bottleneck method for discrete and gaussian sources. In *2018 International Zurich Seminar on Information and Communication*, pages 35–39, 2018.
- Uri Alon and Eran Yahav. On the bottleneck of graph neural networks and its practical implications. In *International Conference on Learning Representations*, 2021.
- Mahmoud Assran, Quentin Duval, Ishan Misra, Piotr Bojanowski, Pascal Vincent, Michael Rabbat, Yann LeCun, and Nicolas Ballas. Self-supervised learning from images with a joint-embedding predictive architecture. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15619–15629, 2023.
- Pradeep Kr. Banerjee, Kedar Karhadkar, Yuguang Wang, Uri Alon, and Guido Montúfar. Oversquashing in GNNs through the lens of information contraction and graph expansion. In *2022 58th Annual Allerton Conference on Communication, Control, and Computing*, pages 1–8, 2022. doi: 10.1109/ALLERTON49937.2022.9929363.
- Hippolyte Charvin, Nicola Catenacci Volpi, and Daniel Polani. Exact and soft successive refinement of the information bottleneck. *Entropy*, 25(9):1355, 2023. doi: 10.3390/e25091355.
- Arslan Chaudhry, Marc’Aurelio Ranzato, Marcus Rohrbach, and Mohamed Elhoseiny. Efficient lifelong learning with A-GEM. In *International Conference on Learning Representations*, 2019. URL <https://arxiv.org/abs/1812.00420>.
- Alexis Chevalier, Alexander Wettig, Anirudh Ajith, and Danqi Chen. Adapting language models to compress contexts. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 3829–3846. Association for Computational Linguistics, 2023. doi: 10.18653/v1/2023.emnlp-main.232. URL <https://aclanthology.org/2023.emnlp-main.232/>.
- Nhat Chung, Taisei Hanyu, Toan Nguyen, Huy Le, Frederick Bumgarner, Duy Minh Ho Nguyen, Khoa Vo, Kashu Yamazaki, Chase Rainwater, Tung Kieu, Anh Nguyen, and Ngan Le. Rethinking progression of memory state in robotic manipulation: An object-centric perspective. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 3407–3415, 2026. doi: 10.1609/aaai.v40i5.37337.
- Thomas M. Cover and Joy A. Thomas. *Elements of Information Theory*. Wiley-Interscience, 2 edition, 2006.
- John Duchi, Elad Hazan, and Yoram Singer. Adaptive subgradient methods for online learning and stochastic optimization. *Journal of Machine Learning Research*, 12(61):2121–2159, 2011.
- Tao Feng, Yexin Wu, Guanyu Lin, and Jiaxuan You. Graph world model. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 16931–16955. PMLR, 2025.
- Christoph Goller and Andreas Küchler. Learning task-dependent distributed representations by backpropagation through structure. In *Proceedings of the International Conference on Neural Networks (ICNN’96)*, volume 1, pages 347–352. IEEE, 1996. doi: 10.1109/ICNN.1996.548916.
- Alessio Gravina, Giulio Lovisotto, Claudio Gallicchio, Davide Bacciu, and Claas Grohnfeldt. Long range propagation on continuous-time dynamic graphs. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 16206–16225. PMLR, 2024.
- Steffen Grünewälder, Guy Lever, Luca Baldassarre, Sam Patterson, Arthur Gretton, and Massimiliano Pontil. Conditional mean embeddings as regressors. In *Proceedings of the 29th International Conference on Machine Learning*, 2012. URL <https://icml.cc/2012/papers/898.pdf>.
- Jiani Guo, Zuchao Li, Jie Wu, Qianren Wang, Yun Li, Lefei Zhang, Hai Zhao, and Yujiu Yang. ToM: Leveraging tree-oriented MapReduce for long-context reasoning in large language models. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 17793–17812. Association for Computational Linguistics, 2025. doi: 10.18653/v1/2025.emnlp-main.899.
- Ahmed Hefny, Zita Marinho, Wen Sun, Siddhartha Srinivasa, and Geoffrey Gordon. Recurrent predictive state policy networks. In *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pages 1949–1958. PMLR, 2018.

- Jang-Hyun Kim, Junyoung Yeom, Sangdoo Yun, and Hyun Oh Song. Compressed context memory for online language model interaction. In *International Conference on Learning Representations*, 2024. URL https://proceedings.iclr.cc/paper_files/paper/2024/hash/97dc07f1253ab33ee514f395a82fa7cc-Abstract-Conference.html.
- Zae Myung Kim, Young-Jun Lee, Seungyeon Jwa, and Dongyeop Kang. Metaⁿ: Recursive self-improvement through emergent depth. *arXiv preprint arXiv:2608.24735*, 2026. URL <https://arxiv.org/abs/2608.24735>.
- Alex Kulesza, Nan Jiang, and Satinder Singh. Spectral learning of predictive state representations with insufficient statistics. In *Proceedings of the Twenty-Ninth AAAI Conference on Artificial Intelligence*, pages 2715–2721, 2015. doi: 10.1609/aaai.v29i1.9635.
- Srikanth Kumar, Xikun Zhang, and Jure Leskovec. Predicting dynamic embedding trajectory in temporal interaction networks. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 1269–1278, 2019. doi: 10.1145/3292500.3330895.
- Steffen L. Lauritzen. *Graphical Models*. Oxford University Press, 1996.
- Yanran Li, Hui Su, Xiaoyu Shen, Wenjie Li, Ziqiang Cao, and Shuzi Niu. DailyDialog: A manually labelled multi-turn dialogue dataset. In *Proceedings of the Eighth International Joint Conference on Natural Language Processing*, pages 986–995, 2017. URL <https://aclanthology.org/I17-1099/>.
- Michael L. Littman, Richard S. Sutton, and Satinder Singh. Predictive representations of state. In *Advances in Neural Information Processing Systems*, volume 14, pages 1555–1561, 2001. URL https://papers.nips.cc/paper_files/paper/2001/hash/1e4d36177d71bbb3558e43af9577d70e-Abstract.html.
- David Lopez-Paz and Marc’Aurelio Ranzato. Gradient episodic memory for continual learning. In *Advances in Neural Information Processing Systems*, volume 30, 2017. URL <https://papers.nips.cc/paper/2017/hash/f87522788a2be2d171666752f97ddebb-Abstract.html>.
- Sarah E. Marzen and James P. Crutchfield. Predictive rate-distortion for infinite-order markov processes. *Journal of Statistical Physics*, 163(6):1312–1338, 2016. doi: 10.1007/s10955-016-1520-1.
- Pietro Panzarasa, Tore Opsahl, and Kathleen M. Carley. Patterns and dynamics of users’ behavior and interaction: Network analysis of an online community. *Journal of the American Society for Information Science and Technology*, 60(5):911–932, 2009. doi: 10.1002/asi.21015.
- Yury Polyanskiy and Yihong Wu. Strong data-processing inequalities for channels and bayesian networks. In *Convexity and Concentration*, pages 211–249. Springer, 2017. doi: 10.1007/978-1-4939-7005-6_7.
- Ben Poole, Sherjil Ozair, Aaron Van Den Oord, Alex Alemi, and George Tucker. On variational bounds of mutual information. In *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 5171–5180. PMLR, 2019.
- Farimah Poursafaei, Shenyang Huang, Kellin Pelrine, and Reihaneh Rabbany. Towards better evaluation for dynamic link prediction. In *Advances in Neural Information Processing Systems*, volume 35, 2022. doi: 10.52202/068431-2386.
- Sashank J. Reddi, Satyen Kale, and Sanjiv Kumar. On the convergence of adam and beyond. In *International Conference on Learning Representations*, 2018.
- Bernardino Romera-Paredes, Mohammadamin Barekatain, Alexander Novikov, Matej Balog, M. Pawan Kumar, Emilien Dupont, Francisco J. R. Ruiz, Jordan S. Ellenberg, Pengming Wang, Omar Fawzi, Pushmeet Kohli, and Al-hussein Fawzi. Mathematical discoveries from program search with large language models. *Nature*, 625(7995): 468–475, 2024. doi: 10.1038/s41586-023-06924-6.
- Emanuele Rossi, Ben Chamberlain, Fabrizio Frasca, Davide Eynard, Federico Monti, and Michael Bronstein. Temporal graph networks for deep learning on dynamic graphs. In *ICML 2020 Workshop on Graph Representation Learning*, 2020. URL <https://arxiv.org/abs/2006.10637>.

- Franco Scarselli, Marco Gori, Ah Chung Tsoi, Markus Hagenbuchner, and Gabriele Monfardini. The graph neural network model. *IEEE Transactions on Neural Networks*, 20(1):61–80, 2009. doi: 10.1109/TNN.2008.2005605.
- Hao Shi, Bin Xie, Yingfei Liu, Lin Sun, Fengrong Liu, Tiancai Wang, Erjin Zhou, Haoqiang Fan, Xiangyu Zhang, and Gao Huang. MemoryVLA: Perceptual-cognitive memory in vision-language-action models for robotic manipulation. In *International Conference on Learning Representations*, 2026. URL <https://iclr.cc/virtual/2026/poster/10011504>.
- Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. In *Advances in Neural Information Processing Systems*, volume 36, 2023. doi: 10.52202/075280-0377. URL https://proceedings.neurips.cc/paper_files/paper/2023/hash/1b44b878bb782e6954cd888628510e90-Abstract-Conference.html.
- Satinder Singh, Michael R. James, and Matthew R. Rudary. Predictive state representations: A new theory for modeling dynamical systems. In *Proceedings of the Twentieth Conference on Uncertainty in Artificial Intelligence*, pages 512–519, 2004.
- Richard Socher, Jeffrey Pennington, Eric H. Huang, Andrew Y. Ng, and Christopher D. Manning. Semi-supervised recursive autoencoders for predicting sentiment distributions. In *Proceedings of the 2011 Conference on Empirical Methods in Natural Language Processing*, pages 151–161. Association for Computational Linguistics, 2011.
- Le Song, Jonathan Huang, Alex Smola, and Kenji Fukumizu. Hilbert space embeddings of conditional distributions with applications to dynamical systems. In *Proceedings of the 26th International Conference on Machine Learning*, pages 961–968, 2009. URL <https://icml.cc/2009/papers/538.pdf>.
- Susanne Still. Information bottleneck approach to predictive inference. *Entropy*, 16(2):968–989, 2014. doi: 10.3390/e16020968.
- Weiwei Sun, Shengyu Feng, Shanda Li, and Yiming Yang. CO-Bench: Benchmarking language model agents in algorithm search for combinatorial optimization. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 33126–33134, 2026. doi: 10.1609/aaai.v40i39.40596.
- Kai Sheng Tai, Richard Socher, and Christopher D. Manning. Improved semantic representations from tree-structured long short-term memory networks. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1556–1566. Association for Computational Linguistics, 2015. doi: 10.3115/v1/P15-1150.
- Naftali Tishby and Noga Zaslavsky. Deep learning and the information bottleneck principle. In *2015 IEEE Information Theory Workshop (ITW)*, pages 1–5. IEEE, 2015. doi: 10.1109/ITW.2015.7133169.
- Naftali Tishby, Fernando C. Pereira, and William Bialek. The information bottleneck method. In *Proceedings of the 37th Annual Allerton Conference on Communication, Control, and Computing*, pages 368–377, 1999.
- Jake Topping, Francesco Di Giovanni, Benjamin Paul Chamberlain, Xiaowen Dong, and Michael M. Bronstein. Understanding over-squashing and bottlenecks on graphs via curvature. In *International Conference on Learning Representations*, 2022.
- Aaron van den Oord, Yazhe Li, and Oriol Vinyals. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*, 2018.
- Lu Wang, Xiaofu Chang, Shuang Li, Yunfei Chu, Hui Li, Wei Zhang, Xiaofeng He, Le Song, Jingren Zhou, and Hongxia Yang. TCL: Transformer-based dynamic graph modelling via contrastive learning. *arXiv preprint arXiv:2105.07944*, 2021.
- Zehong Wang, Zheyuan Zhang, Tianyi Ma, Nitesh V. Chawla, Chuxu Zhang, and Yanfang Ye. Towards graph foundation models: Learning generalities across graphs via task-trees. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 65518–65555. PMLR, 2025.

- Da Xu, Chuanwei Ruan, Evren Korpeoglu, Sushant Kumar, and Kannan Achan. Inductive representation learning on temporal graphs. In *International Conference on Learning Representations*, 2020.
- Jing Xu, Arthur Szlam, and Jason Weston. Beyond goldfish memory: Long-term open-domain conversation. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5180–5197, Dublin, Ireland, 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.acl-long.356.
- Haoran Ye, Jiarui Wang, Zhiguang Cao, Federico Berto, Chuanbo Hua, Haeyeon Kim, Jinkyoo Park, and Guojie Song. ReEvo: Large language models as hyper-heuristics with reflective evolution. In *Advances in Neural Information Processing Systems*, volume 37, 2024. doi: 10.52202/079017-1381. URL https://proceedings.neurips.cc/paper_files/paper/2024/hash/4ced59d480e07d290b6f29fc8798f195-Abstract-Conference.html.
- Le Yu, Leilei Sun, Bowen Du, and Weifeng Lv. Towards better dynamic graph learning: New architecture and unified library. In *Advances in Neural Information Processing Systems*, volume 36, 2023. doi: 10.52202/075280-2960.
- Tianhe Yu, Saurabh Kumar, Abhishek Gupta, Sergey Levine, Karol Hausman, and Chelsea Finn. Gradient surgery for multi-task learning. In *Advances in Neural Information Processing Systems*, volume 33, 2020. URL <https://proceedings.neurips.cc/paper/2020/hash/3fe78a8acf5fda99de95303940a2420c-Abstract.html>.

Appendix

Table of Contents

A	AI Use Statement	15
B	Related Work	15
C	Experimental Protocols and Evaluation Details	17
C.1	Temporal Graphs	17
C.2	Language Memory	19
C.3	Vision–Language–Action	22
C.4	Self-Recursive Improvement	24
D	Extended Results and Diagnostic Analyses	28
D.1	Temporal Graph Results	28
D.2	Language Memory Results	29
D.3	Vision–Language–Action Results	31
D.4	Recursive Self-Improvement Results	31
E	Implementation, Ablations, and Reproducibility	37
E.1	Temporal-Graph Implementation	37
E.2	Language-Memory Implementation	37
E.3	Vision–Language–Action Implementation	38
E.4	Self-Recursive Improvement Implementation	39
E.5	Training and Compute Configuration	41
E.6	Efficiency and Model Overhead	41
E.7	Ablation Study	42
E.8	Method Hyperparameters and Sensitivity	43
F	Theoretical Results and Proofs	45
F.1	Recursive Predictive Closure	45
F.2	Local Variational Characterization	51
F.3	From Local Predictive Deficiency to Constrained Updates	52
F.4	Finite-Horizon Predictive Control	60
F.5	Root Predictive Stability	61
F.6	Why Root-Target Supervision Is Insufficient	63

Appendices C–E contain the full experimental protocol, extended analyses, and implementation details. Appendix F collects all formal results and proofs in one place.

A AI Use Statement

Generative AI tools were used to assist with several supporting aspects of this work. They were used to polish and improve the clarity of the manuscript, while the technical content and final wording were reviewed and controlled by the authors. They were also used for literature and repository retrieval and discovery; all cited papers, repositories, and links were subsequently verified by the authors against the original sources.

Generative AI was additionally used to draft portions of standard descriptive text, such as preliminary summaries of experimental settings or results, which were subsequently revised by the authors based on the underlying experiments and technical details. For mathematical claims, the claims and main proof ideas were developed by the authors, while generative AI was used to assist with intermediate derivations, formalization, and proof checking during iterative development. All final mathematical statements and proofs were reviewed and verified by the authors.

For software development, the authors designed the code structure, implementation logic, and experimental pipeline, while generative AI was used to assist with code implementation. All AI-assisted code was subsequently reviewed, checked, and validated by the authors.

The authors take full responsibility for the final content of the paper.

B Related Work

Recursive state compression appears across a broad range of modern learning systems. Temporal graph models repeatedly aggregate historical interactions into evolving node representations, as in TGN and TGAT (Rossi et al., 2020; Xu et al., 2020); recurrent language-memory methods compress accumulated context into states that are reused across subsequent segments or interactions, as in CCM and AutoCompressor (Kim et al., 2024; Chevalier et al., 2023); embodied models such as MemoryVLA maintain compact perceptual–cognitive memories across multi-stage control (Shi et al., 2026); and iterative self-improvement or program-search systems reuse selected candidates, execution feedback, or reflections across successive rounds, as in Reflexion, FunSearch, and ReEvo (Shinn et al., 2023; Romera-Paredes et al., 2024; Ye et al., 2024). Despite their architectural differences, these systems share a common structure: intermediate states are repeatedly aggregated, compressed, and reused. This makes the central question not only how to compress a state, but what information must survive compression so that subsequent computation remains predictive.

Existing representation-learning methods impose different criteria for deciding whether a compressed state is adequate. A classical approach uses reconstruction. Recursive autoencoders, for example, compose child representations into a parent state and train the parent representation to reconstruct its children (Socher et al., 2011). More generally, autoencoding and masked-reconstruction objectives encourage representations to retain enough information to recover designated inputs or local content. A second family instead uses local or future prediction. Contrastive Predictive Coding trains a context representation to predict future latent representations (van den Oord et al., 2018), while joint-embedding predictive approaches such as I-JEPA predict representations of masked target regions from visible context without reconstructing raw inputs (Assran et al., 2023). Such objectives place greater emphasis on predictive structure than direct reconstruction. However, both reconstruction and future-prediction objectives require a target to be specified in advance. In a recursively composed system, accurately reconstructing an immediate input, predicting an immediate parent, or predicting a particular future latent does not by itself imply that the target preserves all distinctions needed after subsequent aggregation and compression.

Information-theoretic and predictive-state formulations provide a more general perspective on what a representation should preserve. The Information Bottleneck (IB) formalizes compression through retained information about a designated relevance variable (Tishby et al., 1999); distributed and multivariate variants extend this principle to multiple observations and interacting variables (Aguerre and Zaidi, 2018; Abdelaleem et al., 2025), while successive-refinement formulations study information preservation across multiple stages of compression (Charvin et al., 2023). Predictive State Representations (PSRs) instead characterize state through conditional predictions of future observables rather than reconstruction of the complete history (Littman et al., 2001; Singh et al., 2004). These perspectives establish task relevance and future predictability as principled criteria for representation quality. Our setting introduces an additional compositional requirement: the predictive distinctions retained at one interface must remain sufficient for the predictive requirements encountered at the next interface. We therefore do not introduce another reconstruction or fixed future-prediction target; we formulate a local predictive-sufficiency condition whose role is explicitly tied to recursive composition.

Directly enforcing such a condition through full conditional distributions or mutual information is generally im-

practical in high-dimensional learned systems. Mutual-information estimation from finite samples is statistically difficult, with variational estimators exhibiting substantial bias–variance trade-offs (Poole et al., 2019). Predictive-state learning faces a related approximation problem because practical systems must restrict attention to a finite collection of predictive tests (Kulesza et al., 2015). Spectral PSRs, conditional-distribution embeddings (Song et al., 2009), and conditional mean or operator-regression methods (Grünwälder et al., 2012) therefore characterize predictive relationships through finite tests, regressions, or cross-covariance operators. Our empirical predictive deficiency follows this computational philosophy, but the direction of construction is important: the recursive predictive requirement is specified first, and finite tests, ridge readouts, and covariance balancing are introduced only as a tractable approximation to that requirement. Thus, empirical predictive deficiency approximates but does not define this preservation criterion.

A separate line of work concerns how preservation or compatibility constraints are enforced during optimization. GEM constrains a current gradient using losses on episodic memories from previous tasks and projects violating gradients through a quadratic program (Lopez-Paz and Ranzato, 2017); A-GEM replaces the collection of per-task constraints with a reference-gradient constraint (Chaudhry et al., 2019); and PCGrad modifies multi-task gradients according to pairwise gradient conflicts (Yu et al., 2020). More generally, projected and proximal optimization methods allow an optimizer step to be followed by a correction with respect to a prescribed feasible domain, including adaptive methods for constrained stochastic optimization (Duchi et al., 2011; Reddi et al., 2018). We therefore do not regard gradient projection, quadratic programming, or post-optimizer projection itself as a contribution.

Our distinction lies instead in what defines the constrained update and where that constraint is imposed. GEM-type methods derive admissible directions from task losses or gradient compatibility, while conventional projected optimization assumes a feasible parameter domain specified independently of the current predictive state. In our setting, the predictive-feasible region is generated dynamically from predictive sensitivities of empirical predictive deficiency at recursive interfaces. Moreover, because the first-order predictive constraint is defined over an actual parameter displacement, we apply it to the task proposal produced by the host optimizer rather than directly projecting the raw task gradient before Adam or AdamW is applied. Given the task proposal t_t , predictive feasibility projection returns the closest constrained update d_t^* in the predictive-feasible region $\mathcal{F}_t$. The optimization contribution is therefore not a new projection operator, but the conversion of local predictive sufficiency into data-dependent margin-relaxed predictive constraints on the task proposal.

Taken together, prior work provides powerful mechanisms for reconstruction, future prediction, information-theoretic compression, predictive-state approximation, and constrained optimization. The remaining question addressed here is different: what local condition should an intermediate state satisfy when that state will itself be aggregated, compressed, and reused in later computation? We formulate this condition through local predictive sufficiency, approximate its local predictive deficiency with empirical predictive deficiency, and use predictive sensitivities to restrict updates that would erode the corresponding predictive distinctions.

Table 3: **Reproduction map for the four experimental domains.** Each row traces the reported results from data preparation through model selection and frozen evaluation. Each row links its protocol, results, and implementation.

Domain	Data / split	Training / initialization	Selection	Frozen evaluation
Temporal graphs	Wikipedia and UCI; chronological 70/15/15 split	TGN host with matched task, depth, temporal neighborhood, and seed; five independent runs	Wikipedia: validation ROC-AUC; UCI: full-validation AP	Selected checkpoint on held-out test; causal memory replay for Wikipedia; global AUC/AP. <i>Refs.: C.1, D.1, E.1</i>
Language memory	DailyDialog original splits with a fixed-target depth cohort; MSC chronological five-session conversations	One fixed CCM-merge host per backbone and dataset; three independent Ours runs initialized from the same host	Pre-specified validation criterion; one checkpoint selected per Ours run before depth-wise evaluation	DailyDialog: fixed pooled depth cohort; MSC: held-out test conversations; dialogue-equal PPL. <i>Refs.: C.2, D.2, E.2</i>
VLA	100 released refined T3 demonstrations: 80 training + 20 internal development	MemoryVLA host trained from the common Open-VLA initialization; Ours starts from the matched trained host and optimizes only Γ ; three independent runs	20-demonstration internal development split only; 25k-step upper budget; one checkpoint frozen per run	20 separate official held-out T3 evaluation initializations; matched MemoryVLA/Ours rollouts; SR and SGC. <i>Refs.: C.3, D.3, E.3</i>
SRI	Fixed six-task CO-Bench cohort with official development and held-out instances	Meta ⁿ and Ours begin from the same realized Layer-1 state and receive the same recursive-search opportunity and retained-history capacity	Recursive refinement and strategy selection use development feedback only; selected strategies are then frozen	Official held-out instances; matched evaluation of frozen strategies; three evaluation repeats for the reported task-level scores. <i>Refs.: C.4, D.4, E.4</i>

C Experimental Protocols and Evaluation Details

Reproduction Guide

Organization. All four experimental domains follow the same high-level reproduction path: data preparation, matched-host initialization, training of Ours, validation- or development-only model selection, and frozen final evaluation. Appendix C specifies the dataset construction, split rules, selection criteria, metrics, and evaluation cohorts; Appendix D reports the complete results and diagnostic analyses; and Appendix E documents the host-specific integration, optimization settings, compute environment, and method-specific frozen hyperparameters. Exact executable commands and frozen configuration files are provided with the supplementary code release.

Execution order. To reproduce a reported result, we first construct the corresponding dataset and evaluation cohort using the domain-specific protocol in Appendix C. We then initialize or train the matched host model and train Ours from the prescribed host state using the corresponding implementation in Appendix E. Checkpoint or strategy selection uses only the validation or development data specified for that domain. The selected state is subsequently frozen and passed to the corresponding evaluation protocol without further parameter updates or held-out-based selection. Metrics are aggregated according to the rules specified in Appendix C, and the complete run-level results are reported in Appendix D. Training budgets, repetitions, software, and compute configurations are summarized in Appendix E.5, while the method-specific frozen hyperparameters are reported in Appendix E.8.

C.1 Temporal Graphs

Datasets and provenance. We evaluate on Wikipedia (Kumar et al., 2019) and UCI (Panzarasa et al., 2009), two established continuous-time interaction networks. Wikipedia contains timestamped interactions between users and Wikipedia pages together with dynamic user-state labels, and is used for node classification. UCI contains timestamped message exchanges between users in an online community and is used for temporal link prediction.

Table 4: **Temporal-graph datasets and evaluation settings.**

Dataset	Nodes	Interactions	Task	Depth
Wikipedia	9,227	157,474	Node classification	2, 3
UCI	1,899	59,835	Link prediction	3, 4

We use the processed benchmark files released with DGB (Poursafaei et al., 2022).² Within each task, the same processed data are used for all compared methods. Table 4 summarizes the dataset statistics and evaluation settings.

Task and host selection. The two datasets provide complementary prediction targets on continuous-time interaction streams: Wikipedia evaluates node-level state prediction, whereas UCI evaluates edge-level interaction prediction. Together, they allow us to examine predictive preservation across both prediction targets and multiple temporal depths.

We use TGN (Rossi et al., 2020) as the temporal-graph host and as the corresponding uncompressed baseline. TGN combines persistent node memory with temporal-neighborhood aggregation and exposes intermediate representations across successive propagation stages, providing natural recursive interfaces at which our method can be applied. Comparing TGN with our method keeps the host architecture, temporal encoding, and task definition fixed, thereby isolating the effect of predictive preservation at intermediate representations.

Baselines and common protocol. We compare against TGN (Rossi et al., 2020), TGAT (Xu et al., 2020), TCL (Wang et al., 2021), CTAN (Gravina et al., 2024), and DyGFormer (Yu et al., 2023). For reproducibility, baseline implementations follow their publicly released reference codebases. We use the unified DyGLib implementations (Yu et al., 2023) for TGN, TGAT, TCL, and DyGFormer,³ and the official CTAN implementation for CTAN.⁴ Where applicable, we use the accompanying Temporal Graph Benchmark (TGB) utilities for temporal-graph data handling and evaluation.⁵ Within each task, all methods use the same processed dataset, chronological split, evaluation examples, and metric implementation. Each baseline retains its native representation, propagation operator, and architecture.

Interactions are ordered by timestamp and split at the 70th and 85th timestamp percentiles, yielding chronological 70%/15%/15% training, validation, and test partitions. No interaction from a later split is used for parameter optimization in an earlier split.

Depth denotes the number of successive temporal representation or propagation stages used by each model. We vary depth to examine how predictive performance changes as historical information passes through more successive representation transformations. The operation performed at each stage remains architecture-specific; equal depth therefore denotes a matched number of successive representation stages rather than identical internal computation or an identical node-level receptive field across different architectures.

For the TGN host, temporal neighborhoods are constructed causally using only interactions preceding the query time. Wikipedia uses the 10 most recent available interactions at depth 2 and 5 at depth 3, whereas UCI uses 10 at depth 3 and 5 at depth 4. The smaller fanout in the deeper settings limits the growth of recursively expanded temporal neighborhoods as representation depth increases. Our method preserves the host temporal encoding and temporal-neighbor selection rule and introduces no additional source of future input information.

Wikipedia node classification. For Wikipedia, we follow the standard TGN/JODIE dynamic node-classification setting. A temporal representation model is first trained on the interaction stream, after which a node-classification head is optimized using binary cross-entropy on the observed dynamic labels. Training, validation, and test examples follow disjoint chronological splits.

Wikipedia is evaluated at depths 2 and 3. Checkpoint selection is based on ROC-AUC on the held-out validation split. Because TGN maintains persistent node memory, the temporal state required at the beginning of test evaluation must reflect the interaction history preceding the test period. After loading the selected checkpoint, we therefore clear the memory and replay the training and validation interactions in chronological order without parameter updates before evaluating on the test stream. This procedure reconstructs only the causal memory state; parameters remain fixed.

²Dataset archive: <https://zenodo.org/records/7213796>; DGB code: <https://github.com/fpour/DGB>.

³DyGLib: <https://github.com/yule-BUAA/DyGLib>.

⁴CTAN: <https://github.com/gravins/non-dissipative-propagation-CTDGs>.

⁵TGB: <https://github.com/shenyangHuang/TGB>.

Table 5: **Temporal-graph evaluation protocol.**

Setting	Wikipedia	UCI
Task	Node classification	Temporal link prediction
Evaluation setting	Chronological	Transductive
Split	70/15/15	70/15/15
Depth	2, 3	3, 4
TGN temporal neighbors	10 (depth 2); 5 (depth 3)	10 (depth 3); 5 (depth 4)
Evaluation negatives	–	1 per positive
Checkpoint criterion	Validation ROC-AUC	Full-validation AP
Reported metrics	ROC-AUC	AP / ROC-AUC
Metric aggregation	Global	Global

We report ROC-AUC on the complete held-out test split. Predictions and labels from all evaluation mini-batches are first concatenated, and ROC-AUC is then computed once over the full split. We do not average independently computed mini-batch ROC-AUC values.

UCI temporal link prediction. For UCI, we evaluate transductive temporal link prediction at depths 3 and 4. The main experiment uses the chronological transductive setting; new-node subsets are not included in the reported results.

Training negatives are sampled by drawing destination nodes from the unique destination-node pool observed in the training stream. Validation and test evaluation use fixed random negative samplers over the full-stream node pools, with sampler seeds 0 and 2, respectively. Each positive interaction is paired with one negative interaction during evaluation. The same positive examples and negative-sampling protocol are used for all compared methods.

Model selection uses only the held-out validation split. The best checkpoint is selected by full-validation average precision (AP), with ROC-AUC recorded as an additional validation metric. The selected checkpoint is then evaluated on the held-out test split.

We report AP and ROC-AUC for UCI. Predictions and labels from all evaluation mini-batches are concatenated before either metric is computed, so the reported values are global split-level metrics rather than averages of mini-batch AP or ROC-AUC values.

All formal temporal-graph comparisons are repeated over five independent random seeds. Appendix D.1 reports mean $\pm$ standard deviation across these runs. Evaluation examples and the validation/test negative-sampling protocol are matched across methods within each run.

C.2 Language Memory

Datasets and tasks. We evaluate language-memory compression on DailyDialog (Li et al., 2017) and Multi-Session Chat (MSC) (Xu et al., 2022). DailyDialog is a multi-turn dialogue corpus and is used for next-utterance language modeling. MSC is a multi-session dialogue corpus and is used for long-term response prediction across sessions.

For both datasets, we preserve their original dialogue structure and chronological ordering. DailyDialog follows the data representation and preprocessing of the released CCM implementation.⁶ DailyDialog is obtained from the original release linked by the dataset paper, and MSC is obtained through the public ParlAI task release.⁷ For MSC, conversation sessions are processed in chronological order so that information accumulated from earlier sessions can be retained for prediction in later sessions.

The two tasks expose complementary prediction interfaces over accumulated context. DailyDialog varies the amount of preceding dialogue history while holding the current context and prediction target fixed. MSC evaluates response prediction across successive session depths as the amount of available cross-session history increases.

Backbones and memory host. We instantiate the language-memory experiments with two language-model backbones: LLaMA-7B and google/gemma-4-E4B-it. CCM (Kim et al., 2024) serves as the common recursive memory-compression host across both backbones.

⁶Official CCM implementation: <https://github.com/snu-mlab/Context-Memory>.

⁷DailyDialog: <https://aclanthology.org/I17-1099/>; MSC: <https://parl.ai/projects/msc/>.

For a dialogue with recursively compressed history $(u_1, \dots, u_L)$, CCM updates its memory through the sequence of interfaces

$$(M_{t-1}, u_t) \longrightarrow M_t, \quad t = 1, \dots, L,$$

and we identify the post-compression state with

$$Z_t^\Gamma = M_t.$$

We use Z_t^Γ to denote the post-update memory state at this recursive interface; the host-specific realization of Γ is described in Appendix E.2. Across both backbones, the base language-model parameters remain frozen during RPBE adaptation, while the native compression parameters consist of the conditional LoRA parameters in the attention projections together with the trainable COMP/SUM embedding rows.

All matched comparisons within a backbone use the same raw task examples, native tokenizer and serialization rule, recursive CCM memory layout, and evaluation construction. Full-context and no-history variants, when reported, use the same query and target and differ only in the treatment of the preceding history. Detailed trainable-parameter, predictive-statistic, and optimization configurations are reported in Appendix E.

DailyDialog protocol. We preserve the original DailyDialog training, validation, and test partitions and the text normalization used by CCM. Following the CCM preprocessing, dialogues shorter than three utterances are removed, individual utterances are limited to 128 tokens, with total token limits of 400 in training and 600 in held-out evaluation.

To isolate the effect of recursive memory depth, we use a fixed-target controlled-depth protocol. The evaluation cohort is restricted to dialogues containing at least 15 utterances. For every evaluated depth, the 15th utterance is used as the prediction target and the 14th utterance as the current context. We vary only the number of immediately preceding history utterances,

$$L \in \{4, 6, 8, 11, 13\}.$$

Thus, for a dialogue $(u_1, \dots, u_{15})$, the input at depth L contains the L utterances immediately preceding u_{14} as the recursively compressed history, followed by the fixed context u_{14} , while the prediction target remains u_{15} .

The dialogue cohort, current context, prediction target, and scored target positions are held fixed across depths. Consequently, variation along the depth axis changes only the amount of history processed through the recursive memory-compression mechanism. All matched methods are evaluated on exactly the same dialogue instances, history depths, context–target pairs, and scored target positions. Within each backbone, the tokenizer, serialization rule, and recursive CCM memory construction are also held fixed.

For the reported fixed-target depth analysis, the validation and test partitions are combined after preprocessing to form a larger fixed evaluation cohort. This increases the number of eligible long dialogues and reduces sampling variability in the depth-wise comparison. Checkpoint and hyperparameter selection are completed beforehand using the pre-specified validation criterion; the pooled fixed-target scores are never used for model selection. The same frozen cohort is used at every depth and for every compared method.

We report dialogue-equal target perplexity. Prompt, history, compression, padding, and terminal EOS positions are excluded from scoring. For dialogue i at depth L , let Y_i denote its scored target tokens. We first compute the mean target negative log-likelihood

$$\ell_{i,L} = \frac{1}{|Y_i|} \sum_{t \in Y_i} -\log p(y_{i,t} \mid \text{input}_{i,L}),$$

and then aggregate dialogues with equal weight,

$$\text{PPL}_L^{\text{dlg}} = \exp \left(\frac{1}{N} \sum_{i=1}^N \ell_{i,L} \right).$$

This aggregation treats each dialogue as one evaluation unit and prevents longer target utterances from receiving greater weight solely because they contain more scored tokens. The same scoring and aggregation rule is applied to every method in the matched comparison.

Because LLaMA-7B and Gemma-4 use different native tokenizers, absolute perplexity values are compared within each backbone rather than across backbone families.

MSC protocol. We preserve the original MSC training, validation, and test partitions (Xu et al., 2022) and maintain the chronological ordering of sessions and utterances. Each conversation spans five sessions, allowing information accumulated from earlier interactions to remain available during later sessions.

For the depth-controlled evaluation, the same set of complete five-session conversations is evaluated at the session openings

$$S \in \{3, 4, 5\}.$$

For session S , the preceding sessions $(1, \dots, S-1)$ constitute the available conversation history. The opening user utterance of session S is used as the current context, and the corresponding response is used as the prediction target. Increasing S therefore increases the amount of accumulated cross-session history available before prediction while retaining the same conversation cohort.

For the recursive comparison, CCM and Ours process the same ordered conversation history through the CCM recursive merge host. The session ordering, current context, prediction target, and evaluation examples are matched within each setting, and no future-session information is provided as input.

Checkpoint and hyperparameter selection are performed using the pre-specified validation criterion before final evaluation. The selected checkpoint is then frozen and evaluated on the same held-out test conversations for all S .

We report dialogue-equal session-opening perplexity. Prompt, preceding history, compression, padding, and terminal EOS positions are excluded from scoring. For conversation i at session depth S , let $Y_{i,S}$ denote the scored target tokens of the opening response. We first compute the mean target negative log-likelihood

$$\ell_{i,S} = \frac{1}{|Y_{i,S}|} \sum_{t \in Y_{i,S}} -\log p(y_{i,S,t} \mid \text{input}_{i,S}),$$

and then aggregate conversations with equal weight,

$$\text{PPL}_S^{\text{dlg}} = \exp \left(\frac{1}{N} \sum_{i=1}^N \ell_{i,S} \right).$$

The same set of complete conversations is evaluated at every session depth, so N is constant across S . This aggregation treats each session-opening prediction as one evaluation unit and prevents longer target responses from receiving greater weight solely because they contain more scored tokens. All methods use identical scoring and aggregation.

As with DailyDialog, absolute perplexity is compared within each backbone, not across backbones.

Model selection and reporting. For each backbone and dataset, we first select one CCM-merge host checkpoint using the pre-specified validation criterion and then keep this checkpoint fixed. The same checkpoint provides the reported CCM-merge baseline and the common initialization for three independent Ours training runs. Ours uses the same pre-specified training and checkpoint-selection rule across the three seeds, and the selected checkpoint from each run is evaluated unchanged over the complete depth grid; no checkpoint or hyperparameter is selected per depth.

CCM-merge therefore contributes one fixed baseline result at each depth, whereas Ours is reported as mean $\pm$ standard deviation over the three independent training seeds. The relative PPL change is computed against the same fixed CCM-merge baseline, with its reported variability induced by the three Ours runs. Training seeds, checkpoint-selection rules, optimization budgets, and trainable parameter counts are reported in Appendix E.

For DailyDialog, the pooled fixed-target depth scores are computed only after checkpoint selection and are used for the controlled depth analysis. For MSC, the fixed CCM-merge checkpoint and the selected checkpoint from each Ours run are evaluated on the held-out test conversations over the complete session-depth grid $S \in \{3, 4, 5\}$.

Table 6: **Language-memory evaluation protocol.**

Setting	DailyDialog	MSC
Task	Next-utterance prediction	Session-opening prediction
Backbones	LLaMA-7B / Gemma-4	LLaMA-7B / Gemma-4
Host	CCM-merge	CCM-merge
Depth	$L = 4, 6, 8, 11, 13$	$S = 3, 4, 5$
Evaluation cohort	Fixed pooled ≥ 15 -utterance dialogues	Fixed five-session test conversations
History	L preceding utterances	Sessions $1, \dots, S - 1$
Current context	Fixed u_{14}	Opening user utterance of session S
Prediction target	Fixed u_{15}	Opening response of session S
Metric	Dialogue-equal target PPL $\downarrow$	Dialogue-equal session-opening PPL $\downarrow$
Checkpoint selection	CCM-M fixed once;	CCM-M fixed once;
	Ours validation-selected	Ours validation-selected
Depth evaluation	Fixed CCM-M + each Ours checkpoint over full L grid	Fixed CCM-M + each Ours checkpoint over full S grid

C.3 Vision–Language–Action

Benchmark and data protocol. We evaluate vision–language–action memory on the T3 task of LIBERO-Mem (Chung et al., 2026). T3 requires the robot to lift the same bowl and return it to the plate three times in sequence, so successful execution requires maintaining task progress across repeated interactions.

LIBERO-Mem provides 100 refined T3 demonstrations for model development in the released training data. We partition these into 80 demonstrations for gradient-based training and 20 demonstrations used only as an internal development split for checkpoint selection. No development-split sample enters gradient updates.

After checkpoint selection, the selected checkpoint is frozen and evaluated on the 20 official LIBERO-Mem validation initializations, which are held out from both gradient training and checkpoint selection and are used only for our final evaluation. These validation initializations are disjoint from both the 80 training demonstrations and the 20-demonstration internal checkpoint-selection split.

Pretrained initialization. All runs start from the same OpenVLA-7B Prismatic checkpoint, `step-295000-epoch-40-loss=0.2200.pt`, downloaded from `openvla/openvla-7b-prismatic`. This checkpoint provides the pretrained visual encoders, Llama-2 backbone, and multimodal projector. It does not contain the LIBERO-Mem action model or memory modules used in our experiments.

The parameters inherited from this pretrained checkpoint remain frozen. MemoryVLA-specific components are initialized separately, including the DiT-L action model (`action_model`), cognitive memory bank (`cog_mem_bank`), perceptual memory bank (`per_mem_bank`), and perceptual compressor (`per_compr`). The DiT-L action model predicts 7-dimensional actions over a 16-step action horizon.

MemoryVLA host training. We first train the MemoryVLA host using AVG as its memory aggregation rule. During this stage, the trainable components are the LoRA adapters, DiT action model, `cog_mem_bank`, `per_mem_bank`, and `per_compr`. The original pretrained Llama-2, DINOv2, SigLIP, and multimodal-projector parameters remain frozen.

We use `--reg-head 0`; therefore, no auxiliary regression head is instantiated or trained.

Training Ours. Ours is initialized from the trained MemoryVLA host of the same training run. The complete host is then frozen, including its trained LoRA adapters, DiT action model, cognitive memory bank, perceptual memory bank, and perceptual compressor.

We introduce our compressor Γ , implemented as `GammaMerger`, and optimize only its parameters using the predictive-preservation objective. No existing host parameter is updated during this stage. We additionally verified that the parameters shared by MemoryVLA and Ours remain unchanged during Gamma-only training.

Thus, Ours does not receive additional fine-tuning of the underlying VLA policy. The method-specific training stage only fits the newly introduced memory-compression module on top of an otherwise fixed MemoryVLA host.

Independent training runs. We report results over three independently trained runs. For each run, the MemoryVLA host is trained from the same pretrained OpenVLA initialization using the procedure above, and Ours is then trained from the corresponding host checkpoint with the complete host frozen and only Γ optimized. The reported mean and standard deviation use the three independent training runs, irrespective of seed identifiers.

Within each run, Ours is initialized from the corresponding trained MemoryVLA host, and the matched MemoryVLA baseline is evaluated from that same host training run. The intervention is the memory-compression mechanism and its predictive-preservation training.

Checkpoint selection. All formal VLA runs use a maximum budget of 25,000 optimizer steps and save checkpoints every 1,000 steps. Checkpoint selection is performed exclusively on the 20-demonstration internal development split drawn from the released refined training data. This split is used only for selection, with no gradient updates.

Checkpoints are ranked by full-task success on the internal development split, with SGC used only to break ties. Once selected, a checkpoint is fixed before any rollout on the 20 official LIBERO-Mem validation initializations.

The same checkpoint-selection rule and a maximum budget of 25,000 optimizer steps are applied to each method-specific training stage. After one checkpoint has been selected for each training run, that checkpoint is frozen before the official held-out evaluation is started. The checkpoint-selection traces and selected checkpoints are reported in Appendix D.3; the training configuration is summarized in Appendix E.5.

Held-out matched MemoryVLA evaluation. Within each training run, the selected MemoryVLA and Ours checkpoints are frozen and evaluated on the same fixed set of 20 official LIBERO-Mem validation initializations, with matched observation and action interfaces, rollout budget, rollout settings, and LIBERO-Mem evaluator. These validation rollouts are distinct from the internal checkpoint-selection demonstrations.

For MemoryVLA, the host uses AVG aggregation. For Ours, the same host parameters are kept fixed and AVG is replaced by the trained Γ memory-compression module. This matched construction isolates the effect of the proposed memory-compression method from additional adaptation of the underlying policy.

The same fixed held-out validation initializations are used for matched MemoryVLA–Ours comparisons across training runs. Reusing the benchmark evaluation cases does not create additional training runs; the reported uncertainty is computed across independently trained runs.

SR and SGC. We report full-task success rate (SR) and sequential-goal completion (SGC), both in percent. Each T3 rollout contains three sequential lift-and-return repetitions.

Let N denote the number of evaluation rollouts. For rollout i , let $s_i \in \{0, 1\}$ indicate whether all three repetitions are successfully completed according to the LIBERO-Mem evaluator, and let $k_i \in \{0, 1, 2, 3\}$ denote the number of repetitions successfully credited during that rollout. We compute

$$\text{SR} = \frac{100}{N} \sum_{i=1}^N s_i,$$

and

$$\text{SGC} = \frac{100}{3N} \sum_{i=1}^N k_i.$$

In our held-out evaluation, $N = 20$, corresponding to one closed-loop T3 rollout from each official LIBERO-Mem validation initialization. Therefore, SR is the percentage of the 20 rollouts that successfully complete all three repetitions, whereas SGC is the total number of successfully completed repetitions divided by

$$3 \times 20 = 60.$$

For example, a rollout completing one, two, or all three repetitions contributes one, two, or three counts, respectively, to the SGC numerator.

All repetition counting, stability checks, and overshoot handling use the original LIBERO-Mem evaluator unchanged. We introduce no method-specific success or partial-success criterion.

Prior-work references and comparison policy. For broader context, Table 1 additionally includes the LIBERO-Mem results reported by Chung et al. (Chung et al., 2026) for π_0 , SlotVLA with $h = 1$, SlotVLA with $h = 8$, and E-SlotSSM. These values are reproduced from the published study and are not re-evaluated under our local MemoryVLA pipeline. We therefore treat them as contextual reference points rather than protocol-matched baselines.

All claims concerning the effect of our method are based on the matched MemoryVLA–Ours comparison described above. E-SlotSSM is marked with † for using oracle subgoal information; it is an oracle-assisted reference.

We preserve the quantities reported by the source wherever possible. If a prior method reports zero sequential-goal completion, we also report zero full-task success because completing none of the three required repetitions cannot constitute successful completion of T3. Conversely, partial sequential-goal completion does not determine full-task success, so SR is left unreported when it cannot be obtained from the source.

Exact optimization hyperparameters, training budgets, checkpoint intervals, software versions, and hardware configuration are provided in Appendix E.

C.4 Self-Recursive Improvement

Purpose and evaluation setting. We use self-recursive improvement (SRI) as a mechanism-level test of predictive preservation under explicit recursive strategy refinement. In this setting, previously generated execution traces are repeatedly reused to construct later strategies, making the retained recursive history directly relevant to subsequent computation. Our comparison is therefore designed to isolate the effect of predictive preservation while holding the realized initialization, capacity, recursive-search opportunity, backbone, and evaluator fixed.

Benchmark, data, and released host. We evaluate on a fixed six-task cohort from CO-Bench (Sun et al., 2026). CO-Bench provides task descriptions, development instances, held-out test instances, and a common evaluator that maps solver outputs to normalized task scores. We obtain the benchmark data from the official CO-Bench release on Hugging Face,⁸ using the format and evaluator provided by the public CO-Bench repository.⁹ No task instance is regenerated or custom development/test split introduced; the official evaluator and scoring rule remain unchanged.

The recursive host is the public Metaⁿ implementation.¹⁰ We use its released CO-Bench integration (`--benchmark co.bench`) and evolutionary archive orchestrator (`--use-archive`). The six-task cohort is fixed before the paired comparison and is identical for Metaⁿ and Ours. The exact task identifiers, repository revisions, and run-level configurations are retained in the experiment manifest.

Backbones and API execution. We evaluate three API backbones: `gpt-5.5`, `gemini-3.1-pro`, and `DeepSeek-V4.1-Flash`. Within each backbone, Metaⁿ and Ours use the same provider-side model identifier and the same API route. Following the released host protocol, the same backbone is used for the Layer-1 solver and for every invocation of the recursive meta-operation Ω .

For each paired comparison, the provider route, decoding configuration, maximum output length, retry policy, prompt templates, solver mode, and execution timeout are frozen before recursive expansion and shared by the two methods. Provider fallback is disabled, so failed requests follow the same retry policy without silently switching to another model or endpoint. Exact provider/model strings and decoding settings are recorded in the run configuration.

Paired realized initialization. Each Metaⁿ/Ours comparison begins from the same realized Layer-1 state. For a given backbone, the initial task programs, execution traces, development scores, archive state, and associated meta-data are generated once and copied before the two recursive arms are expanded. All locally controlled sources of randomness, including archive sampling and task ordering, use paired settings across the two methods.

This design controls the realized API output at the point where the methods begin to differ. Remote model calls need not be bitwise deterministic, and independently regenerating the root would simultaneously alter the initial programs, execution traces, and downstream recursive environment. After the intervention begins, the two recursive trajectories are allowed to diverge as a consequence of their different historical-trace retention decisions; this downstream divergence is part of the mechanism being evaluated.

⁸<https://huggingface.co/datasets/CO-Bench/CO-Bench>

⁹<https://github.com/sunnweiwei/CO-Bench>

¹⁰<https://github.com/minnesotanlp/meta-n>

Controlled predictive-preservation intervention. Metaⁿ recursively refines candidate strategies using execution information produced by earlier stages. In the paired comparison, both methods use the same host procedure for constructing the available execution-history pool, the same fixed retained-history capacity, the same native solver stack and ordering convention, and the same surrounding context construction.

Metaⁿ uses its fixed historical-trace retention rule. Ours applies predictive preservation to determine which already available execution traces are retained for the subsequent recursive update. The predictive-preservation configuration is fixed before the paired recursive search and receives no held-out information.

All remaining components are shared between the two arms: the CO-Bench tasks, Layer-1 solver, Ω prompt and output schema, archive data structure, outer parent-selection procedure, code executor, task evaluator, and recursive-search machinery. Predictive preservation operates only on information already produced within the host run and creates no additional candidate proposal, evaluator query, retrieval call, or external LLM request. The comparison therefore changes the information retained at the recursive interface while preserving the amount of retained history and the external opportunities available for recursive search.

Matched recursive-search budget. We use equal recursive-search opportunity as the primary resource control. Before each paired run, a common archive-expansion budget is fixed. Both methods receive the same number of candidate-generation opportunities and the same evaluation allocation associated with each candidate.

A candidate-generation slot is consumed once its generation has been attempted. Parsing failures, invalid programs, execution errors, and timeouts therefore remain part of the realized search cost and do not receive free replacement proposals. The two arms also use the same execution timeout, retry policy, maximum generation length, and maximum number of host solver or repair calls associated with a candidate.

Method-dependent convergence statistics are retained as run diagnostics but do not alter the number of recursive expansions available to either method. Likewise, any difference in realized prompt length or token usage is not converted into additional candidate generations, evaluator calls, or model requests.

For resource accounting, we record candidate-generation attempts, evaluator invocations, external LLM requests, input and output tokens, and wall-clock time. Computation required internally by predictive preservation is accounted for separately and does not enlarge the external recursive-search budget.

Development-only recursive selection. The recursive search uses only the development instances and development feedback supplied by the official CO-Bench evaluator. Held-out scores are not exposed to the Layer-1 solver, Ω , historical-trace retention, archive evolution, stopping logic, or predictive-preservation configuration.

After the common recursive-search budget is exhausted, the development-side archive, recursive lineage, and selected strategies are frozen. We report the paper-facing *Dev Gain* under the same frozen development-based selection protocol for Metaⁿ and Ours. The same six-task development cohort, aggregation rule, evaluator, and score scale are used in both arms. Appendix D.4 reports cohort-level development results and search diagnostics.

Held-out results play no role in development-side candidate selection or in the computation of *Dev Gain*.

Held-out evaluation. Held-out evaluation begins only after the recursive search and development-side selection have been frozen. The main table reports held-out scores for tasks whose recursive strategy is modified during the frozen development-side refinement process. The modified-task set is identified from the recursive run artifacts before held-out scores are examined.

For every task included in this set, the frozen Metaⁿ and Ours solutions are evaluated on the same official held-out instances, and their task scores are reported side by side. If several tasks are modified for a backbone, all such tasks are retained in the comparison; held-out performance is not used to choose among them.

The modified-task presentation in Table 1 highlights where the recursive intervention produces an actual downstream strategy change. For completeness, Appendix D.4 reports the task-wise held-out results for the full six-task cohort together with the unconditional cohort-level averages for Metaⁿ and Ours. Consequently, the complete held-out record does not depend on the direction or magnitude of the main-table differences.

Repeated evaluation of frozen strategies. For each backbone, we use one paired recursive-search realization beginning from the shared realized Layer-1 state described above. Once development-side selection is complete, the resulting strategies, recursive configuration, prompt construction, model route, and held-out task set are frozen.

Table 7: **Controlled SRI protocol on CO-Bench.** Metaⁿ and Ours share the realized initialization, retained-history capacity, recursive-search opportunity, and evaluation protocol; the method-specific intervention changes which execution traces are retained for subsequent recursive refinement.

Component	Protocol
Data source	Official CO-Bench release
Task cohort	Same fixed six tasks
Host	Public Meta ⁿ implementation
Backbones	gpt-5.5 / gemini-3.1-pro / DeepSeek-V4.1-Flash
Model assignment	Same backbone at Layer 1 and all Ω calls
Initialization	Same realized Layer-1 state within each pair
History-pool construction	Same host procedure
Retained-history capacity	Same fixed capacity in both arms
Native stack	Same construction and ordering
Method-specific change	Historical-trace retention rule only
Recursive-search procedure	Same host procedure
Search budget	Same fixed expansion budget
Candidate failures	Consume the assigned search slot
Evaluator	Official CO-Bench evaluator, unchanged
Search feedback	Development only
Held-out access during search	None
Additional API calls for Ours	None
Search realizations	One paired realization per backbone
Development result	Dev Gain $\uparrow$
Held-out evaluation	Three matched evaluations of each frozen solution
Main-table held-out rows	Three-evaluation mean for all development-defined modified tasks
Appendix held-out results	One fixed evaluation for all six tasks + unconditional average
Resource accounting	Candidates / evals / calls / tokens / wall-clock

Each frozen solution is evaluated three times on the same held-out instances. Metaⁿ and Ours use the same backbone, provider route, decoding configuration, instance set, instance ordering, retry policy, and official evaluator in every repetition. The three-evaluation protocol is fixed beforehand and recorded in the experiment manifest.

These repetitions quantify execution-time variability of an already selected strategy under API stochasticity. They are repeated evaluations of one frozen recursive-search outcome and are not treated as independent recursive-search seeds. The main table reports the mean held-out score over the three matched evaluations. Appendix D.4 reports one fixed held-out evaluation for the complete six-task cohort and a compact repeat-level variability summary.

Reporting and bias control. The SRI protocol is fixed before held-out evaluation. The task cohort, realized Layer-1 initialization, history-pool construction, retained-history capacity, recursive-search budget, failure accounting, development-side selection procedure, modified-task identification rule, and repeated held-out evaluation protocol are all determined without access to held-out outcomes.

Dev Gain and Held-out Score serve separate roles. Dev Gain measures the result of recursive refinement under the feedback available during search. Held-out Score evaluates the frozen resulting strategies on unseen instances. Both are computed from the common CO-Bench evaluator and neither is defined from the internal predictive statistic.

The paper-facing SRI comparison is limited to these task-performance quantities and resource-accounting statistics. We do not introduce additional post-hoc thresholds or method-specific evaluation scores into the comparison. Main-table modified-task results are accompanied by the complete six-task results and unconditional cohort-level averages in the appendix.

Run artifacts and reproducibility. We retain the native Metaⁿ artifacts for both arms, including `config.json`, `summary.json`, convergence records, `checkpoint.json`, `archive/index.json`, per-candidate execution traces and injected-code records, and the JSONL log of external LLM requests and responses.

The manifest also records the six CO-Bench task identifiers, CO-Bench and Metaⁿ repository revisions, exact

provider/model identifiers, decoding and retry settings, paired local randomness configuration, common recursive-search budget, evaluator timeout, history-pool configuration, retained-history capacity, historical-trace retention settings, development-selected strategies, modified-task set, and repeated held-out evaluation settings.

The minimal public data and software setup is:

```
# CO-Bench data
huggingface-cli download CO-Bench/CO-Bench \
  --repo-type dataset --local-dir data/co_bench

# Meta^n host
git clone https://github.com/minnesotanlp/meta-n
cd meta-n
python -m venv .venv
source .venv/bin/activate
pip install -e ".[bench]"
```

API-backed runs use the exact provider/model identifiers stored in the frozen run configuration. Authentication is supplied through environment variables and is not serialized into released experiment artifacts. Paper-facing commands are generated from the frozen configuration rather than edited separately between Metaⁿ and Ours.

Together, these artifacts reconstruct the common realized initialization, method-specific recursive lineages, development-side selection, and repeated held-out evaluation.

Table 8: **Complete temporal-graph results.** Results are reported as mean $\pm$ standard deviation over five random seeds. AP and AUC are reported in %.

Dataset / Task	Setting	TGN	TGAT	TCL	CTAN	DyGFormer	Ours
Wikipedia	Depth 2 AUC $\uparrow$	83.61 $\pm$ 1.00	85.45 $\pm$ 0.26	85.64 $\pm$ 0.32	87.31 $\pm$ 0.29	82.90 $\pm$ 1.59	88.81 $\pm$ 0.77
	Depth 3 AUC $\uparrow$	87.47 $\pm$ 1.05	82.08 $\pm$ 1.73	81.26 $\pm$ 1.77	87.38 $\pm$ 0.14	87.00 $\pm$ 0.71	89.17 $\pm$ 0.67
UCI	Depth 3 AP $\uparrow$	93.04 $\pm$ 1.73	86.08 $\pm$ 0.66	86.35 $\pm$ 0.82	–	95.47 $\pm$ 0.27	94.14 $\pm$ 0.33
	Depth 3 AUC $\uparrow$	92.79 $\pm$ 1.68	85.44 $\pm$ 0.61	85.95 $\pm$ 0.60	–	94.52 $\pm$ 0.23	93.73 $\pm$ 0.56
	Depth 4 AP $\uparrow$	94.07 $\pm$ 0.13	84.14 $\pm$ 1.70	83.78 $\pm$ 0.62	–	94.92 $\pm$ 0.25	94.89 $\pm$ 0.09
	Depth 4 AUC $\uparrow$	93.73 $\pm$ 0.12	83.09 $\pm$ 1.79	83.20 $\pm$ 0.59	–	94.14 $\pm$ 0.21	94.47 $\pm$ 0.12

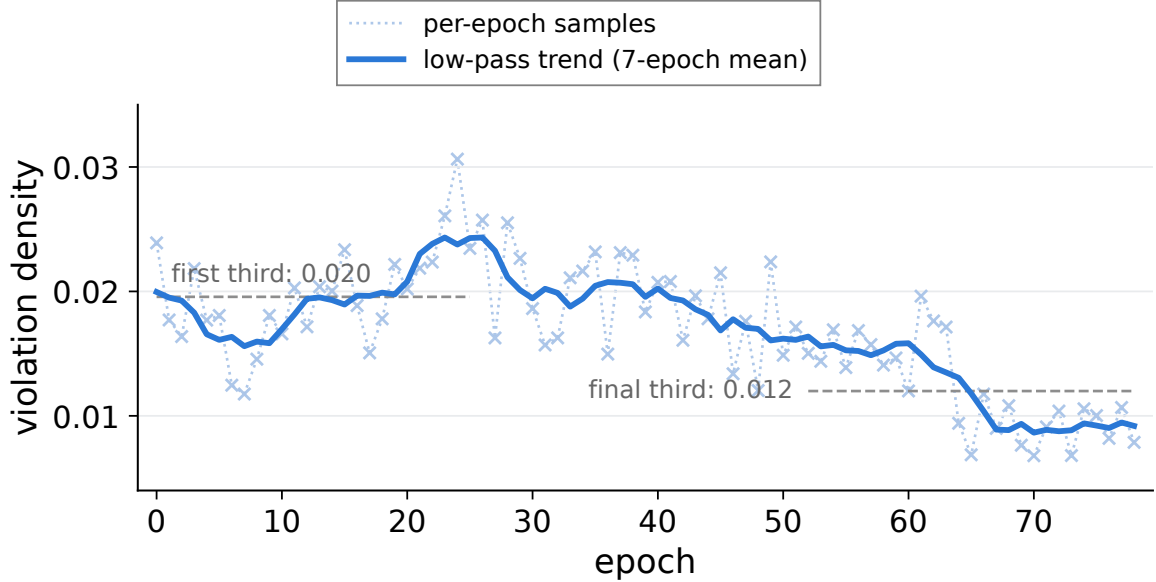


Figure 5: **Treewise predictive-constraint conflict during training.** Violation density is the fraction of grouped predictive constraints violated by the unconstrained task proposal. On UCI 3-hop ($R0$, $\kappa = 0.05$), the mean violation density decreases from 0.020 in the first third of training to 0.012 in the final third.

D Extended Results and Diagnostic Analyses

This appendix reports complete results and domain-specific diagnostics for the main comparisons. Temporal graphs include five-seed results and predictive-constraint diagnostics; language memory includes the full depth-wise perplexity comparisons and training-time predictive diagnostics; VLA includes internal checkpoint-selection, held-out initialization-level, and rollout analyses together with the three-run aggregate; and SRI includes the complete six-task results, recursive candidate and strategy evolution, and held-out variability.

D.1 Temporal Graph Results

Table 8 reports the complete temporal-graph results. All entries are averaged over five random seeds and are reported as mean $\pm$ standard deviation.

Figure 5 shows that predictive-constraint conflicts remain present throughout training but become less frequent in later epochs. The trajectory is not monotonic: conflict density rises temporarily in the middle of training before declining, indicating that task optimization continues to propose directions that can interfere with predictive preservation as the representation evolves. The lower density in the final third suggests that the task proposal becomes progressively more aligned with the predictive-feasible region, reducing the amount of correction required from the projection. This trend is consistent with the compressor and task objective becoming better coordinated over training, while the remaining violations motivate retaining the predictive constraints rather than assuming that such conflicts disappear entirely.

Table 9: **Real-data first-order bridge audit on UCI.** We compare the first-order change predicted by the constraint surrogate with the measured finite change of the exact window statistic used by `PairKFWindow`. The perturbation scale α multiplies the same parameter-space update direction.

α	$\alpha q^\top \delta$	$\Delta \hat{J}_{\text{win}}$	$\Delta \hat{J}_{\text{win}} / (\alpha q^\top \delta)$	Relative scaling
1	3.639×10^{-7}	4.044×10^{-7}	1.111	$1.0\times$
16	5.822×10^{-6}	6.386×10^{-6}	1.097	$15.8\times$

Interpretation. Table 9 directly tests the local approximation used to construct our predictive constraints. Here, $q = \nabla_{\theta} \hat{J}_{\text{win}}$ denotes the local predictive sensitivity represented by the constraint surrogate, δ is the parameter-space perturbation direction, and $\Delta \hat{J}_{\text{win}}$ uses the same `PairKFWindow` tree-weighted window aggregation.

The predicted and measured changes have the same sign and closely matched magnitudes. At the base perturbation scale, the measured change is only $1.111\times$ the first-order prediction; after increasing the perturbation by a factor of 16, this ratio remains nearly unchanged at 1.097. More importantly, the predicted change grows by exactly $16.0\times$, while the measured change grows by $15.8\times$. Thus, over this resolvable local range, the empirical window statistic responds almost linearly to the perturbation and is well tracked by the directional quantity used in the constraint construction.

This audit is important because the optimization procedure does not directly constrain the finite post-update value of $\hat{J}_{\text{win}}$. Instead, it constrains its local first-order surrogate through terms of the form $q^\top \delta$. The close agreement above therefore verifies, on a real UCI training window, the practical bridge between the predictive statistic used in the implementation and the linearized half-space constraints imposed on parameter updates. The remaining approximately 10% scale difference is stable across perturbation sizes rather than increasing with α , and therefore does not exhibit the growth expected from a dominant nonlinear higher-order error.

D.2 Language Memory Results

We report the matched CCM-merge–Ours comparison on DailyDialog and Multi-Session Chat (MSC) across LLaMA-7B and Gemma-4-E4B-It. DailyDialog uses the fixed-target controlled-depth protocol described in Appendix C.2, while MSC evaluates session-opening prediction as the amount of preceding cross-session history increases.

Within each backbone and dataset, CCM-merge and Ours use the same evaluation examples, memory-depth construction, tokenizer, prediction targets, and perplexity aggregation. The CCM-merge host checkpoint is selected once by the pre-specified validation criterion and then kept fixed. Ours is initialized from this same host checkpoint and trained under three independent seeds. The selected checkpoint from each Ours run is evaluated unchanged across the reported depth grid. Absolute perplexity values are interpreted only within the same backbone because LLaMA-7B and Gemma-4-E4B-It use different native tokenizers.

Table 10 reports the complete matched comparison at the evaluated depths. We abbreviate CCM-merge as CCM-M. For Ours seed r , the relative PPL change with respect to the fixed CCM-M host is

$$\Delta_r(\%) = 100 \frac{\text{PPL}_{\text{Ours},r} - \text{PPL}_{\text{CCM-M}}}{\text{PPL}_{\text{CCM-M}}}.$$

We report Δ_r mean and standard deviation across three Ours seeds. Negative values mean lower Ours PPL.

Training-time predictive diagnostics. Beyond the final depth-wise results, we examine whether the predictive-preservation signal retained across the recursive memory interfaces evolves consistently with downstream validation performance during training. For the internal diagnostic, J denotes the finite-test predictive value used in the main mechanism analysis, and we compute $\Delta J = J_{\text{real}} - J_{\text{shuffled}}$ at every optimization window, where J_{real} uses the correctly paired future observations and J_{shuffled} breaks this correspondence. We additionally report $\Delta J_{\text{within-}L}$, where shuffling is restricted to examples at the same recursive depth, thereby controlling for depth-dependent effects. Because the per-optimization-window statistic is noisy, we report raw measurements and a $w = 9$ smoothed trajectory.

Figure 6 compares these internal predictive-preservation diagnostics with the validation trajectory. The right panel reports the negative mean relative PPL change of Ours with respect to the fixed CCM-merge host baseline, averaged

Table 10: **Language-memory results across recursive depth.** DailyDialog reports dialogue-equal target PPL under the fixed-target controlled-depth protocol, while MSC reports dialogue-equal session-opening PPL. Lower PPL is better. CCM-merge reports one fixed validation-selected host checkpoint. Ours is initialized from that checkpoint and reports mean $\pm$ standard deviation over three independent training seeds. $\Delta(\%)$ reports the corresponding mean $\pm$ standard deviation of the seed-wise relative PPL change with respect to the fixed CCM-merge baseline.

Dataset / Metric	Depth	LLaMA-7B			Gemma-4-E4B-It		
		CCM-M	Ours	Δ (%)	CCM-M	Ours	Δ (%)
DailyDialog PPL $\downarrow$	<i>Selected ckpt.</i>	<i>s650</i>	<i>s70</i>	–	<i>s600</i>	<i>s40</i>	–
	$L = 4$	5.98	5.86 ± 0.03	-1.98 ± 0.52	7.00	6.97 ± 0.01	-0.54 ± 0.19
	$L = 6$	5.85	5.71 ± 0.05	-2.51 ± 0.80	6.84	6.78 ± 0.01	-0.80 ± 0.11
	$L = 8$	5.80	5.65 ± 0.07	-2.56 ± 1.13	6.85	6.77 ± 0.05	-1.05 ± 0.75
	$L = 11$	5.72	5.55 ± 0.12	-2.91 ± 2.06	6.77	6.66 ± 0.07	-1.64 ± 0.98
	$L = 13$	5.63	5.38 ± 0.12	-4.53 ± 2.03	6.73	6.58 ± 0.07	-2.24 ± 0.97
MSC PPL $\downarrow$	<i>Selected ckpt.</i>	<i>s1000</i>	<i>s40</i>	–	<i>s600</i>	<i>s50</i>	–
	$S = 3$	6.82	6.77 ± 0.00	-0.84 ± 0.03	7.96	7.96 ± 0.00	0.00 ± 0.00
	$S = 4$	7.02	6.95 ± 0.01	-1.09 ± 0.10	8.23	8.22 ± 0.00	-0.12 ± 0.00
	$S = 5$	7.03	6.93 ± 0.01	-1.39 ± 0.10	8.16	8.14 ± 0.00	-0.25 ± 0.00

over all evaluated depths, so both panels follow the same convention that higher values indicate better behavior. The predictive-preservation signals remain positive throughout training, while the validation improvement also remains above the CCM-merge baseline. More importantly, their training dynamics are broadly aligned: the smoothed ΔJ signals strengthen through the intermediate stage and reach their strongest region around the later-middle windows, while the validation gain similarly increases toward s40; both subsequently weaken toward s50. This shared trajectory links the internal predictive-preservation signal to the observed downstream improvement and provides supporting evidence for the validation-selected checkpoint.

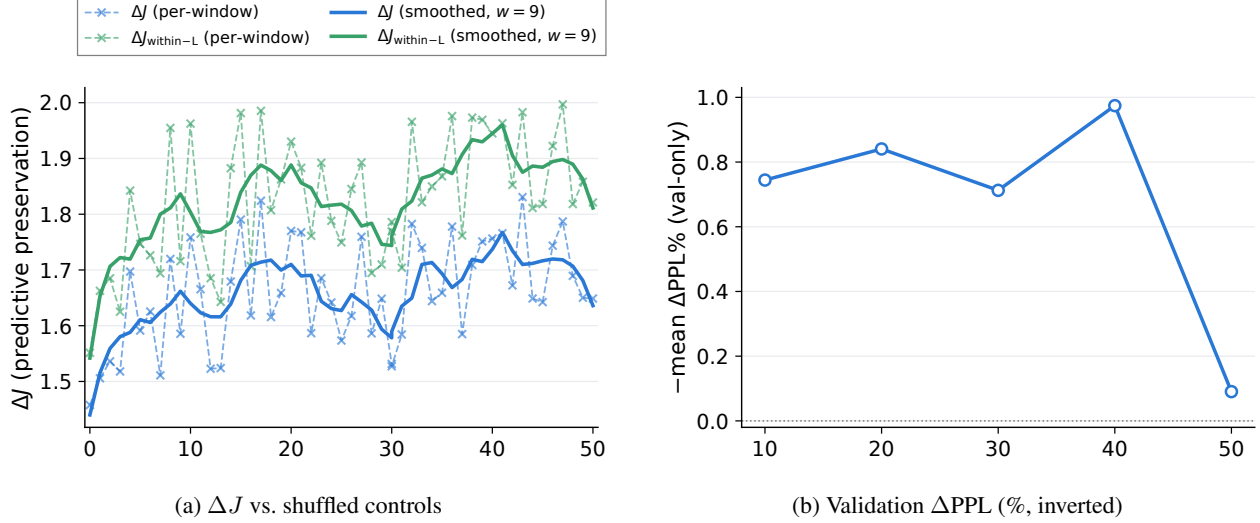


Figure 6: **Training-time predictive diagnostics for CCM.** Internal predictive-preservation signals and downstream validation gains are shown over the same training trajectory, where higher values are better in both panels.

D.3 Vision–Language–Action Results

Under the matched protocol in Appendix C.3, we evaluate three independently trained runs on the same 20 official held-out evaluation initializations. Each evaluation initialization produces one closed-loop T3 rollout, within which up to three ordered lift-and-return repetitions can be completed sequentially. For each training run, the checkpoint is selected on the internal development split using strict T3 success, with T3 SGC used as a tie-breaker; the resulting checkpoint step is reported below.

Qualitative rollout comparison. To complement the aggregate and initialization-level results above, we visualize two paired held-out rollouts with different sequential-completion counts. On evaluation initialization 15, Ours completes 2/3 ordered repetitions within the rollout, compared with 1/3 for MemoryVLA. On evaluation initialization 16, Ours completes all 3/3 ordered repetitions, compared with 2/3 for MemoryVLA. The snapshots show the corresponding rollout evolution at regularly sampled time steps under the same task setting.

D.4 Recursive Self-Improvement Results

We provide additional results for recursive self-improvement (SRI), including task-level held-out performance, candidate evolution during recursive search, and a qualitative trace of the solver strategies generated across successive rounds. The experiments test whether predictive preservation changes the information propagated through recursive improvement and, consequently, the downstream solver trajectory. All three backbones follow the same SRI protocol described in Appendix C.4.

Candidate evolution. The final task scores alone do not show whether predictive preservation actually changes the recursive search trajectory. We therefore inspect the development-score trajectory for DeepSeek-V4.1-Flash. The two procedures begin from the same depth-1 state but retain different numbers of candidates and reach different scores.

Qualitative evolution of solver strategies. To examine how the recursive context changes subsequent model responses, we trace the gemini-3.1-pro recursive-search run across generations. Table 16 summarizes the main solver strategies proposed by the model. The clearest trajectory occurs on `aircraft_landing`, where the model progressively separates discrete sequence search from continuous landing-time optimization.

The aircraft trajectory illustrates a progressive solver refinement. The model first strengthens discrete search over landing sequences, then identifies greedy landing-time assignment as the remaining bottleneck, and finally introduces

Table 11: **Held-out initialization-level comparison for training run 1.** Ours at 12k and MemoryVLA at 20k are evaluated on the same 20 official held-out evaluation initializations. One closed-loop T3 rollout is run from each initialization. “Success” reports the number of ordered T3 repetitions completed sequentially within that rollout, from 0/3 to 3/3. “Completion step” gives the rollout step at which each credited repetition is completed.

Eval. init.	Ours @ 12k		MemoryVLA @ 20k	
	Success	Completion step	Success	Completion step
1	0/3	–	0/3	–
2	1/3	105	1/3	105
3	2/3	230, 259	3/3	230, 255, 293
4	0/3	–	0/3	–
5	1/3	135	1/3	135
6	3/3	206, 256, 329	2/3	240, 452
7	1/3	408	0/3	–
8	0/3	–	0/3	–
9	0/3	–	0/3	–
10	0/3	–	0/3	–
11	0/3	–	0/3	–
12	1/3	421	0/3	–
13	2/3	495, 543	0/3	–
14	1/3	483	0/3	–
15	2/3	202, 293	1/3	200
16	3/3	222, 251, 326	2/3	242, 343
17	0/3	–	0/3	–
18	0/3	–	1/3	231
19	0/3	–	0/3	–
20	0/3	–	0/3	–
Completed repetitions	17/60	–	11/60	–
Strict T3 SR	2/20	–	1/20	–

exact LP refinement over the best SA candidates. Although later responses explore wider candidate funnels, the selected deployed solver retains the Gen. 5 SA–plus–LP strategy.

Held-out evaluation variability. Each main-table SRI held-out score is the mean over three matched evaluations of the same frozen strategy. As a representative example, the three held-out evaluations of the frozen Ours gemini-3.1-pro aircraft strategy score 0.9065, 0.9259, and 0.9378, yielding a mean of **0.9234**. The solver code, prompt, task instances, and evaluation settings are fixed across repeats; these repetitions quantify evaluation variability of one recursive-search outcome rather than independent search seeds.

Table 12: **Complete held-out T3 results on LIBERO-Mem across training runs.** Each training run is evaluated on the same 20 official held-out evaluation initializations, with one closed-loop T3 rollout from each initialization. Within each rollout, the task requires three ordered lift-and-return repetitions to be completed sequentially. Columns 0/3–3/3 report the number of evaluation initializations whose rollout completes exactly zero, one, two, or three ordered repetitions, respectively. T3 SR denotes strict task success, i.e., the fraction of the 20 rollouts that complete all three ordered repetitions. T3 SGC is the total number of credited ordered repetitions completed within the 20 rollouts, divided by the maximum possible $20 \times 3 = 60$ ordered repetitions. The aggregate rows pool the corresponding initialization–training-run instances, and report the three-run mean $\pm$ standard deviation.

Training run	Method	Ckpt. step	0/3	1/3	2/3	3/3	T3 SR $\uparrow$	T3 SGC $\uparrow$
Run 1	MemoryVLA	20k	13	4	2	1	5.0%	18.3%
	Ours	12k	10	5	3	2	10.0%	28.3%
Run 2	MemoryVLA	18k	11	6	3	0	0.0%	20.0%
	Ours	17k	12	3	3	2	10.0%	25.0%
Run 3	MemoryVLA	20k	10	7	3	0	0.0%	21.7%
	Ours	18k	11	4	2	3	15.0%	28.3%
Aggregate	MemoryVLA	–	34	17	8	1	$1.67 \pm 2.89\%$	$20.00 \pm 1.67\%$
	Ours	–	33	12	8	7	$11.67 \pm 2.89\%$	$27.22 \pm 1.92\%$

Table 13: **Summary of SRI results.** We report development scores from the paired recursive-search run and one fixed held-out evaluation of the frozen Metaⁿ and Ours strategies. The main table reports the mean over three matched held-out evaluations of the same frozen strategies.

Model	Development			Held-out		
	Meta ⁿ	Ours	Δ	Meta ⁿ	Ours	Δ
gemini-3.1-pro	0.9001	0.9547	+0.0546	0.8338	0.8479	+0.0141
gpt-5.5	0.8172	0.8279	+0.0107	0.7527	0.7579	+0.0051
DeepSeek-V4.1-Flash	0.8070	0.8600	+0.0530	0.7924	0.8222	+0.0298



(a) Ours @ 12k



(b) MemoryVLA @ 20k

Figure 7: **Qualitative rollout comparison on LIBERO-Mem T3, held-out evaluation initialization 15.** Snapshots are sampled at regular intervals from paired rollouts of training run 1. Within this held-out T3 rollout, Ours completes 2/3 ordered repetitions, while MemoryVLA completes 1/3 (Table 11).



(a) Ours @ 12k



(b) MemoryVLA @ 20k

Figure 8: **Qualitative rollout comparison on LIBERO-Mem T3, held-out evaluation initialization 16.** Snapshots are sampled at regular intervals from paired rollouts of training run 1. Within this held-out T3 rollout, Ours completes all 3/3 ordered repetitions, while MemoryVLA completes 2/3 (Table 11).

Table 14: **Task-level held-out SRI results.** Δ denotes Ours minus Metaⁿ in percentage points; scores are shown in percent. Differences are computed before rounding, so displayed values may differ by 0.01 percentage points. Each panel reports one fixed held-out evaluation of the frozen strategies from the single paired recursive-search run for that backbone. The main table reports the mean over three matched held-out evaluations of the same frozen strategies.

(a) gemini-3.1-pro			
Task	Meta ⁿ	Ours	Δ
aircraft_landing	83.89	92.82	+8.93
assignment_problem	100.00	100.00	0.00
assortment_problem	55.27	55.27	0.00
bin_packing	94.17	93.57	-0.60
capacitated_warehouse_location	69.28	69.40	+0.12
common_due_date_scheduling	97.67	97.68	+0.01
Mean	83.38	84.79	+1.41

(b) gpt-5.5			
Task	Meta ⁿ	Ours	Δ
aircraft_landing	91.26	91.26	0.00
assignment_problem	53.13	52.86	-0.28
assortment_problem	45.98	49.33	+3.35
bin_packing	94.03	94.03	0.00
capacitated_warehouse_location	69.85	69.85	0.00
common_due_date_scheduling	97.40	97.40	0.00
Mean	75.27	75.79	+0.51

(c) DeepSeek-V4.1-Flash			
Task	Meta ⁿ	Ours	Δ
aircraft_landing	87.04	87.04	0.00
assignment_problem	82.92	100.00	+17.08
assortment_problem	44.82	44.51	-0.30
bin_packing	95.69	95.68	-0.02
capacitated_warehouse	68.73	69.76	+1.03
common_due_date	96.25	96.33	+0.08
Mean	79.24	82.22	+2.98

Table 15: **Candidate evolution for DeepSeek-V4.1-Flash.** #Cand. denotes the number of retained candidates at each recursive depth. Ours changes both the retained candidate set and the resulting development trajectory.

Depth	Meta ⁿ		Ours		Δ
	#Cand.	Dev	#Cand.	Dev	
d1	1	0.6845	1	0.6845	0.0000
d2 (merge)	5	0.8073	5	0.8605	+0.0532
d3	6	0.8073	14	0.8546	+0.0473
d4	14	0.8037	4	0.8605	+0.0568
d5	–	–	2	0.8546	–

Table 16: **Evolution of model-generated solver strategies in gemini-3.1-pro.** Each row summarizes the main strategy proposed at one generation and the model’s rationale for the subsequent change. The deployed aircraft solver ultimately retains the Gen. 5 strategy: simulated annealing over landing sequences followed by exact LP refinement of the top candidate sequences.

Gen.	Meta ²¹ response	Ours response	Reason for the change
1	Accelerate assignment solving and refine assortment packing through restarts and stock selection.	Use <code>linear.sum.assignment</code> for assignment; diversify assortment ordering and stock selection.	Runtime is the main limitation for assignment, while assortment is sensitive to fixed ordering and stock choices.
2	Continue assortment refinement using stronger packing heuristics and stock combinations; one branch explores warehouse search.	Remove restrictive assortment choices, improve optional-piece handling, and introduce MaxRects-style packing.	Earlier generated solvers do not fully realize the intended packing strategy, leaving implementation-level restrictions.
3	Continue assortment improvement with randomized ordering, GRASP-style search, and richer placement heuristics.	Continue assortment refinement, introduce local search for warehouse, and apply simulated annealing (SA) to aircraft landing sequences.	After assortment improves, the model identifies additional headroom in warehouse and aircraft optimization.
4	Further refine assortment using SA/hill climbing and additional placement and stock-selection heuristics.	Strengthen warehouse subset search and add exact transportation-LP evaluation; continue improving assortment packing helpers.	Heuristic warehouse evaluation can mis-rank candidate subsets, motivating exact final evaluation.
5	Continue assortment-oriented search and packing refinement.	For <code>aircraft.landing</code> , retain SA for sequence search, keep the top 10 candidate sequences, and optimize landing times with <code>scipy.optimize.linprog</code> .	The model identifies greedy landing-time assignment as the main remaining bottleneck: promising sequences can be mis-scored because early/late penalties are not optimized globally.
6	Continue assortment refinement and implementation cleanup.	Explore wider aircraft candidate funnels and exact-LP local refinement, while continuing assortment helper integration.	After the Gen. 5 aircraft improvement, the model attributes the remaining limitation to candidate pre-selection before exact evaluation.

E Implementation, Ablations, and Reproducibility

This appendix describes how the common predictive-preservation framework is instantiated in each host system, followed by controlled ablations and hyperparameter sensitivity. Dataset construction, split rules, and evaluation protocols are kept in Appendix C; complete results and diagnostic analyses are kept in Appendix D.

E.1 Temporal-Graph Implementation

Host recursion and recursive interfaces. We use TGN as the common host for UCI temporal link prediction and Wikipedia node classification. For a temporal query with propagation depth L , TGN recursively constructs node representations from temporally sampled neighborhoods. At each propagation layer, information collected from the current temporal subtree is aggregated into an intermediate representation and then reused by the parent recursion. Consequently, signals originating deeper in the temporal neighborhood must pass through more successive recursive interfaces before reaching the task prediction. These reused intermediate representations are the recursive interfaces at which predictive preservation is applied: information needed by later prediction must survive the current aggregation before it can propagate further toward the root.

Method insertion. We instantiate the recursive interface at each internal propagation layer $0 < \ell < L$. TGN first computes its original temporal aggregation at layer ℓ . The compression map Γ then receives the layer-specific own state together with this vanilla aggregate and produces the representation passed to the parent recursion. The leaf layer ($\ell = 0$) retains the raw host state, and the task-facing root ($\ell = L$) retains the original TGN aggregation operator. The method therefore acts precisely on intermediate representations that will subsequently be reused at another recursive interface after a further round of temporal aggregation.

This construction is shared by both temporal-graph tasks. The host temporal memory, neighborhood construction, temporal aggregation procedure, and task pipeline are retained; the distinction between UCI and Wikipedia remains the original benchmark task and evaluation protocol.

Predictive records and predictive feasibility optimization. During the same recursive query, the host adapter traces the eligible internal interfaces together with the child–parent relationships actually consumed by the TGN computation. These traces provide the aligned local predictive records used to estimate the finite-test predictive value and empirical predictive deficiency introduced in Section 3. The resulting predictive sensitivities are used by the common constrained-update procedure, with the predictive correction restricted to the compression parameter block Γ . All remaining trainable TGN parameters continue to follow the host task optimization.

The statistical configuration, hyperparameter selection, and optimization settings associated with the predictive-preservation procedure are reported jointly with the corresponding method-level configurations below.

E.2 Language-Memory Implementation

Host and recursive memory. We use CCM as the host for the language-memory experiments. Under its `merge_recur` construction, dialogue history is compressed progressively rather than presented in full at every prediction step. After processing the first t history turns, CCM aggregates the corresponding compression-token states into a compact memory M_t , which is then reused when the next turn is incorporated. The resulting computation therefore forms a chain

$$M_1 \rightarrow M_2 \rightarrow \cdots \rightarrow M_L \rightarrow \text{response prediction}.$$

The language-model backbone, dialogue objective, and decoding procedure remain those of the CCM host.

Recursive interface and method insertion. This recursive memory update instantiates the recursive interface used by our method. Information from an early dialogue turn can influence the final response only if it survives the intermediate memory states through which the history is repeatedly propagated. In the notation of the main method, the accumulated information available before the current memory update plays the role of the pre-compression state U_t , while the memory reused by subsequent CCM computation is the compressed representation associated with Z_t^Γ .

Let $\bar{M}_t$ denote the memory obtained from the native CCM merge at turn t . We retain this host computation and realize the method-specific compression map through the residual R_Γ at the recursive merge interface:

$$M_t^\Gamma = \bar{M}_t + R_\Gamma(M_{t-1}^\Gamma, h_t, t),$$

where h_t is the current compressed-turn representation. The residual map is initialized with zero output, so the initial computation coincides with the corresponding CCM host. The resulting M_t^Γ is then consumed by the next CCM update in the same position as the original memory state.

Predictive observations. For a dialogue

$$[u_1, \dots, u_L, c, y],$$

we construct predictive observations at each eligible recursive memory interface. For an intermediate cut, the predictive observations are drawn from utterances that remain downstream of that memory state in the same dialogue trajectory, combining a nearby future event with the eventual response target. At the terminal cut, the remaining context c and response y provide the final predictive observation. Thus, every predictive observation is formed from information that is genuinely unavailable before the corresponding compression event and subsequently contributes to the same dialogue prediction.

A fixed readout of M_t^Γ provides the compressed representation used to estimate the finite-test predictive value. The readout carries no trainable parameters and serves only to evaluate predictive preservation at the recursive interface.

Training integration. The same predictive-preservation criterion is evaluated at these recursive interfaces, while language-memory optimization uses the aggregate predictive update. This is a specialization of the same training principle in which predictive preservation is enforced directly on Γ , rather than through conflict-triggered projection of the host update. The task gradient updates the trainable CCM compression parameters together with Γ , whereas the predictive gradient is restricted to Γ ; the base language-model parameters remain frozen. Consequently, the intervention changes how predictive information is preserved across recursive memory updates without changing the dialogue task or evaluation protocol. At inference, the learned Γ residual remains part of the recursive memory update, while the training-time observer and predictive statistic are absent. Optimization coefficients and formal training configurations are reported separately with the shared hyperparameter settings.

E.3 Vision–Language–Action Implementation

Host and recursive memory. We instantiate the method on MemoryVLA for the LIBERO-Mem experiments. MemoryVLA maintains a compact perceptual–cognitive memory that is updated and reused throughout sequential visuo-motor execution. At each stage, the current visual observation, language instruction, and previously retained memory are integrated to form the working state used for subsequent memory updates and action generation. The resulting computation therefore contains the same recursive structure as the preceding domains: information acquired at an earlier stage must survive a sequence of memory updates before it can influence later actions.

Recursive interface and method insertion. The recursive working-memory update instantiates the recursive interface used by our method. Let U_v denote the working representation available before the memory compression at stage v . We apply the compression map at this interface,

$$Z_v^\Gamma = \Gamma(U_v),$$

and feed the resulting compact memory back into the original MemoryVLA computation. This memory is subsequently reused by later perception, memory-update, and action-generation stages. Hence, information discarded at one interface cannot contribute to downstream control decisions, making this recursive memory state the recursive interface at which predictive preservation is applied.

The intervention is restricted to this internal recursive interface. The original visual and language encoders, action-generation pathway, task objective, and sequential execution procedure are otherwise retained.

Predictive observations. Predictive observations are constructed from future events along the same demonstration trajectory. For each eligible recursive memory interface, the compressed state is paired with recorded downstream actions that occur after that memory state has been formed. These future actions instantiate the local predictive events used by the empirical predictive criterion: a memory state is favored when it retains information useful for later control.

The future trajectory is used only to construct training-time predictive supervision. It is never provided to the working memory, compression map, or policy input, and test-time rollouts follow causal MemoryVLA execution.

Training integration. The resulting interface-wise predictive records instantiate the same predictive-preservation criterion used for temporal graphs and language memory. The task loss continues to optimize the original VLA objective, while the predictive-preservation signal constrains updates to the designated memory compression block. Thus, the method changes how information is retained across successive memory updates while leaving the host task and downstream control computation intact.

The reported LIBERO-Mem experiments use the T3 setting throughout. The predictive-preservation construction is applied unchanged across the repeated stages of this multi-stage manipulation trajectory. Formal runs use dense frame-level training with batch size 4 and gradient accumulation 4 (effective batch 16), a constant schedule with zero warmup, a task-LR argument of 10^{-5} and a Gamma learning rate of 2×10^{-5} . The host is frozen in the Gamma-only stage, so only the Gamma optimizer updates method-specific parameters. All formal VLA runs are capped at 25k optimizer steps and save a checkpoint every 1k steps. Checkpoint selection and final held-out rollout evaluation use disjoint data as specified in Appendix C.3; the official evaluation rollouts are not reused for model selection.

E.4 Self-Recursive Improvement Implementation

Host recursion and recursive interfaces. We instantiate the method on Meta^n , where recursive improvement proceeds by repeatedly reusing execution experience from earlier search rounds. Layer-1 candidates produce task-solving programs and execution traces; at subsequent depths, the operator Ω consumes retained traces together with previously injected code to generate or refine the next candidate. The resulting candidate is evaluated and may contribute further experience to later recursive rounds.

Before every `generate` or `refine` call, Meta^n reduces the available historical context to satisfy a fixed context budget. This context-reduction step instantiates the recursive interface. Earlier heuristics, execution outcomes, failure modes, and injected repair routines can influence deeper search only if they survive this reduction. Repeated selection therefore creates the same preservation problem as repeated state compression in the preceding domains.

Offline lineage construction. Unlike the other hosts, Meta^n does not expose a differentiable recursive state together with its future observations during a single forward pass. We therefore construct the predictive supervision from completed host trajectories. We first execute Meta^n with its native context reduction and freeze the resulting archives. From each archive, we recover only lineages that actually occur in the recursive search,

$$c_v \longrightarrow c_{v+1} \longrightarrow c_{v+2}.$$

Each candidate c_v defines one recursive interface. Its pre-compression state is

$$U_v = \begin{cases} (\text{traces, context stack}), & \text{generate,} \\ (\text{child traces, context stack} + \text{previous injection}), & \text{refine.} \end{cases}$$

The remaining task-level prompt information is retained as C_v and is passed through unchanged.

Only real child and grandchild states are used to construct future observations. For an eligible lineage, we define

$$Y_{v+1} = \Phi(T_{v+1}), \quad Y_{v+2} = \Phi(T_{v+2}),$$

where T_{v+1} and T_{v+2} are the execution traces produced by the actual child and grandchild candidates. Interfaces without an observed grandchild are excluded from the predictive record.

Historical-trace compression and retention. The items contained in U_v are encoded by a frozen encoder E_0 ,

$$X_v = [E_0(x_1), \dots, E_0(x_{n_v})], \quad q_v = E_0(\text{current traces}),$$

and passed to the learned compression map Γ_θ . In the implementation, Γ_θ uses a query-conditioned slotted fusion:

$$\begin{aligned} Q_v &= Q_0 + B_c A_c q_v, & K &= X_v W_K, & V &= X_v W_V, & g &= \sigma(X_v w_g), \\ A_v &= \text{softmax} \left(\frac{Q_v K^\top}{\sqrt{d_e}} + \mathbf{1} \log(g + \epsilon)^\top + M_v \right), \\ Z_v &= \text{LN}(Q_v + A_v V). \end{aligned}$$

Here Z_v is the compact representation used by the predictive statistic, while A_v determines which host-produced historical items are retained. This is the discrete-retention specialization of the same predictive-preservation principle used for continuous recursive states: rather than controlling which components survive in a continuous latent representation, Γ_θ controls which history items survive the capacity-limited recursive interface. The reducer returns the original `Trace` and `InjectedCode` objects selected under the same context budget as `Metan`; it does not synthesize additional experience or modify the downstream prompt construction.

Predictive supervision and offline training. The future side of each training record is obtained from the same recovered lineage. We encode the real child and grandchild observations as

$$f_v^{(1)} = E_0(\text{serialize}(Y_{v+1})), \quad f_v^{(2)} = E_0(\text{serialize}(Y_{v+2})),$$

and form fixed predictive tests

$$p_v^{(r)} = R_S^{(r)} \begin{bmatrix} f_v^{(1)} \\ f_v^{(2)} \end{bmatrix}.$$

We additionally record the realized two-step improvement

$$R_v = \text{score}(c_{v+2}) - \text{score}(c_v).$$

After projecting the compressed state to the statistic space,

$$b_v = P_b \text{vec}(Z_v),$$

the predictive and improvement statistics are

$$J_{\text{LPSE}} = \frac{1}{4} \sum_{r=1}^4 J_{\text{CCA}}(B, P^{(r)}), \quad J_{\text{task}} = J_{\text{CCA}}(B, R).$$

Their sensitivities instantiate the same predictive-preservation training principle used elsewhere in the paper: the task objective favors histories associated with subsequent recursive improvement, while the predictive-preservation term discourages discarding information that remains predictive across the recovered interfaces.

Training of Γ_θ is performed entirely offline on the frozen archive records. The language model and item encoder remain fixed, and no additional Ω calls are made during this optimization.

Evaluation-time integration. After offline training, Γ_θ is frozen and inserted only at the two native context-reduction points preceding `generate` and `refine`. Formal evaluation uses only the information available at the current recursive state; child and grandchild observations are used solely for constructing the offline training records and are never accessed during evaluation.

The `Metan` archive, parent-selection and acceptance rules, recursive candidate-generation procedure, Ω prompt and output schema, code executor, and evaluator remain unchanged. `Metan` and `Ours` use the same context budget and recursive-search budget. Thus, `SRI` does not introduce a different preservation objective; it realizes the same interface-level principle in a discrete setting, where compression takes the form of deciding which components of recursive history survive a capacity-limited context interface so that they remain useful for later improvement.

E.5 Training and Compute Configuration

Table 17 summarizes the run-level configurations used for the formal experiments. Method-specific statistical and feasibility hyperparameters are reported separately in Appendix E.8. The table records the actual experimental configuration rather than host repository defaults.

Table 17: **Training and compute configuration used in the formal experiments.**

Configuration	Temporal Graph	Language Memory	VLA	SRI
Host	TGN	CCM-merge	MemoryVLA	Meta ⁿ
Formal repetitions	5 random seeds	fixed CCM-merge host + 3 Ours seeds	3 independently trained runs	1 paired search run / backbone
Optimization	Adam	AdamW; base LM frozen; task gradient on CCM comp. predictive gradient on Γ	AdamW, frozen host + Γ	API-backed recursive search
Batch / accumulation	200	adaptive optimization windows	4×4 (effective 16)	–
Primary learning rate	task 10^{-4} ; repr. 3×10^{-4} (UCI formal line)	frozen formal CCM schedule	task-LR argument 10^{-5} ; Γ LR 2×10^{-5}	–
Schedule	validation-selected	cosine host schedule	constant; warmup 0	fixed search budget
Maximum budget	setting-specific formal epoch budget	60 optimization windows	25k optimizer steps	fixed recursive-search budget
Checkpoint cadence	validation evaluated during training	CCM-M fixed once; Ours validation-only	every 1k steps; internal dev selection	frozen strategy after search
Evaluation repeats	split-level evaluation	split-level evaluation	20 held-out T3 rollouts per selected checkpoint	3 matched held-out evaluations
Compute	RTX 5090D	A100 80GB	A100 80GB	API-backed
Software	Python ≥ 3.9 ; PyTorch 2.8 environment	Python ≥ 3.9 ; PyTorch 2.8 environment	Python 3.10; PyTorch 2.2.0; Transformers 4.40.1; PEFT 0.11.1	Python ≥ 3.11

For VLA, the 25k budget is an upper bound rather than a requirement to report the endpoint. Checkpoints are saved every 1k steps and selected using only the 20-demonstration internal development split described in Appendix C.3. After selection, the checkpoint is frozen and evaluated on a separate set of 20 official held-out T3 evaluation initializations. The reported SR/SGC rollouts are used for neither training nor checkpoint selection.

E.6 Efficiency and Model Overhead

We measure computational overhead on the TGN host, where the training and inference paths can be timed under matched structural settings. All timings in Tables 18 and 19 use the same RTX 5090D environment within each comparison. The predictive-feasibility machinery is active only during training; inference uses the ordinary host recursion with the learned compressor and performs no feasibility projection.

Table 18: **Training-time overhead on TGN.** Mean epoch time under matched settings.

Setting	Vanilla	Ours	Ratio
3L10N	87.1 s	165.7 s	1.9×
4L5N	88.6 s	190.6 s	2.2×

Table 19: **Inference-time comparison on TGN.** The projection is disabled at inference.

Setting	Vanilla eval	Ours eval	Vanilla build	Ours build
3L10N	68.1 s	66.0 s	1.6 s	0.6 s
4L5N	86.7 s	87.6 s	0.5 s	0.7 s

The extra computation is therefore concentrated in training: epoch time is 1.9–2.2× the vanilla host in these settings. Test-time evaluation stays within about $\pm 3\%$ of vanilla; inference uses no projection or replay.

Parameter overhead. The vanilla TGN host contains 3,774,385 unique parameters (3.77M). The compressor adds 381,788 parameters (0.38M), giving approximately 4.16M unique parameters in total, or a 10.1% increase relative to the host. The serialized checkpoint contains duplicated references to the compressor and therefore has a larger stored parameter count; this duplication does not increase the unique model parameterization used at runtime.

E.7 Ablation Study

We further examine which components of the proposed training procedure contribute to predictive preservation. All ablations are conducted on UCI link prediction at propagation depth 3 using seed 0. Each configuration is run once under the same data split, host architecture, training budget, and evaluation protocol. Accordingly, this experiment is intended as a controlled mechanism-level diagnosis of the full method rather than an estimate of cross-seed variability. The corresponding multi-seed results for the main comparison are reported separately.

Does the choice of preservation objective matter? Yes. Task-Only Training reaches 92.62 AP and 92.13 AUC, providing the reference performance when no explicit predictive-preservation objective is introduced. Replacing predictive preservation with history reconstruction reduces performance to 90.89 AP and 90.28 AUC, indicating that retaining information sufficient to reconstruct the past does not necessarily retain the information useful for subsequent prediction. Direct Future Prediction performs better at 92.76 AP and 92.24 AUC, but still remains below the full method at 94.52 AP and 94.25 AUC. This suggests that predictive targets are more suitable than reconstruction targets, while directly fitting future outcomes does not recover the full predictive criterion’s benefit.

Does the structure of predictive supervision matter? The results indicate that it does. The Single-Event Predictive Criterion reaches 92.41 AP and 91.93 AUC. Replacing the adjacent predictive pair $S_v = (Y_v, Y_{\text{pa}(v)})$ with a single predictive event weakens the local supervision supplied at each recursive interface. Cross-level mispaired supervision reaches 92.73 AP and 92.28 AUC. Its degradation relative to the full method indicates that the correspondence between a compressed state and its associated predictive event is important, even when comparable predictive events are available elsewhere in the recursion. Removing the retained context gives 92.89 AP and 92.50 AUC. The remaining gap to the full method is consistent with the role of context in defining the conditional predictive information that should survive each recursive interface.

Does the statistical realization of the predictive criterion matter? All three statistical simplifications lead to a larger reduction. Estimating the predictive statistics separately for each tree obtains 91.48 AP and 90.99 AUC, suggesting that the shared empirical estimate benefits from pooling aligned observations across recursive instances. Removing balancing gives 91.30 AP and 90.98 AUC, supporting the use of balanced predictive tests when aggregating discrepancies across outcomes or interfaces. Using a diagonal-covariance approximation gives 91.51 AP and 91.04 AUC, indicating that cross-dimensional dependence in the empirical statistic contains useful information. Together, these results show that implementing the predictive criterion matters beyond the supervision target.

Does constrained optimization contribute beyond the predictive objective? Yes. The Additive Predictive-Gradient Update yields 92.64 AP and 92.18 AUC, below the 94.52 AP and 94.25 AUC of the full method. This separates the predictive objective from its predictive-feasibility realization: using the same supervision as an additive gradient does not provide the same protection against task proposals that violate predictive preservation. Replacing the interface-wise constraints with the Global Predictive Constraint causes the largest drop, to 90.32 AP and 89.88 AUC. The result is consistent with the recursive structure of the problem: predictive loss can arise at individual recursive interfaces, and an aggregate global restriction does not provide the same local control over these violations.

Overall. Across the four groups, the full method achieves the highest AP and AUC in this fixed seed-0 run. The ablations jointly support four aspects of the design: predictive rather than reconstructive preservation, correctly aligned interface-level supervision, the balanced empirical statistical realization, and interface-wise constrained optimization. Since the experiment contains one run per configuration, these comparisons are used to diagnose the internal mechanism of the method; claims about cross-run variability are based on the separate multi-seed evaluation.

Table 20: **Ablation study on UCI at depth 3 (seed 0).** Each variant changes one component of the full training procedure while keeping the remaining experimental protocol fixed.

Component	Ablation variant	AP	AUC
Objective	Task-Only Training	92.62	92.13
	History-reconstruction objective	90.89	90.28
	Direct Future Prediction	92.76	92.24
Supervision	Single-Event Predictive Criterion	92.41	91.93
	Cross-level mispaired supervision	92.73	92.28
	Predictive supervision without context	92.89	92.50
Statistics	Tree-specific statistical estimation	91.48	90.99
	Unbalanced predictive-test aggregation	91.30	90.98
	Diagonal-covariance approximation	91.51	91.04
Optimization	Additive Predictive-Gradient Update	92.64	92.18
	Global Predictive Constraint	90.32	89.88
Full method	Our Method	94.52	94.25

E.8 Method Hyperparameters and Sensitivity

Method hyperparameters. Table 21 summarizes the principal hyperparameters introduced by the predictive-preservation procedure across the four experimental domains. We report the frozen configurations used for the formal experiments rather than command-line defaults. Parameters that belong only to the underlying host models follow the corresponding host protocols and are omitted here.

Hyperparameter selection. The fixed measurement dimensions, statistical regularization, support thresholds, and compression capacities are selected using only the corresponding development or validation data and are frozen before formal evaluation. No method-specific hyperparameter is selected using the reported test results. The formal TGN and VLA runs use task-only optimizer proposals before predictive feasibility projection and therefore do not use a predictive coefficient λ ; the UCI Additive Predictive-Gradient Update ablation uses $\lambda = 0.00668$. The language-memory aggregate specialization uses $\lambda = 0.00594$. The feasibility tolerance κ directly controls the admissible predictive degradation of an update and is therefore treated as the principal geometric hyperparameter. We additionally examine the amount of statistical support through the eligible-interface fraction.

Sensitivity analysis. Figure 9 reports sensitivity on UCI as a representative projection-based setting in which both the feasibility mechanism and empirical predictive statistic are active. We vary

$$\kappa \in \{0.01, 0.02, 0.05, 0.10, 0.20\},$$

with all remaining settings fixed, and separately vary the fraction of eligible recursive interfaces used to estimate the empirical predictive statistic. Performance remains stable around the formal operating region, while substantially tighter or looser feasibility and reduced statistical support lead to lower performance.

Table 21: **Method-specific hyperparameters used in the formal experiments.** Only parameters introduced by the predictive-preservation procedure or its statistical realization are reported.

Configuration	Temporal Graph	Language Memory	VLA	SRI
<i>Predictive statistic</i>				
Statistic	Full balancing	Full balancing + OAS	Full dual	CCA / OAS
Sketch dimension	64	4×32	64	4×8
Statistic width	128	128	–	32
Context / future width	32/32	Fixed sketches	64/64	256 encoder
Covariance ridge	10^{-3} (UCI); 10^{-4} (Wiki)	10^{-3}	10^{-4}	10^{-3}
Minimum statistical support	896/1024 trees	128 cuts	128 merges	32 trees/window
Predictive observations	2	2	2	Child + grandchild
Fixed-map seed	0	0	0	0
<i>Compression / actuation</i>				
Γ capacity	width 128	hidden 64	rank 64	$d_e = 256, h = 64$
Additional structure	–	time dim. 16	–	4 slots; cond. rank 32
Initialization	Host-aligned	Zero-output	Host-merge aligned	Fixed seeded init.
Predictive update scope	Γ	Γ	Γ	Γ
<i>Optimization / feasibility</i>				
Feasibility tolerance κ	0.05	– (direct aggregate specialization)	0.05	0.02
Certificate tolerance	10^{-6}	– (direct aggregate specialization)	10^{-3}	3×10^{-4}
Predictive coefficient λ	– (projection mode)	0.00594 (LLaMA/Gemma)	– (projection mode)	–

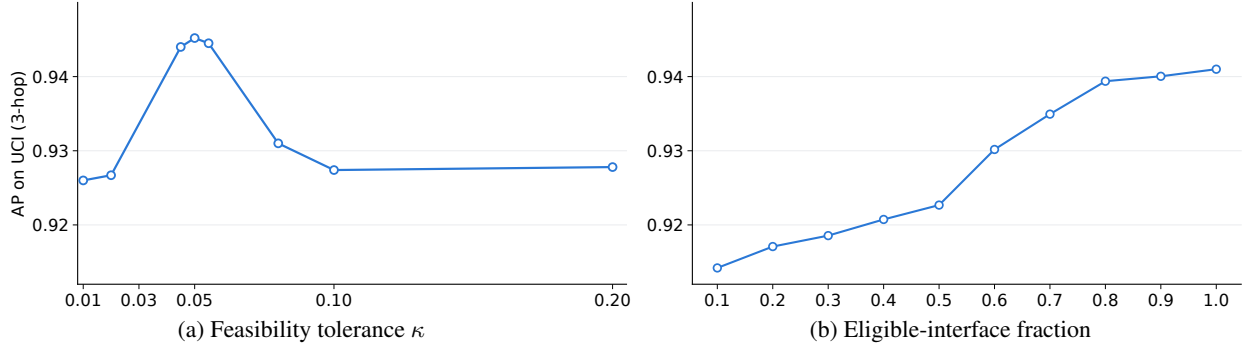


Figure 9: **Hyperparameter sensitivity on UCI.** Test AP under variations of (a) the feasibility tolerance κ and (b) the eligible-interface fraction used to estimate the empirical predictive statistic. All remaining settings are fixed.

F Theoretical Results and Proofs

This appendix collects the formal results supporting the main text. Each subsection is linked to the corresponding proposition, criterion, or guarantee used in Sections 2 and 3.

F.1 Proof of Recursive Closure

This subsection proves Proposition 1 from Section 2 and states its structural assumptions (M1)–(M3).

This appendix proves Proposition 1. The proof is formulated for the *predictive-interface tree*: every non-root vertex appearing below is associated with a predictive boundary variable Y_v . Additional deterministic host operations between designated predictive interfaces may be absorbed into the corresponding edge transition. All population statements condition on the full retained context $C = (C_v)_{v \in V}$; replacing C by a local context C_v is a separate localization step and is not used in Proposition 1.

Let $\mathcal{T} = (V, E)$ be a finite rooted tree with root ρ . Let $\text{pa}(v)$ denote the parent of each non-root node v , and let $\text{ch}(v)$ denote its children. At interface v , let Y_v denote the predictive boundary state and let U_v denote the complete host pre-compression state. Let $V_{\text{comp}} \subseteq V \setminus \{\rho\}$ be the set of compressed interfaces. For a fixed measurable compression map Γ , define

$$Z_v^\Gamma := \begin{cases} \Gamma(U_v), & v \in V_{\text{comp}}, \\ U_v, & v \notin V_{\text{comp}}, \end{cases}$$

so that uncompressed nodes are represented by the identity map. Write

$$U := (U_v)_{v \neq \rho}, \quad Z^\Gamma := (Z_v^\Gamma)_{v \neq \rho}, \quad C := (C_v)_{v \in V}.$$

When product state spaces are needed below, write

$$U := \prod_{v \neq \rho} U_v, \quad Z := \prod_{v \neq \rho} Z_v.$$

All random variables take values in standard Borel spaces.

For every non-root node v , define the adjacent predictive pair

$$S_v := (Y_v, Y_{\text{pa}(v)}),$$

and define the tuple of incoming compressed child states

$$R_v^\Gamma := Z_{\text{ch}(v)}^\Gamma := (Z_u^\Gamma)_{u \in \text{ch}(v)}.$$

For a leaf, R_v^Γ is the unique element of the singleton empty-product space. Within the proof we abbreviate $Z_v := Z_v^\Gamma$ and $R_v := R_v^\Gamma$.

For each compressed node $v \in V_{\text{comp}}$, define the local predictive deficiency

$$\delta_v(\Gamma) := I(S_v; U_v \mid Z_v^\Gamma, C).$$

Tree-local recursive Markov structure. Propositions 1 and 3 use the following structural assumptions for the recursive law induced by the fixed map Γ .

(M1) *Predictive-boundary Markov tree.* For P_C -almost every c , the predictive boundary variables factorize as

$$P(dy_\rho, dy_{-\rho} \mid c) = \Pi_\rho(dy_\rho \mid c) \prod_{v \neq \rho} Q_v(dy_v \mid y_{\text{pa}(v)}, c). \quad (1)$$

(M2) *Recursive host aggregation through compressed child states.* For every non-root node v , there is a regular conditional kernel

$$K_v(du_v \mid s_v, r_v, c) = P(du_v \mid S_v = s_v, R_v = r_v, C = c),$$

and the conditional law of (U_v, Z_v) given (S_v, R_v, C) is

$$\tilde{K}_v(du_v, dz_v \mid s_v, r_v, c) = K_v(du_v \mid s_v, r_v, c) \delta_{\gamma_v(u_v)}(dz_v), \quad (2)$$

where $\gamma_v = \Gamma$ on V_{comp} and $\gamma_v = \text{id}$ otherwise. Conditioned on (Y_v, C) , the child subtrees rooted at distinct children of v are mutually independent. Moreover, conditional on (S_v, R_v, C) , the local pair (U_v, Z_v) is independent of all remaining variables inside the child subtrees; equivalently, the child subtrees can affect the host state at v only through their root compressed tuple R_v . After R_v is realized, (U_v, Z_v) is formed according to Equation 2. At the root, its child subtrees are mutually independent conditioned on (Y_ρ, C) . More precisely, conditional on $C = c$, the joint law is the finite child-before-parent composition of Π_ρ , all Q_v , and all $\tilde{K}_v$, with r_v equal to the sampled child-root z tuple. This factorization permits

$$Z_{\text{ch}(v)}^\Gamma \longrightarrow U_v \longrightarrow Z_v^\Gamma.$$

In particular, no independence between U_v and its incoming compressed child states is assumed. A deterministic host update of the form $U_v = F_v(R_v, X_v, C)$ is included as the degenerate-kernel special case, provided the local host input X_v is part of the state-generation mechanism represented by K_v .

(M3) *Complete-interface screening*. For every compressed node v ,

$$I(S_v; R_v^\Gamma \mid U_v, C) = 0, \quad \text{equivalently} \quad S_v \perp R_v^\Gamma \mid (U_v, C). \quad (3)$$

This is the screening-off property of a complete pre-compression interface state: once U_v and the retained context are known, the incoming compressed child states carry no additional information about the adjacent predictive interface S_v . Equation 3 allows U_v to depend on R_v^Γ , including through a deterministic or stochastic aggregation with local host information, provided the resulting interface law satisfies the stated screening condition. This condition is additional to (M2). If R_v^Γ is a measurable component of (U_v, C) , as when the complete interface record explicitly retains its incoming child tuple, (M3) holds automatically.

Proof of Proposition 1. All regular conditional distributions used below exist because the state spaces are standard Borel. All conditional-kernel identities are understood outside the corresponding conditioning null sets. Since the tree is finite, the finitely many almost-sure identities needed in an induction step can be chosen simultaneously on a common full-measure set. The recursive kernels below are versions of the conditional laws under the same induced joint distribution, so substituting these almost-sure identities into the parent kernel preserves the measure.

Step 1: Zero local predictive deficiency and interface screening imply augmented local closure.

Fix $v \in V_{\text{comp}}$ and abbreviate $S_v = (Y_v, Y_{\text{pa}(v)})$, $Z_v = Z_v^\Gamma$, and $R_v = R_v^\Gamma$. By the hypothesis of Proposition 1,

$$I(S_v; U_v \mid Z_v, C) = 0. \quad (4)$$

By complete-interface screening,

$$I(S_v; R_v \mid U_v, C) = 0. \quad (5)$$

Because $Z_v = \Gamma(U_v)$ is a measurable function of U_v at a compressed node,

$$\sigma(U_v, Z_v, C) = \sigma(U_v, C).$$

Therefore Equation 5 is unchanged if Z_v is added to the conditioning set:

$$I(S_v; R_v \mid U_v, Z_v, C) = 0.$$

The chain rule for conditional mutual information now gives

$$\begin{aligned} I(S_v; U_v, R_v \mid Z_v, C) &= I(S_v; U_v \mid Z_v, C) + I(S_v; R_v \mid U_v, Z_v, C) \\ &= 0. \end{aligned}$$

Hence

$$S_v \perp (U_v, R_v) \mid (Z_v, C).$$

In particular, by decomposition of conditional independence,

$$U_v \perp S_v \mid (Z_v, R_v, C), \quad (6)$$

$$R_v \perp S_v \mid (Z_v, C). \quad (7)$$

Equation 6 is the form needed in the recursive kernel argument: the local sufficiency condition remains valid even after the incoming compressed child tuple is exposed. Notice that this conclusion is derived from the original defect and the structural screening condition; no additional “interaction” or node-coupling defect is assumed.

For completeness, Equation 4 itself is equivalent to conditional independence because

$$I(S_v; U_v \mid Z_v, C) = \mathbb{E}_{Z_v, C} [D_{\text{KL}}(P_{S_v, U_v \mid Z_v, C} \parallel P_{S_v \mid Z_v, C} \otimes P_{U_v \mid Z_v, C})],$$

and a non-negative Kullback–Leibler divergence has expectation zero only when it vanishes almost surely.

Step 2: Augmented local closure gives a boundary-independent reconstruction kernel.

Fix first $v \in V_{\text{comp}}$. Under standard Borel regularity, a regular conditional distribution of U_v given (Z_v, R_v, C) exists. Define

$$A_v(B \mid z_v, r_v, c) := P(U_v \in B \mid Z_v = z_v, R_v = r_v, C = c), \quad B \in \mathcal{B}(U_v).$$

Let K_v^Γ be the pushforward of the local host kernel through Γ :

$$K_v^\Gamma(D \mid s_v, r_v, c) := K_v(\Gamma^{-1}(D) \mid s_v, r_v, c), \quad D \in \mathcal{B}(Z_v).$$

Thus $K_v^\Gamma(\cdot \mid s_v, r_v, c)$ is the conditional law of Z_v given $(S_v, R_v, C) = (s_v, r_v, c)$.

Fix measurable sets $B \subseteq U_v$ and $D \subseteq Z_v$. Disintegrating the local joint kernel in Equation 2 with respect to Z_v yields

$$\begin{aligned} \tilde{K}_v(B \times D \mid s_v, r_v, c) \\ = \int_D P(U_v \in B \mid S_v = s_v, Z_v = z_v, R_v = r_v, C = c) K_v^\Gamma(dz_v \mid s_v, r_v, c). \end{aligned}$$

By Equation 6,

$$P(U_v \in B \mid S_v = s_v, Z_v = z_v, R_v = r_v, C = c) = A_v(B \mid z_v, r_v, c)$$

for $P_{S_v, Z_v, R_v, C}$ -almost every (s_v, z_v, r_v, c) . Therefore, for $P_{S_v, R_v, C}$ -almost every (s_v, r_v, c) ,

$$\tilde{K}_v(B \times D \mid s_v, r_v, c) = \int_D A_v(B \mid z_v, r_v, c) K_v^\Gamma(dz_v \mid s_v, r_v, c).$$

Since standard Borel σ -algebras are countably generated, the identity may be chosen on a common full-measure set for a generating class of rectangles and extended by the monotone class theorem. Hence

$$\boxed{\tilde{K}_v(du_v, dz_v \mid s_v, r_v, c) = A_v(du_v \mid z_v, r_v, c) K_v^\Gamma(dz_v \mid s_v, r_v, c)} \quad P_{S_v, R_v, C}\text{-a.s.} \quad (8)$$

The reconstruction kernel may depend on the incoming compressed child tuple r_v , as it should in a genuine recursive host, but it is independent of the adjacent predictive pair s_v once (z_v, r_v, c) are fixed.

For an uncompressed non-root node, $Z_v = U_v$. Define

$$K_v^\Gamma(dz_v \mid s_v, r_v, c) := K_v(dz_v \mid s_v, r_v, c), \quad (9)$$

$$A_v(du_v \mid z_v, r_v, c) := \delta_{z_v}(du_v). \quad (10)$$

Then Equation 8 holds identically, without requiring either a local predictive deficiency condition or Equation 3. Consequently, Equation 8 is available for every non-root node.

Step 3: Local closure composes recursively over a subtree.

For a non-root node v , let $\mathcal{T}_v$ denote the subtree containing v and all its descendants, and write

$$U_{\mathcal{T}_v} := (U_r)_{r \in V(\mathcal{T}_v)}, \quad Z_{\mathcal{T}_v} := (Z_r)_{r \in V(\mathcal{T}_v)}.$$

Let $M_v^{U, \Gamma}$ denote the conditional joint kernel of $(U_{\mathcal{T}_v}, Z_{\mathcal{T}_v})$ given $(Y_{\text{pa}(v)}, C)$, and let M_v^Γ denote its $Z_{\mathcal{T}_v}$ -marginal.

The recursive Markov structure in (M1)–(M2) gives the following precise child-before-parent construction. For every bounded non-negative measurable function f on $U_{\mathcal{T}_v} \times Z_{\mathcal{T}_v}$,

$$\begin{aligned} & \int f(u_{\mathcal{T}_v}, z_{\mathcal{T}_v}) M_v^{U, \Gamma}(du_{\mathcal{T}_v}, dz_{\mathcal{T}_v} \mid y_{\text{pa}(v)}, c) \\ &= \int Q_v(dy_v \mid y_{\text{pa}(v)}, c) \int \bigotimes_{u \in \text{ch}(v)} M_u^{U, \Gamma}(du_{\mathcal{T}_u}, dz_{\mathcal{T}_u} \mid y_v, c) \\ & \quad \times \int \tilde{K}_v(du_v, dz_v \mid s_v, r_v, c) f(u_v, (u_{\mathcal{T}_u})_{u \in \text{ch}(v)}, z_v, (z_{\mathcal{T}_u})_{u \in \text{ch}(v)}), \end{aligned} \quad (11)$$

where $s_v = (y_v, y_{\text{pa}(v)})$ and $r_v = (z_u)_{u \in \text{ch}(v)}$ is read from the root compressed state of each child subtree. At a leaf, the product kernel over children is the point mass on the empty tuple. Equation 11 is a finite composition of probability kernels and therefore defines a probability kernel by the usual kernel-composition theorem.

Marginalizing the same construction over all U -variables gives

$$\begin{aligned} & M_v^\Gamma(dz_{\mathcal{T}_v} \mid y_{\text{pa}(v)}, c) \\ &= \int Q_v(dy_v \mid y_{\text{pa}(v)}, c) \left[\bigotimes_{u \in \text{ch}(v)} M_u^\Gamma(dz_{\mathcal{T}_u} \mid y_v, c) \right] K_v^\Gamma(dz_v \mid s_v, r_v, c), \end{aligned} \quad (12)$$

where the right-hand side is understood as the same child-before-parent kernel composition as in Equation 11; in particular r_v is evaluated from the sampled child-root z -coordinates before K_v^Γ is applied.

Define reconstruction kernels recursively. At a leaf,

$$A_{\mathcal{T}_v}(du_v \mid z_v, c) := A_v(du_v \mid z_v, r_v^\emptyset, c),$$

where $r_v^\emptyset$ is the empty tuple. At an internal node, define

$$\begin{aligned} & A_{\mathcal{T}_v}(du_{\mathcal{T}_v} \mid z_{\mathcal{T}_v}, c) \\ &:= A_v(du_v \mid z_v, z_{\text{ch}(v)}, c) \bigotimes_{u \in \text{ch}(v)} A_{\mathcal{T}_u}(du_{\mathcal{T}_u} \mid z_{\mathcal{T}_u}, c). \end{aligned} \quad (13)$$

Because $z_{\text{ch}(v)}$ is a measurable coordinate projection of $z_{\mathcal{T}_v}$ and the tree is finite, this is a well-defined probability kernel from $(z_{\mathcal{T}_v}, c)$ to $u_{\mathcal{T}_v}$.

We prove by induction on the height of $\mathcal{T}_v$ that, for every non-root node v ,

$$\begin{aligned} & M_v^{U, \Gamma}(du_{\mathcal{T}_v}, dz_{\mathcal{T}_v} \mid y_{\text{pa}(v)}, c) \\ &= A_{\mathcal{T}_v}(du_{\mathcal{T}_v} \mid z_{\mathcal{T}_v}, c) M_v^\Gamma(dz_{\mathcal{T}_v} \mid y_{\text{pa}(v)}, c) \end{aligned} \quad (14)$$

for $P_{Y_{\text{pa}(v)}, C}$ -almost every $(y_{\text{pa}(v)}, c)$.

Equation 14 is the subtree closure statement. It implies that a version of the conditional law satisfies

$$P(du_{\mathcal{T}_v} \mid Z_{\mathcal{T}_v} = z_{\mathcal{T}_v}, Y_{\text{pa}(v)} = y_{\text{pa}(v)}, C = c) = A_{\mathcal{T}_v}(du_{\mathcal{T}_v} \mid z_{\mathcal{T}_v}, c),$$

so reconstruction of the complete pre-compression subtree state depends on the compressed subtree and retained context but not on the external boundary state.

Base case. Suppose v is a leaf. Then r_v is the empty tuple and Equation 11, applied to a measurable rectangle $B_v \times D_v$, gives

$$\begin{aligned} & M_v^{U, \Gamma}(B_v \times D_v \mid y_{\text{pa}(v)}, c) \\ &= \int Q_v(dy_v \mid y_{\text{pa}(v)}, c) \tilde{K}_v(B_v \times D_v \mid s_v, r_v^\emptyset, c). \end{aligned}$$

Substituting Equation 8,

$$\begin{aligned} & M_v^{U, \Gamma}(B_v \times D_v \mid y_{\text{pa}(v)}, c) \\ &= \int Q_v(dy_v \mid y_{\text{pa}(v)}, c) \int_{D_v} A_v(B_v \mid z_v, r_v^\emptyset, c) K_v^\Gamma(dz_v \mid s_v, r_v^\emptyset, c). \end{aligned}$$

The reconstruction factor is independent of both boundary variables once (z_v, c) are fixed. Tonelli's theorem therefore gives

$$\begin{aligned} & M_v^{U, \Gamma}(B_v \times D_v \mid y_{\text{pa}(v)}, c) \\ &= \int_{D_v} A_{\mathcal{T}_v}(B_v \mid z_v, c) M_v^\Gamma(dz_v \mid y_{\text{pa}(v)}, c), \end{aligned}$$

where the second factor is exactly the leaf case of Equation 12. Equality on rectangles extends to the full product σ -algebra by the monotone class theorem, proving Equation 14 at every leaf.

Induction step. Let v be an internal node and assume Equation 14 holds for every $u \in \text{ch}(v)$. Fix measurable rectangles

$$B_{\mathcal{T}_v} := B_v \times \prod_{u \in \text{ch}(v)} B_u, \quad D_{\mathcal{T}_v} := D_v \times \prod_{u \in \text{ch}(v)} D_u,$$

with $B_v \in \mathcal{B}(U_v)$, $D_v \in \mathcal{B}(Z_v)$, $B_u \in \mathcal{B}(U_{\mathcal{T}_u})$, and $D_u \in \mathcal{B}(Z_{\mathcal{T}_u})$. Applying Equation 11 and then the induction hypothesis to each child gives

$$\begin{aligned} & \mathbf{M}_v^{U,\Gamma}(B_{\mathcal{T}_v} \times D_{\mathcal{T}_v} \mid y_{\text{pa}(v)}, c) \\ &= \int Q_v(dy_v \mid y_{\text{pa}(v)}, c) \int_{\prod_u D_u} \left[\prod_{u \in \text{ch}(v)} A_{\mathcal{T}_u}(B_u \mid z_{\mathcal{T}_u}, c) \right] \\ & \quad \times \tilde{K}_v(B_v \times D_v \mid s_v, r_v, c) \prod_{u \in \text{ch}(v)} \mathbf{M}_u^\Gamma(dz_{\mathcal{T}_u} \mid y_v, c). \end{aligned}$$

Here and below $r_v = (z_u)_{u \in \text{ch}(v)}$ is the tuple of child root coordinates extracted from the sampled $z_{\mathcal{T}_u}$'s. Substitute the local factorization Equation 8:

$$\begin{aligned} & \mathbf{M}_v^{U,\Gamma}(B_{\mathcal{T}_v} \times D_{\mathcal{T}_v} \mid y_{\text{pa}(v)}, c) \\ &= \int Q_v(dy_v \mid y_{\text{pa}(v)}, c) \int_{\prod_u D_u} \int_{D_v} \left[A_v(B_v \mid z_v, r_v, c) \prod_{u \in \text{ch}(v)} A_{\mathcal{T}_u}(B_u \mid z_{\mathcal{T}_u}, c) \right] \\ & \quad \times K_v^\Gamma(dz_v \mid s_v, r_v, c) \prod_{u \in \text{ch}(v)} \mathbf{M}_u^\Gamma(dz_{\mathcal{T}_u} \mid y_v, c). \end{aligned}$$

All factors are non-negative, so Tonelli's theorem applies. The bracketed reconstruction factor depends on $(z_{\mathcal{T}_v}, c)$ only: in particular, although the parent reconstruction is allowed to depend on the incoming child states r_v , it does not depend on either y_v or $y_{\text{pa}(v)}$. By Equation 13, the bracket is exactly

$$A_{\mathcal{T}_v}(B_{\mathcal{T}_v} \mid z_{\mathcal{T}_v}, c).$$

The remaining y_v - and z -kernel composition is exactly $\mathbf{M}_v^\Gamma(dz_{\mathcal{T}_v} \mid y_{\text{pa}(v)}, c)$ by Equation 12. Hence

$$\begin{aligned} & \mathbf{M}_v^{U,\Gamma}(B_{\mathcal{T}_v} \times D_{\mathcal{T}_v} \mid y_{\text{pa}(v)}, c) \\ &= \int_{D_{\mathcal{T}_v}} A_{\mathcal{T}_v}(B_{\mathcal{T}_v} \mid z_{\mathcal{T}_v}, c) \mathbf{M}_v^\Gamma(dz_{\mathcal{T}_v} \mid y_{\text{pa}(v)}, c). \end{aligned}$$

Equality on measurable rectangles again extends to the full product σ -algebra by the monotone class theorem. This completes the induction and proves Equation 14 for every non-root subtree.

Step 4: Subtree closure gives global conditional independence at the root.

By (M2), the child subtrees of the root are conditionally independent given (Y_ρ, C) . Since they form a disjoint partition of all non-root nodes,

$$U = (U_{\mathcal{T}_u})_{u \in \text{ch}(\rho)}, \quad Z^\Gamma = (Z_{\mathcal{T}_u})_{u \in \text{ch}(\rho)}.$$

Therefore, for $P_{Y_\rho, C}$ -almost every (y_ρ, c) ,

$$P(du, dz \mid y_\rho, c) = \bigotimes_{u \in \text{ch}(\rho)} \mathbf{M}_u^{U,\Gamma}(du_{\mathcal{T}_u}, dz_{\mathcal{T}_u} \mid y_\rho, c).$$

Applying Equation 14 to each child factor gives

$$\begin{aligned} P(du, dz \mid y_\rho, c) &= \left[\bigotimes_{u \in \text{ch}(\rho)} A_{\mathcal{T}_u}(du_{\mathcal{T}_u} \mid z_{\mathcal{T}_u}, c) \right] \\ & \quad \times \left[\bigotimes_{u \in \text{ch}(\rho)} \mathbf{M}_u^\Gamma(dz_{\mathcal{T}_u} \mid y_\rho, c) \right]. \end{aligned}$$

Define

$$A_{\mathcal{T}}(du \mid z, c) := \bigotimes_{u \in \text{ch}(\rho)} A_{\mathcal{T}_u}(du_{\mathcal{T}_u} \mid z_{\mathcal{T}_u}, c),$$

$$M_{\rho}^{\Gamma}(dz \mid y_{\rho}, c) := \bigotimes_{u \in \text{ch}(\rho)} M_u^{\Gamma}(dz_{\mathcal{T}_u} \mid y_{\rho}, c).$$

Equivalently, because the tree is finite,

$$A_{\mathcal{T}}(du \mid z, c) = \bigotimes_{v \neq \rho} A_v(du_v \mid z_v, z_{\text{ch}(v)}, c),$$

where the factors are kernels in the u_v coordinates with the full z held fixed. Thus

$$P(du, dz \mid y_{\rho}, c) = A_{\mathcal{T}}(du \mid z, c) M_{\rho}^{\Gamma}(dz \mid y_{\rho}, c) \quad P_{Y_{\rho}, C}\text{-a.s.} \quad (15)$$

Equation 15 is a disintegration of the conditional joint law of (U, Z^{Γ}) given (Y_{ρ}, C) . Hence $A_{\mathcal{T}}$ is a version of the conditional law of U given $(Y_{\rho}, Z^{\Gamma}, C)$:

$$P(du \mid y_{\rho}, z, c) = A_{\mathcal{T}}(du \mid z, c) \quad (16)$$

for $P_{Y_{\rho}, Z^{\Gamma}, C}$ -almost every (y_{ρ}, z, c) .

It remains only to identify the same kernel as the conditional law given (Z^{Γ}, C) . For measurable $B \subseteq U$, the tower property and Equation 16 give

$$\begin{aligned} P(U \in B \mid z, c) &= \int P(U \in B \mid y_{\rho}, z, c) P(dy_{\rho} \mid z, c) \\ &= \int A_{\mathcal{T}}(B \mid z, c) P(dy_{\rho} \mid z, c) \\ &= A_{\mathcal{T}}(B \mid z, c). \end{aligned}$$

Therefore

$$P(du \mid y_{\rho}, z, c) = P(du \mid z, c)$$

for $P_{Y_{\rho}, Z^{\Gamma}, C}$ -almost every (y_{ρ}, z, c) , i.e.

$$Y_{\rho} \perp U \mid (Z^{\Gamma}, C). \quad (17)$$

Step 5: Global conditional independence preserves the root law.

Since Z^{Γ} is a measurable function of U ,

$$\sigma(U, Z^{\Gamma}, C) = \sigma(U, C).$$

Let D be a measurable subset of the state space of Y_{ρ} . Therefore

$$P(Y_{\rho} \in D \mid U, C) = P(Y_{\rho} \in D \mid U, Z^{\Gamma}, C) \quad P\text{-a.s.}$$

By Equation 17,

$$P(Y_{\rho} \in D \mid U, Z^{\Gamma}, C) = P(Y_{\rho} \in D \mid Z^{\Gamma}, C) \quad P\text{-a.s.}$$

Combining the two equalities and using a countable determining class for the standard Borel state space of Y_{ρ} yields

$$\mathcal{L}(Y_{\rho} \mid U, C) = \mathcal{L}(Y_{\rho} \mid Z^{\Gamma}, C) \quad P\text{-a.s.}$$

Finally, Equation 17 and the conditional Kullback–Leibler characterization of mutual information give

$$I(Y_{\rho}; U \mid Z^{\Gamma}, C) = 0.$$

This proves the theorem. □

F.2 Local Variational Characterization

This subsection establishes the exact variational identity underlying the predictive-deficiency construction in Section 3. In particular, Proposition 4 gives the population criterion from which the empirical surrogate is derived.

This appendix gives the exact variational form of the local predictive deficiency used in the main text. For a compressed node $v \in V_{\text{comp}}$, write

$$S_v := (Y_v, Y_{\text{pa}(v)}), \quad Z_v^\Gamma := \Gamma(U_v),$$

and

$$\delta_v(\Gamma) := I(S_v; U_v \mid Z_v^\Gamma, C).$$

All variables are assumed to take values in standard Borel spaces and Γ is measurable, so the regular conditional distributions below exist. Kullback–Leibler divergences are understood in the extended-real sense.

For any measurable conditional distribution $q_v(\cdot \mid Z_v^\Gamma, C)$ of S_v , define

$$\mathcal{V}_v(\Gamma, q_v) := \mathbb{E}[D_{\text{KL}}(P_{S_v|U_v, C} \parallel q_v(\cdot \mid Z_v^\Gamma, C))].$$

Proposition 4 (Local variational characterization). *For every measurable compressor Γ and every compressed node v ,*

$$\boxed{\mathcal{V}_v(\Gamma, q_v) = \delta_v(\Gamma) + \mathbb{E}[D_{\text{KL}}(P_{S_v|Z_v^\Gamma, C} \parallel q_v(\cdot \mid Z_v^\Gamma, C))]} \quad (18)$$

Consequently,

$$\boxed{\delta_v(\Gamma) = \inf_{q_v} \mathcal{V}_v(\Gamma, q_v)} \quad (19)$$

and the infimum is attained by

$$q_v^*(\cdot \mid Z_v^\Gamma, C) = P_{S_v|Z_v^\Gamma, C}.$$

If the common value is finite, every minimizer agrees with q_v^* for $P_{Z_v^\Gamma, C}$ -almost every conditioning value.

Proof. Suppress the node index and write

$$S := S_v, \quad U := U_v, \quad Z := Z_v^\Gamma.$$

Because $Z = \Gamma(U)$ is measurable with respect to U ,

$$P_{S|U, Z, C} = P_{S|U, C} \quad P\text{-a.s.} \quad (20)$$

For $P_{Z, C}$ -almost every (z, c) , the conditional relative-entropy chain rule gives

$$\begin{aligned} & \int D_{\text{KL}}(P_{S|U=u, Z=z, C=c} \parallel q_v(\cdot \mid z, c)) P_{U|Z=z, C=c}(du) \\ &= I(S; U \mid Z = z, C = c) + D_{\text{KL}}(P_{S|Z=z, C=c} \parallel q_v(\cdot \mid z, c)). \end{aligned}$$

Integrating over (Z, C) and using Equation 20 yields Equation 18.

The second term in Equation 18 is non-negative and vanishes at $q_v = q_v^* = P_{S_v|Z_v^\Gamma, C}$. Therefore

$$\inf_{q_v} \mathcal{V}_v(\Gamma, q_v) = \delta_v(\Gamma).$$

If the optimum is finite, equality requires the remaining conditional Kullback–Leibler divergence to vanish almost surely, which gives the stated uniqueness up to $P_{Z_v^\Gamma, C}$ -null sets. $\square$

Zero-defect interpretation. Since Z_v^Γ is a measurable function of U_v ,

$$\boxed{\delta_v(\Gamma) = 0 \iff \mathcal{L}(S_v \mid U_v, C) = \mathcal{L}(S_v \mid Z_v^\Gamma, C) \quad P\text{-a.s.}} \quad (21)$$

Thus this appendix introduces no additional objective: it is an exact reformulation of the same local predictive deficiency used by the recursive closure result. The finite-test and empirical restrictions begin only in Appendix F.3.

F.3 From Local Predictive Deficiency to Constrained Updates

This subsection supplies the approximation and calibration chain used in Section 3 and the projection derivation used in Section 3.2. In particular, Appendix F.3.5 proves the dual characterization stated in Proposition 2.

This appendix connects the ideal local predictive deficiency in the main text to its computable training statistic. The purpose is deliberately limited. We do not introduce a second root-level theorem, nor do we identify the empirical statistic with conditional mutual information. Instead, we isolate the successive restrictions used by the implementation and make their residuals explicit:

$$\boxed{\delta_v \longrightarrow \Delta_v^{\text{test}} \longrightarrow \Delta_v^{\text{bal}} \longrightarrow \widehat{\mathcal{D}}_{v,B}.} \quad (22)$$

The main full-covariance route has three residuals: $\varepsilon_{\text{test},v}$ for finite-test coverage, $\varepsilon_{\text{lin},v}$ for the readout class, and $\varepsilon_{\text{stat},v}$ for finite-sample estimation. The optional diagonal-covariance variant introduces D_v^{diag} between the profiled value and its empirical diagonal estimate, with an additional $\varepsilon_{\text{diag},v}$ residual.

Throughout, let

$$S_v := (Y_v, Y_{\text{pa}(v)}), \quad Z_v^\Gamma := \Gamma(U_v), \quad C := (C_w)_{w \in V},$$

and use the main-text local predictive deficiency

$$\boxed{\delta_v(\Gamma) := I(S_v; U_v \mid Z_v^\Gamma, C).} \quad (23)$$

If an interface is usable only when both events of the adjacent predictive pair are present, let M_v be its validity indicator and write

$$\mathbb{E}_v[F] := \frac{\mathbb{E}[M_v F]}{\mathbb{E}[M_v]}, \quad \mathbb{P}(M_v = 1) > 0.$$

The calibration statements below are evaluated under this same eligible-interface law. For Hilbert-valued f , write $\|f\|_{L_v^2}^2 := \mathbb{E}_v \|f\|^2$. Censored observations are omitted rather than encoded as zero-valued targets. When every theoretical interface is observed, this law is the main-text law. With censoring, identifying the eligible-interface local predictive deficiency with the unconditional main-text local predictive deficiency requires the corresponding support/selection condition; without that condition, the bounds below calibrate the local predictive deficiency on the observed eligible interfaces only.

Scope. The empirical statistic is not claimed to be an exact finite-sample estimator of the local predictive deficiency. For a fixed interface law, the exact local criterion is reduced through finite predictive tests, a restricted readout class, and full-covariance empirical moments. We bound their residual terms under the stated regularity conditions. The root-level information-theoretic guarantee in the main text applies to the ideal local predictive deficiencies. The calibration results below quantify the corresponding local approximation; the pooled training statistic used by Algorithm 1 is treated separately when its interface-wise differential is constructed.

F.3.1 Exact Local Criterion and Context Localization

The main-text criterion in Equation 23 conditions on the retained global context C , whereas the implemented statistic uses the context C_v visible at interface v . Let $C_{-v} := (C_w)_{w \in V \setminus \{v\}}$. We use the following localization condition only to identify these two conditioning choices:

$$S_v \perp C_{-v} \mid (U_v, C_v), \quad S_v \perp C_{-v} \mid (Z_v^\Gamma, C_v). \quad (24)$$

By the chain rule,

$$\begin{aligned} I(S_v; U_v \mid Z_v^\Gamma, C_v, C_{-v}) &= I(S_v; U_v \mid Z_v^\Gamma, C_v) \\ &\quad + I(S_v; C_{-v} \mid U_v, Z_v^\Gamma, C_v) - I(S_v; C_{-v} \mid Z_v^\Gamma, C_v). \end{aligned}$$

The last two terms vanish under Equation 24, using that Z_v^Γ is measurable with respect to U_v . Hence

$$\boxed{\delta_v(\Gamma) = I(S_v; U_v \mid Z_v^\Gamma, C_v).} \quad (25)$$

Without Equation 24, the construction below should be read as a local-context surrogate. The pre-compression reference is U_v throughout this appendix.

For the comparison with the main-text defect below, take $M_v = 1$ almost surely. With censored interfaces, the same derivations apply to the defect and conditional laws under the eligible-interface law; identifying that defect with the unconditional one needs an additional selection assumption. Under full observation, the variational identity remains exact after localization:

$$\delta_v(\Gamma) = \inf_{q_v} \mathbb{E}_v [D_{\text{KL}}(P_{S_v|U_v, C_v} \parallel q_v(\cdot \mid Z_v^\Gamma, C_v))] . \quad (26)$$

Every step below is a restriction or approximation of this local predictive problem, not a replacement for Equation 26.

F.3.2 Finite Predictive Tests

Following Section 3, let

$$P_v := T_S(\chi(C_v) \otimes \phi(Y_v, Y_{\text{pa}(v)})) \in \mathbb{R}^{d_P},$$

where χ , ϕ , and T_S are fixed. The test vector supplies supervision only; it is not an additional input to the recursive host. Define

$$\bar{P}_v := P_v - \mathbb{E}_v[P_v \mid C_v], \quad m_{X,v} := \mathbb{E}_v[\bar{P}_v \mid X_v, C_v], \quad X_v \in \{U_v, Z_v^\Gamma\}.$$

Because the C_v -measurable baseline can be absorbed into the predictor, predicting P_v and predicting $\bar{P}_v$ have the same Bayes-risk difference. Let

$$\mathcal{R}_v^*(P_v \mid X_v, C_v) := \inf_g \mathbb{E}_v \|P_v - g(X_v, C_v)\|_2^2.$$

Conditional expectation is the L^2 projection onto $\sigma(X_v, C_v)$. Since $Z_v^\Gamma = \Gamma(U_v)$, the tower property gives $m_{Z,v} = \mathbb{E}_v[m_{U,v} \mid Z_v^\Gamma, C_v]$, and therefore

$$\boxed{\begin{aligned} \Delta_v^{\text{test}}(\Gamma) &:= \mathcal{R}_v^*(P_v \mid Z_v^\Gamma, C_v) - \mathcal{R}_v^*(P_v \mid U_v, C_v) \\ &= \mathbb{E}_v \|m_{U,v} - m_{Z,v}\|_2^2 \geq 0. \end{aligned}} \quad (27)$$

This is exactly the finite-test value gap used in the main text. The identity is exact for the selected tests; the approximation is the use of those tests in place of the full conditional law of S_v .

To make this approximation explicit, let $\psi_v(S_v, C_v)$ take values in a separable Hilbert test space $\mathcal{G}_v^{\text{test}}$. Let $\Pi_{m,v}$ be the orthogonal projector onto the finite test span used by P_v , and let $Q_{m,v}$ be an isometric coordinate map on that span. Define the full conditional predictive change

$$e_v(\Gamma) := \mathbb{E}_v[\psi_v(S_v, C_v) \mid U_v, C_v] - \mathbb{E}_v[\psi_v(S_v, C_v) \mid Z_v^\Gamma, C_v].$$

We use the following quantitative coverage condition on the admissible law and compressor class: for some finite $c_v^{(0)} > 0$,

$$\delta_v(\Gamma) \leq c_v^{(0)} \|e_v(\Gamma)\|_{L_v^2}^2. \quad (28)$$

Equation 28 is a regularity condition relating the predictive test geometry to conditional KL on the admissible law class; no universal reverse Pinsker inequality is assumed.

Lemma F.1 (Finite-test coverage). Suppose Equation 28 holds and

$$P_v = Q_{m,v} \Pi_{m,v} \psi_v(S_v, C_v).$$

Then

$$\boxed{\delta_v(\Gamma) \leq c_v^{(0)} \Delta_v^{\text{test}}(\Gamma) + \varepsilon_{\text{test},v}(\Gamma)}, \quad (29)$$

where

$$\varepsilon_{\text{test},v}(\Gamma) := c_v^{(0)} \|(I - \Pi_{m,v})e_v(\Gamma)\|_{L_v^2}^2.$$

For a nested complete test family, $\varepsilon_{\text{test},v}(\Gamma) \rightarrow 0$ pointwise in Γ .

Proof. Orthogonality of $\Pi_{m,v}$ gives

$$\|e_v\|_{L_v^2}^2 = \|\Pi_{m,v}e_v\|_{L_v^2}^2 + \|(I - \Pi_{m,v})e_v\|_{L_v^2}^2.$$

Linearity of conditional expectation and the coordinate isometry imply

$$m_{U,v} - m_{Z,v} = Q_{m,v}\Pi_{m,v}e_v.$$

Hence $\Delta_v^{\text{test}} = \|\Pi_{m,v}e_v\|_{L_v^2}^2$. Substitution into Equation 28 yields Equation 29. $\square$

The domination condition is non-vacuous in standard discrete predictive settings. For example, suppose $S_v \in \{1, \dots, K\}$, take the complete one-hot test $\psi_v(S_v) = e_{S_v}$, and write

$$p_U(\cdot) := \mathbb{P}_v(S_v = \cdot \mid U_v, C_v), \quad p_Z(\cdot) := \mathbb{P}_v(S_v = \cdot \mid Z_v^\Gamma, C_v).$$

If

$$p_Z(s) \geq \alpha_v > 0 \quad \text{a.s. for every } s,$$

then

$$\begin{aligned} \delta_v(\Gamma) &= \mathbb{E}_v D_{\text{KL}}(p_U \| p_Z) \\ &\leq \mathbb{E}_v \chi^2(p_U, p_Z) \\ &= \mathbb{E}_v \sum_{s=1}^K \frac{(p_U(s) - p_Z(s))^2}{p_Z(s)} \\ &\leq \frac{1}{\alpha_v} \mathbb{E}_v \|p_U - p_Z\|_2^2. \end{aligned}$$

Thus Equation 28 holds with $c_v^{(0)} = \alpha_v^{-1}$, and for the complete one-hot family the test coverage residual is zero. More general finite sketches need not determine the full conditional law; their uncovered component is what $\varepsilon_{\text{test},v}$ records.

Thus $\varepsilon_{\text{test},v}$ is a representation/test approximation term, not a sampling error.

F.3.3 Profiled Predictive Value

The finite-test value in Equation 27 uses the raw test coordinates, as in the main text. The profiled population criterion additionally balances the target coordinates. Define

$$\Sigma_{PP,v} := \mathbb{E}_v[\bar{P}_v \bar{P}_v^\top], \quad W_{P,v} := (\Sigma_{PP,v} + \varepsilon I)^{-1/2}, \quad \tilde{P}_v := W_{P,v} \bar{P}_v,$$

with $\varepsilon > 0$, and let

$$\tilde{m}_{X,v} := \mathbb{E}_v[\tilde{P}_v \mid X_v, C_v] = W_{P,v} m_{X,v}.$$

The corresponding balanced Bayes value gap is

$$\Delta_v^{\text{test,bal}}(\Gamma) := \mathcal{R}_v^*(\tilde{P}_v \mid Z_v^\Gamma, C_v) - \mathcal{R}_v^*(\tilde{P}_v \mid U_v, C_v) = \mathbb{E}_v \|W_{P,v}(m_{U,v} - m_{Z,v})\|_2^2.$$

Let $s_v := \sigma_{\min}(W_{P,v}) > 0$. Then

$$\Delta_v^{\text{test}}(\Gamma) \leq s_v^{-2} \Delta_v^{\text{test,bal}}(\Gamma). \quad (30)$$

This step changes only the metric on the fixed finite test coordinates.

We next restrict the Bayes predictor to the fixed readout coordinates used by the implementation and profile the readout exactly. For notational simplicity, write X_v for those fixed coordinates; if a fixed lift is used, X_v below denotes that lift. Define

$$\bar{X}_v := X_v - \mathbb{E}_v[X_v \mid C_v],$$

and

$$\Sigma_{XX,v} := \mathbb{E}_v[\bar{X}_v \bar{X}_v^\top], \quad \Sigma_{PX,v} := \mathbb{E}_v[\bar{P}_v \bar{X}_v^\top], \quad \Sigma_{XP,v} := \Sigma_{PX,v}^\top.$$

For $\lambda > 0$, consider

$$\mathcal{R}_{\lambda,\varepsilon,v}^{\text{lin}}(X_v \mid C_v) := \min_A \left\{ \mathbb{E}_v \|\tilde{P}_v - A \bar{X}_v\|_2^2 + \lambda \|A\|_F^2 \right\}. \quad (31)$$

Proposition 5 (Profiled predictive value). *The minimizer of Equation 31 is*

$$A_{X,v}^* = W_{P,v} \Sigma_{PX,v} (\Sigma_{XX,v} + \lambda I)^{-1},$$

and

$$\begin{aligned} \mathcal{R}_{\lambda,\varepsilon,v}^{\text{lin}}(X_v | C_v) &= \text{tr}[(\Sigma_{PP,v} + \varepsilon I)^{-1} \Sigma_{PP,v}] - J_{\text{bal},v}(X_v | C_v), \\ J_{\text{bal},v}(X_v | C_v) &:= \text{tr}[(\Sigma_{PP,v} + \varepsilon I)^{-1} \Sigma_{PX,v} (\Sigma_{XX,v} + \lambda I)^{-1} \Sigma_{XP,v}]. \end{aligned} \quad (32)$$

Equivalently,

$$J_{\text{bal},v}(X_v | C_v) = \left\| (\Sigma_{PP,v} + \varepsilon I)^{-1/2} \Sigma_{PX,v} (\Sigma_{XX,v} + \lambda I)^{-1/2} \right\|_F^2.$$

Proof. Let $G_{X,v} := \Sigma_{XX,v} + \lambda I \succ 0$. Expanding Equation 31 and completing the square gives

$$\begin{aligned} \mathbb{E}_v \|\tilde{P}_v - A\bar{X}_v\|_2^2 + \lambda \|A\|_F^2 \\ &= \text{tr}(W_{P,v} \Sigma_{PP,v} W_{P,v}) - \text{tr}\left(W_{P,v} \Sigma_{PX,v} G_{X,v}^{-1} \Sigma_{XP,v} W_{P,v}\right) \\ &\quad + \left\| (A - W_{P,v} \Sigma_{PX,v} G_{X,v}^{-1}) G_{X,v}^{1/2} \right\|_F^2. \end{aligned}$$

The final term is non-negative and vanishes at the stated minimizer. Cyclicity of trace and $\text{tr}(BB^\top) = \|B\|_F^2$ yield the two forms of $J_{\text{bal},v}$. $\square$

The constant term in Equation 32 is common to U_v and Z_v^Γ . Consistently with the main text, define

$$\Delta_v^{\text{bal}}(\Gamma) := J_{\text{bal},v}(U_v | C_v) - J_{\text{bal},v}(Z_v^\Gamma | C_v).$$

Profiling itself is exact within the ridge class. The approximation restricts predictors to that class.

For $X_v \in \{U_v, Z_v^\Gamma\}$ define its ridge oracle residual

$$\begin{aligned} r_{\text{lin},v}(X_v) &:= \mathcal{R}_{\lambda,\varepsilon,v}^{\text{lin}}(X_v | C_v) - \mathcal{R}_v^*(\tilde{P}_v | X_v, C_v) \\ &= \inf_A \left\{ \mathbb{E}_v \|\tilde{m}_{X,v} - A\bar{X}_v\|_2^2 + \lambda \|A\|_F^2 \right\} \geq 0. \end{aligned}$$

The second equality follows from the L^2 orthogonality of $\tilde{P}_v - \tilde{m}_{X,v}$ to every square-integrable function of (X_v, C_v) . Since

$$\Delta_v^{\text{bal}} = \Delta_v^{\text{test,bal}} + r_{\text{lin},v}(Z_v^\Gamma) - r_{\text{lin},v}(U_v),$$

we have

$$|\Delta_v^{\text{test,bal}}(\Gamma) - \Delta_v^{\text{bal}}(\Gamma)| \leq \varepsilon_{\text{lin},v}(\Gamma), \quad (33)$$

where

$$\varepsilon_{\text{lin},v}(\Gamma) := r_{\text{lin},v}(U_v) + r_{\text{lin},v}(Z_v^\Gamma).$$

The term vanishes if both balanced conditional means lie in the readout span as regularization vanishes.

Combining Equations 29, 30, and 33 gives the population profiled bridge

$$\delta_v(\Gamma) \leq c_v \Delta_v^{\text{bal}}(\Gamma) + \varepsilon_{\text{test},v}(\Gamma) + c_v \varepsilon_{\text{lin},v}(\Gamma), \quad c_v := \frac{c_v^{(0)}}{s_v^2}. \quad (34)$$

Width and the spectral oracle. A width- r transmitted state does not, by dimensionality alone, induce a rank- r orthogonal projection in the balanced covariance geometry. A Ky–Fan rank- r construction can still be used as a diagnostic linear oracle when projection realizability is imposed, but it is not needed for Equation 34 and is not identified with the general nonlinear compressor. We therefore do not use a Ky–Fan equality in the theoretical bridge from δ_v to the implemented statistic.

F.3.4 Empirical Predictive Deficiency

We treat diagonal covariance as optional before deriving finite-sample bounds for the full-covariance method.

Population diagonal geometry. Define the stabilized diagonal marginal covariances

$$D_{P,v} := \text{diag}(\Sigma_{PP,v}) + \varepsilon I, \quad D_{X,v} := \text{diag}(\Sigma_{XX,v}) + \lambda I,$$

and

$$J_{\text{diag},v}(X_v | C_v) := \text{tr} \left[D_{P,v}^{-1} \Sigma_{PX,v} D_{X,v}^{-1} \Sigma_{XP,v} \right].$$

The corresponding population diagonal deficiency is

$$D_v^{\text{diag}}(\Gamma) := J_{\text{diag},v}(U_v | C_v) - J_{\text{diag},v}(Z_v^\Gamma | C_v).$$

Let

$$E_{P,v} := \Sigma_{PP,v} - \text{diag}(\Sigma_{PP,v}), \quad E_{X,v} := \Sigma_{XX,v} - \text{diag}(\Sigma_{XX,v}),$$

and define the relative off-diagonal departures

$$\rho_{P,v} := \left\| D_{P,v}^{-1/2} E_{P,v} D_{P,v}^{-1/2} \right\|_{\text{op}}, \quad \rho_{X,v} := \left\| D_{X,v}^{-1/2} E_{X,v} D_{X,v}^{-1/2} \right\|_{\text{op}}.$$

Here and below $\| \cdot \|_{\text{op}}$ denotes spectral norm.

Lemma F.2 (Diagonal covariance perturbation). For $X_v \in \{U_v, Z_v^\Gamma\}$, suppose $\|\Sigma_{PX,v}\|_F \leq K_{X,v}$. Then

$$\begin{aligned} & |J_{\text{bal},v}(X_v | C_v) - J_{\text{diag},v}(X_v | C_v)| \\ & \leq K_{X,v}^2 \left(\frac{\|E_{P,v}\|_{\text{op}}}{\varepsilon^2 \lambda} + \frac{\|E_{X,v}\|_{\text{op}}}{\varepsilon \lambda^2} \right) =: \beta_{X,v}. \end{aligned} \quad (35)$$

If additionally $\rho_{P,v} < 1$ and $\rho_{X,v} < 1$, the first display can be replaced by the relative bound

$$\beta_{X,v}^{\text{rel}} := \frac{K_{X,v}^2}{\varepsilon \lambda} \left[\frac{\rho_{P,v}}{(1 - \rho_{P,v})(1 - \rho_{X,v})} + \frac{\rho_{X,v}}{1 - \rho_{X,v}} \right]. \quad (36)$$

Consequently,

$$\boxed{|\Delta_v^{\text{bal}}(\Gamma) - D_v^{\text{diag}}(\Gamma)| \leq \varepsilon_{\text{diag},v}(\Gamma)}, \quad (37)$$

with $\varepsilon_{\text{diag},v} := \beta_{U,v} + \beta_{Z,v}$, or with the corresponding relative bounds when their conditions hold.

Proof. Abbreviate $A := \Sigma_{PP,v} + \varepsilon I$, $D_P := D_{P,v}$, $B := \Sigma_{XX,v} + \lambda I$, $D_X := D_{X,v}$, and $C := \Sigma_{PX,v}$. The resolvent identity gives

$$\|A^{-1} - D_P^{-1}\|_{\text{op}} \leq \frac{\|E_{P,v}\|_{\text{op}}}{\varepsilon^2}, \quad \|B^{-1} - D_X^{-1}\|_{\text{op}} \leq \frac{\|E_{X,v}\|_{\text{op}}}{\lambda^2},$$

while $\|A^{-1}\|_{\text{op}}, \|D_P^{-1}\|_{\text{op}} \leq \varepsilon^{-1}$ and $\|B^{-1}\|_{\text{op}}, \|D_X^{-1}\|_{\text{op}} \leq \lambda^{-1}$. A two-term telescope gives

$$\begin{aligned} A^{-1} C B^{-1} C^\top - D_P^{-1} C D_X^{-1} C^\top &= (A^{-1} - D_P^{-1}) C B^{-1} C^\top \\ &\quad + D_P^{-1} C (B^{-1} - D_X^{-1}) C^\top. \end{aligned}$$

Using $|\text{tr}(MN)| \leq \|M\|_{\text{op}} \|N\|_*$ and $\|CBC^\top\|_* \leq \|C\|_F^2 \|B\|_{\text{op}}$ proves Equation 35.

For the relative form, write $A = D_P^{1/2} (I + R_P) D_P^{1/2}$ with $\|R_P\|_{\text{op}} = \rho_{P,v}$, and analogously for B . If $\rho < 1$, then $\|(I + R)^{-1}\|_{\text{op}} \leq (1 - \rho)^{-1}$ and $\|(I + R)^{-1} - I\|_{\text{op}} \leq \rho/(1 - \rho)$. Substituting these two bounds into the same telescope gives Equation 36. Applying the single-state bound to U_v and Z_v^Γ and using the triangle inequality proves Equation 37. $\square$

Equation 37 makes precise the sense in which diagonalization is a geometric approximation. The error is controlled by the off-diagonal departure of the population covariance geometry and is distinct from sampling noise.

Finite-sample moments. Let $\mathcal{B}$ contain $n_{\mathcal{B}}$ independent sampling units from the eligible-interface law. In the tree setting, a sampling unit can be taken as one independent tree/trajectory cluster; for i.i.d. interfaces it is one interface. Let hats denote the corresponding empirical centered covariance blocks. The main empirical value uses full regularized covariance blocks:

$$\widehat{J}_{\text{bal},v,\mathcal{B}}(X_v) := \text{tr} \left[(\widehat{\Sigma}_{PP,v} + \varepsilon I)^{-1} \widehat{\Sigma}_{PX,v} (\widehat{\Sigma}_{XX,v} + \lambda I)^{-1} \widehat{\Sigma}_{XP,v} \right]. \quad (38)$$

The main empirical deficiency is

$$\widehat{\mathcal{D}}_{v,\mathcal{B}}(\Gamma) := \widehat{J}_{\text{bal},v,\mathcal{B}}(U_v) - \widehat{J}_{\text{bal},v,\mathcal{B}}(Z_v^\Gamma). \quad (39)$$

The U_v term is a stop-gradient reference in optimization. The diagonal variant replaces both regularized covariance inverses in Equation 38 by their regularized diagonal inverses. Denote its value and gap by $\widehat{J}_{\text{diag},v,\mathcal{B}}$ and $\widehat{\mathcal{D}}_{v,\mathcal{B}}^{\text{diag}}$.

Lemma F.3 (Finite-sample perturbation). Fix Γ independently of the sampling units in $\mathcal{B}$. Suppose $\varepsilon \geq \varepsilon_0 > 0$, $\lambda \geq \lambda_0 > 0$, and

$$\|\Sigma_{PX,v}\|_F \vee \|\widehat{\Sigma}_{PX,v}\|_F \leq K_v, \quad X \in \{U, Z\}.$$

On an event on which, simultaneously for $X \in \{U, Z\}$,

$$\begin{aligned} \|\widehat{\Sigma}_{PP,v} - \Sigma_{PP,v}\|_{\text{op}} &\leq \omega_{PP,v}, \\ \|\widehat{\Sigma}_{XX,v} - \Sigma_{XX,v}\|_{\text{op}} &\leq \omega_{XX,v}, \\ \|\widehat{\Sigma}_{PX,v} - \Sigma_{PX,v}\|_F &\leq \omega_{PX,v}^F, \end{aligned}$$

one has

$$\left| \widehat{J}_{\text{bal},v,\mathcal{B}}(X_v) - J_{\text{bal},v}(X_v | C_v) \right| \leq \Lambda_{X,v}, \quad (40)$$

where

$$\Lambda_{X,v} := \frac{K_v^2}{\varepsilon_0^2 \lambda_0} \omega_{PP,v} + \frac{K_v^2}{\varepsilon_0 \lambda_0^2} \omega_{XX,v} + \frac{2K_v}{\varepsilon_0 \lambda_0} \omega_{PX,v}^F.$$

Consequently,

$$\left| \widehat{\mathcal{D}}_{v,\mathcal{B}}(\Gamma) - \Delta_v^{\text{bal}}(\Gamma) \right| \leq \varepsilon_{\text{stat},v}, \quad \varepsilon_{\text{stat},v} := \Lambda_{U,v} + \Lambda_{Z,v}. \quad (41)$$

If the three displayed covariance-deviation bounds hold jointly with probability at least $1 - \eta$, then Equation 41 holds with the same probability. Under standard bounded or sub-Gaussian sampling assumptions, the deviation radii $\omega_{PP,v}$, $\omega_{XX,v}$, and $\omega_{PX,v}^F$ admit the usual dimension-dependent $n_{\mathcal{B}}^{-1/2}$ concentration, with lower-order $n_{\mathcal{B}}^{-1}$ terms as appropriate. For clustered trees, $n_{\mathcal{B}}$ denotes the number of independent clusters and the concentration constants depend on the corresponding cluster-norm bound.

Proof. The covariance bounds apply to the full regularized blocks. A four-term telescope for the two inverse factors and the two cross-covariance factors, together with the resolvent identity $\widehat{A}^{-1} - A^{-1} = \widehat{A}^{-1}(A - \widehat{A})A^{-1}$, yields Equation 40. Applying it to U_v and Z_v^Γ gives Equation 41. The probability statement follows whenever the covariance-deviation event is supplied by an appropriate concentration bound, for example standard bounded/sub-Gaussian covariance concentration or matrix Bernstein for independent bounded cluster summaries. For the diagonal variant, diagonal extraction is nonexpansive in spectral norm; the same perturbation radius bounds its empirical value relative to $J_{\text{diag},v}$. $\square$

When several fixed sketches are used, the statistic in Equation 39 is computed for each sketch and averaged before differentiation. The same bounds apply sketchwise and combine by averaging (or by a union bound when a simultaneous high-probability event is required).

Corollary F.1 (Controlled surrogate for the local predictive deficiency). Under context localization, the test-domination condition, and the regularity conditions of Lemmas F.1 and F.3, suppose additionally that the covariance deviation event in Lemma F.3 holds with probability at least $1 - \eta$. Then, with probability at least $1 - \eta$,

$$\delta_v(\Gamma) \leq c_v \widehat{\mathcal{D}}_{v,\mathcal{B}}(\Gamma) + \varepsilon_{\text{test},v}(\Gamma) + c_v \left(\varepsilon_{\text{lin},v}(\Gamma) + \varepsilon_{\text{stat},v} \right). \quad (42)$$

For the diagonal variant, if Lemma F.2 also holds, replace $\widehat{\mathcal{D}}_{v,\mathcal{B}}$ by $\widehat{\mathcal{D}}_{v,\mathcal{B}}^{\text{diag}}$ and add $c_v \varepsilon_{\text{diag},v}$ to the right-hand side. Absorbing c_v into the last two residual definitions for the main method yields the compact form

$$\delta_v(\Gamma) \leq c_v \widehat{\mathcal{D}}_{v,\mathcal{B}}(\Gamma) + \varepsilon_{\text{test},v} + \widetilde{\varepsilon}_{\text{lin},v} + \widetilde{\varepsilon}_{\text{stat},v}.$$

Proof. Successively apply Equations 29, 33, and 41 along the chain in Equation 22. For the diagonal variant, insert Equation 37 before applying the same finite-sample perturbation estimate to the diagonal empirical value. $\square$

Corollary F.1 is the only bridge needed here from the ideal local criterion to the implemented statistic. It does not assert that $\widehat{\mathcal{D}}_{v,\mathcal{B}} = \delta_v$, nor that every stochastic optimizer step monotonically decreases the Shannon defect. Instead, it separates the discrepancy into identifiable terms that shrink under richer tests, a better readout class, and more statistical support, respectively. The optional diagonal variant also incurs the covariance-geometry residual.

The preceding calibration statement is stratum-wise: it applies to any fixed interface law for which the displayed moments and residuals are defined. The implementation does not estimate a separate covariance problem for every interface. Instead, aligned eligible interfaces are pooled and the same moment functional is evaluated under the resulting pooled empirical law. Because covariance inversion is nonlinear, we do not identify this pooled statistic with a weighted average of the stratum-wise statistics, nor with an independent estimator of every δ_v . Pooling is used to obtain a higher-support shared statistic. The projection guarantee below applies directly to this actual pooled statistic through its interface-wise differential.

F.3.5 Interface Constraints and Projection

Although $\widehat{\mathcal{D}}_{\mathcal{B}}$ is estimated jointly from all eligible interfaces in the current window, its differential decomposes through the individual compressed states. Enumerate them as $z_1^\Gamma, \dots, z_{n_{\mathcal{B}}}^\Gamma$ and define, at the current parameters Γ_t ,

$$a_i := \nabla_{z_i^\Gamma} \widehat{\mathcal{D}}_{\mathcal{B}}(\Gamma_t), \quad q_i := \left(\nabla_{\Gamma} z_i^\Gamma \right)^\top a_i \in \mathbb{R}^p.$$

The adjoint a_i is obtained from the jointly estimated statistic; it is not the gradient of a separately estimated single-interface covariance problem. The chain rule gives

$$\nabla_{\Gamma} \widehat{\mathcal{D}}_{\mathcal{B}}(\Gamma_t) = \sum_{i=1}^{n_{\mathcal{B}}} q_i.$$

Holding the other interface routes fixed, the first-order change transmitted through interface i under a parameter displacement d is

$$q_i^\top d + o(\|d\|_2). \quad (43)$$

Let $t_t \in \mathbb{R}^p$ be the task proposal produced by the host optimizer. For each group $\mathcal{G}_g$ used in the main-text implementation, put $\bar{q}_g := \sum_{i \in \mathcal{G}_g} q_i$. For $\bar{q}_g \neq 0$, require

$$\bar{q}_g^\top d \leq \kappa \|\bar{q}_g\|_2 \|t_t\|_2. \quad (44)$$

Defining $h_g := \bar{q}_g / \|\bar{q}_g\|_2$ gives $h_g^\top d \leq \kappa \|t_t\|_2$. Groups with $\bar{q}_g = 0$ impose no first-order restriction. Stack the remaining $h_g^\top$ as the rows of H_t , let

$$b_t := \kappa \|t_t\|_2 \mathbf{1}_m, \quad \mathcal{F}_t := \{d \in \mathbb{R}^p : H_t d \leq b_t\},$$

and define

$$d_t^* := \arg \min_{d \in \mathcal{F}_t} \frac{1}{2} \|d - t_t\|_2^2. \quad (45)$$

This is the predictive feasibility projection used in Proposition 2 and Algorithm 1.

Because $\kappa \geq 0$, $0 \in \mathcal{F}_t$. The feasible set is therefore a nonempty closed convex polyhedron, while the objective in Equation 45 is strictly convex and coercive. Hence d_t^* exists and is unique. It is the constrained update closest to the task proposal, and if $t_t \in \mathcal{F}_t$ then $d_t^* = t_t$.

For completeness, introduce multipliers $\alpha \geq 0$. Stationarity of the Lagrangian gives

$$d = t_t - H_t^\top \alpha.$$

The equivalent dual problem is

$$\alpha_t^* \in \arg \min_{\alpha \geq 0} \left\{ \frac{1}{2} \|H_t^\top \alpha\|_2^2 + \alpha^\top (b_t - H_t t_t) \right\}, \quad d_t^* = t_t - H_t^\top \alpha_t^*. \quad (46)$$

The primal solution is unique even if the dual multiplier is not. The KKT conditions show that the correction $t_t - d_t^*$ is a non-negative combination of active predictive directions.

Computational complexity. Let p be the number of trainable compressor parameters, m the number of grouped predictive constraints, and K the number of dual-solver iterations. Given $H_t \in \mathbb{R}^{m \times p}$, a matrix-free dual solve uses products with H_t and $H_t^\top$ and costs $O(Kmp)$ time and $O(mp)$ storage. If the Gram matrix $G_t = H_t H_t^\top$ is cached, forming it costs $O(m^2 p)$, the dual iterations cost $O(Km^2)$, and the final correction $H_t^\top \alpha_t^*$ costs $O(mp)$, with $O(mp + m^2)$ storage. Thus the optimization is carried out in the m -dimensional constraint space rather than as a p -dimensional QP; here m counts active constraint groups and is much smaller than p .

The Euclidean projection theorem gives

$$(t_t - d_t^*)^\top (d - d_t^*) \leq 0, \quad \forall d \in \mathcal{F}_t.$$

Taking $d = 0$ yields

$$t_t^\top d_t^* \geq \|d_t^*\|_2^2, \quad \|d_t^*\|_2 \leq \|t_t\|_2.$$

Thus the projection does not enlarge the proposed step. Moreover, $h_g^\top t_t \leq \|t_t\|_2$ by Cauchy–Schwarz, so if $\kappa \geq 1$ the task proposal is always feasible, whereas $\kappa = 0$ makes every retained group contribution non-increasing to first order.

Finally, summing Equation 43 within each group and applying primal feasibility gives

$$\bar{q}_g^\top d_t^* \leq \kappa \|\bar{q}_g\|_2 \|t_t\|_2, \quad g = 1, \dots, m,$$

and hence

$$\Delta_g(d_t^*) \leq \kappa \|\bar{q}_g\|_2 \|t_t\|_2 + o(\|d_t^*\|_2),$$

where $\Delta_g(d)$ denotes the combined change through group g . Group feasibility does not imply the same bound for each $q_i^\top d_t^*$. This is intentionally a first-order guarantee on the implemented predictive statistic. It is not a claim that each finite stochastic update monotonically decreases the ideal mutual-information defect.

Summary of the theoretical boundary. The main text provides the ideal information-theoretic implication

$$\text{local predictive deficiency} \implies \text{root predictive stability}.$$

This appendix provides the separate full-covariance local calibration bridge

$$\begin{aligned} \text{local predictive deficiency} &\longrightarrow \text{finite tests} \longrightarrow \text{profiled balanced value} \\ &\longrightarrow \text{empirical statistic,} \end{aligned}$$

with explicit residuals $\varepsilon_{\text{test}}$, ε_{lin} , and $\varepsilon_{\text{stat}}$. The optional diagonal variant adds $\varepsilon_{\text{diag}}$. The calibration result is stated for a fixed interface law. Algorithm 1 uses the corresponding pooled moment functional and projects the task proposal to control its interface-wise first-order variation. No step requires the identification $\widehat{\mathcal{D}}_{\mathcal{B}} = \delta_v$, and the pooled statistic is not claimed to be an independent estimator of every local predictive deficiency.

F.4 Finite-Horizon Control along Predictive Feasibility Optimization

This subsection gives the finite-horizon training statement associated with the projected updates in Section 3.3 and connects that training-time control to Proposition 3.

Proposition 3 is pointwise in the compressor Γ : it converts small population local predictive deficiencies into a small discrepancy at the root. Proposition 2, by contrast, controls the linearized change of the pooled empirical statistic used by the optimizer at one training iterate. This appendix connects the two statements over a finite optimization horizon. The argument accounts for window refresh and pooled-to-local calibration.

At iteration t , write the optimization window as $\mathcal{B}_t$ and make the iteration dependence of the grouped sensitivities explicit by writing $\bar{q}_{g,t}$. These are the same grouped directions as $\bar{q}_g$ in Appendix F.3.5, evaluated at $(\Gamma_t, \mathcal{B}_t)$. The host optimizer proposes t_t , predictive feasibility projection returns d_t^* , and Algorithm 1 sets $\Gamma_{t+1} = \Gamma_t + d_t^*$.

Proposition 6 (Finite-horizon control of the pooled predictive statistic). *Suppose that, at every iterate t , the retained groups partition the eligible interfaces entering $\widehat{\mathcal{D}}_{\mathcal{B}_t}$, and that $\Gamma \mapsto \widehat{\mathcal{D}}_{\mathcal{B}_t}(\Gamma)$ has an L_t -Lipschitz gradient on the line segment joining Γ_t and Γ_{t+1} . Then the projected update satisfies*

$$\widehat{\mathcal{D}}_{\mathcal{B}_t}(\Gamma_{t+1}) \leq \widehat{\mathcal{D}}_{\mathcal{B}_t}(\Gamma_t) + \kappa \|t_t\|_2 \sum_{g=1}^m \|\bar{q}_{g,t}\|_2 + \frac{L_t}{2} \|t_t\|_2^2. \quad (47)$$

Consequently, for any $T \geq 1$,

$$\begin{aligned} \widehat{\mathcal{D}}_{\mathcal{B}_T}(\Gamma_T) &\leq \widehat{\mathcal{D}}_{\mathcal{B}_0}(\Gamma_0) \\ &\quad + \sum_{t=0}^{T-1} \left[\kappa \|t_t\|_2 \sum_{g=1}^m \|\bar{q}_{g,t}\|_2 + \frac{L_t}{2} \|t_t\|_2^2 \right] \\ &\quad + \sum_{t=0}^{T-1} \left| \widehat{\mathcal{D}}_{\mathcal{B}_{t+1}}(\Gamma_{t+1}) - \widehat{\mathcal{D}}_{\mathcal{B}_t}(\Gamma_{t+1}) \right|. \end{aligned} \quad (48)$$

Proof. For a fixed window $\mathcal{B}_t$, the chain-rule decomposition in Appendix F.3.5 gives

$$\nabla_{\Gamma} \widehat{\mathcal{D}}_{\mathcal{B}_t}(\Gamma_t) = \sum_{g=1}^m \bar{q}_{g,t}.$$

By L_t -smoothness,

$$\widehat{\mathcal{D}}_{\mathcal{B}_t}(\Gamma_{t+1}) \leq \widehat{\mathcal{D}}_{\mathcal{B}_t}(\Gamma_t) + \sum_{g=1}^m \bar{q}_{g,t}^\top d_t^* + \frac{L_t}{2} \|d_t^*\|_2^2.$$

Primal feasibility gives $\bar{q}_{g,t}^\top d_t^* \leq \kappa \|\bar{q}_{g,t}\|_2 \|t_t\|_2$ for every retained group, while the projection property established in Appendix F.3.5 gives $\|d_t^*\|_2 \leq \|t_t\|_2$. Substitution proves Equation 47.

When the optimization window is refreshed, add and subtract $\widehat{\mathcal{D}}_{\mathcal{B}_t}(\Gamma_{t+1})$ to obtain

$$\begin{aligned} \widehat{\mathcal{D}}_{\mathcal{B}_{t+1}}(\Gamma_{t+1}) &\leq \widehat{\mathcal{D}}_{\mathcal{B}_t}(\Gamma_t) + \kappa \|t_t\|_2 \sum_{g=1}^m \|\bar{q}_{g,t}\|_2 + \frac{L_t}{2} \|t_t\|_2^2 \\ &\quad + \left| \widehat{\mathcal{D}}_{\mathcal{B}_{t+1}}(\Gamma_{t+1}) - \widehat{\mathcal{D}}_{\mathcal{B}_t}(\Gamma_{t+1}) \right|. \end{aligned}$$

Summing this inequality from $t = 0$ to $T - 1$ gives Equation 48. $\square$

Equation 48 is a finite-horizon drift bound, not a monotonicity statement. The first term in each increment is the allowed first-order margin, the quadratic term is the fixed-window linearization remainder, and the final sum records the change caused by refreshing the optimization window. In particular, the projection prevents an unconstrained accumulation of first-order predictive drift only to the extent quantified by these terms.

Corollary F.2 (Connection to root predictive stability). Let $\mathcal{B}_T^{\text{eval}}$ be an evaluation sample independent of the training trajectory. Suppose the conditions of Corollary F.1 hold at Γ_T for every compressed interface jointly on an event of probability at least $1 - \eta$. Then, on that event, for every $v \in V_{\text{comp}}$,

$$\begin{aligned} \delta_v(\Gamma_T) &\leq c_v \widehat{\mathcal{D}}_{\mathcal{B}_T}(\Gamma_T) + c_v \left| \widehat{\mathcal{D}}_{v, \mathcal{B}_T^{\text{eval}}}(\Gamma_T) - \widehat{\mathcal{D}}_{\mathcal{B}_T}(\Gamma_T) \right| \\ &\quad + \varepsilon_{\text{test}, v}(\Gamma_T) + c_v \left(\varepsilon_{\text{lin}, v}(\Gamma_T) + \varepsilon_{\text{stat}, v} \right). \end{aligned} \quad (49)$$

Consequently, under (M1)–(M3),

$$\begin{aligned} &\mathbb{E}[\text{TV}(\mathcal{L}(Y_\rho \mid U, C), \mathcal{L}(Y_\rho \mid Z^{\Gamma_T}, C))] \\ &\leq \left\{ \frac{1}{2} \sum_{v \in V_{\text{comp}}} \left[c_v \widehat{\mathcal{D}}_{\mathcal{B}_T}(\Gamma_T) + c_v \left| \widehat{\mathcal{D}}_{v, \mathcal{B}_T^{\text{eval}}}(\Gamma_T) - \widehat{\mathcal{D}}_{\mathcal{B}_T}(\Gamma_T) \right| \right. \right. \\ &\quad \left. \left. + \varepsilon_{\text{test}, v}(\Gamma_T) + c_v \left(\varepsilon_{\text{lin}, v}(\Gamma_T) + \varepsilon_{\text{stat}, v} \right) \right] \right\}^{1/2}. \end{aligned} \quad (50)$$

Combining Equation 50 with Equation 48 gives an explicit finite-horizon connection from the projected training updates to the population root stability bound.

Proof. Apply Corollary F.1 on the independent evaluation sample $\mathcal{B}_T^{\text{eval}}$ and add and subtract $c_v \widehat{\mathcal{D}}_{\mathcal{B}_T}(\Gamma_T)$. Taking the absolute value of the resulting pooled-to-local difference gives Equation 49. At uncompressed interfaces, $Z_v^{\Gamma_T} = U_v$ and the local predictive deficiency is zero. Summing the local bounds and applying Proposition 3 yields Equation 50. $\square$

The additional pooled-to-local term in Equation 49 is essential: the pooled training statistic is not identified with an independent estimator of every δ_v . Thus the dynamic bridge requires no stronger identification than the one already used in Appendix F.3. It states precisely when the optimization control is informative for the population root guarantee: the cumulative projected drift, window-refresh discrepancy, local calibration residuals, and pooled-to-local discrepancy must remain controlled.

F.5 Proof of Root Predictive Stability

This subsection proves Proposition 3 from Section 3.

This appendix proves Proposition 3 under (M1)–(M3) of Appendix F.1. In particular, the host state U_v may depend on the incoming compressed child tuple $R_v^\Gamma = Z_{\text{ch}(v)}^\Gamma$. We use the induced joint law for a fixed measurable Γ and condition throughout on the full retained context C . All conditional kernels exist on standard Borel state spaces.

Proof of Proposition 3. Abbreviate Z_v^Γ by Z_v , let $Y_V = (Y_v)_{v \in V}$, and set

$$\Delta_{\text{loc}}(\Gamma) := \sum_{v \neq \rho} I(S_v; U_v \mid Z_v, C).$$

An uncompressed interface has $Z_v = U_v$ and contributes zero. If the sum is infinite, the claimed bound is immediate, so assume it is finite.

1. Factorization conditional on the predictive tree and all compressed states. The child-before-parent construction in (M1)–(M2) has conditional joint kernel

$$\Pi_\rho(dy_\rho \mid c) \prod_{v \neq \rho} Q_v(dy_v \mid y_{\text{pa}(v)}, c) \prod_{v \neq \rho} \widetilde{K}_v(du_v, dz_v \mid s_v, r_v, c),$$

where the products denote the finite child-before-parent kernel composition and $r_v = z_{\text{ch}(v)}$. For each local kernel, write its disintegration with respect to the compressed coordinate as

$$\widetilde{K}_v(du_v, dz_v \mid s_v, r_v, c) = K_v^\Gamma(dz_v \mid s_v, r_v, c) L_v(du_v \mid s_v, z_v, r_v, c),$$

where K_v^Γ is the Z_v marginal and L_v is a version of $P_{U_v|S_v,Z_v,R_v,C}$. In the recursive composition, every K_v^Γ factor depends only on (y, z, c) : its incoming state r_v is a coordinate of the full z tuple. The remaining u factors are the L_v kernels and have disjoint output coordinates. Disintegrating the joint law with respect to (Y_V, Z, C) therefore gives

$$P_{U|Y_V,Z,C}(du \mid y, z, c) = \bigotimes_{v \neq \rho} P_{U_v|S_v,Z_v,R_v,C}(du_v \mid s_v, z_v, r_v, c) \quad P_{Y_V,Z,C}\text{-a.s.} \quad (51)$$

This conditions on the *full* compressed state tuple. It allows U_v to depend on its incoming child states and makes no independence claim for the U_v 's given only (Y_V, C) .

2. Compare with a reference that retains the incoming child states. For fixed (z, c) , define

$$R_{U|Z,C}(du \mid z, c) := \bigotimes_{v \neq \rho} P_{U_v|Z_v,R_v,C}(du_v \mid z_v, r_v, c).$$

By Equation 51 and additivity of relative entropy for finite products,

$$\begin{aligned} \mathbb{E}[D_{\text{KL}}(P_{U|Y_V,Z,C} \parallel R_{U|Z,C})] &= \sum_{v \neq \rho} I(S_v; U_v \mid Z_v, R_v, C) \\ &= I(Y_V; U \mid Z, C) + \mathbb{E}[D_{\text{KL}}(P_{U|Z,C} \parallel R_{U|Z,C})]. \end{aligned} \quad (52)$$

The second equality follows by inserting $P_{U|Z,C}$ into the log-density ratio and averaging over Y_V conditional on (Z, C) . The finite-defect assumption below guarantees that this calculation has no indeterminate $\infty - \infty$ term. In particular, $I(Y_V; U \mid Z, C)$ is at most the sum in the first line.

For each compressed interface, (M3) and the fact that Z_v is a function of U_v give $I(S_v; R_v \mid U_v, Z_v, C) = 0$. The chain rule in its two orders therefore gives

$$\begin{aligned} I(S_v; U_v \mid Z_v, R_v, C) &= I(S_v; U_v \mid Z_v, C) - I(S_v; R_v \mid Z_v, C) \\ &\leq I(S_v; U_v \mid Z_v, C). \end{aligned}$$

At an uncompressed node, the left and right sides are both zero without using (M3). Combining these facts with Equation 52 and the chain rule from Y_V to its coordinate Y_ρ yields

$$I(Y_\rho; U \mid Z^\Gamma, C) \leq I(Y_V; U \mid Z^\Gamma, C) \leq \sum_{v \neq \rho} I(S_v; U_v \mid Z_v^\Gamma, C). \quad (53)$$

3. Pass from conditional information to total variation. Because Z^Γ is a measurable function of U ,

$$I(Y_\rho; U \mid Z^\Gamma, C) = \mathbb{E} D_{\text{KL}}(P_{Y_\rho|U,C} \parallel P_{Y_\rho|Z^\Gamma,C}).$$

Conditional Pinsker and Jensen's inequality imply

$$\begin{aligned} &\mathbb{E}[\text{TV}(\mathcal{L}(Y_\rho \mid U, C), \mathcal{L}(Y_\rho \mid Z^\Gamma, C))] \\ &\leq \left\{ \frac{1}{2} I(Y_\rho; U \mid Z^\Gamma, C) \right\}^{1/2} \\ &\leq \left\{ \frac{1}{2} \sum_{v \neq \rho} I(S_v; U_v \mid Z_v^\Gamma, C) \right\}^{1/2}. \end{aligned} \quad (54)$$

This is precisely Proposition 3. □

Scope of the optimization statement. The bound holds for each fixed Γ under (M1)–(M3). The empirical calibration in Corollary F.1 additionally assumes test coverage, readout and covariance conditions, and a suitable independent evaluation sample. Proposition 2 controls the linearized change of the training statistic; by itself it gives no bound on the value of that statistic at a later iterate, particularly when the margin is positive or projection is not used.

F.6 Root-Target Supervision Does Not Imply Local Predictive Sufficiency

This subsection formalizes the limitation of endpoint-only supervision discussed in Section 3: matching the root-target posterior does not, in general, imply local predictive sufficiency at recursive interfaces.

This appendix isolates the limited claim used in the main text: root-target sufficiency does not, in general, imply local predictive sufficiency for the adjacent predictive pair. We use the same pre-compression state U_v as in the main text and the preceding appendices; no additional source state is introduced.

Fix a compressed node v and suppress the subscript v when no confusion can arise. Let

$$S := S_v = (Y_v, Y_{\text{pa}(v)}), \quad U := U_v, \quad Z^\Gamma := \Gamma(U),$$

and let $T := Y_\rho$ denote the root target. Define the probability-valued posterior states

$$R := P_{S|U,C}, \quad Q := P_{T|U,C}.$$

We assume that the root-target posterior is a measurable readout of the local recursive posterior,

$$Q = \Lambda(R, C) \quad P\text{-a.s.} \quad (55)$$

for some measurable Λ . A sufficient condition is the downstream Markov relation

$$U \longrightarrow S \longrightarrow T \quad \text{conditional on } C,$$

because the root-target posterior is then obtained by integrating the downstream task kernel against $P_{S|U,C}$.

For any representation Z generated from (U, C) without access to (S, T) , define

$$\delta_S(Z) := I(S; U | Z, C), \quad \delta_T(Z) := I(T; U | Z, C).$$

In particular, $\delta_S(Z^\Gamma) = I(S_v; U_v | Z_v^\Gamma, C) = \delta_v(\Gamma)$.

Theorem F.1 (Task-posterior quotient). Under Equation 55, define

$$\Delta := I(S; U | Q, C).$$

Then

$$\Delta = I(S; R | Q, C) = \mathbb{E}[D_{\text{KL}}(R \| P_{S|Q,C})], \quad P_{S|Q,C} = \mathbb{E}[R | Q, C]. \quad (56)$$

Moreover,

$$\Delta = 0 \iff R \text{ is measurable with respect to } \sigma(Q, C) \quad P\text{-a.s.}$$

The root-target posterior itself is root-target sufficient but can fail to be locally predictively sufficient:

$$\delta_T(Q) = 0, \quad \delta_S(Q) = \Delta. \quad (57)$$

Hence, whenever $\Delta > 0$, root-target sufficiency does not imply recursive predictive sufficiency. In particular, under such a law there is no distribution-free function g with $g(0) = 0$ satisfying

$$\delta_S(Z) \leq g(\delta_T(Z)) \quad (58)$$

for every admissible representation Z .

Proof. Because $R = P_{S|U,C}$, the posterior state R is sufficient for S relative to U :

$$S \perp U | (R, C).$$

Likewise, because $Q = P_{T|U,C}$,

$$T \perp U | (Q, C).$$

Since R and Q are measurable functions of (U, C) and Q is measurable from (R, C) under Equation 55,

$$I(S; U | Q, C) = I(S; R | Q, C).$$

The conditional mutual-information representation then gives

$$I(S; R \mid Q, C) = \mathbb{E}[D_{\text{KL}}(P_{S|R, Q, C} \parallel P_{S|Q, C})].$$

Because R is the posterior of S given (U, C) and Q is a function of (R, C) , $P_{S|R, Q, C} = R$ almost surely. The tower property gives $P_{S|Q, C} = \mathbb{E}[R \mid Q, C]$, proving Equation 56. The same identity shows that $\Delta = 0$ exactly when $R = P_{S|Q, C}$ almost surely, equivalently when R is $\sigma(Q, C)$ -measurable.

Taking $Z = Q$, posterior sufficiency gives

$$\delta_T(Q) = I(T; U \mid Q, C) = 0,$$

while by definition

$$\delta_S(Q) = I(S; U \mid Q, C) = \Delta.$$

Thus, if $\Delta > 0$, $Z = Q$ is an explicit representation that is sufficient for the root target but not for the adjacent predictive pair. Applying any proposed bound $\delta_S(Z) \leq g(\delta_T(Z))$ with $g(0) = 0$ to this representation yields $\Delta \leq 0$, a contradiction. This proves Equation 58. $\square$

An explicit compressor of the main-text form. Let C be constant, let A and B be independent fair bits, and take $U = (A, B)$, $S = (A, B)$, and $T = A$. The one-bit map $\Gamma(U) = A$ gives $Z^\Gamma = Q = A$. Hence $I(T; U \mid Z^\Gamma) = 0$ while $I(S; U \mid Z^\Gamma) = H(B) = \log 2$ (in nats). This example establishes the claim within the class $Z^\Gamma = \Gamma(U)$.

Corollary F.3 (One-way control under a downstream task channel). If $U \rightarrow S \rightarrow T$ conditional on C , then for every admissible representation Z ,

$$\delta_S(Z) = \delta_T(Z) + I(S; U \mid T, Z, C) \geq \delta_T(Z). \quad (59)$$

Local predictive sufficiency implies root-target sufficiency, but Theorem F.1 gives a counterexample with $\Delta > 0$.

Proof. The downstream Markov relation and admissibility of Z imply

$$T \perp (U, Z) \mid (S, C),$$

and hence $I(T; U \mid S, Z, C) = 0$. Applying the chain rule in the two orders gives

$$\begin{aligned} I(S, T; U \mid Z, C) &= I(S; U \mid Z, C) + I(T; U \mid S, Z, C) \\ &= \delta_S(Z), \end{aligned}$$

and

$$I(S, T; U \mid Z, C) = I(T; U \mid Z, C) + I(S; U \mid T, Z, C).$$

Equating the two expressions proves Equation 59. $\square$

Relation to the main-text claim. At node v , take $S = S_v$, $U = U_v$, and $T = Y_\rho$. When the downstream task posterior collapses distinct local recursive posteriors, $\Delta_v > 0$. Then the representation $Z_v = Q_v$ is perfectly sufficient for the root target while

$$I(S_v; U_v \mid Z_v, C) = \Delta_v > 0.$$

Therefore root-target supervision alone provides no distribution-free reverse control of the local predictive deficiency. This is the only conclusion from this appendix used by the main text; no minimum-rate information bottleneck comparison and no additive joint-training guarantee are required.