

FEWER BITS, MORE TRIES: RECOVERING CAPABILITY UNDER MEMORY CONSTRAINTS

Tomer Galanti
Texas A&M, Apple

Josh Susskind
Apple

Eran Malach
Apple

ABSTRACT

Large language models are generally more capable than smaller ones, but their memory requirements can make local deployment difficult. We ask whether part of this capability gap can instead be recovered by running a smaller or more compressed model multiple times and selecting among its outputs using public or model-generated tests. Single-user local inference can leave hardware underutilized, allowing parallel candidate generation to trade additional test-time computation for accuracy at modest latency cost. Across four code-generation benchmarks, verified retry recovers substantial accuracy lost to model size or compression. A 7B Qwen model with eight parallel attempts essentially matches a 32B model on MBPP+ and exceeds it on the other three benchmarks, while using about $4\times$ less model memory, running up to $6\times$ faster, and using less energy, as measured on Nvidia GPU. We observe similar tradeoff across model sizes, compression levels and hardware choices, although exact benefit depends on the hardware profile and problem setting. These results show that model capacity can be traded for verified test-time computation when correct solutions remain reachable within a modest retry budget.

1 INTRODUCTION

Deploying a language model under a hard memory budget is usually treated as a compression problem: choose a smaller model, or quantize, prune, or distill a larger one until its weights fit (Hinton et al., 2015; Frantar et al., 2023; Lin et al., 2024; Frantar & Alistarh, 2023). This approach places the entire burden on the compression process: the resulting model must both fit in memory and preserve the accuracy of a larger model. Since language-model performance scales with model size and training compute (Kaplan et al., 2020; Hoffmann et al., 2022), fitting a smaller checkpoint within a local memory budget can require sacrificing one-shot capability.

Test-time compute provides another option (Snell et al., 2025). Instead of using all available memory for the largest possible model, we can deploy a smaller model and spend more compute on generating and verifying multiple attempts. Repeated sampling and selection are already widely used in code generation and reasoning (Chen et al., 2021; Li et al., 2022; Wang et al., 2023; Cobbe et al., 2021; Lightman et al., 2024), and execution feedback provides a natural way to verify generated programs (Ni et al., 2023; Chen et al., 2023a). Importantly, on local hardware serving a single-user, generating multiple attempts in parallel often results in improved hardware utilization compared to single-stream (batch-size 1) decoding (see detailed discussion in Section 3). Consequently, runtime does not increase linearly with the number of parallel attempts, and a moderate number of retries can result in improved accuracy with minimal overhead. We therefore ask the following question:

When can verified attempts from a smaller model substitute for one attempt from a larger model?

The key distinction is between *one-shot accuracy* and *candidate coverage*: whether a correct solution appears within several attempts. A smaller or lower-precision model may be less reliable on each draw while still producing correct solutions after repeated sampling. In that case, verification can recover much of the apparent capability loss. Across our coding benchmarks, one-shot accuracy often changes substantially with model size while candidate coverage changes much less.

Generating a correct candidate is only half the problem; the system must also recognize it. When external tests are available, they provide a fixed verification signal. Otherwise, the model must

generate its own tests, which introduces additional ways for retry to fail. We distinguish *generation failure*, when no correct candidate is produced; *test-discrimination failure*, when the tests cannot distinguish correct from incorrect candidates; and *aggregation failure*, when the selection rule chooses the wrong candidate (for example, failing to discount unreliable tests during majority voting). We analyze these different failure modes across different coding datasets and test-aggregation methods.

Contributions. Our main findings are:

- **Retry can recover capability lost to smaller models or stronger compression.** Across model sizes, quantization levels, and compact model families, much of the loss in one-shot accuracy can be recovered by verified retry. In a controlled one-bit experiment, only 2–4 attempts are needed to recover the bf16 27B model’s one-shot accuracy across all four benchmarks while retaining more than an order-of-magnitude reduction in model memory.
- **A smaller model can pay for retry when large-model performance is recovered in few attempts.** On Nvidia GPUs, Coder-7B with eight attempts essentially matches Coder-32B with one attempt on MBPP+ and exceeds it on the other three benchmarks while using about $4.3\times$ less model memory, running $1.3\text{--}5.9\times$ faster, and using $1.3\text{--}6.7\times$ less energy. On Apple Silicon, a smaller model using 2–4 attempts can be faster and more energy-efficient than Coder-14B.
- **Recovery depends on both generating good solutions and recognizing them.** Model-generated tests can recover substantial accuracy when external tests are unavailable, but introduce an additional verification bottleneck. For example, BigCodeBench is mainly limited by tests that fail to distinguish correct from incorrect programs, while LiveCodeBench also lacks correct candidates under deep sampling. While this is admittedly a limitation of our current approach, we believe that using multi-turn interaction with the environment can overcome this verification bottleneck by allowing the model to iteratively debug its solutions and refine its generated tests based on execution feedback.

2 RELATED WORK

Test-time scaling and verification. Repeated sampling, aggregation, and verifier-guided selection improve code generation and reasoning (Wang et al., 2023; Cobbe et al., 2021; Uesato et al., 2022; Lightman et al., 2024; Snell et al., 2025; Brown et al., 2024; Zhao et al., 2025; Setlur et al., 2025); related work studies candidate coverage, best-of- N selection, and imperfect verification (Gao et al., 2023; Huang et al., 2025; Stroebel et al., 2026). Recent work also shows that an LLM can directly verify and rank its own rollouts using fine-grained probabilistic scoring (Kwok et al., 2026). Execution-grounded consensus further shows that the quality of behavioral evidence can matter more than the particular aggregation rule (Jiang et al., 2026). Work closest in deployment motivation jointly allocates scale, precision, KV-cache memory, and test-time compute or exploits hardware headroom (Kim et al., 2026; Hao et al., 2026). We instead characterize when scale or precision can be exchanged for verified retry and localize the remaining error to generation, test discrimination, or aggregation.

Execution-guided code generation. Program synthesis has long used repeated sampling, execution feedback, learned verifiers, and model-generated tests (Austin et al., 2021; Chen et al., 2021; Li et al., 2022; Le et al., 2022; Ni et al., 2023; Chen et al., 2023a). S* generates distinguishing inputs and DiffCodeGen combines differential testing with behavioral clustering when public tests are unavailable (Li et al., 2025; He et al., 2026). Our contribution is orthogonal to selector design: we hold selectors fixed and study their value under memory constraints. Verifier-backed committee search similarly separates proposal coverage from candidate recovery (Sunkaraneni et al., 2026).

Compression and memory-constrained inference. Distillation, pruning, and quantization reduce persistent weight memory (Hinton et al., 2015; Frantar & Alistarh, 2023; Frantar et al., 2023; Xiao et al., 2023; Lin et al., 2024), while other work studies scale–precision tradeoffs and near-capacity inference (Dettmers & Zettlemoyer, 2023; Alizadeh et al., 2024). BitCal-TTS examines quantization with adaptive test-time reasoning (Patarlapalli & Avvaru, 2026). We instead ask how much accuracy verified retry can recover after choosing a checkpoint to satisfy a hard memory budget. Distilled and pruned models serve as practical deployment alternatives, not controlled descendants of Qwen.

Serving and hardware utilization. Speculative decoding and serving systems improve inference through drafting, scheduling, batching, and KV-cache management (Leviathan et al., 2023; Chen

et al., 2023b; Yu et al., 2022; Kwon et al., 2023). Unlike speculative decoding, which retains the larger target model, retry keeps only the chosen checkpoint resident and spends hardware headroom on additional candidates. We therefore measure wall clock and energy rather than treating candidate count as normalized compute.

3 WHY PARALLEL RETRY CAN BE INEXPENSIVE

Before asking whether retry can recover lost capability, we first ask whether local hardware can execute additional attempts cheaply. Generating K candidates requires more computation than generating one, but need not require K times the latency. Batched inference reuses the same model weights across sequences, allowing additional attempts to exploit otherwise idle compute. We illustrate this with a simple roofline model (Williams et al., 2009; Pope et al., 2023).

A simple model. Consider a network with L layers, each a $d \times d$ matrix, and let $P = Ld^2$ be its parameter count. Processing a batch of B sequences requires approximately $2BP$ FLOPs¹ while reading $b_w P$ bytes of weights, where b_w is the number of bytes per weight. Activation traffic scales as $O(BLd)$ and is smaller than weight traffic when $B \ll d$; we omit it here to isolate the effect of reusing model weights across the batch. If hardware H has compute throughput F_H and memory bandwidth β_H , let $\hat{\tau}_H(B)$ denote the estimated wall-clock time for one inference step on a batch of B sequences. Under the roofline approximation, latency is the larger of the time required to move the weights and the time required to perform the computation: $\hat{\tau}_H(B) = \max \left\{ \frac{b_w P}{\beta_H}, \frac{2BP}{F_H} \right\}$. Factoring out $b_w P / \beta_H$ gives

$$\hat{\tau}_H(B) = \frac{b_w P}{\beta_H} \max \left\{ 1, \frac{B}{B_*(H)} \right\}, \quad B_*(H) = \frac{b_w F_H}{2\beta_H}. \quad (1)$$

Here $B_*(H)$ is the batch size at which the bandwidth and compute terms are equal. For $B \leq B_*(H)$, inference is bandwidth-bound: the dominant cost is moving the weights, so increasing the batch adds relatively little latency. Beyond this point, computation becomes limiting and latency grows approximately linearly with batch size. For a single prompt with K parallel attempts, $B \approx K$. More generally, if N prompts are served concurrently, $B \approx NK$, so existing serving concurrency reduces the available retry headroom. Thus retry remains inexpensive while $NK \leq B_*(H)$. The per-prompt memory accounting used later is separate from this serving-level concurrency.

Equation 1 shows that the relevant hardware quantity is the compute-to-bandwidth ratio F_H / β_H . For bf16 weights, $B_* = F_H / \beta_H$; published NVIDIA specifications give $B_* \approx 153$ for A100, $B_* \approx 295$ for H100, and $B_* \approx 290$ for B200, all well above one (NVIDIA Corporation, 2021; 2022; 2026). Thus the retry headroom depends on the hardware profile rather than its absolute scale: scaling compute and bandwidth together changes runtime but leaves B_* unchanged. For Apple Silicon we measure the break-even point empirically.

Trading model size for retry. Now compare a smaller model with P_s parameters to a reference model with $P_r > P_s$ on the same hardware and at the same precision. If the reference is bandwidth-bound at its serving batch size N , i.e., $N \leq B_*(H)$, then

$$\frac{\hat{\tau}_{H,s}(NK)}{\hat{\tau}_{H,r}(N)} \approx \frac{P_s}{P_r} \max \left\{ 1, \frac{NK}{B_*(H)} \right\}. \quad (2)$$

The smaller model can therefore spend part of its lower inference cost on additional attempts. In this toy model, it remains no slower than the reference while $K \leq K_{\text{sys}} := \frac{P_r}{P_s} \frac{B_*(H)}{N}$. Reducing numerical precision similarly decreases weight traffic, although low-precision kernels can also change effective compute throughput.

From systems headroom to capability recovery. Let K_{rec} be the smallest retry budget at which the smaller or compressed model recovers the reference model’s one-shot accuracy. The useful regime is therefore $K_{\text{rec}} \leq K_{\text{sys}}$. If recovery occurs before the systems advantage is exhausted, a smaller model can match the larger model while remaining faster and using less memory. Otherwise, retry may preserve the memory advantage but lose the latency advantage.

The roofline model is deliberately approximate: modern Transformers add attention, KV-cache traffic, sequence-length effects, and serving overhead, and it implicitly assumes attempts have similar lengths.

¹The factor of 2 comes from counting a multiply and an add as two FLOPs.

Length variation can increase latency when a batch waits for its slowest sequence; adaptive stopping could mitigate this effect but is outside the fixed-retry setting studied here. We use the model to identify the expected dependence on model size, retry depth, and hardware profile rather than to predict measured speedups quantitatively; the actual break-even points are measured on NVIDIA GPUs and Apple Silicon.

4 MAIN RESULTS WITH PUBLIC-TEST VERIFICATION

Section 3 suggests that retry is useful when $K_{\text{rec}} \lesssim K_{\text{sys}}$. We first test this regime using benchmark-visible tests, covered in this section; Section 5 then considers model-generated verification.

4.1 EXPERIMENTAL SETTING

Deployment configurations. A deployment consists of a checkpoint, retry budget K , and serving configuration (e.g., serving engine and batching setup). The model generates K candidates in parallel, and the verifier selects one using only deployment-time information; correctness is evaluated on held-out tests. We denote public-test selected accuracy by $\text{exec}@K$ and define K_{rec} as the smallest tested K that matches or exceeds the reference model’s one-shot accuracy.

Models and compression. Our main model-size experiments use the Qwen2.5-Coder-Instruct family, spanning 1.5B to 32B parameters (Hui et al., 2024). The primary scaling comparisons use the native bf16 checkpoints. To study precision separately from model size, we evaluate the 3B, 7B, and 32B models using 16-, 8-, and 4-bit representations and multiple quantization schemes, including GPTQ and AWQ.

We complement this with a controlled extreme-compression experiment using bf16, 4-bit, and one-bit versions of the same Qwen3.6-27B model. Because the architecture and parameter count are fixed, this comparison isolates the effect of precision. Additional model families and a sparse mixture-of-experts replication appear in Appendix B.

Benchmarks. We evaluate four code-generation benchmarks. HumanEval+ contains 164 tasks and MBPP+ 378 tasks, using EvalPlus (Liu et al., 2023). We use 175 problems from LiveCodeBench `release_v5` dated on or after 2024-08-01 (Jain et al., 2025). For BigCodeBench (Zhuo et al., 2025), we remove tasks whose reference solution fails under our evaluation pipeline, leaving 1,034 of the original 1,140 tasks for the main Qwen2.5-Coder experiments.

Public-test verification. For EvalPlus, the verifier can use the benchmark’s base tests; for LiveCodeBench, it can use the public examples. BigCodeBench does not provide a predefined public/private test split, so for each task we deterministically partition its tests into visible tests used for selection and held-out tests used only for final evaluation.

For each candidate, we execute the visible tests and select the candidate with the highest mean token log-probability among those that pass. If none passes, we return the candidate with the highest mean token log-probability overall. Thus, the fallback is used only when the visible tests provide no passing candidate. Final correctness is always determined using held-out tests.

Candidate generation. Unless stated otherwise, candidates are sampled with temperature 0.8 and top- $p = 0.95$. The main accuracy experiments generate 50 candidates per task. Results at smaller retry budgets are computed from these fixed pools, so changes with K reflect additional attempts rather than different generation runs. For each task and retry budget K , we compute the exact expected accuracy under a uniformly sampled size- K subset of the 50 candidates, using the selector’s ranking of the candidates; the full pool is used at $K = 50$.

Memory accounting. Model memory is checkpoint weights plus KV cache, computed from realized prompt and completion lengths with the shared prompt counted once. We report measured process memory separately in Appendix Table 22.

Runtime and energy. Runtime and energy are measured directly for the checkpoint and retry budget being served rather than inferred from parameter count or candidate count. Our main GPU measurements use vLLM (Kwon et al., 2023) on NVIDIA B200 GPUs with fixed workloads of 40–60 prompts. Multiple candidates are decoded in parallel, so the measured wall time captures the batching effect described in Section 3.

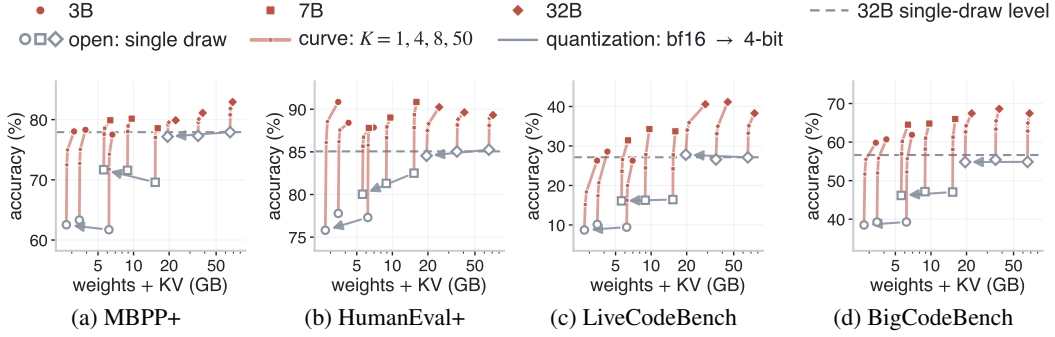


Figure 1: **Retry trades a small amount of additional memory for higher accuracy.** Each curve traces accuracy from $K = 1$ to $K = 50$ against model memory, defined as checkpoint weights plus KV cache. The dashed line marks the one-shot accuracy of native bf16 Coder-32B.

The B200 provides a controlled high-throughput platform on which to measure the retry curve, but it is not intended to stand in for every local device (see the note below). We therefore also run two physical-device studies on 64-GiB M3 Max and M5 Pro systems using llama.cpp. The first compares one-bit Qwen3.6-27B with its bf16 parent, while the second compares smaller dense Qwen2.5-Coder models with Coder-14B at their benchmark-specific K_{rec} , the smallest retry budget that recovers the reference model’s one-shot accuracy. These measurements probe the same memory–retry tradeoff under a substantially different hardware and serving regime.

For each comparison, we report wall-clock speedup and energy saving relative to the reference deployment: $\text{speedup} = \frac{T_{\text{ref}}}{T_{\text{dep}}}$ and $\text{energy saving} = \frac{E_{\text{ref}}}{E_{\text{dep}}}$, so values above one favor the smaller or compressed deployment. Memory saving is defined analogously.

Statistical comparisons. Accuracy differences are computed per task, with 95% confidence intervals estimated from 10,000 bootstrap resamples of tasks (Efron, 1979). When comparing one-shot and retry, both quantities are computed from the same underlying candidate pool, preserving the task-level pairing in each resample.

A note on our hardware choice. *While our work is motivated by the deployment of local models, many of our experiments are conducted on Nvidia B200 GPUs, high-end hardware rarely used by individual consumers. However, as discussed in Section 3, the runtime speedup due to multiple retries depends on the **hardware profile** (the ratio between compute and memory throughput) rather than absolute throughput numbers. The Nvidia B200, designed for large-scale training, is compute-optimized, scaling compute throughput far more than memory bandwidth. Our B200 results are therefore complemented by experiments on current Apple Silicon, which offers a more balanced hardware profile. Ultimately, our results should be viewed as a tool to drive the discussion on design choices for future hardware, rather than a simple benchmarking of current devices.*

4.2 RESULTS

Figure 1 gives the overall memory–accuracy tradeoff. Increasing the retry budget substantially improves accuracy while adding relatively little KV-cache memory compared with the difference in checkpoint size. We next ask whether this accuracy can be recovered without giving up the smaller model’s runtime advantage.

A smaller model can substitute parallel retry for model scale. We begin with the central deployment question: can a model that is substantially smaller in memory use its lower inference cost to generate additional candidates and recover the accuracy of a much larger model without becoming slower? On B200, the answer is yes over a broad operating range.

Table 1 compares native Qwen2.5-Coder models using eight parallel attempts with Coder-32B using a single attempt. Coder-7B at $K = 8$ essentially matches Coder-32B at $K = 1$ on MBPP+ and exceeds it on the other three benchmarks. At the same time, it runs $1.3\text{--}5.9\times$ faster and uses $1.3\text{--}6.7\times$ less energy. Its model memory—checkpoint weights plus KV cache—is about $4.3\times$ smaller, and

Table 1: **Eight attempts from a smaller model can match or exceed one attempt from Coder-32B at lower serving cost.** The 3B, 7B, and 14B models use $K = 8$, while Coder-32B uses $K = 1$. Accuracy comes from the main candidate pools; wall time and energy are measured on matched B200 workloads. Speedup and energy saving are Coder-32B/retried model, so values above $1\times$ favor the smaller model; the Coder-32B row is the reference. See Appendix Table 4 for more details.

Checkpoint	MBPP+			HumanEval+			LiveCodeBench			BigCodeBench		
	Acc.	Wall speedup	Energy saving	Acc.	Wall speedup	Energy saving	Acc.	Wall speedup	Energy saving	Acc.	Wall speedup	Energy saving
Coder-3B ($K=8$)	74.2%	$2.8\times$	$3.5\times$	87.5%	$2.2\times$	$2.7\times$	19.8%	$4.0\times$	$5.8\times$	58.2%	$1.5\times$	$1.7\times$
Coder-7B ($K=8$)	77.8%	$2.0\times$	$1.9\times$	89.4%	$2.2\times$	$2.4\times$	27.5%	$5.9\times$	$6.7\times$	62.7%	$1.3\times$	$1.3\times$
Coder-14B ($K=8$)	79.4%	$1.1\times$	$1.0\times$	89.5%	$1.0\times$	$0.9\times$	33.9%	$1.5\times$	$1.5\times$	66.3%	$0.6\times$	$0.6\times$
Coder-32B ($K=1$)	77.9%	$1.0\times$	$1.0\times$	85.1%	$1.0\times$	$1.0\times$	27.1%	$1.0\times$	$1.0\times$	56.6%	$1.0\times$	$1.0\times$

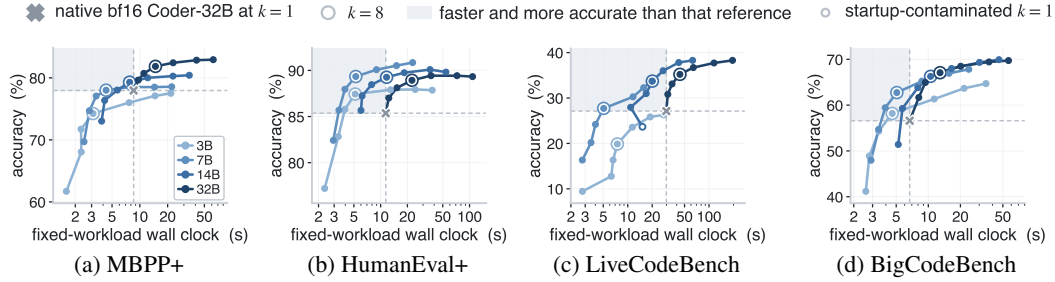


Figure 2: **Parallel retry can make a smaller model both faster and more accurate.** The curves show accuracy versus measured B200 wall-clock time as the number of attempts increases. The $\times$ marks Coder-32B with one attempt, and the circles mark eight attempts.

its measured B200 peak process memory is 21.58 GB rather than 73.02 GB, a $3.38\times$ reduction (Appendix Table 22).

This is the favorable regime identified in Section 3: the accuracy lost by reducing model scale is recovered before parallel retry exhausts the smaller model’s systems advantage. Figure 2 shows the same phenomenon across retry budgets. Initially, increasing K moves the smaller models primarily upward in accuracy while adding relatively little wall time; at larger K , latency grows more rapidly and the gains begin to saturate.

The effect is not simply that any small model becomes competitive after enough sampling. Coder-3B at $K = 8$, for example, remains below the 32B reference on MBPP+ and LiveCodeBench, while Coder-14B at $K = 8$ is more accurate but already loses the latency and energy advantage on BigCodeBench. The useful operating point therefore depends on how quickly accuracy recovers relative to the systems cost of increasing K . We note that while we force a fixed K throughout our experiments, choosing K adaptively based on the problem setting is another path for improving performance, which we leave to future work.

Recovery is possible when compression reduces reliability more than reachability. Why can a much smaller or more compressed model recover so quickly? The key quantity is not only one-shot accuracy, but whether correct solutions remain reachable after repeated sampling.

The controlled Qwen3.6-27B experiment isolates this effect: architecture and parameter count are fixed, and only numerical precision changes. One-bit quantization lowers one-shot accuracy by 2.2–8.3 percentage points across the four benchmarks, while the fraction of tasks solved at least once within 50 attempts changes by at most 1.5 points. As a result, only $K = 2$ –4 verified attempts are needed to recover the bf16 model’s one-shot accuracy on every benchmark (Table 2), so compression increases K_{rec} only modestly.

Reducing model scale can behave differently. On BigCodeBench, Coder-7B and Coder-32B differ by 8.7 percentage points on one-shot accuracy, but by only 1.4 points in the fraction of tasks solved within 50 attempts. Much of the 32B advantage is therefore a reliability advantage that retry can

Table 2: **A few retries recover the one-shot accuracy lost to one-bit quantization.** Each row compares the Bonsai Q1_0 one-bit checkpoint with the bf16 version of the same 27B model. “Tries to recover” is the smallest tested number of attempts for which the one-bit model matches or exceeds bf16 one-shot accuracy. Wall-time and energy ratios are bf16@1 / one-bit@recovery, so values above one favor the one-bit deployment and values below one favor bf16.

Benchmark	Accuracy				Cost of recovering bf16 one-shot accuracy		
	One-shot 1-bit / bf16	At recovery 1-bit / bf16	Selected after 50 tries 1-bit / bf16	Any correct in 50 1-bit / bf16	Tries to recover	Wall-time ratio	Energy ratio
HumanEval+	85.5% / 89.3%	91.5% / 89.3%	93.9% / 93.9%	98.2% / 98.2%	2	0.72×	1.30×
MBPP+	68.9% / 77.2%	79.8% / 77.2%	82.5% / 83.6%	87.3% / 88.6%	4	0.42×	0.73×
LiveCodeBench	14.6% / 16.8%	20.9% / 16.8%	34.9% / 34.3%	35.4% / 34.3%	2	1.04×	1.61×
BigCodeBench	19.2% / 26.7%	29.9% / 26.7%	63.4% / 67.0%	72.3% / 70.8%	2	0.71×	0.92×

recover. LiveCodeBench provides the counterexample: Coder-7B solves 5.7 percentage points fewer tasks within 50 attempts than Coder-32B. Across the full native scale ladder, candidate coverage varies by 13.1 points on LiveCodeBench, compared with only 1.3–2.4 points on the other three benchmarks (Appendix B.4). Figure 4 in the appendix summarizes this contrast. Here reducing model capacity removes reachable solutions, so additional sampling cannot fully recover the loss.

This distinction is also visible under conventional 4- and 8-bit quantization. Across the direct bf16-to-lowest-memory comparisons, weight memory falls by roughly $2.7\text{--}3.6\times$, while accuracy after 50 verified attempts changes by at most 3.1 percentage points (Appendix Table 8). Together, these results suggest that retry is most effective when reducing memory primarily lowers the probability of success on each draw rather than eliminating successful outputs from the model’s support.

The runtime advantage is largest at moderate retry depth. Preserving candidate coverage is necessary but not sufficient: K_{rec} must also remain within the retry budget that the hardware can execute efficiently. Figure 2 shows this tradeoff. On MBPP+, Coder-7B obtains 83% of its eventual $K = 50$ accuracy gain by $K = 4$ and 93% by $K = 8$, while wall time increases by only $1.35\times$ and $1.73\times$, respectively (Appendix Table 14). Beyond this range, accuracy gains diminish while wall time continues to rise.

This is consistent with the roofline picture: retry is inexpensive while batching headroom remains, but eventually compute, KV-cache traffic, or serving overhead dominates. The key question is whether recovery occurs before this systems break-even point.

Recovery depth predicts whether retry pays off, but the break-even K is device-specific. Our two physical-device studies on Apple Silicon (64 GiB M3 Max and M5 Pro, served with `llama.cpp`) test this prediction on a substantially different hardware and serving stack than the B200 results above. Appendix Table 7 shows the same dependence on recovery depth for the dense model-size comparisons. On both M3 Max and M5 Pro, every measured deployment that recovers the Coder-14B one-shot accuracy within at most four attempts is faster and more energy-efficient than the 14B reference. Coder-7B requires only two attempts on HumanEval+, MBPP+, and BigCodeBench and four on LiveCodeBench, and all four comparisons remain favorable on both chips.

The boundary becomes visible for Coder-3B. HumanEval+ and BigCodeBench recover at $K = 4$ and remain favorable on both devices. MBPP+ requires $K = 8$: the deployment is clearly slower and more energy-intensive on M3 Max, while the M5 Pro measurements lie near wall-time break-even and remain unfavorable in energy. LiveCodeBench requires $K = 16$ and is unfavorable in both wall time and energy on both chips. The memory advantage remains substantial throughout, at roughly $4.3\times$ for the 3B deployments, but deeper recovery eventually spends the latency and energy advantage.

The controlled one-bit experiment shows that the break-even point is not a universal value of K . At the same fixed $K = 4$, Bonsai Q1_0 is slower than its bf16 parent on M3 Max across all four workloads, with speedup $0.83\text{--}0.87\times$, but is $1.58\text{--}1.67\times$ faster on M5 Pro. The same deployment therefore falls on opposite sides of latency break-even on the two devices.

This cross-device reversal is qualitatively consistent with the hardware dependence in Section 3: K_{sys} is determined by the interaction between the model and the hardware’s compute–bandwidth profile, not by retry depth alone. The roofline calculation is not intended to predict the measured ratios quantitatively—kernel efficiency, memory capacity, serving software, and other device-specific

Table 3: **Model-generated tests let a compact 7B model recover much of the 32B model’s one-shot accuracy.** We report Coder-7B AWQ4 with model-generated verification at $K = 8$ and $K = 50$, alongside public-test selection and the Coder-32B bf16 one-shot reference. “vs. 32B” is the accuracy difference from that reference.

Benchmark	Accuracy						Memory		
	7B one-shot	7B, 8 tries generated tests	vs. 32B one-shot	7B, 50 tries generated tests	vs. 32B one-shot	7B, 50 tries public tests	32B one-shot	Weights (GB) 7B / 32B	Memory saving Process peak (GB) 7B / 32B
MBPP+	71.6%	76.8%	−1.1	78.6%	+0.7	79.9%	77.9%	5.57 / 65.53	10.3× 11.73 / 73.02
HumanEval+	80.0%	82.9%	−2.2	83.5%	−1.6	87.8%	85.1%	5.57 / 65.53	10.4× 11.73 / 73.02
LiveCodeBench	16.1%	25.0%	−2.1	28.0%	+0.9	31.4%	27.1%	5.57 / 65.53	10.3× 11.73 / 73.02
BigCodeBench	46.3%	52.7%	−3.9	53.5%	−3.2	67.9%	56.6%	5.57 / 65.53	10.3× 11.73 / 73.02

effects also matter— but it correctly anticipates that the same K_{rec} can be inexpensive on one system and too costly on another.

5 MODEL-GENERATED VERIFICATION

The previous section assumes that reliable tests are available at deployment time. We now consider the harder setting in which they are not. In this case, the model must generate not only candidate solutions, but also the evidence used to choose among them. This makes verification itself part of the capability that may be lost when the model is made smaller or more compressed.

5.1 EXPERIMENTAL SETTING

Model-generated tests. Given the task specification, the model generates a set of candidate tests. We execute every candidate solution on these tests and select an answer using CodeT (Chen et al., 2023a). Rather than simply choosing the candidate that passes the most tests, CodeT exploits patterns of agreement between candidates and generated tests to identify groups of behaviorally consistent solutions. If no usable generated tests are produced, we fall back to the candidate with the highest mean token log-probability. Final correctness is always evaluated with separate held-out tests, exactly as in the public-test setting.

Diagnosing verification failure. A failed selection can have three distinct causes. First, the candidate pool may contain no correct solution. We measure this with $\text{oracle}@K$, the fraction of tasks for which at least one of the K candidates is correct.

Second, the generated tests may produce identical outcomes for a correct candidate and an incorrect one. We call the pattern of tests that a candidate passes or fails its *test-outcome signature*. Candidates with the same signature cannot be distinguished using these test results alone. We define $\text{sig-oracle}@K$ as the accuracy of an oracle selector that chooses optimally among the signatures observed in the K candidates, but cannot distinguish candidates that share a signature. This gives an upper bound on selection accuracy when the selector relies only on the generated-test outcomes.

Third, the selector may fail to exploit the information contained in those test outcomes. For example, a selection rule that does not properly discount unreliable tests will fail to choose a correct solution, even though the tests do, technically, distinguish correct from incorrect solutions. The gap from CodeT to $\text{sig-oracle}@K$ measures this aggregation failure; the gap from $\text{sig-oracle}@K$ to $\text{oracle}@K$ measures test-discrimination failure; and the remaining error above $\text{oracle}@K$ measures candidate generation failure.

5.2 RESULTS

Model-generated verification recovers substantial capability. Table 3 shows that the memory–retry tradeoff survives even when external tests are removed. Coder-7B AWQ4 improves substantially over its one-shot accuracy on all four benchmarks. With $K = 50$, model-generated verification reaches 78.6%, 83.5%, 28.0%, and 53.5% on MBPP+, HumanEval+, LiveCodeBench, and BigCodeBench, respectively. These values are within 3.2 percentage points of the displayed Coder-32B

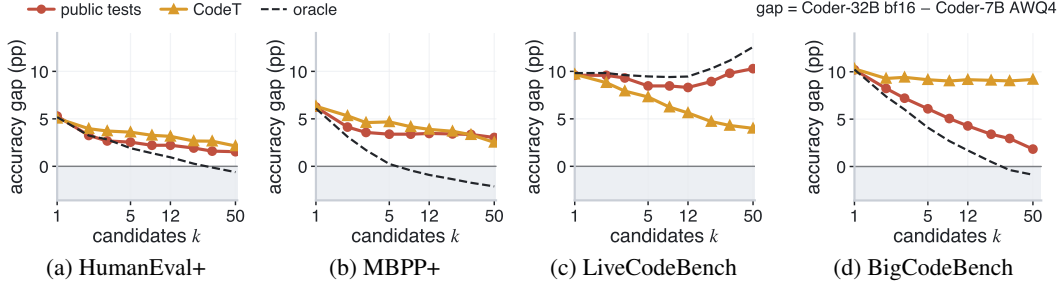


Figure 3: **Retry closes much of the gap between the 7B and 32B models when the smaller model still generates correct solutions.** The curves show the accuracy difference between Coder-32B bf16 and Coder-7B AWQ4 as the number of attempts increases, using public tests, model-generated tests (CodeT), and the fraction of tasks with at least one correct candidate. The gap largely disappears on HumanEval+, MBPP+, and BigCodeBench, but remains on LiveCodeBench because the 7B model fails to generate correct solutions for some tasks.

one-shot reference on every benchmark, while the 7B checkpoint uses about $10\times$ less model memory and $6.23\times$ less measured process memory.

Much of the benefit appears at moderate retry depth: with only eight attempts, the 7B model is already within 1.1–3.9 percentage points of the 32B one-shot reference across the four benchmarks. The effect is also not limited to this particular checkpoint. Across 58 verified model–benchmark configurations on MBPP+, HumanEval+, and BigCodeBench, CodeT improves one-shot accuracy by a median of 7.3 percentage points; the middle half of the gains range from 3.3 to 11.4 points.

Generated verification remains substantially weaker than external tests. Table 3 also shows that generating candidates and recognizing them are different problems. On BigCodeBench, for example, public-test selection reaches 67.9% at $K = 50$, whereas model-generated verification reaches only 53.5%. To understand where this gap comes from, we increase the candidate budget to $K = 500$ and hold the candidate pools and generated-test outcomes fixed while comparing the selector with the two diagnostic upper bounds.

Appendix Figure 8 reveals different bottlenecks across benchmarks. At $K = 500$, the gap from CodeT to the signature oracle is between 4.3 and 7.7 percentage points across the coding benchmarks. Thus, some information already present in the generated-test outcomes is not fully exploited by the selector. More importantly, even the signature oracle remains below candidate coverage by 5.4 – 18.6 percentage points. BigCodeBench is the clearest example: many correct and incorrect programs produce identical outcomes on the generated tests, so no selector using only those tests can reliably distinguish them. The main limitation there is therefore not merely the aggregation rule, but the information provided by the generated tests themselves.

LiveCodeBench exhibits a different failure mode. Even after 500 attempts, 57% of tasks contain no correct candidate at all. For these tasks, neither better generated tests nor a better selector can help. Model-generated verification is therefore constrained by both sides of the retry problem: the generator must continue to produce correct solutions, and the generated tests must contain enough information to recognize them.

These results sharpen the conclusion of the public-test experiments. Parallel retry can recover substantial capability even without an external verifier, but model-generated verification introduces an additional bottleneck. When correct candidates remain reachable, improving the quality of generated tests can be as important as increasing the number of attempts.

6 DISCUSSION AND CONCLUSION

Interest in running language models locally keeps growing, but a gap remains between local and cloud deployment, due to strict compute and memory limitations: the largest checkpoint that fits on a laptop is weaker than the one in a datacenter. This treats local inference as a restricted version of cloud inference, and so local models will always remain inferior to those served on the cloud.

We believe this misses the main advantage of local hardware: we do not share it with anyone. A datacenter GPU is kept busy by many users, so every extra token generated by the model competes with demand from other users. A personal device serving one user is mostly idle, and single-stream decoding leaves most of its compute unused. Therefore, given a single user request, generating multiple attempts can be done almost “for free.” In this paper we showed that this free compute buys back much of the capability lost to a smaller model: a 7B model with eight parallel attempts matches or exceeds a 32B model with one, while using less memory, less time, and less energy. This works because a smaller model is still likely to generate a correct solution given enough attempts.

We note that our results are limited to single-turn code generation and depend on having good tests, which the model cannot always write for itself. A natural next step is extending this method to an interactive, multi-turn, local coding agent, which already writes and runs tests and already spends most of its time waiting on one sequential stream. This opens up questions on how such a harness should spend the idle capacity: on parallel solutions, on parallel plans, or on better verification. Another promising direction is moving beyond single-candidate selection by actively combining parallel generations or allowing concurrent processes to communicate and refine their outputs (with a similar approach as the one studied in Park et al. (2026)). Finally, models could be explicitly trained or distilled not for single-shot performance, but to maximize aggregate success across multiple parallel attempts under local hardware constraints.

REFERENCES

- Keivan Alizadeh, Seyed Iman Mirzadeh, Dmitry Belenko, S. Khatamifard, Minsik Cho, Carlo C. Del Mundo, Mohammad Rastegari, and Mehrdad Farajtabar. LLM in a flash: Efficient large language model inference with limited memory. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 12562–12584. Association for Computational Linguistics, 2024. doi: 10.18653/v1/2024.acl-long.678. URL <https://aclanthology.org/2024.acl-long.678/>.
- Jacob Austin, Augustus Odena, Maxwell Nye, Maarten Bosma, Henryk Michalewski, David Dohan, Ellen Jiang, Carrie Cai, Michael Terry, Quoc V. Le, and Charles Sutton. Program synthesis with large language models. *arXiv preprint arXiv:2108.07732*, 2021. URL <https://arxiv.org/abs/2108.07732>.
- Bradley Brown, Jordan Juravsky, Ryan Ehrlich, Ronald Clark, Quoc V. Le, Christopher Ré, and Azalia Mirhoseini. Large language monkeys: Scaling inference compute with repeated sampling. *arXiv preprint arXiv:2407.21787*, 2024. URL <https://arxiv.org/abs/2407.21787>.
- Bei Chen, Fengji Zhang, Anh Nguyen, Daoguang Zan, Zeqi Lin, Jian-Guang Lou, and Weizhu Chen. CodeT: Code generation with generated tests. In *International Conference on Learning Representations*, 2023a. URL <https://arxiv.org/abs/2207.10397>.
- Charlie Chen, Sebastian Borgeaud, Geoffrey Irving, Jean-Baptiste Lespiau, Laurent Sifre, and John Jumper. Accelerating large language model decoding with speculative sampling. *arXiv preprint arXiv:2302.01318*, 2023b. URL <https://arxiv.org/abs/2302.01318>.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, Alex Ray, Raul Puri, Gretchen Krueger, Michael Petrov, Heidy Khlaaf, Girish Sastry, Pamela Mishkin, Brooke Chan, Scott Gray, Nick Ryder, Mikhail Pavlov, Alethea Power, Lukasz Kaiser, Mohammad Bavarian, Clemens Winter, Philippe Tillet, Felipe Petroski Such, Dave Cummings, Matthias Plappert, Fotios Chantzis, Elizabeth Barnes, Ariel Herbert-Voss, William Hebgen Guss, Alex Nichol, Alex Paino, Nikolas Tezak, Jie Tang, Igor Babuschkin, Suchir Balaji, Shantanu Jain, William Saunders, Christopher Hesse, Andrew N. Carr, Jan Leike, Josh Achiam, Vedant Misra, Evan Morikawa, Alec Radford, Matthew Knight, Miles Brundage, Mira Murati, Katie Mayer, Peter Welinder, Bob McGrew, Dario Amodei, Sam McCandlish, Ilya Sutskever, and Wojciech Zaremba. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*, 2021. URL <https://arxiv.org/abs/2107.03374>.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021. URL <https://arxiv.org/abs/2110.14168>.
- Tim Dettmers and Luke Zettlemoyer. The case for 4-bit precision: k -bit inference scaling laws. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 7750–7774. PMLR, 2023. URL <https://proceedings.mlr.press/v202/dettmers23a.html>.
- Bradley Efron. Bootstrap methods: Another look at the jackknife. *The Annals of Statistics*, 7(1):1–26, 1979. doi: 10.1214/aos/1176344552. URL <https://doi.org/10.1214/aos/1176344552>.
- Elias Frantar and Dan Alistarh. SparseGPT: Massive language models can be accurately pruned in one-shot. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 10323–10337. PMLR, 2023. URL <https://proceedings.mlr.press/v202/frantar23a.html>.
- Elias Frantar, Saleh Ashkboos, Torsten Hoefer, and Dan Alistarh. GPTQ: Accurate post-training quantization for generative pre-trained transformers. In *International Conference on Learning Representations*, 2023. URL <https://arxiv.org/abs/2210.17323>.

- Leo Gao, John Schulman, and Jacob Hilton. Scaling laws for reward model overoptimization. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 10835–10866. PMLR, 2023. URL <https://proceedings.mlr.press/v202/gao23h.html>.
- Zixu Hao, Jianyu Wei, Tuowei Wang, Minxing Huang, Huiqiang Jiang, Shiqi Jiang, Ting Cao, and Ju Ren. Scaling LLM test-time compute with mobile NPU on smartphones. In *Proceedings of the 21st European Conference on Computer Systems*, pp. 2157–2172, 2026. doi: 10.1145/3767295.3769382. URL <https://doi.org/10.1145/3767295.3769382>.
- Yifeng He, Ethan Wang, Jicheng Wang, Xuanxin Ouyang, and Hao Chen. Code generation by differential test time scaling. *arXiv preprint arXiv:2605.20473*, 2026. URL <https://arxiv.org/abs/2605.20473>.
- Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. Distilling the knowledge in a neural network. *arXiv preprint arXiv:1503.02531*, 2015. URL <https://arxiv.org/abs/1503.02531>.
- Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, et al. Training compute-optimal large language models. In *Advances in Neural Information Processing Systems*, volume 35, pp. 30016–30030, 2022.
- Audrey Huang, Adam Block, Qinghua Liu, Nan Jiang, Akshay Krishnamurthy, and Dylan J. Foster. Is best-of-N the best of them? coverage, scaling, and optimality in inference-time alignment. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pp. 25075–25126. PMLR, 2025. URL <https://proceedings.mlr.press/v267/huang25c.html>.
- Binyuan Hui, Jian Yang, Zeyu Cui, Jiayi Yang, Dayiheng Liu, Lei Zhang, Tianyu Liu, Jiajun Zhang, Bowen Yu, Keming Lu, Kai Dang, Yang Fan, Yichang Zhang, An Yang, Rui Men, Fei Huang, Bo Zheng, Yibo Miao, Shanghaoran Quan, Yunlong Feng, Xingzhang Ren, Xuancheng Ren, Jingren Zhou, and Junyang Lin. Qwen2.5-Coder technical report. *arXiv preprint arXiv:2409.12186*, 2024. URL <https://arxiv.org/abs/2409.12186>.
- Naman Jain, King Han, Alex Gu, Wen-Ding Li, Fanjia Yan, Tianjun Zhang, Sida Wang, Armando Solar-Lezama, Koushik Sen, and Ion Stoica. LiveCodeBench: Holistic and contamination free evaluation of large language models for code. In *International Conference on Learning Representations*, 2025. URL <https://openreview.net/forum?id=chfJJYC3iL>.
- Shan Jiang, Zijian Yi, and Chenguang Zhu. Semantic voting: Execution-grounded consensus for llm code generation, 2026. URL <https://arxiv.org/abs/2605.08680>.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*, 2020.
- Junhyuck Kim, Ethan Ewer, Taehong Moon, Jongho Park, and Dimitris Papailiopoulous. Not all bits are equal: Scale-dependent memory optimization strategies for reasoning models. In *International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=b6qQmQ2F13>.
- Jacky Kwok, Shulu Li, Pranav Atreya, Yuejiang Liu, Yixing Jiang, Chelsea Finn, Marco Pavone, Ion Stoica, and Azalia Mirhoseini. Llm-as-a-verifier: A general-purpose verification framework, 2026. URL <https://arxiv.org/abs/2607.05391>.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with PagedAttention. In *Proceedings of the 29th Symposium on Operating Systems Principles*, pp. 611–626. ACM, 2023. doi: 10.1145/3600006.3613165. URL <https://doi.org/10.1145/3600006.3613165>.
- Hung Le, Yue Wang, Akhilesh Deepak Gotmare, Silvio Savarese, and Steven C. H. Hoi. CodeRL: Mastering code generation through pretrained models and deep reinforcement learning. In *Advances in Neural Information Processing Systems*, volume 35,

2022. URL https://proceedings.neurips.cc/paper_files/paper/2022/hash/8636419deala9fbd25fc4248e702da4-Abstract-Conference.html.
- Yaniv Leviathan, Matan Kalman, and Yossi Matias. Fast inference from transformers via speculative decoding. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 19274–19286. PMLR, 2023. URL <https://proceedings.mlr.press/v202/leviathan23a.html>.
- Dacheng Li, Shiyi Cao, Chengkun Cao, Xiuyu Li, Shangyin Tan, Kurt Keutzer, Jiarong Xing, Joseph E. Gonzalez, and Ion Stoica. S*: Test time scaling for code generation. In *Findings of the Association for Computational Linguistics: EMNLP 2025*, pp. 15964–15978. Association for Computational Linguistics, 2025. doi: 10.18653/v1/2025.findings-emnlp.865. URL <https://aclanthology.org/2025.findings-emnlp.865/>.
- Yujia Li, David Choi, Junyoung Chung, Nate Kushman, Julian Schrittwieser, Rémi Leblond, Tom Eccles, James Keeling, Felix Gimeno, Agustin Dal Lago, Thomas Hubert, Peter Choy, Cyprien de Masson d’Autume, Igor Babuschkin, Xinyun Chen, Po-Sen Huang, Johannes Welbl, Sven Gowal, Alexey Cherepanov, James Molloy, Daniel J. Mankowitz, Esme Sutherland Robson, Pushmeet Kohli, Nando de Freitas, Koray Kavukcuoglu, and Oriol Vinyals. Competition-level code generation with AlphaCode. *Science*, 378(6624):1092–1097, 2022. doi: 10.1126/science.abq1158. URL <https://doi.org/10.1126/science.abq1158>.
- Hunter Lightman, Vineet Kosaraju, Yuri Burda, Harrison Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let’s verify step by step. In *International Conference on Learning Representations*, 2024. URL <https://arxiv.org/abs/2305.20050>.
- Ji Lin, Jiaming Tang, Haotian Tang, Shang Yang, Wei-Ming Chen, Wei-Chen Wang, Guangxuan Xiao, Xingyu Dang, Chuang Gan, and Song Han. AWQ: Activation-aware weight quantization for on-device LLM compression and acceleration. In *Proceedings of Machine Learning and Systems*, volume 6, 2024. URL https://proceedings.mlsys.org/paper_files/paper/2024/hash/42a452cbafa9dd64e9ba4aa95cc1ef21-Abstract-Conference.html.
- Jiawei Liu, Chunqiu Steven Xia, Yuyao Wang, and Lingming Zhang. Is your code generated by ChatGPT really correct? rigorous evaluation of large language models for code generation. In *Advances in Neural Information Processing Systems*, volume 36, 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/hash/43e9d647ccd3e4b7b5baab53f0368686-Abstract-Conference.html.
- Ansong Ni, Srini Iyer, Dragomir Radev, Veselin Stoyanov, Wen-Tau Yih, Sida Wang, and Xi Victoria Lin. LEVER: Learning to verify language-to-code generation with execution. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 26106–26128. PMLR, 2023. URL <https://proceedings.mlr.press/v202/ni23b.html>.
- NVIDIA Corporation. NVIDIA A100 Tensor Core GPU. Datasheet, 2021. URL <https://www.nvidia.com/content/dam/en-zz/Solutions/Data-Center/a100/pdf/a100-80gb-datasheet-update-nvidia-us-1521051-r2-web.pdf>.
- NVIDIA Corporation. NVIDIA Hopper Architecture In-Depth. NVIDIA Technical Blog, 2022. URL <https://developer.nvidia.com/blog/nvidia-hopper-architecture-in-depth/>.
- NVIDIA Corporation. NVIDIA HGX Platform, 2026. URL <https://www.nvidia.com/en-us/data-center/hgx/>. Product specifications; accessed 2026-09-26.
- Jongho Park, Vasilis Kontonis, Shivam Garg, Akshay Krishnamurthy, and Dimitris Papailiopoulos. Scaling discovery through test-time communication. *arXiv preprint arXiv:2609.21032*, 2026.
- Sai Babu Patarlapalli and Surya Teja Avvaru. BitCal-TTS: Bit-calibrated test-time scaling for quantized reasoning models. *arXiv preprint arXiv:2605.05561*, 2026. URL <https://arxiv.org/abs/2605.05561>.

- Reiner Pope, Sholto Douglas, Aakanksha Chowdhery, Jacob Devlin, James Bradbury, Jonathan Heek, Kefan Xiao, Shivani Agrawal, and Jeff Dean. Efficiently scaling transformer inference. In *Proceedings of Machine Learning and Systems*, volume 5, pp. 606–624, 2023.
- Amrith Setlur, Nived Rajaraman, Sergey Levine, and Aviral Kumar. Scaling test-time compute without verification or RL is suboptimal. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pp. 54058–54094. PMLR, 2025. URL <https://proceedings.mlr.press/v267/setlur25a.html>.
- Charlie Victor Snell, Jaehoon Lee, Kelvin Xu, and Aviral Kumar. Scaling LLM test-time compute optimally can be more effective than scaling parameters for reasoning. In *International Conference on Learning Representations*, 2025. URL https://proceedings.iclr.cc/paper_files/paper/2025/hash/1b623663fd9b874366f3ce019fd9d44-Abstract-Conference.html.
- Benedikt Stroebl, Sayash Kapoor, and Arvind Narayanan. The limits of inference scaling through resampling. In *International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=j8H84v6AZ1>.
- Varun Sunkaraneni, Pierfrancesco Beneventano, Riccardo Neumarker, Tomaso Poggio, and Tomer Galanti. Agentic systems as boosting weak reasoning models. *arXiv preprint arXiv:2605.14163*, 2026. URL <https://arxiv.org/abs/2605.14163>.
- Jonathan Uesato, Nate Kushman, Ramana Kumar, Francis Song, Noah Siegel, Lisa Wang, Antonia Creswell, Geoffrey Irving, and Irina Higgins. Solving math word problems with process- and outcome-based feedback. *arXiv preprint arXiv:2211.14275*, 2022. URL <https://arxiv.org/abs/2211.14275>.
- Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc V. Le, Ed H. Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. Self-consistency improves chain of thought reasoning in language models. In *International Conference on Learning Representations*, 2023. URL <https://arxiv.org/abs/2203.11171>.
- Samuel Williams, Andrew Waterman, and David Patterson. Roofline: An insightful visual performance model for multicore architectures. *Communications of the ACM*, 52(4):65–76, 2009. doi: 10.1145/1498765.1498785.
- Guangxuan Xiao, Ji Lin, Mickael Seznec, Hao Wu, Julien Demouth, and Song Han. SmoothQuant: Accurate and efficient post-training quantization for large language models. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 38087–38099. PMLR, 2023. URL <https://proceedings.mlr.press/v202/xiao23c.html>.
- Gyeong-In Yu, Joo Seong Jeong, Geon-Woo Kim, Soojeong Kim, and Byung-Gon Chun. Orca: A distributed serving system for transformer-based generative models. In *16th USENIX Symposium on Operating Systems Design and Implementation*, pp. 521–538. USENIX Association, 2022. URL <https://www.usenix.org/conference/osdi22/presentation/yu>.
- Eric Zhao, Pranjal Awasthi, and Sreenivas Gollapudi. Sample, scrutinize and scale: Effective inference-time search by scaling verification. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pp. 77272–77309. PMLR, 2025. URL <https://proceedings.mlr.press/v267/zhao25a.html>.
- Terry Yue Zhuo, Minh Chien Vu, Jenny Chim, Han Hu, Wenhao Yu, Ratnadira Widayarsi, Imam Nur Bani Yusuf, Haolan Zhan, Junda He, Indraneil Paul, Simon Brunner, Chen Gong, James Hoang, Armel Zebaze, Xiaoheng Hong, Wen-Ding Li, Jean Kaddour, Ming Xu, Zhihan Zhang, Prateek Yadav, Naman Jain, Alex Gu, Zhoujun Cheng, Jiawei Liu, Qian Liu, Zijian Wang, Binyuan Hui, Niklas Muennighoff, David Lo, Daniel Fried, Xiaoning Du, Harm de Vries, and Leandro Von Werra. BigCodeBench: Benchmarking code generation with diverse function calls and complex instructions. In *International Conference on Learning Representations*, 2025. URL https://proceedings.iclr.cc/paper_files/paper/2025/hash/a6a90bcc2aa470c3871b2d39a67d26e8-Abstract-Conference.html.

Table 4: **Eight attempts from a smaller model can match or exceed one attempt from Coder-32B at lower serving cost.** The 3B, 7B, and 14B models use $K = 8$, while Coder-32B uses $K = 1$. Accuracy comes from the main candidate pools; wall time and energy are measured on matched B200 workloads. Speedup and energy saving are Coder-32B/retried model, so values above $1\times$ favor the smaller model.

Checkpoint	MBPP+ (77.9% ref.)					HumanEval+ (85.1% ref.)					LiveCodeBench (27.1% ref.)					BigCodeBench (56.6% ref.)				
	Acc.	Wall	speedup	J/task	Energy saving	Acc.	Wall	speedup	J/task	Energy saving	Acc.	Wall	speedup	J/task	Energy saving	Acc.	Wall	speedup	J/task	Energy saving
Coder-3B ($K=8$)	74.2%	3.12	$2.8\times$	32	$3.5\times$	87.5%	5.17	$2.2\times$	60	$2.7\times$	19.8%	7.46	$4.0\times$	120	$5.8\times$	58.2%	4.59	$1.5\times$	54	$1.7\times$
Coder-7B ($K=8$)	77.8%	4.31	$2.0\times$	59	$1.9\times$	89.4%	5.25	$2.2\times$	68	$2.4\times$	27.5%	5.06	$5.9\times$	104	$6.7\times$	62.7%	5.07	$1.3\times$	72	$1.3\times$
Coder-14B ($K=8$)	79.4%	7.75	$1.1\times$	110	$1.0\times$	89.5%	11.66	$1.0\times$	175	$0.9\times$	33.9%	20.08	$1.5\times$	450	$1.5\times$	66.3%	10.51	$0.6\times$	157	$0.6\times$
Coder-32B ($K=1$)	77.9%	8.57	$1.0\times$	112	$1.0\times$	85.1%	11.41	$1.0\times$	162	$1.0\times$	27.1%	29.82	$1.0\times$	692	$1.0\times$	56.6%	6.69	$1.0\times$	92	$1.0\times$

Table 5: **Accuracy and model-generated verification for the Qwen3.6-27B precision variants.** All accuracy columns use the full task population for each experiment. “Usable tests” reports the fraction of tasks for which a usable generated test suite was produced.

Benchmark	Checkpoint	pass@1	exec@8	exec@50	oracle@50	CodeT@8	Usable tests
HumanEval+	Bonsai Q1.0 (1-bit)	85.5%	93.3%	93.9%	98.2%	91.2%	0.707
	Bonsai AWQ4 (4-bit)	89.9%	94.1%	94.5%	98.2%	93.1%	0.866
	Qwen3.6-27B (bf16)	89.3%	93.6%	93.9%	98.2%	93.3%	0.927
MBPP+	Bonsai Q1.0 (1-bit)	68.9%	81.0%	82.5%	87.3%	78.2%	0.810
	Bonsai AWQ4 (4-bit)	76.6%	82.3%	83.3%	87.8%	80.8%	0.918
	Qwen3.6-27B (bf16)	77.2%	83.5%	83.6%	88.6%	82.1%	0.899
LiveCodeBench	Bonsai Q1.0 (1-bit)	14.6%	28.7%	34.9%	35.4%	37.2%	0.977
	Bonsai AWQ4 (4-bit)	15.5%	29.4%	34.3%	34.3%	37.1%	0.514
	Qwen3.6-27B (bf16)	16.8%	30.5%	34.3%	34.3%	38.1%	0.754
BigCodeBench	Bonsai Q1.0 (1-bit)	19.2%	51.5%	63.4%	72.3%	40.4%	0.835
	Bonsai AWQ4 (4-bit)	23.9%	54.0%	67.3%	72.9%	30.5%	0.935
	Qwen3.6-27B (bf16)	26.7%	53.9%	67.0%	70.8%	33.8%	0.962

A ADDITIONAL EXPERIMENTAL RESULTS

We add here a more complete version of the tables appearing in the main text.

B ADDITIONAL EVIDENCE FOR THE MEMORY-RETRY TRADEOFF

The Qwen3.6-27B experiments study extreme one-bit compression, while the Qwen2.5-Coder experiments cover more conventional quantization and changes in model size. We complement the accuracy results with wall-clock and energy measurements on B200 GPUs and Apple silicon, together with process-memory measurements on B200. Throughout, model memory refers to checkpoint weights plus the KV cache required for generation; measured process-level peaks are reported separately in Table 22.

B.1 EXTREME ONE-BIT COMPRESSION AND PRESERVED CANDIDATE COVERAGE

We compare bf16, 4-bit, and one-bit versions of the same Qwen3.6-27B model to isolate the effect of numerical precision. We also evaluate model-generated verification to test whether the one-bit model can recover lost one-shot accuracy when it must generate the tests used to select among its own candidates.

Table 5 reports the accuracy and model-generated verification results. All accuracy measures are evaluated on the full task population for each experiment.

Reliability versus reachability. One-bit compression hurts the probability of solving a task on any single attempt much more than it changes whether the model can solve the task at all after repeated sampling. On HumanEval+, Q1.0 loses 3.8 percentage points in pass@1, yet both Q1.0 and bf16 solve 98.2% of tasks at least once within 50 attempts. On MBPP+, the one-shot gap is 8.3 percentage points, while the corresponding gap after 50 attempts is only 1.3 points. The same pattern appears

on BigCodeBench: pass@1 falls from 26.7% to 19.2%, but the fraction of tasks solved at least once within 50 attempts remains within 1.5 percentage points of bf16. LiveCodeBench is noisier, with Q1_0 slightly exceeding bf16 at deeper retry; we treat these small differences as sampling variation rather than evidence that one-bit compression improves the model.

The 4-bit checkpoint is generally close to bf16, although the ordering is not perfectly monotone with precision. The robust pattern is instead that one-bit compression substantially reduces single-attempt reliability while leaving the set of tasks that can be solved after repeated attempts much less affected.

LiveCodeBench formatting failures. LiveCodeBench also exposes a separate failure mode. Only about one quarter of generations contain the fenced code block expected by the evaluation pipeline: 25.0%, 25.8%, and 26.5% for Q1_0, AWQ4, and bf16, respectively. Among generations with the expected format, held-out pass rates are 58.3%, 60.2%, and 63.2%; generations without a fenced block never pass. Moreover, 78, 91, and 93 of the 175 tasks produce no correctly formatted candidate at all within 50 attempts. The low LiveCodeBench scores therefore reflect not only problem-solving ability, but also a formatting failure shared across the model family rather than one caused specifically by one-bit compression. We evaluate the models under the fixed deployed pipeline rather than conditioning on generations that happened to satisfy the expected format.

Model-generated verification. BigCodeBench shows that generating good candidates and selecting among them are not the same problem. On the full Bonsai evaluation population, CodeT@8 reaches 40.4%, 30.5%, and 33.8% for Q1_0, AWQ4, and bf16, respectively. Thus, one-bit compression substantially lowers one-shot accuracy while still benefiting strongly from model-generated verification.

LiveCodeBench reveals a different limitation. A compact line-based format produces usable generated tests for 97.7%, 51.4%, and 75.4% of tasks for Q1_0, AWQ4, and bf16, compared with only 0.6%, 1.1%, and 2.3% under the earlier JSON-array format at the same 5,120-token budget. The improvement comes from preserving completed tests before generation is truncated: 133/175, 146/175, and 131/175 tasks still reach the token limit.

Despite substantial differences in test-generation success across checkpoints, CodeT@8 is similar for Q1_0, AWQ4, and bf16 (37.20%, 37.12%, and 38.13%). Because failed test generation falls back to confidence ranking, these scores include the cost of test-generation failure rather than conditioning on successful test suites.

How many attempts are needed to recover the parent? Table 2 defines recovery as the smallest tested value of K for which Q1_0 matches or exceeds the bf16 model’s one-shot accuracy. HumanEval+, LiveCodeBench, and BigCodeBench recover at $K = 2$. MBPP+ requires $K = 4$, although the boundary is extremely close: at $K = 2$, Q1_0 reaches 77.1981%, compared with 77.2381% for bf16, a difference of only 0.04 percentage points. At $K = 4$, Q1_0 reaches 79.83%. We therefore report $K = 4$ as the observed recovery point, while noting that the distinction between two and four attempts on MBPP+ is very small.

On BigCodeBench, the recovery is much clearer. Q1_0 improves from 19.22% with one attempt to 29.93% with two, exceeding the bf16 one-shot accuracy of 26.70%. These intermediate- K accuracies are computed from the existing $K = 50$ candidate pools.

Systems cost of recovery. Recovering accuracy is useful only if the additional attempts do not erase the systems advantage of the compressed model. We first compare Q1_0 and bf16 at the same value of K on HumanEval+ to measure how efficiently each checkpoint uses the serving stack.

Table 6 shows that at equal K , Q1_0 is consistently faster and uses less energy than bf16. Its advantage also grows with the retry budget: wall-clock speedup increases from $1.32\times$ at $K = 1$ to $1.92\times$ at $K = 50$, and energy saving increases from $2.38\times$ to $3.13\times$. This shows that the one-bit checkpoint can use wide parallel batches efficiently. It does not, however, tell us whether compression is cheaper after accounting for the additional attempts needed to recover accuracy.

For that comparison, we run Q1_0 at the benchmark-specific recovery budget and compare it with bf16 at $K = 1$. The result depends strongly on the workload. Wall-clock speedup and energy saving are $0.72\times$ and $1.30\times$ on HumanEval+, $0.42\times$ and $0.73\times$ on MBPP+, $1.04\times$ and $1.61\times$ on LiveCodeBench, and $0.71\times$ and $0.92\times$ on BigCodeBench. Thus, the memory advantage remains large, but recovery does not always save time or energy. On MBPP+, for example, the additional

Table 6: **Q1.0 is faster and more energy-efficient than bf16 at the same retry budget.** Results use the HumanEval+ serving workload. Entries compare Q1.0 with bf16 at the same K . Speedup and energy saving are bf16/Q1.0, while throughput ratio is Q1.0/bf16. Values are medians over three repetitions.

K	Weights (GB) Q1 / bf16	Weight saving	Wall (s) Q1 / bf16	Wall-clock speedup	tok/s Q1 / bf16	Throughput ratio	J/task Q1 / bf16	Energy saving
1	3.80 / 54.66	14.38×	271.7 / 359.7	1.32×	222.8 / 156.5	1.42×	1,656.2 / 3,946.8	2.38×
8	3.80 / 54.66	14.38×	1,549.1 / 2,719.3	1.76×	307.4 / 166.0	1.85×	10,367 / 30,382	2.93×
50	3.80 / 54.66	14.38×	8,603.8 / 16,477.5	1.92×	346.8 / 171.1	2.03×	59,151 / 185,108	3.13×

attempts make Q1.0 slower and more energy-intensive than bf16, whereas on LiveCodeBench it is slightly faster and uses substantially less energy.

We repeated the HumanEval+ and BigCodeBench recovery measurements in both execution orders to check for order effects. The two wall-time/energy ratios are 0.675/1.289 and 0.762/1.312 on HumanEval+, and 0.7079/0.9068 and 0.7191/0.9288 on BigCodeBench. The main table reports the geometric mean across the two orders. Energy is more stable than wall time across these repetitions, so we avoid attaching significance to small differences in the latency ratios.

Model-memory accounting for the Apple comparison. For the fixed- $K = 4$ Bonsai comparison in Table 7, model memory is the checkpoint weights plus the KV cache implied by the realized prompt and completion lengths. Mean prompt lengths are 216.6, 96.3, 646.1, and 363.0 tokens on HumanEval+, MBPP+, LiveCodeBench, and BigCodeBench, respectively. Relative to bf16 at $K = 1$, the resulting memory savings are 13.41×, 13.45×, 13.31×, and 11.43×. The smaller saving on BigCodeBench is due to its substantially longer completions.

Qwen3.6-27B uses a hybrid architecture with 48 linear-attention layers and 16 full-attention layers. Only the full-attention layers require a KV cache that grows with sequence length, corresponding to 65,536 bytes per token. The recurrent state of the linear-attention layers does not grow with sequence length and is therefore excluded from Equation 3. We also verified the prompt accounting independently: after normalizing llama.cpp’s `prompt_tokens` counter by the number of tasks and parallel slots, it matches the separately tokenized prompt lengths. We therefore count the shared prompt once and each generated completion separately.

BigCodeBench extraction. Code extraction matters for the Qwen3.6/Bonsai BigCodeBench results. Without `evalplus.sanitize`, the regex fallback can select the wrong code block. On the bf16 pool, canonical sanitization raises the parse rate from 72.9% to 93.1% and pass@1 from 9.18% to 26.70% on the same generations. For the non-reasoning Qwen2.5-Coder models, the canonical and legacy extraction procedures agree up to whitespace on all 120 checked examples, so their BigCodeBench results are unchanged. All Qwen3.6/Bonsai results use canonical sanitized extraction.

Serving concurrency. For the matched serving sweeps, each checkpoint uses the fastest slot count found in its tuning sweep. Q1.0 uses 16 slots at $K = 8$ and $K = 50$, while bf16 uses 4. The bf16 $K = 50$ configuration was not exhaustively reswept over every possible slot count, so the reported throughput ratios should be read as comparisons between the best configurations we measured rather than as globally optimized serving points.

B.2 PHYSICAL-DEVICE MEASUREMENTS ON APPLE SILICON

We run two matched experiments with llama.cpp on 64-GiB M3 Max and M5 Pro systems. The first compares Qwen3.6-27B bf16 at $K = 1$ with Bonsai Q1.0 at $K = 4$. The second compares fp16 GGUF Qwen2.5-Coder-3B and Coder-7B with Coder-14B, using the retry budget required for the smaller model to recover the 14B model’s one-shot accuracy. Within each comparison, the reference and retried configurations are measured on the same physical device using deterministic eight-prompt batches. We record generation wall time, completion tokens, throughput, package power, energy, and swap activity. The only exception is M3 Max BigCodeBench in the Bonsai comparison, where two disjoint task shards are measured on configuration-matched M3 Max systems.

Table 7: **Physical-device recovery depends on retry depth.** Accuracy is deployment/reference. Memory saving, speedup, energy saving, and power ratio are reference/deployment. In the model-scale block, semicolon-separated entries follow the order of the two comparisons in the second column. Model memory is checkpoint weights plus KV cache from realized sequence lengths.

Benchmark	Comparison	Accuracy dep.ref.	Memory saving (×)	M3 Max, 64 GiB				M5 Pro, 64 GiB			
				Speedup (×)	Energy saving (×)	Power ratio (×)	Swap	Speedup (×)	Energy saving (×)	Power ratio (×)	Swap
<i>One-bit quantization</i>											
HumanEval+	Q1@4 / 27B@1	93.1/89.3	13.41	0.85	0.88	1.04	yes/no	1.67	1.06	0.63	yes/no
MBPP+	Q1@4 / 27B@1	79.8/77.2	13.45	0.86	0.83	0.97	yes/no	1.59	1.05	0.66	yes/no
LiveCodeBench	Q1@4 / 27B@1	25.6/16.8	13.31	0.87	0.87	1.00	yes/no	1.66	1.08	0.65	yes/no
BigCodeBench	Q1@4 / 27B@1	41.4/26.7	11.43	0.83	0.82	0.99	yes/no	1.58	1.03	0.65	yes/no
<i>Reducing model scale</i>											
HumanEval+	7B@2 / 14B@1; 3B@4 / 14B@1	85.7/85.6; 85.9/85.6	1.94; 4.34	2.14; 2.21	2.18; 2.04	1.04; 1.00	no/no; no/no	2.36; 2.44	2.23; 2.01	0.95; 0.83	no/no; no/no
MBPP+	7B@2 / 14B@1; 3B@8 / 14B@1	74.7/73.1; 74.3/73.1	1.94; 4.33	2.12; 0.76	2.04; 0.75	0.96; 0.99	no/no; no/no	2.15; 0.98	2.05; 0.80	0.96; 0.82	no/no; no/no
BigCodeBench	7B@2 / 14B@1; 3B@4 / 14B@1	53.5/48.8; 52.2/48.8	1.94; 4.32	1.78; 2.05	1.82; 1.92	1.00; 0.93	no/no; no/no	1.77; 2.43	1.68; 1.87	0.95; 0.77	no/no; no/no
LiveCodeBench	7B@4 / 14B@1; 3B@16 / 14B@1	24.2/23.6; 23.6/23.6	1.94; 4.14	1.46; 0.53	1.50; 0.63	1.05; 1.22	no/no; no/no	1.66; 0.68	1.68; 0.79	1.02; 1.16	no/no; no/no

We report energy only when every expected batch has a power record, power sampling covers at least half of each batch, and the measurements pass our consistency checks. For Bonsai, the two chips give qualitatively different results. On M3 Max, Q1_0 at $K = 4$ is slower than bf16 on all four workloads, with wall-clock speedups of 0.83–0.87 $\times$ and energy-saving ratios of 0.82–0.88 $\times$. On M5 Pro, it is 1.58–1.67 $\times$ faster, with energy-saving ratios of 1.03–1.08 $\times$.

The difference is also visible in throughput. Q1_0 reaches 3.48–3.57 $\times$ the bf16 throughput on M3 Max and 6.60–6.85 $\times$ on M5 Pro. Since Q1_0 generates four candidates for each bf16 candidate, the M5 Pro throughput gain is large enough to offset the additional work, whereas the M3 Max gain is not. The bf16 model uses swap in every matched Bonsai comparison, while Q1_0 does not. We do not attribute the cross-chip reversal to swap or to any single hardware mechanism; the measurements establish the serving outcome rather than its unique cause.

The dense-model comparison shows a clear dependence on recovery depth. Coder-7B recovers Coder-14B one-shot accuracy with two attempts on HumanEval+, MBPP+, and BigCodeBench, and with four attempts on LiveCodeBench. Every measured $K \leq 4$ comparison is favorable in both wall time and energy on both chips. Coder-3B at $K = 8$ on MBPP+ is clearly unfavorable on M3 Max; on M5 Pro its two wall-time ratios, 1.03 $\times$ and 0.92 $\times$, straddle break-even, while its energy-saving ratios, 0.85 $\times$ and 0.76 $\times$, remain below one. At $K = 16$ on LiveCodeBench, Coder-3B is unfavorable on both chips, with wall-clock speedup/energy saving of 0.53 $\times$ / 0.63 $\times$ on M3 Max and 0.68 $\times$ / 0.79 $\times$ on M5 Pro. Thus recovery depth predicts the broad systems regime, but the precise margin depends on the hardware.

Average package power does not follow a single cross-benchmark pattern. Most M5 Pro dense-model rows have power ratios below one, whereas the LiveCodeBench ratios are 1.02 and 1.16. We therefore treat wall time and total energy as the primary systems outcomes rather than attributing the cross-chip differences to power alone.

The served GGUF checkpoints occupy 6.80, 15.24, and 29.55 GB for Coder-3B, Coder-7B, and Coder-14B, respectively. None of the dense-model runs uses swap. At $K = 1$, measured peak process RSS is approximately 7.62, 15.95, and 32.48 GB for the three models, and it rises with retry depth to about 47.1 GB for Coder-14B at $K = 8$. This increase is larger than the computed KV-cache growth alone predicts, so the main text uses checkpoint weights plus computed KV cache for model-memory comparisons and treats RSS as a separate physical measurement. The roughly 47–48 GB peak at Coder-14B $K = 8$ also motivates the use of 64-GiB systems for the full experiment.

Device-generation accuracy check. We verify that the physical-device serving path preserves candidate quality. On the full 164-task HumanEval+ population, independent fp16-GGUF/lama.cpp generations differ from the bf16/vLLM pools by at most 1.23 percentage points in pass@1 and 1.21 points in oracle@ K across Coder-14B at $K = 1$, Coder-7B at $K = 2$, and Coder-3B at $K = 4$. The differences are small and similar across models and retry budgets, supporting the use of full-population pool accuracy alongside the physical-device systems measurements.

Accuracy and systems cost are measured separately. Accuracy comes from the full offline candidate populations using public-test selection, while wall time, energy, and power are measured on the physical devices. The M3 Max dense-model measurements cover the full 164, 378, 342, and 175 task populations for HumanEval+, MBPP+, BigCodeBench, and LiveCodeBench, respectively. On M5

Table 8: **Conventional quantization substantially reduces weight memory with relatively small changes in accuracy.** Each row compares bf16 with the lowest-memory measured precision at the same model size. Accuracy differences are compact minus bf16, in percentage points. The MoE result uses a third-party AWQ4 checkpoint. Full results for every precision are given in Tables 9 and 11.

Model size	Compact precision	Memory		MBPP+		HumanEval+		LiveCodeBench		BigCodeBench		Largest $ \Delta $ at $K = 50$
		Weights (GB)	Weight saving	Δ pass@1	Δ exec@50	Δ pass@1	Δ exec@50	Δ pass@1	Δ exec@50	Δ pass@1	Δ exec@50	
Coder-3B	GPTQ4	6.17 $\rightarrow$ 2.07	2.98 $\times$	+0.7	+0.0	-1.0	+1.7	+0.0	+2.3	-1.7	-0.3	2.3
Coder-7B	AWQ4	15.23 $\rightarrow$ 5.57	2.73 $\times$	+2.0	+1.3	-2.6	-3.1	-0.2	-2.3	-1.6	+0.1	3.1
Coder-32B	AWQ4	65.53 $\rightarrow$ 19.33	3.39 $\times$	-0.7	-3.0	-0.6	+0.9	+0.6	+2.3	+0.3	+0.1	3.0
Qwen3-Coder MoE	AWQ4	61.07 $\rightarrow$ 16.81	3.63 $\times$	+0.4	+0.3	+0.2	-0.7	-1.8	-2.3	-3.4	+0.8	2.3

Table 9: **Qwen2.5-Coder accuracy across all measured precisions.** For each model size, we report one-shot accuracy, accuracy after 50 attempts selected with public tests, and accuracy after 50 attempts selected with model-generated tests. The memory column reports checkpoint weight size. LiveCodeBench CodeT uses independently generated candidate pools.

Model	Precision	Weights (GB)	MBPP+			HumanEval+			LiveCodeBench			BigCodeBench		
			pass@1	exec@50	CodeT@50	pass@1	exec@50	CodeT@50	pass@1	exec@50	CodeT@50	pass@1	exec@50	CodeT@50
Coder-3B	bf16	6.17	61.6%	77.5%	75.4%	77.4%	87.9%	84.2%	9.5%	26.3%	18.3%	41.3%	64.7%	49.7%
	GPTQ 8-bit	3.47	63.3%	78.3%	71.4%	77.7%	88.4%	82.9%	10.1%	28.6%	19.4%	40.7%	64.1%	48.6%
	AWQ 4-bit	2.69	62.6%	78.0%	71.4%	75.9%	90.9%	84.1%	8.7%	26.3%	17.7%	39.5%	64.0%	47.7%
	GPTQ 4-bit	2.07	62.3%	77.5%	71.2%	76.4%	89.6%	83.5%	9.5%	28.6%	17.7%	39.5%	64.4%	47.6%
Coder-7B	bf16	15.23	69.6%	78.6%	77.5%	82.6%	90.9%	84.1%	16.3%	33.7%	28.0%	47.9%	67.8%	56.2%
	GPTQ 8-bit	8.86	71.6%	80.2%	76.2%	81.4%	89.0%	83.5%	16.2%	34.3%	26.9%	47.8%	67.6%	55.5%
	AWQ 4-bit	5.57	71.6%	79.9%	78.6%	80.0%	87.8%	83.5%	16.1%	31.4%	28.0%	46.3%	67.9%	53.5%
	GPTQ 4-bit	5.58	71.2%	79.9%	76.7%	80.8%	90.2%	84.1%	16.0%	31.4%	23.4%	47.1%	68.0%	55.4%
Coder-32B	bf16	65.53	77.9%	82.9%	81.1%	85.1%	89.3%	85.7%	27.1%	38.3%	32.0%	56.6%	69.7%	62.7%
	GPTQ 8-bit	35.07	77.2%	81.1%	79.0%	85.1%	89.6%	86.0%	26.5%	41.1%	30.9%	56.8%	70.4%	62.7%
	AWQ 4-bit	19.33	77.2%	79.9%	79.1%	84.5%	90.2%	86.0%	27.7%	40.6%	30.9%	56.9%	69.8%	63.0%
	GPTQ 4-bit	19.34	76.2%	80.4%	77.8%	84.4%	88.6%	86.2%	26.5%	38.9%	32.0%	56.1%	69.7%	61.2%

Pro, HumanEval+ uses two 82-task measurements; MBPP+ uses a 190-task first measurement and a 95-task second measurement; BigCodeBench covers 170 tasks; and LiveCodeBench uses one 44-task shard. Table 7 reports the geometric mean of the two HumanEval+ and MBPP+ measurement ratios and the available BigCodeBench and LiveCodeBench measurements directly.

The M5 Pro LiveCodeBench measurement was run on a second M5 Pro chassis (Mac17, 9) rather than the Mac17, 8 system used for the other M5 Pro measurements. The systems report the same Apple M5 Pro chip, 18 logical CPUs, 64 GiB of RAM, and the same Metal working-set limit. Single-stream decode rates for the 3B and 7B checkpoints differ by at most 1.3% between the two systems, so we report the result as M5 Pro while retaining the chassis provenance.

B.3 CONVENTIONAL 4/8-BIT QUANTIZATION

We next ask whether the same pattern holds for more conventional 4- and 8-bit quantization. For each model size, Table 8 compares bf16 with the measured quantized checkpoint that uses the least weight memory. The choice is based only on checkpoint size, not benchmark accuracy.

The reduction in weight memory is substantial, ranging from about $2.7\times$ to $3.6\times$, while the corresponding accuracy changes are much smaller and vary in direction. Across these comparisons, the largest change after 50 verified attempts is 3.1 percentage points. Conventional quantization therefore preserves retrieved accuracy fairly well on these benchmarks. The one-bit Bonsai experiment is a more severe intervention and produces the larger one-shot loss needed to study recovery under aggressive compression.

Table 9 gives the complete Qwen2.5-Coder precision sweep, including the intermediate precisions omitted above. We report both public-test selection and CodeT because stability under an external verifier does not necessarily imply stability when the model must generate its own tests.

No quantized checkpoint is uniformly best across benchmarks, and small positive or negative differences should not be interpreted as a monotone effect of precision. LiveCodeBench CodeT is

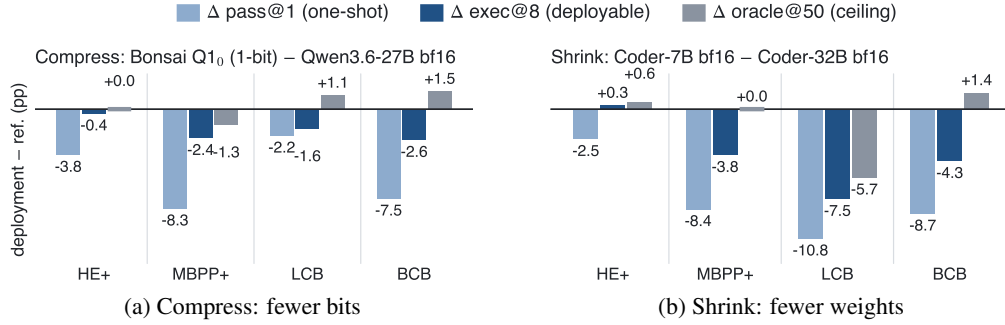


Figure 4: **Retry recovers lost one-shot accuracy only when correct solutions remain reachable.** Panel (a) compares one-bit Bonsai with its bf16 Qwen3.6-27B parent, and panel (b) compares Coder-7B with Coder-32B. Bars show the change relative to the higher-precision or larger reference for accuracy after eight verified attempts and for the fraction of tasks solved at least once within 50 attempts. Quantization largely preserves candidate coverage, whereas reducing model size can lower it, most clearly on LiveCodeBench.

Table 10: **Model scale mostly improves single-attempt reliability on MBPP+, HumanEval+, and BigCodeBench, but also expands the set of solvable tasks on LiveCodeBench.** The endpoint columns compare 3B with 32B. The oracle@50 column shows all four native model sizes (3B / 7B / 14B / 32B), and the final column reports their range. Accuracy differences are in percentage points. LiveCodeBench CodeT uses independently generated candidate pools.

Benchmark	pass@1	Δ pass@1	exec@50	CodeT@50	oracle@50	oracle@50 range
	3B → 32B		3B → 32B	3B → 32B	3B / 7B / 14B / 32B	
MBPP+	61.6% → 77.9%	+16.3	77.5% → 82.9%	75.4% → 81.1%	86.8/87.3/86.0/87.3%	1.3
HumanEval+	77.4% → 85.1%	+7.7	87.9% → 89.3%	84.2% → 85.7%	93.9/92.7/94.5/92.1%	2.4
BigCodeBench	41.3% → 56.6%	+15.4	64.7% → 69.7%	49.7% → 62.7%	75.6/76.9/77.0/75.5%	1.5
LiveCodeBench	9.5% → 27.1%	+17.6	26.3% → 38.3%	18.3% → 32.0%	30.3/37.1/43.4/42.9%	13.1

computed from independently generated candidate and test pools, so those values can be compared across checkpoints but are not paired with the public-test generations in the same row.

B.4 CANDIDATE COVERAGE UNDER MODEL SCALING

Choosing a smaller model can change more than the probability of success on a single attempt. It can also change which tasks the model is able to solve at all. The Qwen2.5-Coder size ladder lets us separate these effects. If one-shot accuracy improves with model size but the fraction of tasks solved at least once within 50 attempts stays nearly unchanged, then retry can recover much of the gap. If that fraction also increases with model size, some of the advantage of the larger model cannot be recovered by sampling alone.

Table 10 shows a striking separation between one-shot accuracy and what the models can solve after repeated attempts on the first three benchmarks. From 3B to 32B, one-shot accuracy rises by 16.3, 7.7, and 15.4 percentage points on MBPP+, HumanEval+, and BigCodeBench, respectively. Yet the fraction of tasks solved at least once within 50 attempts varies by only 1.3, 2.4, and 1.5 points across the entire model-size ladder. On these benchmarks, much of the advantage of the larger model comes from solving the same tasks more reliably on each attempt rather than from being able to solve many additional tasks.

LiveCodeBench is different. One-shot accuracy rises by 17.6 percentage points from 3B to 32B, and the fraction of tasks solved at least once within 50 attempts also changes substantially, by 13.1 points. For Coder-7B, public-test selection reaches 33.7% at $K = 50$, already close to the 37.1% of tasks for which the model generates at least one correct solution. The remaining gap to the larger models therefore cannot be closed mainly by a better selector: the smaller model often never generates a correct solution.

Table 11: **Qwen3-Coder-30B-A3B remains relatively stable across precision levels.** The model has 30.5B total parameters and 3.3B active parameters per token. The final two rows report the range across precisions for one-shot accuracy and accuracy after 50 verified attempts; brackets give paired 95% bootstrap intervals for the latter.

Precision	Weights (GB)	MBPP+		HumanEval+		LiveCodeBench		BigCodeBench	
		pass@1	exec@50	pass@1	exec@50	pass@1	exec@50	pass@1	exec@50
bf16	61.07	77.2%	79.3%	88.5%	90.9%	32.7%	43.4%	57.0%	63.3%
FP8	31.18	77.1%	79.4%	88.2%	91.5%	31.6%	45.1%	57.8%	63.5%
GPTQ 8-bit	32.00	77.4%	79.1%	88.2%	90.9%	32.4%	45.1%	54.7%	62.6%
AWQ 4-bit	16.81	77.6%	79.6%	88.7%	90.2%	30.9%	41.1%	53.6%	64.1%
GPTQ 4-bit	16.93	76.8%	78.8%	87.8%	90.2%	31.5%	44.0%	52.6%	62.1%
pass@1 range		0.8		0.9		1.8		5.2	
exec@50 range [95% CI]		0.8 [−0.5, +2.1]		1.2 [+0.0, +3.0]		4.0 [+0.6, +8.0]		2.1 [−1.2, +5.3]	

Quantizing a larger model provides another option when memory permits. On MBPP+, for example, Coder-32B AWQ4 and Coder-7B AWQ4 both reach 79.9% after 50 verified attempts, while their checkpoints occupy 19.33 GB and 5.57 GB, respectively. On HumanEval+ and LiveCodeBench, however, the larger checkpoint retains an accuracy advantage. The useful deployment choice therefore depends on whether additional model scale mainly improves reliability or actually expands the set of tasks the model can solve.

B.5 PRECISION REPLICATION IN A SPARSE MIXTURE-OF-EXPERTS MODEL

We also test whether the precision results carry over to a sparse mixture-of-experts model. Qwen3-Coder-30B-A3B has 30.5B total parameters but activates only 3.3B parameters per token, and is available in precisions ranging from bf16 to 4-bit. This provides a useful contrast with the dense Qwen2.5-Coder models.

Table 11 shows that the same pattern largely extends to the sparse MoE model. Despite a more than threefold difference in weight memory between bf16 and 4-bit checkpoints, accuracy changes relatively little on most benchmarks. After 50 verified attempts, the full precision range is only 0.8 percentage points on MBPP+, 1.2 on HumanEval+, and 2.1 on BigCodeBench. LiveCodeBench is less stable, with a 4.0-point range and a paired interval that excludes zero. BigCodeBench shows the opposite pattern: its 5.2-point one-shot spread shrinks to 2.1 points after 50 attempts. Thus, retry often reduces sensitivity to precision, but not uniformly across workloads.

The sparse architecture also changes the relationship between memory and serving cost. Across the four Qwen3-Coder workloads, throughput remains between 18.6k and 19.5k tokens/s. On LiveCodeBench, the MoE model reaches 19,520 tokens/s, compared with 7,852 tokens/s for dense Coder-32B under the matched protocol, while using $2.83\times$ less energy per token. The expert weights still occupy memory, but only a small fraction of the model is active for each token.

We exclude DeepSeek-Coder-6.7B from the quantitative precision comparison because its MBPP+ generations contain 2,006 structurally malformed, concatenated solutions. This is a generation-format failure rather than an effect of numerical precision.

B.6 BIGCODEBENCH VERIFICATION LIMITS

BigCodeBench makes the gap between finding a correct solution and identifying it especially clear. Table 12 compares public-test selection, candidate coverage, and CodeT across the full Qwen2.5-Coder precision sweep.

Table 12 shows that, for the native bf16 models, the gap between public-test selection and the best candidate available after 50 attempts shrinks with model size, from 10.9 percentage points at 3B to 5.8 points at 32B. At the same time, the fraction of tasks with at least one correct candidate changes very little, remaining within a 1.5-point range across the model-size ladder. Larger models therefore

Table 12: **Verification, rather than candidate generation, remains a major bottleneck on Big-CodeBench.**

Model	Precision	exec@50	oracle@50	Public-test gap	CodeT@50	CodeT gap	Tasks with usable tests
Coder-3B	bf16	64.7%	75.6%	10.9	49.7%	15.0	99.9%
	GPTQ 8-bit	64.1%	74.5%	10.3	48.6%	15.5	100.0%
	AWQ 4-bit	64.0%	75.1%	11.1	47.7%	16.3	99.8%
	GPTQ 4-bit	64.4%	75.5%	11.1	47.6%	16.8	100.0%
Coder-7B	bf16	67.8%	76.9%	9.1	56.2%	11.6	99.9%
	GPTQ 8-bit	67.6%	76.7%	9.1	55.5%	12.1	100.0%
	AWQ 4-bit	67.9%	76.4%	8.5	53.5%	14.4	100.0%
	GPTQ 4-bit	68.0%	77.0%	9.0	55.4%	12.6	100.0%
Coder-14B	bf16	69.9%	77.0%	7.1	60.8%	9.1	100.0%
Coder-32B	bf16	69.7%	75.5%	5.8	62.7%	7.0	100.0%
	GPTQ 8-bit	70.4%	75.0%	4.6	62.7%	7.7	100.0%
	AWQ 4-bit	69.8%	75.0%	5.2	63.0%	6.8	100.0%
	GPTQ 4-bit	69.7%	75.6%	5.9	61.2%	8.5	100.0%

Table 13: **Verified retry across several compact deployment strategies.** Each row compares a compact checkpoint after 50 verified attempts with the one-shot reference shown in the third column. Accuracy is retried/reference, and Δ is the paired accuracy difference where confidence intervals are available. Granite-Code uses Granite-Code-34B as its within-family reference.

Strategy	Retried checkpoint	One-shot reference	Selection	Retried weights		Weight saving	MBPP+		HumanEval+		LiveCodeBench			
				(GB)			Acc.	Δ	Acc.	Δ	Acc.	Δ		
Prune + distill	Minitron-8B	Coder-32B bf16	exec@50	16.83	3.9×	71.7/77.9%	-6.2	[-10.5, -2.0]	75.0/85.1%	-10.0	[-15.9, -4.4]	26.3/27.1%	-1.1	[-5.1, +3.0]
Native bf16	Coder-7B	Coder-32B bf16	exec@50	15.23	4.3×	78.6/77.9%	+0.7	[-2.8, +4.2]	90.9/85.1%	+5.8	[-1.8, +10.0]	33.7/27.1%	+6.3	[+1.8, +11.1]
Quantization	Coder-7B AWQ4	Coder-32B bf16	exec@50	5.57	11.8×	79.9/77.9%	+2.0	[-1.7, +5.7]	87.8/85.1%	+2.8	[-1.8, +7.3]	31.4/27.1%	+4.0	[-0.6, +8.8]
Reasoning distill	R1-Distill-1.5B	Coder-32B bf16	exec@50	3.55	18.5×	71.7/77.9%	-6.2	[-10.7, -1.7]	79.9/85.1%	-5.2	[-11.4, +0.9]	30.9/27.1%	+3.5	[-1.1, +8.0]
Quantization	Coder-3B GPTQ8	Coder-32B bf16	exec@50	3.47	18.9×	78.3/77.9%	+0.4	[-3.2, +3.9]	88.4/85.1%	+3.4	[-0.9, +7.7]	28.6/27.1%	+1.2	[-3.6, +5.9]
External family	Granite-Code-3B	Granite-Code-34B	exec@50	—	9.7×	66.7/55.6%	+11.1		72.0/53.0%	+19.0		17.7/9.2%	+8.5	

make the available correct candidates easier to identify rather than greatly expanding the set of tasks solved within 50 attempts.

The same table also shows that model-generated tests leave an even larger gap for many checkpoints. Test-generation failures are rare, so the deeper $K = 500$ analysis in Section C.2 points to the main limitation. On many tasks, correct and incorrect programs produce the same outcomes on the generated tests, leaving too little information for the selector to tell them apart.

B.7 ALTERNATIVE COMPACT DEPLOYMENT STRATEGIES

A practical deployment need not use only a smaller or quantized Qwen model. It may instead use a distilled, pruned, reasoning-distilled, or entirely different model family. We therefore compare several compact checkpoints after 50 verified attempts. Because these models differ in architecture, training data, and training objective, the comparison is descriptive rather than a controlled comparison of compression methods.

Figure 5 shows the paired accuracy difference between each retried checkpoint and its one-shot reference. Intervals that lie entirely above or below zero indicate a detectable advantage or deficit, respectively; intervals that cross zero are consistent with the reference at the 95% level. Granite-Code uses its own within-family 34B reference and is shown separately.

Figure 5 and Table 13 show that the outcome depends strongly on the compact checkpoint. Native Coder-7B exceeds the Coder-32B one-shot reference on HumanEval+ and LiveCodeBench with confidence intervals above zero. Coder-7B AWQ4 and Coder-3B GPTQ8 are statistically consistent

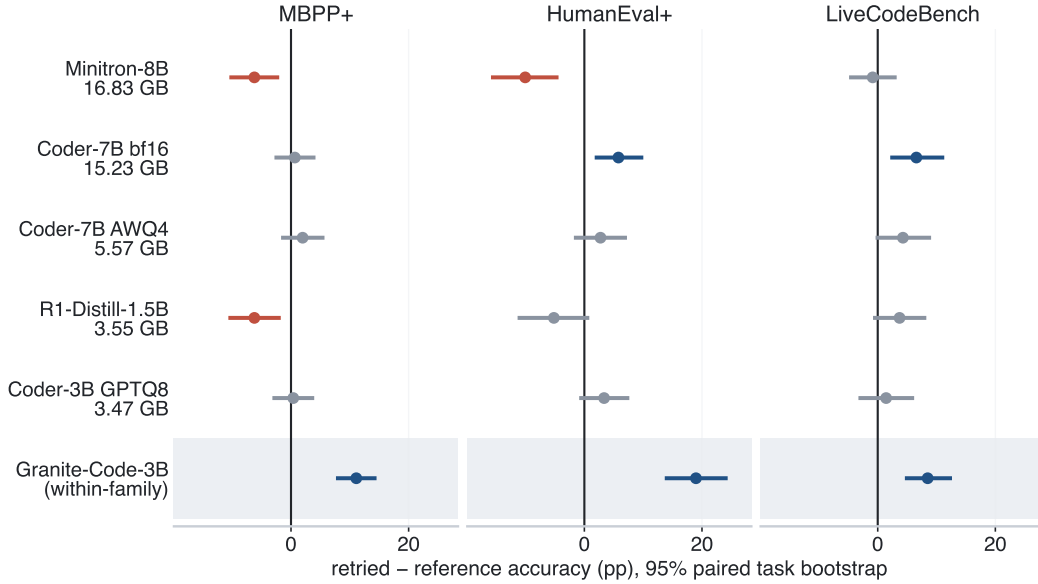


Figure 5: **Verified retry has different effects across compact checkpoints.** Points show retrieved accuracy minus one-shot reference accuracy, with 95% paired task-bootstrap intervals. Each comparison uses its common task set, so the plotted differences need not exactly match subtraction of the rounded full-population values in Table 13. Blue intervals are above zero, red intervals are below zero, and gray intervals cross zero. Granite-Code uses Granite-Code-34B as its reference rather than Qwen2.5-Coder-32B, so its effect sizes are not directly comparable with the other rows.

with the 32B reference on all three benchmarks. Minitron and R1-Distill, in contrast, retain a clear deficit on at least one benchmark. Granite-Code provides a separate within-family example: Granite-Code-3B with 50 verified attempts exceeds the Granite-Code-34B one-shot reference on all three benchmarks while using $9.7\times$ fewer weight bytes.

The ordering can also change when the verifier changes. Minitron, for example, is weaker under public-test selection on MBPP+ and HumanEval+ but produces some of the largest improvements from CodeT in our experiments. A model’s ability to generate good candidate solutions and its ability to generate useful verification evidence are therefore separate properties.

B.8 PRACTICAL RETRY BUDGETS

We use $K = 50$ to study how much capability remains reachable after repeated sampling, but such a large retry budget is not necessarily useful in practice. A more relevant question is how quickly the accuracy gains arrive. On MBPP+, Table 14 compares the fraction of the eventual $K = 50$ gain obtained at smaller values of K with the corresponding increase in wall-clock time.

Table 14 shows that the useful gains arrive well before $K = 50$. For Coder-7B, four attempts recover 83% of the eventual improvement at only $1.35\times$ the one-shot wall time, while eight attempts recover 93% at $1.73\times$ the wall time. The same broad pattern holds for 3B and 32B. Beyond about eight attempts, additional accuracy becomes small relative to the increase in serving time. We therefore use large retry budgets mainly to measure reachable capability, while the deployment comparisons focus on smaller values of K .

B.9 PUBLIC-TEST FALLBACK BEHAVIOR

The public-test selector chooses among candidates that pass all visible tests. If none passes, it returns the candidate with the highest mean token log-probability. Thus, the fallback is used only when the visible tests provide no passing candidate.

Table 14: **Most of the benefit of retry arrives at moderate budgets.** For each model, “Gain” is the fraction of its improvement from $K = 1$ to $K = 50$ that has already been obtained at the displayed K . Wall time is reported relative to the same model at $K = 1$.

K	Coder-3B		Coder-7B		Coder-32B	
	Gain (%)	Wall-time multiplier	Gain (%)	Wall-time multiplier	Gain (%)	Wall-time multiplier
1	0	1.00	0	1.00	0	1.00
2	40	1.45	56	1.14	33	1.12
4	63	1.44	83	1.35	55	1.29
8	80	1.95	93	1.73	80	1.72
16	91	4.78	99	3.13	90	2.68
32	97	9.13	99	5.80	100	4.80
50	100	13.55	100	8.91	100	7.28

Table 15: **Retry sharply reduces how often the selector must fall back.** The left block varies the retry budget for Coder-7B; values below $K = 50$ are averaged over 120 candidate subsets and $K = 50$ is exact. The right block compares native model sizes at $K = 50$.

Benchmark	Coder-7B across retry budget			Model size at $K = 50$			
	$K = 1$	$K = 8$	$K = 50$	3B	7B	14B	32B
MBPP+	18.2%	6.0%	4.2%	5.0%	4.2%	4.0%	4.2%
HumanEval+	12.4%	5.8%	4.3%	3.7%	4.3%	3.7%	6.1%
LiveCodeBench	77.8%	55.4%	38.9%	48.6%	38.9%	30.9%	34.3%
BigCodeBench	40.1%	20.8%	13.9%	14.1%	13.9%	14.5%	15.1%

Table 15 shows that additional attempts substantially reduce fallback. For Coder-7B on LiveCodeBench, for example, the fallback rate falls from 77.8% with one attempt to 38.9% with 50. By contrast, at $K = 50$ model size has relatively little effect on fallback for MBPP+, HumanEval+, and BigCodeBench. On LiveCodeBench, public-test selection already recovers most of the correct candidates produced by Coder-7B, so the remaining advantage of larger models comes mainly from generating solutions that the 7B model does not produce.

B.10 SERIAL REASONING VERSUS PARALLEL RETRY

Additional test-time compute can be spent in two different ways: generating several independent attempts or producing a longer reasoning trace before returning one answer. Qwen3-30B-A3B provides Instruct and Thinking variants with the same architecture and weight footprint, allowing us to compare these two strategies without changing model size. This experiment uses a 16,384-token generation limit and is therefore reported separately from the shorter-generation systems sweeps in the main text.

Table 16 shows that neither strategy is consistently better. On MBPP+, eight non-reasoning attempts come within 0.2 percentage points of one reasoning attempt while using about $2.3\times$ less wall time and energy. On HumanEval+, one reasoning attempt is 1.3 points more accurate than eight non-reasoning attempts, while also running $1.64\times$ faster and using less energy. LiveCodeBench falls between these cases: eight non-reasoning attempts are 1.3 points more accurate, with similar wall time and energy.

Deeper sampling also affects the two modes differently. At $K = 50$, the Thinking model improves accuracy by about 1.3, 4.3, and 12.0 percentage points over the Instruct model on MBPP+, HumanEval+, and LiveCodeBench, respectively. On LiveCodeBench, the gap between selected accuracy and the fraction of tasks with a correct candidate shrinks from 12.5 to 3.4 percentage points, suggesting that reasoning changes not only which solutions are generated but also how effectively the visible tests identify them. These gains are expensive, however: at $K = 50$, Thinking uses about $6.5\times$ the wall time and $6.7\times$ the energy of the non-reasoning model.

Table 16: **Longer reasoning and parallel retry have different advantages across benchmarks.** The Instruct and Thinking variants use the same Qwen3-30B-A3B architecture and weight footprint. Accuracy uses public-test selection on the full benchmark sets; wall time and energy come from matched 40-prompt B200 workloads and should be compared only within a benchmark. Bold rows highlight eight non-reasoning attempts versus one reasoning attempt.

Mode	K	MBPP+			HumanEval+			LiveCodeBench		
		Acc.	Wall (s)	J/task	Acc.	Wall (s)	J/task	Acc.	Wall (s)	J/task
Instruct	1	77.9%	16.5	243	87.9%	52.8	700	43.8%	114.5	1,707
	8	79.3%	53.3	866	89.9%	137.2	2,301	53.0%	199.4	4,317
	50	79.6%	130.2	2,454	90.2%	257.5	5,099	52.6%	467.6	11,156
Thinking	1	79.5%	124.2	2,008	91.2%	83.8	1,389	51.7%	186.0	3,899
	8	80.9%	218.3	4,899	92.9%	193.0	3,972	62.2%	578.2	13,670
	50	81.0%	748.1	17,948	94.5%	685.2	15,684	64.6%	3,020.2	74,190

Table 17: **Additional model sizes on MBPP+ at $K = 50$.** All four accuracy measures in each row are computed from the same candidate pool. The 1.5B and 14B checkpoints belong to the native Qwen2.5-Coder scale ladder. Qwen2.5-72B is a separate general model and is included only as an additional accuracy comparison.

Model	Type	pass@1	CodeT@50	exec@50	oracle@50
Coder-1.5B	native Coder	57.3%	68.3%	75.4%	84.7%
Coder-14B	native Coder	73.2%	79.4%	80.4%	86.0%
Qwen2.5-72B	general model	78.2%	78.7%	80.8%	84.4%

B.11 ADDITIONAL SCALE CHECKS

Our main controlled comparisons focus on the 3B, 7B, and 32B Qwen2.5-Coder models. Table 17 adds the native 1.5B and 14B checkpoints, together with a separate 72B Qwen2.5 model, to show how the intermediate and larger scales behave on MBPP+.

Table 17 also illustrates why model size alone does not determine the benefit of repeated sampling. The 72B model has the highest one-shot accuracy, but its oracle@50 is below that of the 14B Coder model. We therefore treat the 72B result as an additional accuracy check rather than as part of the controlled scaling comparison.

B.12 ENERGY SCALING UNDER PARALLEL RETRY

Generating K candidates does not require K times the energy of generating one. Parallel decoding can make better use of the GPU, so the additional energy grows more slowly than the number of attempts. Figure 6 shows this effect directly.

Across the native model sizes, increasing the retry budget from one to 50 attempts raises measured energy by 6.9–18.6 $\times$, far less than the 50 $\times$ increase that would result from running each attempt independently. Parallelism therefore provides a substantial energy discount, but deeper retry is still expensive: beyond moderate values of K , energy continues to grow while the accuracy gains become progressively smaller.

The energy measurements include idle board power. We therefore compare energy within each benchmark rather than across benchmarks, since the workloads use different numbers of prompts and different generation limits. One LiveCodeBench Coder-14B run uses slightly more energy at $K = 1$ than at $K = 2$, most likely because of fixed startup or runtime overhead. We retain the measurement but exclude that configuration from summaries that require a one-shot energy baseline.

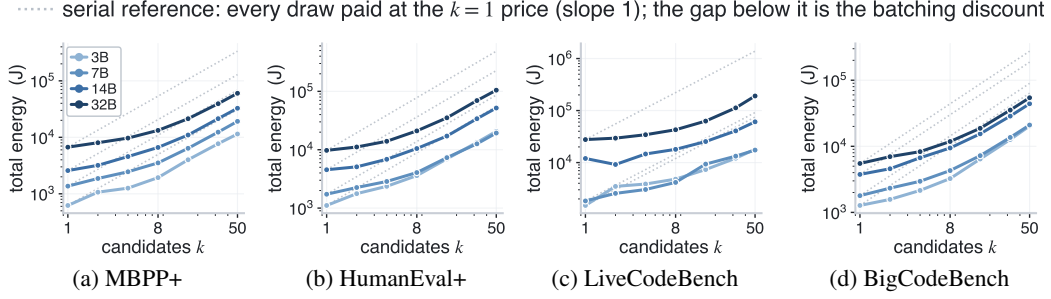


Figure 6: **Parallel decoding reduces the energy cost of additional attempts.** Solid curves show measured B200 energy for the native Qwen2.5-Coder models. Dotted lines show the energy that would be used if every attempt cost as much as a single attempt. Absolute energy should not be compared across panels because the benchmarks use different workloads and generation limits.

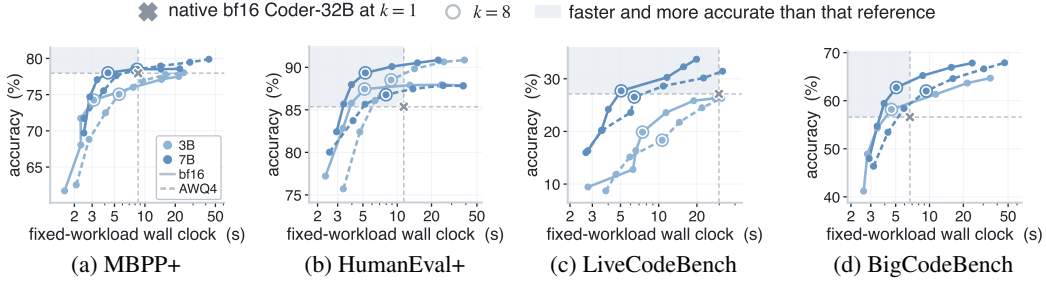


Figure 7: **Quantization changes serving time as well as memory use.** Each quantized checkpoint is compared with the bf16 model of the same size.

Quantization introduces a separate systems tradeoff. It substantially reduces the memory required to store a model, but the low-bit kernels are not necessarily faster when many sequences are decoded in parallel. Figure 7 and Table 18 show this effect for Coder-7B.

At $K = 1$, Coder-7B AWQ4 is roughly as fast as bf16, with wall-clock ratios between $0.92\times$ and $1.15\times$. At larger retry budgets, however, the bf16 model is consistently faster: by $K = 50$, the AWQ4 speedups fall to $0.51\text{--}0.62\times$. Quantization therefore provides a clear memory benefit without guaranteeing a runtime benefit, especially under wide parallel decoding.

This distinction also helps explain why memory use and serving cost should be reported separately. Quantization reduces the number of bits stored per parameter, while sparse models can reduce the amount of computation performed per token without proportionally reducing their stored weights. The resulting effects on memory, throughput, and energy are related but not interchangeable.

C WHEN THE MODEL MUST WRITE ITS OWN VERIFIER

Public tests provide a fixed external signal for selecting among candidate solutions. When such tests are unavailable, the model must generate its own tests, creating two additional ways verification can fail. The generated tests may not distinguish correct from incorrect programs, or the selection rule may fail to use the distinctions that are present. We study these failures separately from the more basic case in which no correct candidate is generated.

C.1 AGGREGATION WITH MODEL-GENERATED TESTS

CodeT uses patterns of agreement between candidates and generated tests rather than simply choosing the candidate that passes the most tests. To measure the value of this aggregation step, Table 19

Table 18: **AWQ4 does not consistently speed up wide-batch decoding.** Entries are Coder-7B wall-clock speedups $T_{\text{bf16}}/T_{\text{AWQ4}}$ on B200, so values above $1 \times$ favor AWQ4.

Benchmark	$K = 1$	$K = 8$	$K = 50$
MBPP+	$1.00 \times$	$0.52 \times$	$0.51 \times$
HumanEval+	$1.15 \times$	$0.66 \times$	$0.60 \times$
LiveCodeBench	$1.04 \times$	$0.79 \times$	$0.62 \times$
BigCodeBench	$0.92 \times$	$0.54 \times$	$0.52 \times$

Table 19: **CodeT aggregation helps most for smaller models on MBPP+.** Values are the accuracy difference between CodeT and simple test-pass counting at $K = 50$, with paired 95% bootstrap intervals.

Model	Δ accuracy (pp)	95% CI (pp)
Coder-1.5B	+6.08	[2.65, 9.79]
Coder-3B	+3.70	[1.06, 6.61]
Coder-7B	+3.44	[1.06, 5.82]
Coder-14B	+1.32	[-0.79, 3.44]
Coder-32B	+0.79	[-1.32, 2.91]

compares CodeT with a simple pass-count rule while holding the candidate set and generated tests fixed.

Table 19 shows that CodeT provides a clear benefit for the smaller models on MBPP+. Relative to simple pass counting, it improves accuracy by 6.08 percentage points at 1.5B, 3.70 points at 3B, and 3.44 points at 7B, with all three confidence intervals above zero. The difference becomes small at 14B and 32B. This pattern is not universal: on HumanEval+, all of the corresponding intervals include zero, and on LiveCodeBench some point estimates favor simple counting. CodeT can therefore improve how generated tests are used, but it does not remove the more fundamental limitations of self-verification.

C.2 WHERE MODEL-GENERATED VERIFICATION FAILS

A failed selection can have three different causes. First, the selection rule may fail to use information already present in the test outcomes. Second, the generated tests themselves may fail to distinguish correct from incorrect programs. Third, the candidate set may contain no correct solution at all. Figure 8 separates these effects using Qwen2.5-Coder-7B with up to 500 candidates per task.

The first gap comes from *selection*. At $K = 500$, CodeT reaches 77.5%, 84.1%, 26.3%, and 54.7% on MBPP+, HumanEval+, LiveCodeBench, and BigCodeBench, while the best possible selection based on the observed test-outcome patterns reaches 84.2%, 88.5%, 34.0%, and 61.7%. The corresponding gaps of 6.7, 4.3, 7.7, and 7.0 percentage points measure how much information is present in the generated tests but not fully extracted by CodeT.

The second gap comes from the *tests themselves*. Even with the best possible use of the observed test outcomes, accuracy remains 6.5, 5.4, 8.9, and 18.6 percentage points below the fraction of tasks that contain a correct candidate. BigCodeBench is the clearest example: correct and incorrect programs often behave identically on the generated tests, so no selection rule using only those tests can reliably tell them apart. Better aggregation cannot recover information that the tests never reveal.

The final limitation is *candidate generation*. On LiveCodeBench, even after 500 attempts, 57% of tasks still contain no correct candidate. For those tasks, neither better tests nor a better selector can help. These three failure modes suggest different remedies: improve the selection rule when the available evidence is being used poorly, improve the generated tests when they fail to separate candidates, and improve the generator when correct solutions never appear.

C.3 EFFECT OF TEST-WRITER SCALE

A natural question is whether the generated tests are weak simply because the test-writing model is too small. We test this at $K = 500$ while holding the candidate programs fixed. Replacing the 7B test

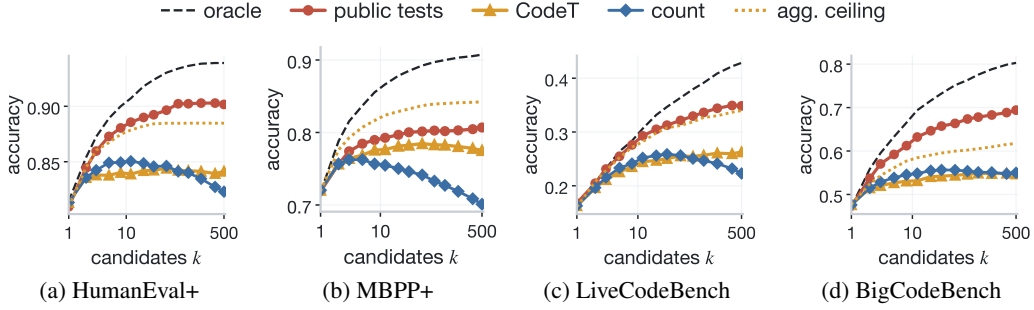


Figure 8: **Deep retry separates failures of selection, generated tests, and candidate generation.** Curves use Qwen2.5-Coder-7B candidate pools through $K = 500$. Solid curves show public-test selection, CodeT, and simple test-pass counting. The remaining curves show the best accuracy possible from the generated-test outcome patterns and the fraction of tasks with at least one correct candidate. BigCodeBench has the largest gap between these two upper bounds, showing that its generated tests often fail to distinguish correct from incorrect programs.

writer with a 32B model changes CodeT accuracy by only 0.5 percentage points on MBPP+ and 1.2 points on HumanEval+. The corresponding upper bound obtained from the observed test outcomes changes by only 1.0 and 0.3 points. A larger test writer therefore does little to close the verification gap in these experiments. The main problem appears to be that the generated tests omit behaviors needed to distinguish some incorrect programs from correct ones.

We omit LiveCodeBench from this comparison because the stored $K = 500$ data do not retain the candidate programs. Regenerating them would change the candidate set and would no longer give a paired comparison.

C.4 USABILITY OF MODEL-GENERATED TESTS

Before asking whether generated tests are informative, they must first be generated in a form that can be parsed and executed. This is rarely a problem for the native Qwen models on MBPP+ and HumanEval+, but it becomes important for some compact models and on LiveCodeBench. Table 20 reports the fraction of tasks with usable generated tests and the average number of tests produced.

Table 20 shows that native and quantized Qwen models almost always produce usable tests on MBPP+ and HumanEval+. The differences become much larger across model families and on LiveCodeBench. For example, R1-Distill-1.5B produces usable tests for only 75% of MBPP+ tasks and 69% of HumanEval+ tasks, and none of its LiveCodeBench test generations are usable. Minitron-8B is reliable on the EvalPlus benchmarks but falls to 61% usability on LiveCodeBench. These failures occur before we can even ask whether the tests are good enough to distinguish correct programs from incorrect ones.

The controlled Qwen3.6/Bonsai LiveCodeBench experiment uses the compact line-based format described in Section B.1. Usable tests are produced for 97.7%, 51.4%, and 75.4% of tasks by Q1_0, AWQ4, and bf16, respectively. We report these differences explicitly because generating a usable test suite is itself part of the self-verification problem.

D MEASUREMENT CONSTRUCTION AND VALIDATION

The results in this paper combine generated candidates, benchmark execution, model-generated tests, checkpoint files, and systems measurements. Because these pieces are produced separately, the comparisons depend on matching the right candidates, tasks, and measurements. This section describes the task populations and memory accounting used throughout the paper.

Table 20: **The ability to produce usable generated tests varies substantially across model families.** “Usable” is the fraction of tasks in the generated-test pool for which the tests can be parsed and executed. “Tests” is the mean number of generated tests.

Checkpoint	MBPP+		HumanEval+		LiveCodeBench	
	Usable	Tests	Usable	Tests	Usable	Tests
<i>Native Qwen2.5-Coder</i>						
Coder-1.5B	0.99	10.8	0.99	11.2	0.95	8.4
Coder-3B	1.00	11.5	1.00	11.7	0.98	9.8
Coder-7B	1.00	11.8	1.00	11.8	0.95	9.5
Coder-14B	1.00	12.0	1.00	11.9	0.89	8.9
Coder-32B	1.00	12.0	1.00	12.0	0.84	8.4
<i>Quantized Qwen2.5-Coder</i>						
Coder-3B AWQ4	1.00	11.4	1.00	11.5	0.97	9.7
Coder-3B GPTQ4	1.00	11.3	1.00	11.7	0.99	9.9
Coder-3B GPTQ8	1.00	11.4	1.00	11.7	0.96	9.6
Coder-7B AWQ4	1.00	11.6	1.00	11.8	0.98	9.8
Coder-7B GPTQ4	1.00	11.6	1.00	11.7	0.97	9.6
Coder-7B GPTQ8	1.00	11.7	1.00	11.8	0.97	9.7
<i>Other model families</i>						
Granite-Code-3B	0.97	10.0	0.98	10.4	0.84	5.4
Minitron-8B	1.00	11.3	1.00	11.5	0.61	6.0
R1-Distill-1.5B	0.75	8.0	0.69	7.3	0.00	0.0

D.1 TASK POPULATIONS, CANDIDATE POOLS, AND MEMORY ACCOUNTING

The main accuracy experiments use 50 candidates per task, while the deeper verification study uses separate Qwen2.5-Coder-7B pools with up to 500 candidates per task. Candidate correctness is always evaluated with tests kept separate from the evidence available to the selector. EvalPlus uses the full configured HumanEval+ and MBPP+ task sets, while LiveCodeBench uses the 175 problems from the stated `release_v5` date range.

BigCodeBench uses the filtered population defined in Section 4.1. The separate Qwen3.6/Bonsai study begins from a 380-task subset and retains 339 tasks after the same reference-solution check. The $K = 500$ verification study and the MoE experiments use their own fixed task populations.

Checkpoint memory is measured directly from the model files used in each experiment. For example, the native Qwen2.5-Coder-32B checkpoint occupies 65.53 GB. We report the footprint of the checkpoint actually used rather than inferring a hypothetical lower-precision footprint. The additional Qwen2.5-72B result is reported only as an accuracy comparison because we do not have a corresponding measured checkpoint footprint.

Model-memory calculation. Let W_q denote checkpoint weight memory, b_q the number of KV-cache bytes per token, P_x the prompt length, and $C_{x,i}$ the completion length of candidate i . For K

Table 21: **Checkpoint weights, KV cache, and accuracy across retry budgets.** W is checkpoint weight memory, V is the KV cache from Equation 3, and $A = W + V$ is their sum. The table contains the configurations used for the main accuracy–memory curves in Figure 1. Memory values exclude runtime overhead; measured process-memory results are reported separately in Table 22.

Benchmark	Checkpoint	W (GB)	KV cache V (GB)				Weights + KV A (GB)				Accuracy (%)			
			$K=1$	$K=4$	$K=8$	$K=50$	$K=1$	$K=4$	$K=8$	$K=50$	$K=1$	$K=4$	$K=8$	$K=50$
MBPP+	Coder-3B AWQ4	2.69	0.01	0.04	0.07	0.45	2.70	2.73	2.76	3.14	62.5%	72.5%	75.0%	78.0%
	Coder-7B AWQ4	5.57	0.02	0.07	0.13	0.78	5.59	5.64	5.70	6.35	71.7%	77.6%	78.6%	79.9%
	Coder-7B bf16	15.23	0.02	0.07	0.13	0.78	15.25	15.30	15.36	16.01	69.6%	77.0%	78.0%	78.6%
	Coder-32B bf16	65.53	0.09	0.29	0.56	3.41	65.62	65.82	66.09	68.94	77.9%	80.8%	81.8%	82.9%
HumanEval+	Coder-3B AWQ4	2.69	0.02	0.07	0.13	0.80	2.71	2.76	2.82	3.49	75.8%	86.1%	88.5%	90.9%
	Coder-7B AWQ4	5.57	0.02	0.07	0.13	0.75	5.59	5.64	5.70	6.32	80.0%	85.7%	86.7%	87.8%
	Coder-7B bf16	15.23	0.02	0.07	0.13	0.75	15.25	15.30	15.36	15.98	82.5%	87.8%	89.4%	90.9%
	Coder-32B bf16	65.53	0.16	0.49	0.94	5.61	65.69	66.02	66.47	71.14	85.3%	88.1%	89.0%	89.3%
LiveCodeBench	Coder-3B AWQ4	2.69	0.04	0.08	0.14	0.80	2.73	2.77	2.83	3.49	8.7%	15.2%	18.4%	26.3%
	Coder-7B AWQ4	5.57	0.05	0.09	0.15	0.80	5.62	5.66	5.72	6.37	16.1%	23.6%	26.6%	31.4%
	Coder-7B bf16	15.23	0.05	0.09	0.15	0.80	15.28	15.32	15.38	16.03	16.4%	24.2%	27.7%	33.7%
	Coder-32B bf16	65.53	0.33	0.89	1.63	9.46	65.86	66.42	67.16	74.99	27.1%	33.2%	35.1%	38.3%
BigCodeBench	Coder-3B AWQ4	2.69	0.03	0.07	0.13	0.73	2.72	2.76	2.82	3.42	39.4%	53.1%	57.5%	64.0%
	Coder-7B AWQ4	5.57	0.03	0.08	0.15	0.82	5.60	5.65	5.72	6.39	46.4%	58.4%	62.0%	67.9%
	Coder-7B bf16	15.23	0.03	0.08	0.15	0.82	15.26	15.31	15.38	16.05	48.0%	59.4%	62.7%	67.8%
	Coder-32B bf16	65.53	0.14	0.30	0.52	2.79	65.67	65.83	66.05	68.32	56.6%	64.9%	67.1%	69.7%

candidates from the same prompt, we count the shared prompt once and each completion separately:

$$V_q(x, K) = b_q \left(P_x + \sum_{i=1}^K C_{x,i} \right) = b_q (P_x + K \bar{C}_x). \quad (3)$$

The resulting model memory is

$$A_q(x, K) = W_q + V_q(x, K).$$

This quantity includes the checkpoint weights and KV cache, but not activations, driver state, allocator overhead, or serving-engine workspace. Measured process memory is therefore reported separately.

Table 21 shows how the KV cache changes the memory footprint as the retry budget increases.

Table 21 shows why moderate retry changes memory much less than changing checkpoint size. On MBPP+, for example, Coder-7B AWQ4 at $K = 8$ uses 5.57 GB for its weights and only 0.13 GB for the KV cache, for a total of 5.70 GB. Coder-32B bf16 at $K = 1$ uses 65.53 GB of weights and 0.09 GB of KV cache. The additional memory needed for several attempts is therefore small compared with the difference in checkpoint size.

At much higher concurrency, KV memory becomes more important. For example, the 60-prompt MBPP+ workload for Coder-7B AWQ4 at $K = 50$ corresponds to 46.9 GB of KV state if all requests are summed. This is a logical cache requirement rather than a measured process peak: vLLM allocates and schedules KV memory internally. We therefore keep the weights-plus-KV calculation separate from the process-memory measurements reported next.

D.2 FROM MODEL MEMORY TO MEASURED PROCESS MEMORY

The weights-plus-KV calculation isolates the memory that changes directly with checkpoint choice and retry depth, but a running server also uses memory for runtime state, allocator overhead, and serving-engine workspace. We therefore measure peak process memory on the same B200/vLLM stack.

For each configuration, we gradually reduce `gpu_memory_utilization` until the run no longer succeeds and report the lowest successful setting. This gives a measured process-level check on the weights-plus-KV calculation; it is not intended to identify the best serving configuration.

Table 22 shows the same ordering as the weights-plus-KV calculation, although the savings are smaller once runtime overhead is included. Coder-7B bf16 at $K = 8$ peaks at 21.58 GB, compared

Table 22: **Measured process memory for representative B200/vLLM configurations.** For each configuration, we report the lowest tested `gpu_memory_utilization` setting that completed successfully and the corresponding peak process memory. The utilization setting controls vLLM’s cache allocation and is not itself a device-memory limit.

Configuration	Lowest successful utilization	Peak (GB)	Process-memory saving
Coder-7B AWQ4, $K = 8$	0.045	11.55	$6.32\times$
Coder-7B AWQ4, $K = 50$	0.046	11.73	$6.23\times$
Coder-7B bf16, $K = 8$	0.098	21.58	$3.38\times$
Coder-32B bf16, $K = 1$	0.370	73.02	$1.00\times$

with 73.02 GB for Coder-32B bf16 at $K = 1$, giving a $3.38\times$ reduction in measured process memory. The corresponding weights-plus-KV comparison is about $4.3\times$. Coder-7B AWQ4 at $K = 50$ peaks at 11.73 GB, or $6.23\times$ less than the 32B reference.

The small difference between the two AWQ4 measurements should not be interpreted as a precise effect of retry depth. Their measured peaks differ by only 0.18 GB, while adjacent settings in the sweep correspond to roughly 0.38 GB of process memory. We therefore use the process measurements to validate the overall scale of the memory savings and use the weights-plus-KV calculation to describe how memory changes with K .

The accuracy results were not regenerated at these reduced memory settings. They come from the standard candidate pools, generated with `gpu_memory_utilization=0.9`. The memory sweep is used only to measure the physical process footprint of configurations that successfully execute, not to produce a separate set of accuracy results.

D.3 RUNTIME AND ENERGY MEASUREMENT PROTOCOL

The main Qwen2.5-Coder systems experiments use vLLM on B200 GPUs (Kwon et al., 2023). At each retry budget, a fixed set of 40–60 prompts is run concurrently, and wall time is measured until the entire workload finishes. This reflects the deployment setting we care about: multiple candidate streams can run in parallel and use hardware that would otherwise be underutilized by single-stream decoding.

The Qwen3.6/Bonsai experiments and the dense Apple model-size comparisons use llama.cpp for every checkpoint within a comparison. We never form a speedup by comparing a llama.cpp run with a vLLM run. All Apple measurements use the same llama.cpp source revision, 4df29be4f4c3673f428170fda944a5b19f743bb8 (release b10454).

Within each systems experiment, prompts and generation limits are held fixed. Reported wall times are based on at least three repetitions. For the HumanEval+ recovery comparison, we also run both checkpoint orders, with a discarded warm-up followed by five measured repetitions per checkpoint. Completion-token counts vary by only 0.9–1.8% across these blocks, whereas wall time varies by 16.0–28.9%. We therefore report latency ratios at modest precision. Runtime is always measured directly for the checkpoint being served; we do not infer the speed of a quantized model from the corresponding native model.

D.4 SCOPE AND LIMITATIONS

All experiments are in code generation, where executable tests provide a particularly clear notion of correctness. The results therefore establish a memory–retry tradeoff for tasks with executable feedback; they do not imply that the same tradeoff will hold for open-ended generation or other settings where correctness cannot be checked directly.

The runtime and energy measurements use public-test selection. A fully end-to-end system based on model-generated tests would also pay the cost of generating and executing those tests, which is not included in the systems numbers reported here. Similarly, the B200 process-memory measurements are separate calibration runs rather than the runs used to generate the accuracy pools.

The systems results are also specific to the hardware and serving stack. For the one-bit Qwen3.6 comparison, the same $K = 4$ deployment is slower than bf16 on M3 Max and faster on M5 Pro. In the dense-model comparison, every measured recovery point at $K \leq 4$ is favorable in wall time and energy on both chips. At $K = 8$ on MBPP+, M3 Max is unfavorable, while the two M5 Pro wall-time measurements straddle break-even and both energy measurements remain unfavorable. At $K = 16$ on LiveCodeBench, both wall time and energy are unfavorable on both chips, although the M5 Pro ratios are closer to break-even. These observations should not be interpreted as a universal retry threshold; the break-even depends on the model, workload, hardware, and serving stack.

Apple energy is reported only when every expected batch has a power record, sampling covers at least half of each batch, and the measurement passes the same consistency checks used throughout the study. Some reported device results combine compatible disjoint shards; within each shard, the reference and retried configurations are measured on the same physical device.

Adaptive stopping could reduce the average number of attempts, but it would introduce sequential decision rounds and therefore represents a different serving strategy from the fixed parallel retry budgets studied here.

D.5 VALIDATION OF CANDIDATE AND VERIFIER DATA

Matching candidates to generated tests. A generated-test result is meaningful only if it is matched to the candidate programs on which those tests were actually executed. Matching task names or filenames is not sufficient: if two candidate generations differ, combining correctness labels from one with test outcomes from the other can produce invalid selector results. We therefore require the candidates, correctness labels, mean log-probabilities, and candidate-by-test outcomes to come from the same generation before including a CodeT result in a paired analysis.

Under this rule, the pooled CodeT improvement reported in Section 5 contains 58 verified configurations: 24 on MBPP+, 21 on HumanEval+, and 13 on BigCodeBench. We exclude 17 LiveCodeBench configurations from that pooled statistic because their generated-test experiments intentionally use independently generated candidate pools. Those experiments remain valid for comparisons within their own pools, but we do not pair them with a different generation.

Four additional identifiers correspond to duplicate generations with materially different correctness labels: DeepSeek-6.7B, DeepSeek-33B, and DeepSeek-1.3B on HumanEval+, and Magicoder on MBPP+. We exclude these from paired analyses. DeepSeek-6.7B and Magicoder also show unusually high rates of malformed outputs. These exclusions do not affect the controlled Qwen precision comparisons, the native accuracy-time experiments, the fallback analysis, the memory results, or the $K = 500$ Qwen study.

Invalid candidate pools. We never exclude a candidate pool simply because its score is low. A pool is removed only when an independent check identifies a systematic generation, extraction, or execution failure.

Generated-test failures. When a task produces no usable generated tests, CodeT falls back to the highest-confidence candidate rather than dropping the task. Test-generation failures therefore remain part of the reported accuracy. The native LiveCodeBench generated-test experiments use independently generated candidate pools, so comparisons with the separate public-test runs are descriptive rather than paired.

Extraction and execution checks. CodeT requires the full candidate-by-test outcome matrix; a stored count of passed tests is not enough. Before accepting a new model family, we check code extraction, code fences, tokenizer-specific decoding, parse rates, expected outputs, and preservation of line breaks. Program correctness is determined from the expected output rather than process exit status alone.

For Qwen3.6/Bonsai on BigCodeBench, each candidate runs with a 16-GiB memory limit. A pathological program can therefore fail without interrupting the rest of the evaluation. We also verify candidate identities and the fixed 339-task population before accepting the resulting verification measurements.

The native Qwen2.5-Coder LiveCodeBench generated-test experiments create their own candidate solutions. Their CodeT results can therefore be compared across checkpoints, but they are not paired

candidate-by-candidate with the separate public-test generation. A per-pool `PROVENANCE.json` file identifies the intended candidate-by-test matrix explicitly. The reported 3B and 32B LiveCodeBench CodeT accuracies are 18.3% and 32.0%.

The controlled Qwen3.6 LiveCodeBench experiment instead executes generated tests against the existing $K = 50$ candidate pools. Each checkpoint contains exactly 8,750 candidates over 175 tasks, with no missing candidate IDs, log-probability mismatches, or correctness-label mismatches. Differences in test usability therefore come from test generation and parsing rather than from mismatched candidate pools.

Finally, within each $K = 500$ experiment, every curve uses the same candidates, generated tests, and candidate-by-test outcomes. CodeT and the upper bound based on test-outcome patterns use independent Monte Carlo subsets, so their plotted difference includes sampling variation from both estimates. Independent 7B generations differ in one-shot accuracy by roughly 1.5–2.3 percentage points, which sets a practical scale below which cross-generation differences should not be overinterpreted.