

Action-Consequence Alignment for Reliable Planning and Self-Improving in Latent World Models

Jinping Wang^{1,2}, Zhiqiang Gao², Xiantong Zhen³, Ling Shao^{1,3}

¹University of the Chinese Academy of Sciences, ²International Frontier Interdisciplinary Research Institute (IFIRI), Wenzhou-Kean University, ³OPI Labs

Latent world models learn to predict observed transitions, yet low prediction error alone does not guarantee reliable planning. Inspired by self-tickling experiments in neuroscience showing that disrupting motor-sensory correspondence increases prediction mismatch, we examine whether learned world models preserve an analogous action-consequence correspondence. The results show nearby alternatives can receive lower prediction errors despite producing physical outcomes farther from the recorded target. With that future treated as a goal, this reveals a concrete prediction-planning mismatch: the model assigns a lower cost to an action that achieves the target less accurately. To mitigate this gap, we introduce Action-Consequence Alignment (ACA), a training objective that complements forward prediction by penalizing the prediction-error advantage of locally searched alternatives over factual actions without additional model components or environment interactions during training. The same principle can also guide additional data collection for self-improvement. We demonstrate that across diverse environments and evaluation settings, ACA improves planning performance and reduces real goal error, while ACA-guided data collection outperforms random local sampling. These results support action-consequence alignment as a practical principle for bridging predictive learning and reliable planning.

Project Page: <https://github.com/smithgun2005/ACA>

1 Introduction

World models [1] provide an internal predictive mechanism for agents to anticipate future states and plan towards the desired outcomes. Instead of reconstructing high-dimensional observations, recent latent world models aim to predict future states and learn compact representations directly in the latent space [2, 3, 4]. However, low prediction error on observed transitions does not by itself guarantee reliable comparisons between candidate actions and their consequences, as required for reliable planning. In many visual control environments, the next observation is highly predictable from visual inertia, repetitive movement patterns and correlations induced by the behavior policy. A model can still achieve low prediction error while responding weakly to its action inputs [5, 6, 7].

Recent end-to-end latent world models have introduced anti-collapse objectives [8, 9, 10, 11, 12] to learn stable predictive representations. However, preventing representation collapse does not ensure that a predictor captures the role of actions in producing future observations. Several recent approaches in latent action-conditioned world model recognize related failures. SMWM [10] and Delta-JEPA [11] introduce an inverse dynamic model to recover executed actions from the consecutive representations or their latent displacement. Other recent related approaches on different classes of world models also notice related problems and mainly introduce inductive biases or post-hoc verification mechanisms to inject action-consequence causality [7, 6, 13]. These concerns point to a mismatch between predictive training and planning objectives. Training fits

observed futures under recorded actions, whereas planning optimizes actions to make predicted futures match a desired goal. Accurate predictions on recorded transitions therefore do not by themselves ensure that the resulting planning costs favor actions with better physical outcomes. We refer to this mismatch between factual prediction fitting and reliable action selection as the prediction–planning gap. This observation raises a fundamental question: can the causal correspondence between an executed action and its observed consequence provide an intrinsic consistency principle for training that helps mitigate this gap?

We approach this question from the classical theory of forward models in neuroscience in which the sensorimotor control theory bears a strong similarity to planning in latent world model. An internal forward model predicts the sensory consequence of a motor command and update the model using the signal that discrepancies between the predicted and observed consequences provide [14, 15]. Self-tickling experiments show that: when the temporal or spatial relationship between a movement and its sensory consequence is perturbed, the resulting sensation becomes more surprising [16]. Inspired by this experimental logic, we examine a trained world model by keeping the current state and observed future fixed, varying the conditioning action, and comparing the resulting prediction errors. We find nearby alternatives that receive lower errors than the factual action, even though executing them from the same simulator state moves the physical outcome away from the recorded target. With the recorded future treated as a goal, the model thus favors an action that achieves the target less accurately.

These observations are consistent with the prediction–planning gap discussed above, suggesting that the actions favored by a learned predictor may not lead to better physical goal attainment. To mitigate this prediction–planning gap, we introduce Action–Consequence Alignment (ACA). For each observed transition, ACA uses a single action-gradient step to search for a nearby alternative. ACA then penalizes a positive minibatch-averaged prediction-error advantage of the searched alternatives over factual actions [17]. Combined with forward prediction, this objective provide direct supervision on how the predictor evaluates neighboring actions that may mislead planning, without additional model components or environment interaction during offline training.

We demonstrate across all environments with multiple training and evaluation settings, ACA consistently achieves better planning performance. Moreover, ACA offers an effective technique to guide additional data collection for self-improvement. Our main contributions can be concluded as:

- We identify a prediction–planning mismatch in latent world models. Inspired by self-tickling experiments, we show that nearby counterfactual actions can receive lower prediction errors than the factual action while producing physical outcomes farther from the observed target.
- We introduce Action–Consequence Alignment (ACA), a simple training principle that searches for locally misleading counterfactual actions and penalizes their minibatch-averaged prediction-error advantage over the factual action, without additional model components or environment interaction during offline training. ACA improves planning performance across all evaluated environments and multiple training and evaluation settings.
- We further extend ACA into a self-improving learning mechanism. ACA enables the model to use its own action–consequence inconsistencies to identify informative counterfactual actions for additional data collection, forming a self-improvement loop that yields better subsequent planning than random local sampling.

2 Problem Setting

Offline transitions. Following [10, 4], we consider an offline dataset $\mathcal{D} = \{(x_t, a_t, x_{t+1})\}$ of transitions, where $x_t, x_{t+1} \in \mathcal{X}$ are consecutive observations and $a_t \in \mathcal{A} \subseteq \mathbb{R}^{d_a}$ is the action executed between them. We do not require a behavior policy or a reward function. The goal is to learning a latent action-conditioned world model consisting of an encoder $f_\theta : \mathcal{X} \rightarrow \mathcal{Z}$ and a forward predictor $P_\phi : \mathcal{Z} \times \mathcal{A} \rightarrow \mathcal{Z}$, here $\mathcal{Z}$ denotes the latent state space.

Latent forward prediction. Given a transition (x_t, a_t, x_{t+1}) , we encode both observations using the same encoder f_θ and predict the next conditioned on an action a with the forward predictor P_ϕ :

$$z_t = f_\theta(x_t), \quad z_{t+1} = f_\theta(x_{t+1}), \quad \hat{z}_{t+1}(a) = P_\phi(z_t, a). \quad (1)$$

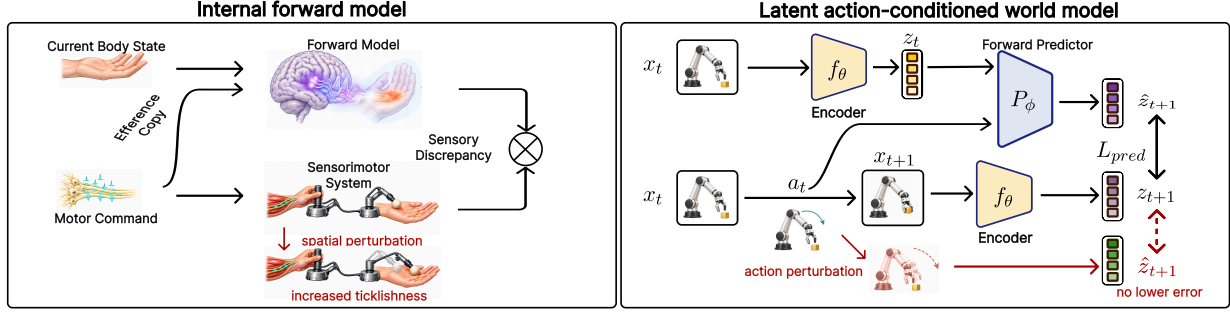


Figure 1: Structural correspondence between biological forward models (left) and latent action-conditioned world models (right). Both use an action signal to predict the resulting consequence and use the discrepancy between predicted and observed outcomes to update the internal model.

The prediction objective is to match the embedding of the next observation with the following forward loss:

$$\mathcal{L}_{\text{pred}}(\theta, \phi) = \mathbb{E}_{(x_t, a_t, x_{t+1}) \sim \mathcal{D}} \left[\|P_\phi(z_t, a_t) - z_{t+1}\|_2^2 \right]. \quad (2)$$

This training objective alone will admit a trivial solution when the encoder maps every observation to a constant embedding c ($f_\theta(x_t) = f_\theta(x_{t+1}) = c$), then the prediction loss $\mathcal{L}_{\text{pred}} = 0$. To prevent such collapse, we use an anti-collapse regularization term $\mathcal{L}_{\text{anti}}$ by adopting $\mathcal{L}_{\text{inv}}$ [10] and $\mathcal{L}_{\text{sig}}$ [4].

3 Action–Consequence Correspondence in Latent World Models

3.1 From Factual Prediction to Action Selection

In visual control environments, a latent world model tends to rely on visual inertia, the statistical correlations within the dataset to predict the future even if the model is formally conditioned on actions. Thus, the model may achieve a low prediction error while responding weakly to action variations [18, 19, 13, 7]. More generally, for end-to-end world models, forward training and planning evaluate the predictor differently. Forward training measures prediction error under the action recorded in each transition, while planning compares candidate actions through their predicted consequences. The factual prediction objective does not explicitly compare the error assigned to the recorded action with that assigned to an alternative action for the same observed future. This raises a natural question: how can an observed action–consequence pair serve as a reference for evaluating alternative actions? A useful starting point comes from neuroscience, where perturbations to the correspondence between movement and sensory feedback reveal how internal forward models evaluate expected and unexpected consequences.

3.2 Neuroscientific Inspiration: Action–Consequence Mismatch in Forward Models

The classical forward model theory shows that the brain uses an efference copy of a motor command to predict the sensory consequence. The discrepancy between the predicted sensory consequence and the actual feedback is used to correct state estimates, modulate sensory responses and update the internal model [15, 14, 20]. This structure resembles action-conditioned prediction in contemporary world models, which have also been widely discussed [1, 21, 22, 2].

This connection motivates us to investigate the relationship between action and forward prediction in latent world models. The self-tickling experiment offers a particularly revealing example. [16] examined the action-sensation matching using a two robot apparatus which the participants moved one robot with one hand while a second robot delivered tactile stimulation to the other hand. The experiments show that when introducing a temporal delay between the movement and its tactile consequence or perturbing the spatial correspondence between their trajectories, the ticklishness increases progressively.

This perturbation based experimental logic inspires a direct probe of learned action comparisons. We keep the current state and the observed future fixed, perturbing the conditioning action and examine how the prediction error changes. Executing the corresponding actions then allows us to relate these model preferences to physical outcomes.

As illustrated in Fig. 2, for a fixed transition, we visualize the action-loss landscape using the trained predictor and search an alternative counterfactual action with lower prediction error. The resulting action attains a substantially lower prediction error than the factual action. However, executing the two actions from the same initial state produces visibly different physical outcomes. We make the same observations in more thorough experiments across four environments as shown in Appendix B.

These results expose a mismatch between the actions favored by the learned predictor and those that achieve the desired physical outcome. When the recorded future is treated as the goal, a nearby alternative can receive a lower prediction error than the factual action yet lead to a larger physical goal error. Thus, minimizing the learned prediction error can favor actions that move the system farther from the goal, which is a specific manifestation of the prediction-planning gap. This lower error under a mismatched action runs counter to the intuition drawn from the self-tickling experiments, where disrupting action-consequence correspondence makes sensory feedback less predictable. The contrast motivates a training principle that encourages the predictor to preserve this correspondence when comparing nearby actions, beyond fitting factual transitions alone.

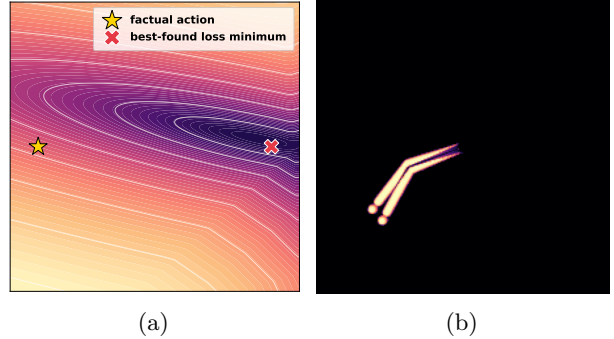


Figure 2: (a) Local action-loss landscape for a fixed Reacher transition. The landscape is a two-dimensional slice of the 10-dimensional five-step action space. (b) Absolute pixel-wise difference between the MuJoCo renders obtained by executing the two action sequences for five steps from the same recorded initial simulator state.

4 Action-Consequence Alignment

We introduce the computational principle, Action-Consequence Alignment (ACA), which is used as a training objective to mitigate the prediction-planning mismatch for reliable planning.

4.1 Factual-Counterfactual Prediction Comparison

Consider an observed transition $\tau = (x_t, a_t, x_{t+1}) \sim \mathcal{D}$. Keeping the current latent state z_t and observed future z_{t+1} fixed, we define the prediction error under a candidate action a as

$$E_\phi(a; \tau) = \|P_\phi(z_t, a) - z_{t+1}\|_2^2. \quad (3)$$

ACA aggregates the prediction-error differences between factual and searched actions within each minibatch and penalizes a positive average advantage of the searched alternatives. Equal errors are permitted, allowing different actions to explain the same outcome.

This comparison has an ideal-model reference. If the conditioning variables determine the next latent state, an ideal predictor assigns zero error to the factual action, which is consequently a minimizer. Appendix C relates expected prediction-error differences to differences between latent conditional means and clarifies the effect of conditional variability on individual transitions. ACA uses these factual-alternative comparisons as a local training surrogate motivated by the observed prediction-planning mismatch. The following subsection describes how we construct the alternative action efficiently.

4.2 Searching for Alternative Actions

Searching the full continuous action space for a challenging alternative can be computationally expensive. We therefore adapt the local perturbation framework of the traditional Sharpness-Aware Minimization [17, 23, 24]

to action-conditioned prediction. SAM searches for loss increasing parameter perturbations within a bounded neighborhood to improve the generalization ability of a model. We repurpose this framework for perturbing conditioning actions. Starting from the factual action, ACA searches for a nearby alternative that decreases the prediction error for the same observed future. The search identifies alternatives to which the current predictor assigns an error advantage, providing confusable candidates for the factual–alternative comparison.

Specifically, we define an action neighborhood centered at the factual action:

$$\mathcal{C}_\rho(a_t) = \{a \in \mathcal{A} : \|a - a_t\|_2 \leq \rho\}, \quad (4)$$

where $\rho > 0$ controls the perturbation radius. Within this neighborhood, the local search target is

$$a_t^* \in \arg \min_{a \in \mathcal{C}_\rho(a_t)} E_\phi(a; \tau). \quad (5)$$

Even within this neighborhood, accurately solving the inner problem can be difficult because the prediction error is potentially nonconvex with respect to the action. Repeating iterative optimization for every training transition would also introduce substantial computational overhead. Following the first-order inner approximation used in SAM, we linearize the objective around the factual action and construct the candidate using a single normalized action-gradient step.

Let $g_t = \nabla_a E_\phi(a; \tau)|_{a=a_t}$ denote the action gradient. We construct the searched alternative as

$$\hat{a}_t = \text{sg} \left[\Pi_{\mathcal{A}} \left(a_t - \rho \frac{g_t}{\|g_t\|_2 + \epsilon} \right) \right], \quad (6)$$

where $\Pi_{\mathcal{A}}$ projects the perturbed action onto the valid action space and $\epsilon > 0$ ensures numerical stability. The stop-gradient operator prevents differentiation through the construction of $\hat{a}_t$, avoiding second-order derivatives through g_t . The prediction error $E_\phi(\hat{a}_t; \tau)$ remains differentiable with respect to the encoder and predictor parameters. This approximation requires a single gradient computation with respect to the action, without an iterative inner loop or additional environment interaction. The resulting candidate is used in the ACA comparison objective described next.

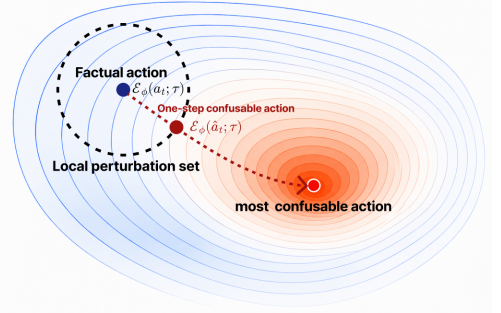


Figure 3: Illustration of the Action Consequence Alignment (ACA) principle.

4.3 ACA Objective

Given the searched alternatives, ACA compares their prediction errors with those of the factual actions within each minibatch. For a minibatch $\mathcal{B}$, we apply a hinge penalty to the average factual-minus-alternative prediction-error difference:

$$\mathcal{L}_{\text{ACA}}(\theta, \phi) = \mathbb{E}_{\mathcal{B}} \left[\left[\frac{1}{|\mathcal{B}|} \sum_{\tau \in \mathcal{B}} (E_\phi(a_t; \tau) - E_\phi(\hat{a}_t; \tau)) \right]_+ \right]. \quad (7)$$

The minibatch penalty is positive when the searched alternatives have a lower average prediction error than the factual actions. We combine this term with the forward-prediction and anti-collapse objectives:

$$\mathcal{L}(\theta, \phi) = \mathcal{L}_{\text{pred}}(\theta, \phi) + \lambda_{\text{anti}} \mathcal{L}_{\text{anti}} + \lambda_{\text{ACA}} \mathcal{L}_{\text{ACA}}(\theta, \phi). \quad (8)$$

The complete training procedure is summarized in Appendix A.

The joint objective supervises both factual predictions and local relative errors. Forward prediction fits the observed consequence under the recorded action, while ACA penalizes a positive minibatch-averaged error advantage of the searched alternatives. In this way, the same transition provides both a prediction target and a reference for action comparison. The resulting objective mitigates the prediction–planning gap by improving the usefulness of the learned predictor for goal-directed action selection.

Table 1: Planning performance comparison on different environments. Success rates (%) are reported as mean. The standard deviation is provided in Table 7.

Method	TwoRoom	TwoRoom*	Reacher	Push-T	OGBench-Cube	OGBench-Cube*
Random	30.0	2.2	14.0	3.0	43.0	5.4
Forward-only	37.0	2.0	11.0	2.0	44.0	4.4
LeWM	94.0	73.8	67.0	81.0	59.0	30.8
SMWM	97.8	82.0	66.0	81.4	82.2	66.2
LeWM+ACA	94.2	79.4	72.0	83.2	65.0	34.0
SMWM+ACA	98.8	95.8	71.4	84.4	85.6	72.4

5 Reliable Planning

5.1 Experiment Setup

Environments and datasets. We conduct experiment on four environments and offline datasets: TwoRoom [25], Reacher [26], Push-T [27], and OGBench-Cube [28], ranging from 2D navigation to articulated control and contact-rich manipulation. Noting that even random policies achieve relatively high success rates on OGBench-Cube and TwoRoom, which result in difficulties distinguishing the control capabilities of different methods, we adopt the Strict cube and TwoRoom protocol (OGBench-Cube*, TwoRoom*) in CLEAR-LeWM [29]. More details of the experiment datasets are given in Appendix D.

Architecture. We adopt the same encoder and forward-prediction architecture following [4, 10]. The encoder is a ViT tiny [30, 31] with around 5M parameters. The forward predictor P_ϕ is a small transformer [32] with the action a_t injected via AdaLN-zero [33].

Training and planning protocol. To ensure fair comparison, we strictly follow the training and planning protocol of [10]. All models are trained end-to-end using two-frame snippets and a single-step forward-prediction target. The datasets are loaded with a frame skip of five which the primitive actions within the skipped interval are concatenated to form a single model-level action. Every model is trained for 10 epochs, detailed hyper-parameters for training is shown in Appendix E. We evaluate the learned models through goal-conditioned trajectory optimization in the latent space. In the beginning of each planning episode, the agent will receive a current observation x_t and a goal observation x_g . The frozen encoder will map them to $z_c = f_\theta(x_t)$, $z_g = f_\theta(x_g)$. For each candidate action sequence, the frozen predictor is rolled out auto-regressively where:

$$\hat{z}_{t+h+1} = P_\phi(\hat{z}_{t+h}, a_{t+h}), \quad \hat{z}_t = z_t.$$

The candidate sequence is then evaluated using its terminal latent goal matching cost:

$$\mathcal{C}(a_{t:t+H-1}) = \|\hat{z}_{t+H} - z_g\|_2^2.$$

The cost is optimized using the Cross-Entropy Method [34]. All methods are evaluated with a fixed budget of 50 environment steps per episode to reach the goal. We evaluate each fixed trained checkpoint using five consecutive planner random seeds and report the mean success rate with standard deviation (SD). More detailed experiment settings are in Appendix E.

5.2 Planning Performance

Baseline. We compare ACA against various baselines under same experiment settings. Random uniformly samples action from the action space without using a learned world model; Foward-Only trains the encoder and the predictor with only the forward-prediction objective; LEWM [4] applies a Gaussian-matching regularization term to prevent representation collapse; SMWM [10] uses an inverse dynamic model to prevent model collapse.

Results. As shown in Table 1, ACA improves both LeWorldModel and SMWM across the evaluated environments and protocols. The improvements over SMWM indicate that inverse-dynamics supervision leaves room for improving downstream action selection through the forward predictor. Under the shared

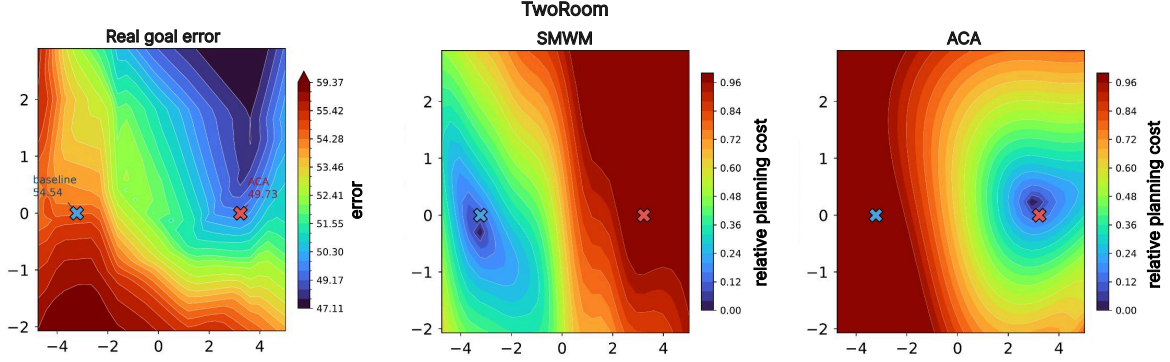


Figure 4: Visualization of planning-cost alignment on TwoRoom, more visualization results is shown in Appendix F.

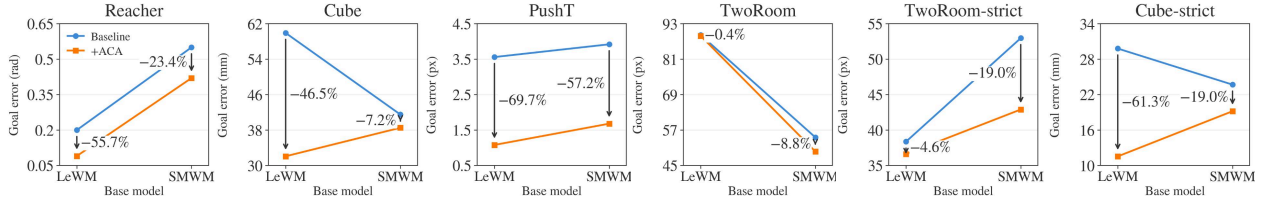


Figure 5: ACA substantially reduces the real planning error across environments, indicating improved alignment between the planning cost and the actual consequences of executed actions.

planning protocol, adding ACA yields better planning performance, supporting the value of explicitly training factual-counterfactual comparisons alongside factual prediction.

5.3 Planning-Cost Alignment Analysis

The action perturbation experiment shows that lower prediction error can favor an alternative action with a different physical consequence. We now examine whether training with ACA improves the outcomes of actions selected through the trained models. For the trained baseline and ACA models, we run CEM under the same planning protocol and construct a shared two-dimensional slice over complete action plans. The same plans are evaluated using model-based planning costs and simulator rollouts. Figure 4 illustrates the discrepancy between a model preference and the physical outcome of its selected plan. The baseline favors a plan with low model cost even though its actual outcome has a larger goal error than the ACA-selected plan. The landscape visualization thus shows how optimizing a learned prediction-based objective can favor a physically inferior solution. In the illustrated example, training with ACA shifts the model preference toward a plan that achieves a better physical outcome.

Figure 5 extends this evaluation across environments and both base models, showing lower real goal errors for plans selected using ACA-trained predictors. Together with the planning success rates, these results provide empirical support that local factual-counterfactual comparisons help mitigate the prediction-planning gap by improving the physical outcomes of selected plans. Additional visualizations are provided in Appendix F.

5.4 Planning with limited training data

We next examine whether ACA remains useful when training experience is limited, using only 5% of the original training data. Restricted state-action coverage provides a challenging setting for transferring factual prediction learning to the candidate actions considered during planning. This experiment evaluates whether the local comparisons introduced by ACA improve downstream action selection under the same limited data budget.

We train models on Reacher for 20 epochs, Cube for 10 epochs, TwoRoom for 20 epochs and Push-T

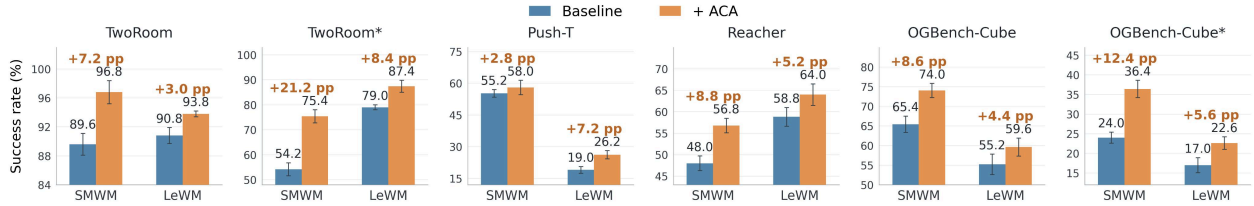


Figure 6: ACA achieves reliable planning under the limited data settings.

for 40 epochs to ensure convergence. We use cosine learning-rate annealing with an initial learning rate of 10^{-4} . As shown in Figure 6, ACA outperforms LeWorldModel and SMWM across the evaluated settings and reduces the performance difference from their corresponding full-data baselines. These results support the value of complementing factual prediction with action-consequence comparisons: with the same limited training data, ACA-trained models achieve better goal-directed planning on held-out tasks.

5.5 Additional experiment

We provide hyperparameter sensitivity analysis (Appendix E), additional planning-cost visualizations (Appendix F), single-plan and long-horizon evaluations (Appendix G), ablations of action search and regularization (Appendix H), and variability across planner seeds (Appendix I).

6 Self-Improving via the ACA principle

Identifying potential model failures can guide targeted data collection during training and support iterative self-improvement [35]. The ACA principle provides such a signal by identifying nearby actions through searching for nearby alternatives with lower prediction error against a recorded future. We then execute these counterfactual actions from the corresponding simulator states, collect their actual outcomes, and augment the dataset for further training. This creates a self-improvement loop in which the local action preferences of the model guide the acquisition of additional experience.

We evaluate this procedure, starting from a model pre-trained on 5% of the original training data on Reacher and Cube datasets. We compare two sampling strategies using exactly the same reference-transition indices: the random baseline reuses the indices selected for self-improving sampling strategy. For each shared transition $\tau = (x_t, a_t, x_{t+1})$, Self-improving sampling strategy follows the normalized negative gradient of the prediction error:

$$a_t^{\text{Self}} = \Pi_{\mathcal{A}} \left(a_t - \rho \frac{g_t}{\|g_t\|_2 + \epsilon} \right), \quad g_t = \nabla_a E_\phi(a; \tau)|_{a=a_t}. \quad (9)$$

The random baseline instead perturbs the same factual action along a random unit direction u_t , using the same perturbation scale and action-space projection:

$$a_t^{\text{Random}} = \Pi_{\mathcal{A}} (a_t + \rho u_t), \quad \|u_t\|_2 = 1, \quad (10)$$

where u_t is sampled without using the prediction-error gradient. For both strategies, the selected action is executed from the same reference simulator state, and its actual resulting observation is collected to construct a new training transition. For all models and datasets, we use a constant learning rate of 10^{-4} . Both base models are trained for 25 epochs on Reacher and 30 epochs on OGBench-Cube to ensure convergence. For both sampling strategies, additional transitions are collected at epochs 5 and 10, with each sampling round

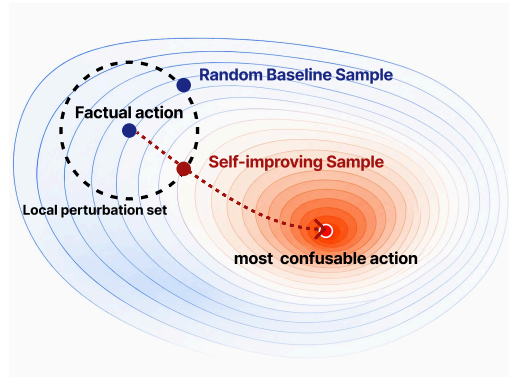


Figure 7: Overview of ACA self-improving sampling method and random sampling baseline.

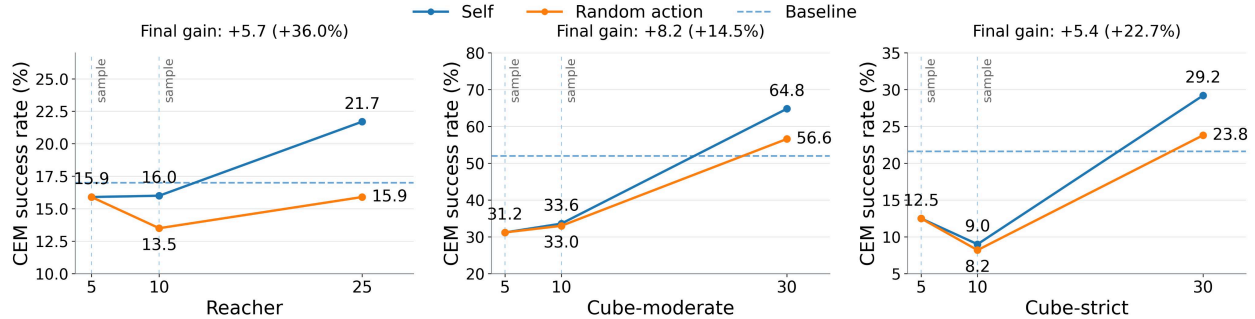


Figure 8: ACA sampling enables better self-improved performance than random sampling.

containing a number of samples equal to 10% of the initial training subset. To ensure a fair comparison, the two strategies use exactly the same indices of initial simulator states and differ only in the perturbation directions applied to the corresponding factual actions.

As shown in Fig. 8, ACA-guided sampling consistently achieves higher planning performance than random local sampling, and also surpasses the reference model trained without additional data. Because both sampling strategies use the same initial-state indices, sampling budgets, and perturbation scale, their difference isolates the effect of the selected perturbation direction. These results suggest that executing alternatives favored by the current predictor can provide useful additional action–consequence supervision. Under the evaluated sampling protocol, this directed collection improves subsequent planning more than random local perturbations.

7 Related work

Latent world models World models learn compact dynamics for prediction and control. Early work studied control through learned representations [1], latent-space planning [36], and imagined trajectories [37]. Predictive representation learning further reduces reliance on reconstruction: CPC [38] uses contrastive future prediction, while I-JEPA [39] and V-JEPA [40] predict target embeddings directly. DINO-WM [41], V-JEPA 2 [3], and PLDM [25] extend latent prediction to planning and control. For end-to-end learning, VICReg [8] and LeJEPA [12] introduce anti-collapse regularization, while LeWorldModel combines such regularization with latent dynamics learning from pixels [4]. Garrido et al. [42] learn continuous latent actions from in-the-wild videos and connect known controls to the learned action space for planning. CoLA-World [43] enables joint learning of latent action and world models through a representation warm-up that mitigates collapse. DiLA [44] separates dynamics-relevant structure from visual content and models latent-action-conditioned transitions in structure space. CLAW [45] jointly learns continuous latent actions and a world model from action-free videos using adversarial latent regularization.

Action–consequence dependence Internal forward models predict sensory consequences from motor commands and states [15, 14], while self-produced touch experiments highlight movement–sensation correspondence [16]. Forward and inverse dynamics have also been used for representation learning [46, 47]. Recent latent world models strengthen action dependence through inverse dynamics in SMWM [10], latent difference decoding in Delta-JEPA [11], action-conditioned consistency in CoCo [7], action-dependent decomposition in Dueling World Models [6], and inverse-dynamics-aware planning costs in ACID [13]. Related theory studies identifiability through conditional action variation [5]. Wang et al. [48] train a latent compatibility predictor using counterfactual action sequences for goal-directed navigation.

8 Conclusion

We studied the prediction–planning gap in latent world models through the action preferences induced by their forward predictors. We showed that alternative actions can receive lower prediction errors than the factual action while producing outcomes farther from the target, indicating that accurate prediction alone does not

guarantee reliable planning. To address this, we introduced Action–Consequence Alignment (ACA), which explicitly trains local action comparisons using factual transitions as references. ACA improves planning performance, reduces real goal error, and remains effective with limited data. The same inconsistency signal can further guide self-improving data collection, enabling the model to acquire more informative experience than random local sampling. Together, these results establish action–consequence alignment as a practical principle for both reliable planning and self-improvement.

References

- [1] David Ha and Jürgen Schmidhuber. World models. *arXiv preprint arXiv:1803.10122*, 2(3):440, 2018.
- [2] Yann LeCun et al. A path towards autonomous machine intelligence version 0.9. 2, 2022-06-27. *Open Review*, 62(1):1–62, 2022.
- [3] Mido Assran, Adrien Bardes, David Fan, Quentin Garrido, Russell Howes, Matthew Muckley, Ammar Rizvi, Claire Roberts, Koustuv Sinha, Artem Zhohus, et al. V-jepa 2: Self-supervised video models enable understanding, prediction and planning. *arXiv preprint arXiv:2506.09985*, 2025.
- [4] Lucas Maes, Quentin Le Lidec, Damien Scieur, Yann LeCun, and Randall Balestriero. Leworldmodel: Stable end-to-end joint-embedding predictive architecture from pixels. *arXiv preprint arXiv:2603.19312*, 2026.
- [5] Xiangteng Zhang, Yang Guan, Bo Zhang, Ya-Qin Zhang, and Shengbo Eben Li. On the identifiability of controlled world models. *arXiv preprint arXiv:2607.22430*, 2026.
- [6] Jiazhao Li, Yiming Fei, Zhiruo Zhou, and Heikichi Hayashi. Dueling world models: Advantage-style action channels for common-mode distractor rejection. *arXiv preprint arXiv:2608.06706*, 2026.
- [7] Yuhong Shi, Zhenhao Chu, Jie Wei, Jun Hao, Jianyi Liu, and Jingwen Fu. Overcoming statistical bias in action-controllable world models. *arXiv preprint arXiv:2608.04653*, 2026.
- [8] Adrien Bardes, Jean Ponce, and Yann LeCun. Vicreg: Variance-invariance-covariance regularization for self-supervised learning. *arXiv preprint arXiv:2105.04906*, 2021.
- [9] Lucas Maes, Quentin Le Lidec, Dan Haramati, Nassim Massaudi, Damien Scieur, Yann LeCun, and Randall Balestriero. stable-worldmodel-v1: Reproducible world modeling research and evaluation. *arXiv preprint arXiv:2602.08968*, 2026.
- [10] Petr Ivashkov, Randall Balestriero, and Bernhard Schölkopf. Sensorimotor world models: Perception for action via inverse dynamics. *arXiv preprint arXiv:2606.20104*, 2026.
- [11] Zhenghao Zhang, Yuanxiang Wang, Zhenyu Guan, Yujia Yang, Bingkan Shi, Tianyu Zong, Hongzhu Yi, Guoqing Chao, Xingchen Chen, Tiankun Yang, et al. Delta-jepa: Learning action-sensitive world models via latent difference decoding. *arXiv preprint arXiv:2606.31232*, 2026.
- [12] Randall Balestriero and Yann LeCun. Lejepa: Provable and scalable self-supervised learning without the heuristics. *arXiv preprint arXiv:2511.08544*, 2025.
- [13] Gawon Seo, Dongwon Kim, and Suha Kwak. Acid: Action consistency via inverse dynamics for planning with world models. *arXiv preprint arXiv:2607.02403*, 2026.
- [14] R Chris Miall and Daniel M Wolpert. Forward models for physiological motor control. *Neural networks*, 9(8):1265–1279, 1996.
- [15] Daniel M Wolpert, Zoubin Ghahramani, and Michael I Jordan. An internal model for sensorimotor integration. *Science*, 269(5232):1880–1882, 1995.
- [16] Sarah-J Blakemore, Chris D Frith, and Daniel M Wolpert. Spatio-temporal prediction modulates the perception of self-produced stimuli. *Journal of cognitive neuroscience*, 11(5):551–559, 1999.
- [17] Pierre Foret, Ariel Kleiner, Hossein Mobahi, and Behnam Neyshabur. Sharpness-aware minimization for efficiently improving generalization. *arXiv preprint arXiv:2010.01412*, 2020.
- [18] Huihan Liu, Yu Zhang, Vaarij Betala, Evan Zhang, James Liu, Crystal Ding, and Yuke Zhu. Multi-task interactive robot fleet learning with visual world models. *arXiv preprint arXiv:2410.22689*, 2024.

- [19] Xinyang Gu, Yen-Jen Wang, Xiang Zhu, Chengming Shi, Yanjiang Guo, Yichen Liu, and Jianyu Chen. Advancing humanoid locomotion: Mastering challenging terrains with denoising world model learning. *arXiv preprint arXiv:2408.14472*, 2024.
- [20] Andreja Bubic, D Yves Von Cramon, and Ricarda I Schubotz. Prediction, cognition and the brain. *Frontiers in human neuroscience*, 4:1094, 2010.
- [21] Tadahihiro Taniguchi, Shingo Murata, Masahiro Suzuki, Dimitri Ognibene, Pablo Lanillos, Emre Ugur, Lorenzo Jamone, Tomoaki Nakamura, Alejandra Ciria, Bruno Lara, et al. World models and predictive coding for cognitive and developmental robotics: frontiers and challenges. *Advanced Robotics*, 37(13):780–806, 2023.
- [22] Rajesh PN Rao. A sensory–motor theory of the neocortex. *Nature neuroscience*, 27(7):1221–1235, 2024.
- [23] Tao Li, Pan Zhou, Zhengbao He, Xinwen Cheng, and Xiaolin Huang. Friendly sharpness-aware minimization. In *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 5631–5640. IEEE, 2024.
- [24] Jinping Wang, Qinhan Liu, Zhiwu Xie, and Zhiqiang Gao. Fix the loss, not the radius: Rethinking the adversarial perturbation of sharpness-aware minimization. *arXiv preprint arXiv:2605.10183*, 2026.
- [25] Uladzislau Sobal, Wancong Zhang, Kyunghyun Cho, Randall Balestriero, Tim GJ Rudner, and Yann LeCun. Learning from reward-free offline data: A case for planning with latent dynamics models. *Advances in Neural Information Processing Systems*, 38:43905–43941, 2026.
- [26] Yuval Tassa, Yotam Doron, Alistair Muldal, Tom Erez, Yazhe Li, Diego de Las Casas, David Budden, Abbas Abdolmaleki, Josh Merel, Andrew Lefrancq, et al. Deepmind control suite. *arXiv preprint arXiv:1801.00690*, 2018.
- [27] Cheng Chi, Zhenjia Xu, Siyuan Feng, Eric Cousineau, Yilun Du, Benjamin Burchfiel, Russ Tedrake, and Shuran Song. Diffusion policy: Visuomotor policy learning via action diffusion. *The International Journal of Robotics Research*, 44(10-11):1684–1704, 2025.
- [28] Seohong Park, Kevin Frans, Benjamin Eysenbach, and Sergey Levine. Ogbench: Benchmarking offline goal-conditioned rl. In *International Conference on Learning Representations*, volume 2025, pages 94937–94982, 2025.
- [29] Junhan Sun, Hao Zhao, and Guofeng Zhang. Intact: Isomorphic intent-to-action learning for search-free world models, 2026.
- [30] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020.
- [31] Hugo Touvron, Matthieu Cord, Matthijs Douze, Francisco Massa, Alexandre Sablayrolles, and Hervé Jégou. Training data-efficient image transformers & distillation through attention. In *International conference on machine learning*, pages 10347–10357. PMLR, 2021.
- [32] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- [33] William Peebles and Saining Xie. Scalable diffusion models with transformers. In *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 4172–4182. IEEE, 2023.
- [34] Reuven Y Rubinstein. Optimization of computer simulation models with rare events. *European Journal of Operational Research*, 99(1):89–112, 1997.

- [35] Yuejiang Liu, Fan Feng, Lingjing Kong, Weifeng Lu, Jinzhou Tang, Kun Zhang, Kevin Murphy, Chelsea Finn, and Yilun Du. World action verifier: Self-improving world models via forward-inverse asymmetry. *arXiv preprint arXiv:2604.01985*, 2026.
- [36] Danijar Hafner, Timothy Lillicrap, Ian Fischer, Ruben Villegas, David Ha, Honglak Lee, and James Davidson. Learning latent dynamics for planning from pixels. In *International conference on machine learning*, pages 2555–2565. PMLR, 2019.
- [37] Danijar Hafner, Timothy Lillicrap, Jimmy Ba, and Mohammad Norouzi. Dream to control: Learning behaviors by latent imagination. *arXiv preprint arXiv:1912.01603*, 2019.
- [38] Aaron van den Oord, Yazhe Li, and Oriol Vinyals. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*, 2018.
- [39] Mahmoud Assran, Quentin Duval, Ishan Misra, Piotr Bojanowski, Pascal Vincent, Michael Rabbat, Yann LeCun, and Nicolas Ballas. Self-supervised learning from images with a joint-embedding predictive architecture. In *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 15619–15629. IEEE, 2023.
- [40] Adrien Bardes, Quentin Garrido, Jean Ponce, Xinlei Chen, Michael Rabbat, Yann LeCun, Mahmoud Assran, and Nicolas Ballas. Revisiting feature prediction for learning visual representations from video. *arXiv preprint arXiv:2404.08471*, 2024.
- [41] Gaoyue Zhou, Hengkai Pan, Yann LeCun, and Lerrel Pinto. Dino-wm: World models on pre-trained visual features enable zero-shot planning. *arXiv preprint arXiv:2411.04983*, 2024.
- [42] Quentin Garrido, Tushar Nagarajan, Basile Terver, Nicolas Ballas, Yann LeCun, and Michael Rabbat. Learning latent action world models in the wild. In *Forty-third International Conference on Machine Learning*, 2026.
- [43] Yucen Wang, Fengming Zhang, De-Chuan Zhan, Li Zhao, Kaixin Wang, and Jiang Bian. Co-evolving latent action world models. *arXiv preprint arXiv:2510.26433*, 2025.
- [44] Tianqiu Zhang, Muyang Lyu, Yufan Zhang, Fang Fang, and Si Wu. Dila: Disentangled latent action world models. *arXiv preprint arXiv:2605.15725*, 2026.
- [45] Tewodros Ayalew, Matthew Jeung, Samuel Wheeler, Xiao Zhang, Andre de la Cruz Arce, Kaylene Stocking, Michael Maire, and Matthew R Walter. Claw: Learning continuous latent action world models via adversarial latent regularization. *arXiv preprint arXiv:2606.04130*, 2026.
- [46] Pulkit Agrawal, Ashvin V Nair, Pieter Abbeel, Jitendra Malik, and Sergey Levine. Learning to poke by poking: Experiential learning of intuitive physics. *Advances in neural information processing systems*, 29, 2016.
- [47] Deepak Pathak, Pulkit Agrawal, Alexei A Efros, and Trevor Darrell. Curiosity-driven exploration by self-supervised prediction. In *International conference on machine learning*, pages 2778–2787. PMLR, 2017.
- [48] Zengmao Wang, Wei Gao, and Shuhan Shen. Predicting consequences and reinforcing navigation policies with latent world models. In *European Conference on Computer Vision*, pages 280–296. Springer, 2026.
- [49] Vlad Sobal, Wancong Zhang, Kyunghyun Cho, Randall Balestriero, Tim GJ Rudner, and Yann LeCun. Stress-testing offline reward-free reinforcement learning: A case for planning with latent dynamics models. In *7th Robot Learning Workshop: Towards Robots with Human-Level Abilities*, 2025.
- [50] Tuomas Haarnoja, Aurick Zhou, Pieter Abbeel, and Sergey Levine. Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor. In *International conference on machine learning*, pages 1861–1870. Pmlr, 2018.

Appendix Contents

A	Algorithm	15
B	Local Action Comparisons and Their Physical Consequences	15
C	Theoretical Reference for Action Comparisons	17
D	Datasets	20
E	Experiment Details	21
E.1	Architecture	21
E.2	Training and Planning Details	21
E.3	Hyper-parameter Selections and Sensitive Analysis for ACA	21
F	Extra Visualization Results	21
G	Performance Under Additional Planning Settings	22
H	Ablation of Action Search and Regularization	28
I	Variability Across Planner Seeds	29
J	Discussion	30
K	Scope and Limitation	30

Algorithm 1 Action–Consequence Alignment (ACA)

Require: Dataset $\mathcal{D}$, encoder f_θ , predictor P_ϕ , perturbation radius ρ , coefficients λ_{anti} , λ_{ACA} , stabilizer ϵ

- 1: **for** each minibatch $\mathcal{B} \sim \mathcal{D}$ **do**
- 2: Encode observations for each $\tau = (x_t, a_t, x_{t+1}) \in \mathcal{B}$: $z_t = f_\theta(x_t)$, $z_{t+1} = f_\theta(x_{t+1})$
- 3: Define prediction error: $E_\phi(a; \tau) = \|P_\phi(z_t, a) - z_{t+1}\|_2^2$
- 4: Compute action gradient: $g_t = \nabla_a E_\phi(a; \tau)|_{a=a_t}$
- 5: Estimate the most confusable action: $\hat{a}_t = \text{sg}\left[\Pi_{\mathcal{A}}\left(a_t - \rho \frac{g_t}{\|g_t\|_2 + \epsilon}\right)\right]$
- 6: Compute ACA loss: $\mathcal{L}_{\text{ACA}} = \left[\frac{1}{|\mathcal{B}|} \sum_{\tau \in \mathcal{B}} (E_\phi(a_t; \tau) - E_\phi(\hat{a}_t; \tau))\right]_+$
- 7: Compute total objective: $\mathcal{L} = \mathcal{L}_{\text{pred}} + \lambda_{\text{anti}} \mathcal{L}_{\text{anti}} + \lambda_{\text{ACA}} \mathcal{L}_{\text{ACA}}$
- 8: Update model parameters by minimizing $\mathcal{L}$
- 9: **end for**

A Algorithm

B Local Action Comparisons and Their Physical Consequences

We examine the local manifestation of the prediction–planning gap through two complementary evaluations. In this section, we measure how frequently a locally searched action receives lower prediction error than the factual action. We then execute lower-error alternatives and measure how far their outcomes deviate from the corresponding factual outcomes. Together, these evaluations connect the predictor relative action preferences with physical attainment of the factual target.

Lower-error alternatives. We evaluate frozen trained baseline world models, SMWM and LeWM, on $N = 10000$ valid one-step transitions sampled uniformly from the training data of each environment. For a transition $\tau = (x_t, a_t, x_{t+1})$, we encode the observations as $z_t = f_\theta(x_t)$ and $z_{t+1} = f_\theta(x_{t+1})$, keep both representations fixed, and the transition-wise prediction error can be defined as

$$E_\phi(a; \tau) = \|P_\phi(z_t, a) - z_{t+1}\|_2^2. \quad (11)$$

Starting from the factual action, we construct an alternative using one normalized gradient-descent step:

$$a_{\text{cf}}^{(\rho)} = \Pi_{\mathcal{A}} \left(a_t - \rho \frac{\nabla_a E_\phi(a; \tau)|_{a=a_t}}{\|\nabla_a E_\phi(a; \tau)|_{a=a_t}\|_2} \right), \quad \rho \in \{0.05, 0.10, 0.25\}, \quad (12)$$

where $\Pi_{\mathcal{A}}$ enforces the action bounds. The radius ρ specifies the nominal step length; projection can reduce the actual displacement. For each radius, the candidate is constructed independently from the factual action, rather than through successive updates.

A searched alternative receives lower prediction error when

$$E_\phi(a_{\text{cf}}^{(\rho)}; \tau) < E_\phi(a_t; \tau). \quad (13)$$

We report the frequency of lower error alternatives:

$$\hat{p}_{\text{lower}}(\rho) = \frac{1}{N} \sum_{i=1}^N \mathbf{1} \left[E_\phi(a_{\text{cf},i}^{(\rho)}; \tau_i) < E_\phi(a_i; \tau_i) \right]. \quad (14)$$

Figure 9 shows that lower-error alternatives remain detectable as the nominal perturbation radius increases from 0.05 to 0.25. Although these frequencies generally decrease with increasing radius, substantial rates persist in several model–environment settings at the largest tested radius. Thus, the observed lower-error alternatives are not confined to the smallest tested step length. These statistics characterize the action preferences of the predictor;

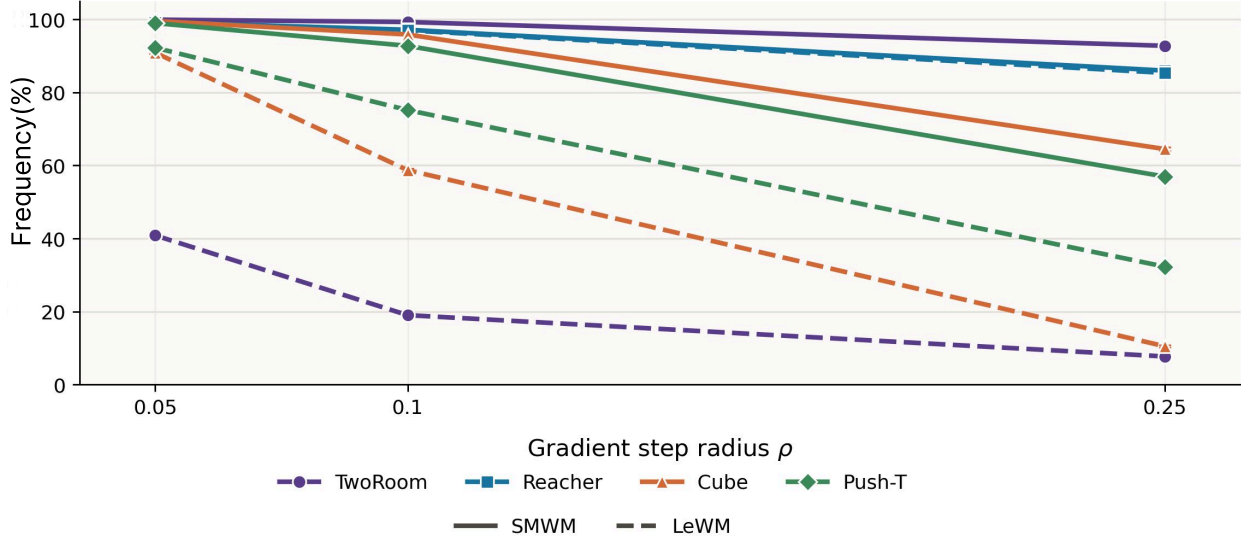


Figure 9: **Frequency of lower-error alternatives.** Frozen SMWM and LeWM models are evaluated on 10,000 transitions per environment. At each nominal perturbation radius, an alternative action is constructed using one normalized gradient-descent step from the factual action. The plotted frequency measures the fraction of transitions for which this alternative receives lower prediction error against the same observed future.

Physical outcomes of lower-error alternatives. We extend the controlled execution example in the main text to TwoRoom, Reacher, OGBench-Cube, and Push-T, using the same trained frozen baseline models discussed in this section. For each model, environment, and perturbation radius, we evaluate 1000 transitions whose searched alternatives satisfy Equation 13. For each evaluated transition, we restore the corresponding complete simulator state s_t and execute the alternative action over the same action horizon as the factual transition.

Let $T(s_t, a)$ denote the simulator state reached after executing action a over this horizon, and let s_{t+1} denote the recorded factual outcome. We measure the physical outcome deviation as

$$D_{\text{phys}}(a; \tau) = d_{\text{env}}(T(s_t, a), s_{t+1}), \quad (15)$$

where d_{env} is an environment-specific distance computed from simulator state variables. The reported distances are expressed in pixels for TwoRoom and Push-T, radians for Reacher, and millimeters for OGBench-Cube. They are computed independently of the learned latent representations.

For each model and environment, let $\mathcal{V}_\rho$ index the evaluated transitions with lower-error alternatives at radius ρ . The plotted mean is

$$\overline{D}_{\text{phys}}(\rho) = \frac{1}{|\mathcal{V}_\rho|} \sum_{i \in \mathcal{V}_\rho} D_{\text{phys}}(a_{\text{cf}, i}^{(\rho)}; \tau_i). \quad (16)$$

This quantity measures the magnitude of outcome deviation among the evaluated lower-error alternatives, complementing the frequency of lower-error alternatives in Equation 14.

Figure 10 shows nonzero mean outcome deviations across all evaluated environments, models, and perturbation radius. The mean deviations increase at larger tested radius, while the individual transitions exhibit heterogeneous responses. These measurements show that alternatives favored by the predictor can produce outcomes that depart from the factual target across multiple environments. The relevant discrepancy is the coexistence of lower prediction error and physical outcome deviation: the predictor assigns a better score or cost to an alternative that does not reproduce the observed consequence.

Implications for action selection. The recorded future also defines a goal against which candidate actions can be compared. When replaying the factual action from s_t reproduces the recorded transition,

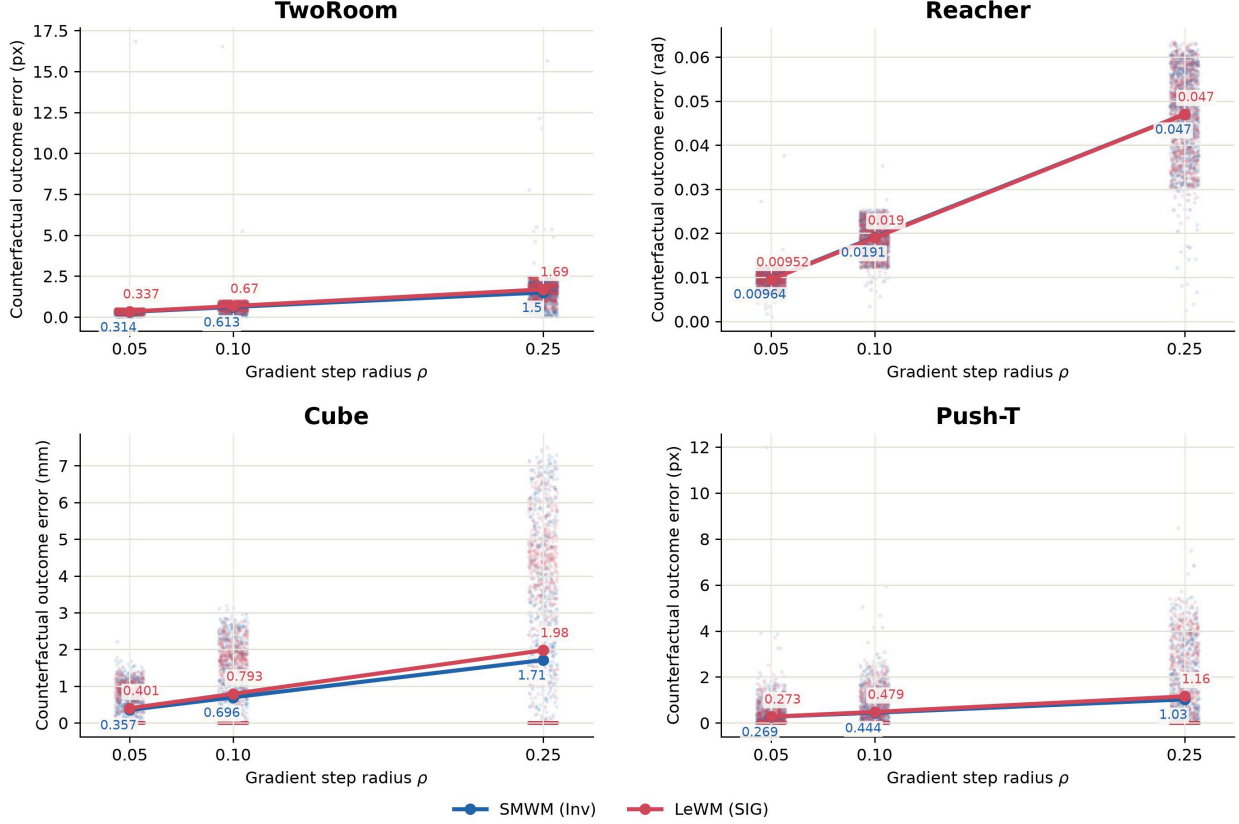


Figure 10: **Physical outcome deviations of lower-error counterfactual actions.** We execute searched alternatives that receive lower prediction error than the factual actions, starting from the corresponding recorded simulator states. Each model–radius setting contains 1,000 evaluated transitions. Translucent dots show individual outcome deviations from the factual targets, and solid lines connect their means. Blue and red denote SMWM and LeWM, respectively. Outcome deviations are measured using environment-specific simulator state distances, with units indicated on the axes. The alternatives receive lower model errors despite producing nonzero mean deviations from the factual outcomes.

$D_{\text{phys}}(a_t; \tau) = 0$. A lower-error alternative with positive physical deviation then satisfies

$$E_{\phi}(a_{\text{cf}}^{(\rho)}; \tau) < E_{\phi}(a_t; \tau), \quad D_{\text{phys}}(a_{\text{cf}}^{(\rho)}; \tau) > D_{\text{phys}}(a_t; \tau). \quad (17)$$

These inequalities describe a disagreement between the model’s action preference and actual attainment of the factual target. While local descent induced by prediction residuals offers a possible explanation for lower-error alternatives under small perturbations, Figure 9 shows that these alternatives persist as the nominal perturbation radius increases from 0.05 to 0.25, with substantial frequencies in several model–environment settings even at the largest tested radius. Figure 10 further shows that their mean physical outcome deviations increase with the tested radius. Thus, the observed mismatch is not confined to the smallest tested perturbation. Even when such preferences originate from prediction residuals, assigning a lower model error to an action that achieves the target less accurately can misdirect action selection, constituting a concrete manifestation of the prediction–planning gap.

C Theoretical Reference for Action Comparisons

For latent action conditioned world model, action selection depends on how prediction error varies across candidate actions. This section characterizes that dependence for an ideal squared-error predictor and

examines how conditional variability affects transition-level comparisons, providing a theoretical reference for the local training objective used by ACA.

Setup. Fix the encoder f_θ and a current latent state z_t . For each action under consideration, we assume that the conditional distribution $p(Z^+ | z_t, a)$ is well-defined and has a finite second moment. We then define its conditional mean and the corresponding ideal predictor as

$$\mu(z_t, a) = \mathbb{E}[Z^+ | z_t, a], \quad P^*(z_t, a) = \mu(z_t, a).$$

For a factual action a_t , evaluate every candidate action against the same factual future distribution:

$$\overline{E}^*(a; z_t, a_t) = \mathbb{E}_{Z^+ \sim p(\cdot | z_t, a_t)} [\|P^*(z_t, a) - Z^+\|_2^2].$$

In this definition, the candidate action is fixed while the factual future is averaged over.

Theorem 1 (Expected prediction-error decomposition). *Under the above assumptions, every candidate action a satisfies*

$$\overline{E}^*(a; z_t, a_t) - \overline{E}^*(a_t; z_t, a_t) = \|\mu(z_t, a) - \mu(z_t, a_t)\|_2^2 \geq 0.$$

Consequently, the factual action is a minimizer of the expected prediction error. Equality holds if and only if the two actions have the same conditional mean in the latent representation.

Proof. Write

$$Z^+ = \mu(z_t, a_t) + \xi, \quad \mathbb{E}[\xi | z_t, a_t] = 0,$$

and let $\Delta(a) = \mu(z_t, a) - \mu(z_t, a_t)$. Expanding the squared error gives

$$\begin{aligned} \overline{E}^*(a; z_t, a_t) &= \mathbb{E} [\|\Delta(a) - \xi\|_2^2 | z_t, a_t] \\ &= \|\Delta(a)\|_2^2 + \mathbb{E} [\|\xi\|_2^2 | z_t, a_t]. \end{aligned}$$

The second term equals $\overline{E}^*(a_t; z_t, a_t)$, which proves the result. $\square$

Equivalent actions and non-unique minima. The ideal expected error can have multiple minimizing actions. Action redundancy, actuator saturation, and non-injective dynamics are compatible with the result: actions with the same conditional mean receive the same expected prediction error. The zero-margin ACA objective also assigns zero penalty to equal errors. Thus, the comparison does not require recovering a unique action from an observed consequence. Under stochastic transitions, equality of conditional means does not imply equality of the full transition distributions; the result concerns the conditional means elicited by squared prediction loss.

Corollary 1 (Prediction-error decomposition for conditionally deterministic transitions). *Suppose that the factual latent future is conditionally deterministic:*

$$Z^+ = \mu(z_t, a_t) \quad \text{almost surely given } (z_t, a_t).$$

For any resulting transition τ , define

$$E^*(a; \tau) = \|P^*(z_t, a) - z_{t+1}\|_2^2.$$

Then, simultaneously for all candidate actions,

$$E^*(a; \tau) - E^*(a_t; \tau) = \|\mu(z_t, a) - \mu(z_t, a_t)\|_2^2 \geq 0.$$

Proof. Substitute $z_{t+1} = \mu(z_t, a_t)$ into the definition of E^* . $\square$

The corollary requires that the factual latent future be determined by the predictor conditioning variables. A deterministic simulator alone does not establish this condition: partial observations or the encoder may merge states with different future outcomes. A sufficient condition is that the conditioning representation retains the information needed to determine the next latent state under the action. Local action injectivity is unnecessary.

Lemma 1 (Local bound on variability-induced error advantages). *For each transition $\tau = (x_t, a_t, x_{t+1})$ under consideration, suppose $\mu(z_t, \cdot)$ is L -Lipschitz on $\mathcal{C}_\rho(a_t)$, with a common constant L . Let*

$$\xi_\tau = z_{t+1} - \mu(z_t, a_t).$$

For every $a \in \mathcal{C}_\rho(a_t)$,

$$[E^*(a_t; \tau) - E^*(a; \tau)]_+ \leq 2L\rho \|\xi_\tau\|_2.$$

Consequently, for any minibatch $\mathcal{B}$ and searched actions $\hat{a}_t \in \mathcal{C}_\rho(a_t)$,

$$\begin{aligned} \hat{\mathcal{L}}_{\text{ACA}}^*(\mathcal{B}) &:= \left[\frac{1}{|\mathcal{B}|} \sum_{\tau \in \mathcal{B}} (E^*(a_t; \tau) - E^*(\hat{a}_t; \tau)) \right]_+ \\ &\leq \frac{2L\rho}{|\mathcal{B}|} \sum_{\tau \in \mathcal{B}} \|\xi_\tau\|_2. \end{aligned}$$

These bounds also hold for alternatives selected using the observed transitions, provided that each selected action remains within its corresponding neighborhood.

Proof. For a transition τ and a candidate action a , let $\Delta_\tau(a) = \mu(z_t, a) - \mu(z_t, a_t)$. Expanding the squared prediction errors and applying Cauchy-Schwarz gives

$$\begin{aligned} [E^*(a_t; \tau) - E^*(a; \tau)]_+ &= [2\langle \Delta_\tau(a), \xi_\tau \rangle - \|\Delta_\tau(a)\|_2^2]_+ \\ &\leq 2\|\Delta_\tau(a)\|_2 \|\xi_\tau\|_2 \\ &\leq 2L\rho \|\xi_\tau\|_2. \end{aligned}$$

This inequality holds for every action in the neighborhood, including an observation-dependent selection.

For the minibatch objective, convexity of the positive-part function gives

$$\begin{aligned} \hat{\mathcal{L}}_{\text{ACA}}^*(\mathcal{B}) &= \left[\frac{1}{|\mathcal{B}|} \sum_{\tau \in \mathcal{B}} (E^*(a_t; \tau) - E^*(\hat{a}_t; \tau)) \right]_+ \\ &\leq \frac{1}{|\mathcal{B}|} \sum_{\tau \in \mathcal{B}} [E^*(a_t; \tau) - E^*(\hat{a}_t; \tau)]_+ \\ &\leq \frac{2L\rho}{|\mathcal{B}|} \sum_{\tau \in \mathcal{B}} \|\xi_\tau\|_2. \end{aligned}$$

Taking expectations over minibatches yields the corresponding bound on the expected ACA objective. $\square$

ACA applies the positive-part operation after averaging the factual-alternative error differences within each minibatch. The lemma bounds the contribution of conditional variability to this minibatch comparison penalty. Since the searched alternatives depend on the observed futures, minibatch averaging does not in general eliminate this contribution, even for an ideal predictor.

What ACA constrains. (gradient analysis) ACA constrains the relative prediction errors around an observed action; it does not directly maximize the sensitivity of the predictor to actions. This distinction is important. Let

$$r_t = P_\phi(z_t, a_t) - z_{t+1}, \quad J_t = \left. \frac{\partial P_\phi(z_t, a)}{\partial a} \right|_{a=a_t}.$$

Then

$$\nabla_a E_\phi(a_t; \tau) = 2J_t^\top r_t.$$

Therefore, a small factual error gradient does not imply an action-invariant predictor. In particular, an accurate predictor has $r_t = 0$ and hence $\nabla_a E_\phi(a_t; \tau) = 0$ even when $J_t \neq 0$. Locally,

$$E_\phi(a_t + \delta; \tau) - E_\phi(a_t; \tau) = \delta^\top J_t^\top J_t \delta + O(\|\delta\|^3),$$

so an action-sensitive predictor can have a stationary factual action while assigning increasing error to nearby actions.

Summary The above results and analysis clarify the principle underlying ACA. Theorem 1 shows that, for an ideal predictor, the expected error increase relative to the factual action equals the squared difference between the corresponding latent conditional means, making the factual action a natural reference for local action comparisons. Corollary 1 shows that this relation holds transition-wise when the conditioning variables determine the next latent state, while Lemma 1 bounds the contribution of conditional variability to both individual error advantages and the resulting minibatch penalty. The gradient analysis further shows that a stationary prediction error at the factual action is compatible with action-sensitive dynamics. These results motivate a straightforward training principle: use each observed action–consequence pair to supervise not only the factual prediction, but also the model evaluation of nearby actions. ACA implements this principle as a minibatch-level regularizer alongside forward prediction, providing a local comparison signal for the action selection required by planning.

D Datasets



Figure 11: Four evaluation environments

We conduct experiments on the same four environments (shown in Fig 11) and offline datasets following [4, 10]. All models are implemented, trained, and evaluated using the codebase of [10, 9], which provides a unified interface for environment interaction, dataset processing, and downstream planning. For each environment, we split the data at the episode level into 90% for training and 10% for validation. The model are optimized only on the training trajectories, whereas all reported result are evaluated exclusively on the held-out validation episodes.

TwoRoom. TwoRoom [25, 49] is a two-dimensional point-navigation environment consisting of two rooms connected by a single doorway. The agent begins in one room while the target is located in the other, requiring it to first navigate toward the doorway and then proceed to the goal after crossing the separating wall. The offline dataset contains 10,000 noisy scripted trajectories, with an average episode length of 92 steps.

Push-T. Push-T [27] is a planar, contact-rich manipulation task in which a point-like agent must push a T-shaped object toward a desired target configuration. We use the expert demonstrations released with DINO-WM [41], comprising 20,000 episodes with an average length of 196 steps.

OGBench-Cube. OGBench-Cube [28] is a tabletop manipulation benchmark in which a robotic gripper is tasked with moving a cube to a specified target pose. We consider the single-cube variant and use the benchmark’s scripted offline dataset, which consists of 10,000 trajectories of 200 steps each.

Reacher. Reacher [26] is the standard two-link robotic arm environment from the DeepMind Control Suite. Following the DINO-WM formulation, the objective is defined in terms of matching the target joint configuration rather than merely minimizing end-effector distance. We use an offline dataset of 10,000 trajectories generated by a SAC policy [50], with each episode containing 200 steps.

OGBench-Cube-Moderate. The Moderate protocol preserves the original position-based success criterion: an episode succeeds when the Euclidean distance between the cube center and its target is at most 4 cm. Cube orientation and the final robot or gripper configuration are not evaluated, and the first qualifying step counts as success without a persistence requirement. This protocol retains compatibility with the original task criterion while excluding initially solved evaluation pairs.

OGBench-Cube-Strict. The Strict protocol additionally evaluates orientation and short-term per-

sistence. Success requires a cube-center distance of at most 3 cm and an orientation error of at most 15° , simultaneously maintained for three consecutive simulator steps. Orientation error is minimized over the cube 24 rotational symmetries, treating geometrically equivalent orientations as identical. The final robot or gripper configuration remains unconstrained. This protocol evaluates whether the cube reaches and briefly maintains the target pose, rather than merely entering a positional tolerance region.

TwoRoom-Strict. Evaluation pairs are restricted to start and goal states in opposite rooms, with collision-free placements of the full agent disk of radius 7 pixels. The recorded trajectory segment connecting each pair must also be collision-free under continuous swept-disk geometry. During evaluation, collision checking accounts for the full disk throughout each movement, preventing wall crossings that could be missed by endpoint-only checks. Success requires a valid trajectory, at least one legal crossing through the doorway, arrival on the goal side of the wall, and a distance to the goal strictly below 8 pixels. The first step satisfying all conditions counts as success; no additional persistence requirement is imposed.

E Experiment Details

E.1 Architecture

For the network architecture we used in this paper, we follow the encoder and forward model of LeWorldModel [4] and SMWM [10]. Inputs are 224×224 RGB images. In detail, for the encoder f_θ we use a Vision Transformer Tiny (ViT-Tiny) with patch size 14 with approximate 5M parameters. For the forward predictor P_ϕ we use a ViT-S backbone (with approximate 10M parameters) where the action a is injected via AdaLN-zero. We set the history length to 1 on every environment following [10]. For SMWM, they use an extra 2-layer MLP as an inverse model with approximately 0.1M parameters.

E.2 Training and Planning Details

All world models are trained end-to-end under the same settings as LeWM and SMWM. As for planning setting, we use the same MPC and CEM hyperparameters in all four environment and baselines. The detailed hyperparameters for training and planning are shown in Table 2.

E.3 Hyper-parameter selections and sensitive analysis for ACA

We consider two hyperparameters for ACA: the action perturbation radius ρ , which controls the search step for counterfactual actions, and the loss weight λ_{ACA} , which controls the contribution of the ACA comparison penalty to the overall training objective. We follow the hyperparameter-selection procedure used in SMWM [10] and LeWM [4], selecting the ACA perturbation radius and regularization weight for each environment and evaluation protocol. Importantly, the baseline models are not left untuned: we reproduce SMWM and LeWM using their published, environment-specific recommended regularization weights, while tuning only the two additional hyper-parameters introduced by ACA under the same hyperparameter-selection protocol. We select ρ from $\{0.05, 0.1, 0.25, 0.5\}$ and λ_{ACA} from $\{0.5, 1.0, 1.5\}$. The detailed hyper-parameter of our method is shown in Table 3. As for the hyper-parameter for SMWM and LeWM, we use the suggested value in their original paper which also shown in Table 3. We analyze the sensitivity of ACA to the perturbation radius and loss weight on Reacher shown in Figure 12. An excessively large perturbation radius weakens the planning gains, highlighting the importance of keeping counterfactual comparisons within an appropriate neighborhood. Meanwhile, ACA consistently outperforms the baseline across the tested nonzero loss weights, suggesting that its benefits do not require precise tuning of the penalty strength within this range.

F Extra Visualization Results

Figure 13 extends the planning-cost analysis with additional examples across environments and base models. Each triplet evaluates the same action sequences on a shared two-dimensional slice, showing the real goal error, baseline planning cost, and ACA planning cost. In these examples, low baseline cost can favor plans with relatively poor physical outcomes, whereas ACA shifts the model preference toward plans with lower

Table 2: Training and planning hyperparameters.

Hyperparameter	Value
Training	
Optimizer	AdamW
Learning rate	10^{-4}
Weight decay	10^{-3}
Batch size	256
Training epochs	10
Gradient clipping	1.0
Planning	
Planning horizon H	5 model steps
Executed steps K	5 model steps
Action block	5 primitive actions
CEM population	300
CEM iterations	30
CEM elites	30
Initial CEM variance scale	1.0
Evaluation tasks	100
Goal offset	25 primitive steps
Evaluation budget	50 primitive steps

real goal error. The relevant improvement is in which plans the model favors, rather than exact agreement between the learned and physical cost landscapes. These visualizations relate changes in learned action preferences to physical goal attainment and provide qualitative evidence that complements the aggregate planning results.

G Performance Under Additional Planning Settings

We complement the main evaluation with single-plan and long-horizon settings to examine planning without intermediate feedback and over longer predicted trajectories.

Single-plan evaluation. We select goal observations 25 primitive steps after the initial observations and set the execution budget to 25 steps. The planner optimizes five action blocks, each containing five primitive actions, and executes the resulting sequence without replanning. This setting tests the quality of the initially selected plan, since actions cannot be corrected using intermediate observations. As shown in Table 4, ACA improves the reported success rates of both base models across all evaluated environments and protocols, supporting its usefulness when execution relies entirely on the initial action selection.

Long-horizon evaluation. We extend both the goal offset and execution budget to 50 primitive steps. The planner optimizes ten action blocks at the initial state and executes the full sequence without replanning. Selecting actions now requires evaluating their consequences through twice as many autoregressive prediction steps. This tests whether the local factual-counterfactual comparisons introduced during one-step training remain useful for selecting longer action sequences. Table 5 shows higher reported success rates with ACA for both base models across all evaluated environments and protocols, providing evidence that its planning benefits extend to longer open-loop execution.

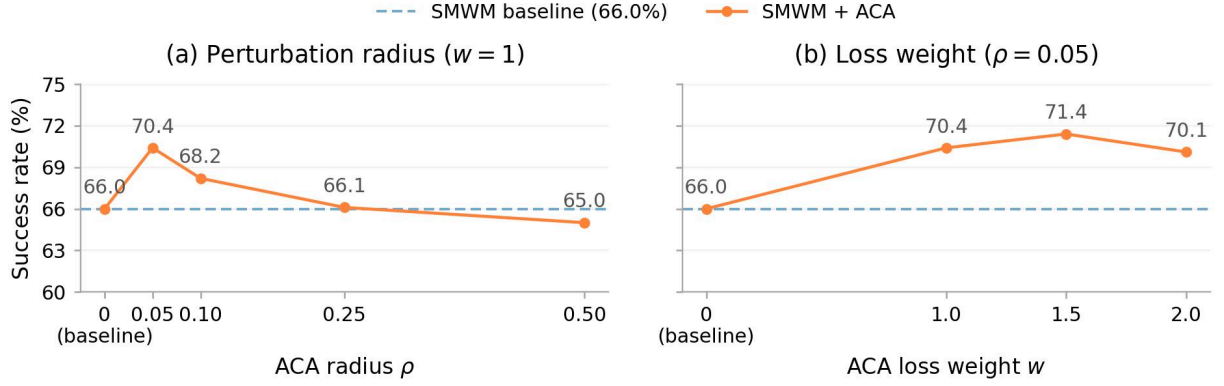


Figure 12: Sensitive Analysis on Reacher

Table 3: Hyperparameter configurations across environments. An asterisk denotes the strict evaluation protocol.


Environment	Method	InvReg λ	SIGReg λ	ACA ρ	ACA w
TwoRoom	SMWM	0.1	–	–	–
TwoRoom	LeWM	–	0.09	–	–
TwoRoom	SMWM+ACA	0.1	–	0.10	1.0
TwoRoom	LeWM+ACA	–	0.09	0.10	1.0
TwoRoom*	SMWM	0.1	–	–	–
TwoRoom*	LeWM	–	0.09	–	–
TwoRoom*	SMWM+ACA	0.1	–	0.25	1.0
TwoRoom*	LeWM+ACA	–	0.09	0.05	1.0
Reacher	SMWM	5.0	–	–	–
Reacher	LeWM	–	0.09	–	–
Reacher	SMWM+ACA	5.0	–	0.05	1.5
Reacher	LeWM+ACA	–	0.09	0.50	1.0
Cube	SMWM	1.0	–	–	–
Cube	LeWM	–	0.09	–	–
Cube	SMWM+ACA	1.0	–	0.05	1.5
Cube	LeWM+ACA	–	0.09	0.05	1.5
Cube*	SMWM	1.0	–	–	–
Cube*	LeWM	–	0.09	–	–
Cube*	SMWM+ACA	1.0	–	0.10	1.5
Cube*	LeWM+ACA	–	0.09	0.05	1.5
Push-T	SMWM	30.0	–	–	–
Push-T	LeWM	–	0.09	–	–
Push-T	SMWM+ACA	30.0	–	0.25	1.0
Push-T	LeWM+ACA	–	0.09	0.25	1.5

Table 4: Single-plan evaluation. Success rates (%) with a goal offset, planning horizon, and execution budget of 25 primitive steps. A single action sequence is optimized from the initial observation and executed without replanning. An asterisk denotes the strict evaluation protocol. Success rates (%) are reported as mean, the standard deviation is provided in Table 8.


Method	TwoRoom	TwoRoom*	Reacher	Push-T	OGBench-Cube	OGBench-Cube*
LeWM	89.8	37.0	36.6	76.6	60.0	22.0
SMWM	92.6	25.8	33.4	81.6	82.2	45.2
LeWM+ACA	90.2	39.6	38.4	78.6	63.0	23.8
SMWM+ACA	97.0	67.2	39.6	83.0	85.0	47.2

Table 5: Long-horizon evaluation. Success rates (%) with a goal offset, planning horizon, and execution budget of 50 primitive steps. The complete 50-step action sequence is planned at the initial state and executed without intermediate replanning. An asterisk denotes the strict evaluation protocol. Success rates (%) are reported as mean, the standard deviation is reported in Table 9


Method	TwoRoom	TwoRoom*	Reacher	Push-T	OGBench-Cube	OGBench-Cube*
LeWM	56.0	22.6	26.6	19.2	37.6	16.6
SMWM	55.6	32.0	28.2	33.0	49.0	34.8
LeWM+ACA	59.6	27.6	28.8	20.6	40.0	17.8
SMWM+ACA	77.4	61.2	30.6	34.4	52.4	38.0

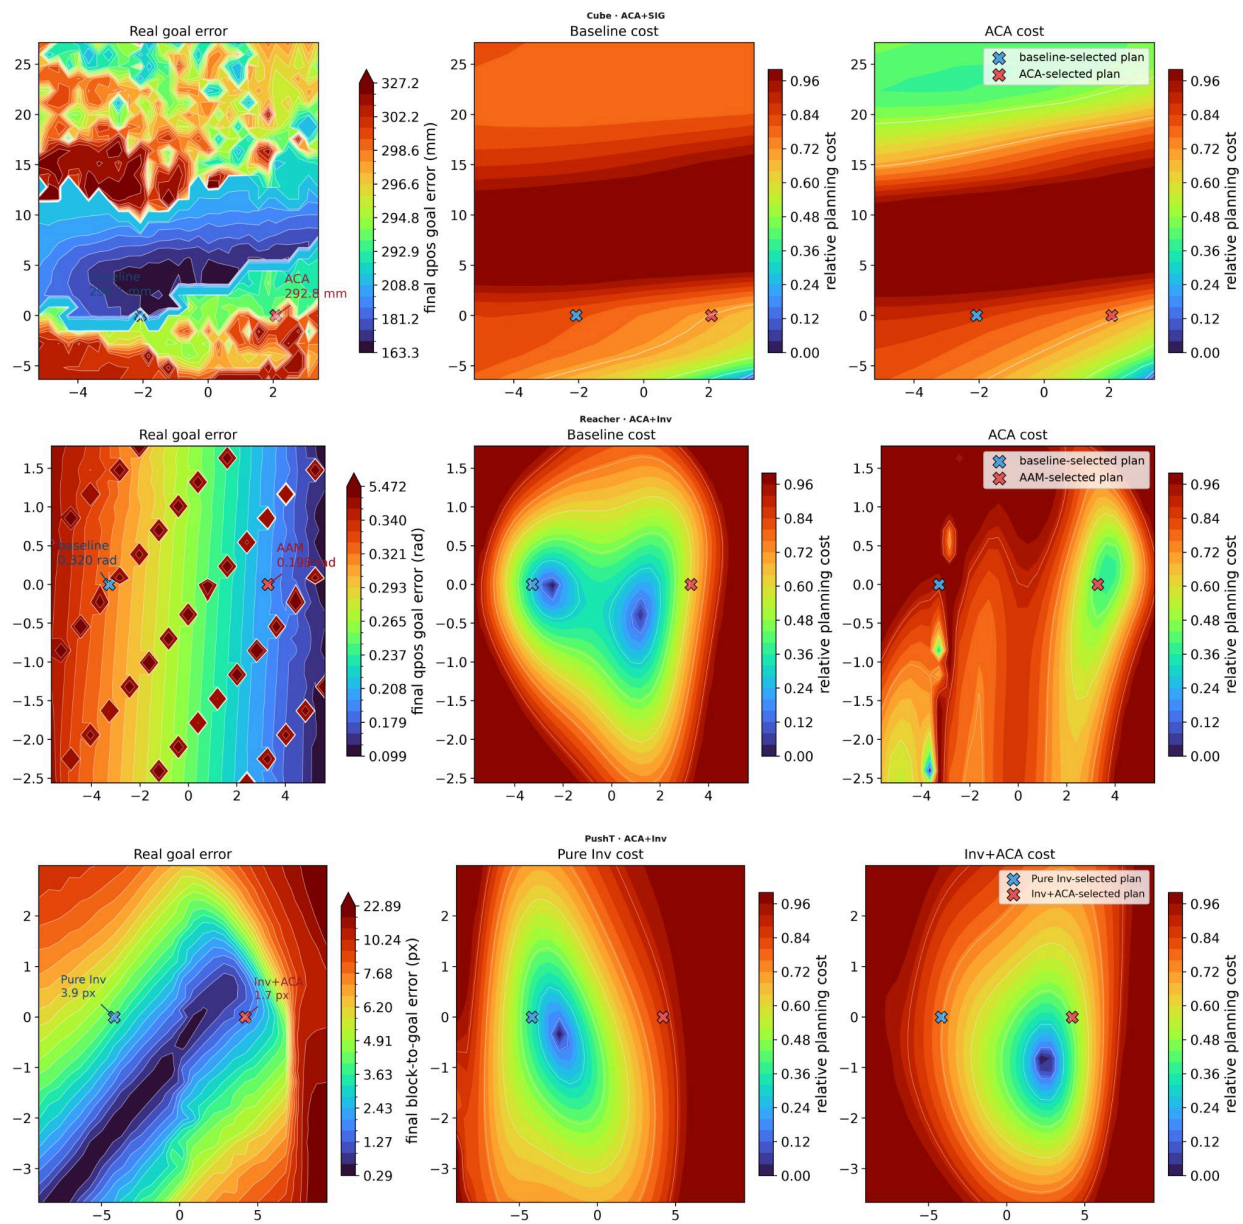

(a)

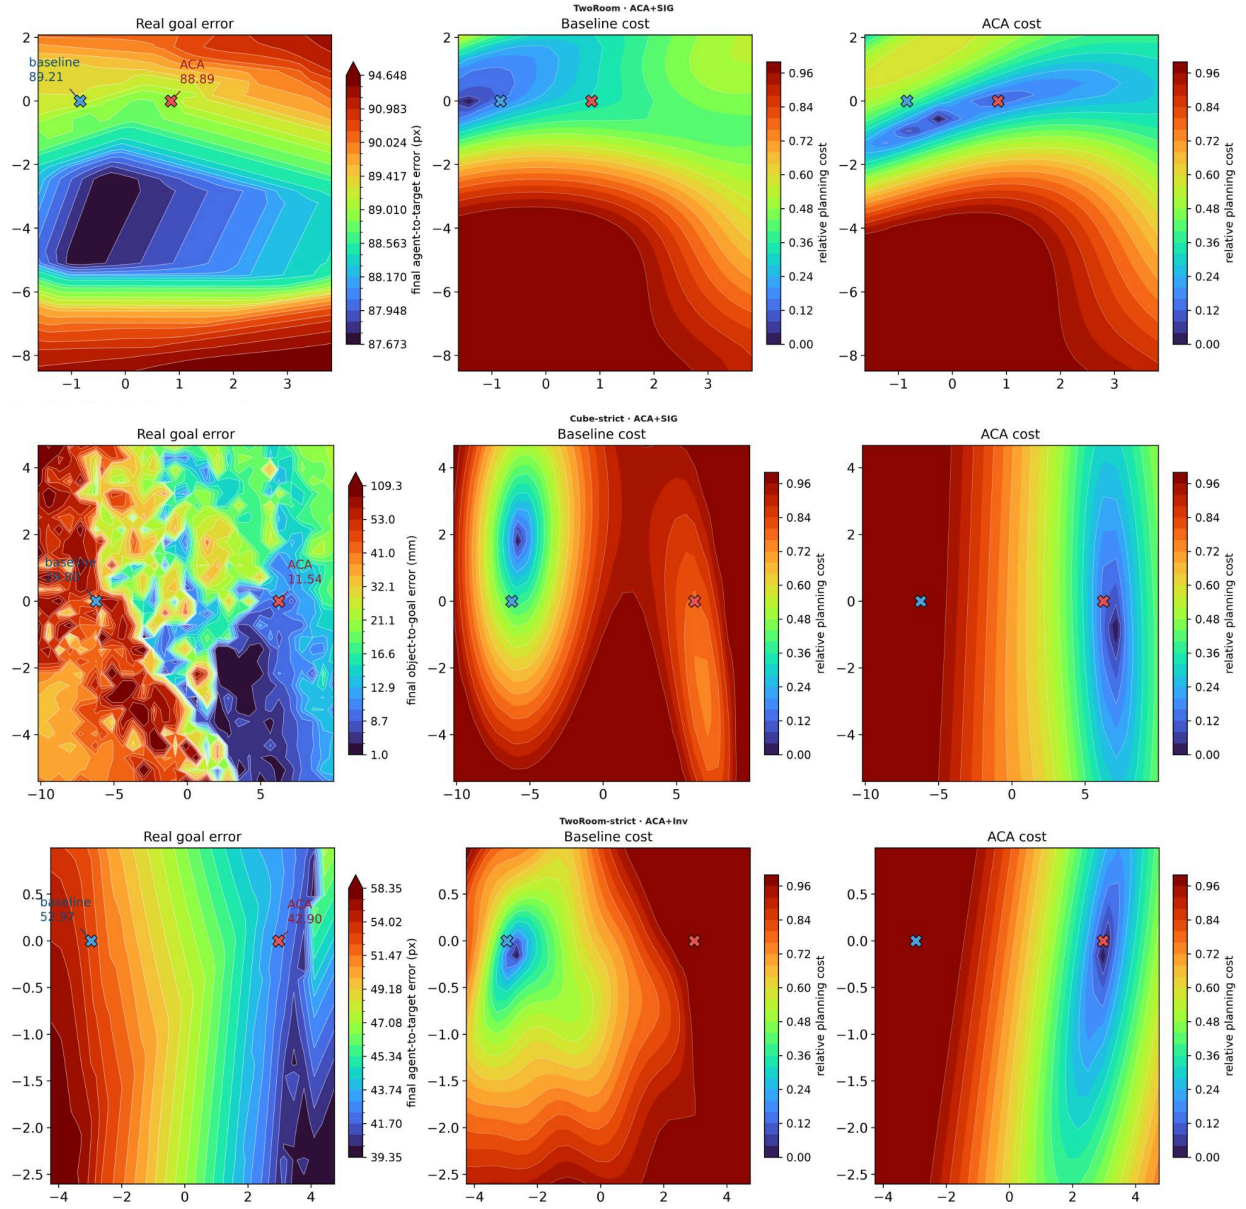

(b)

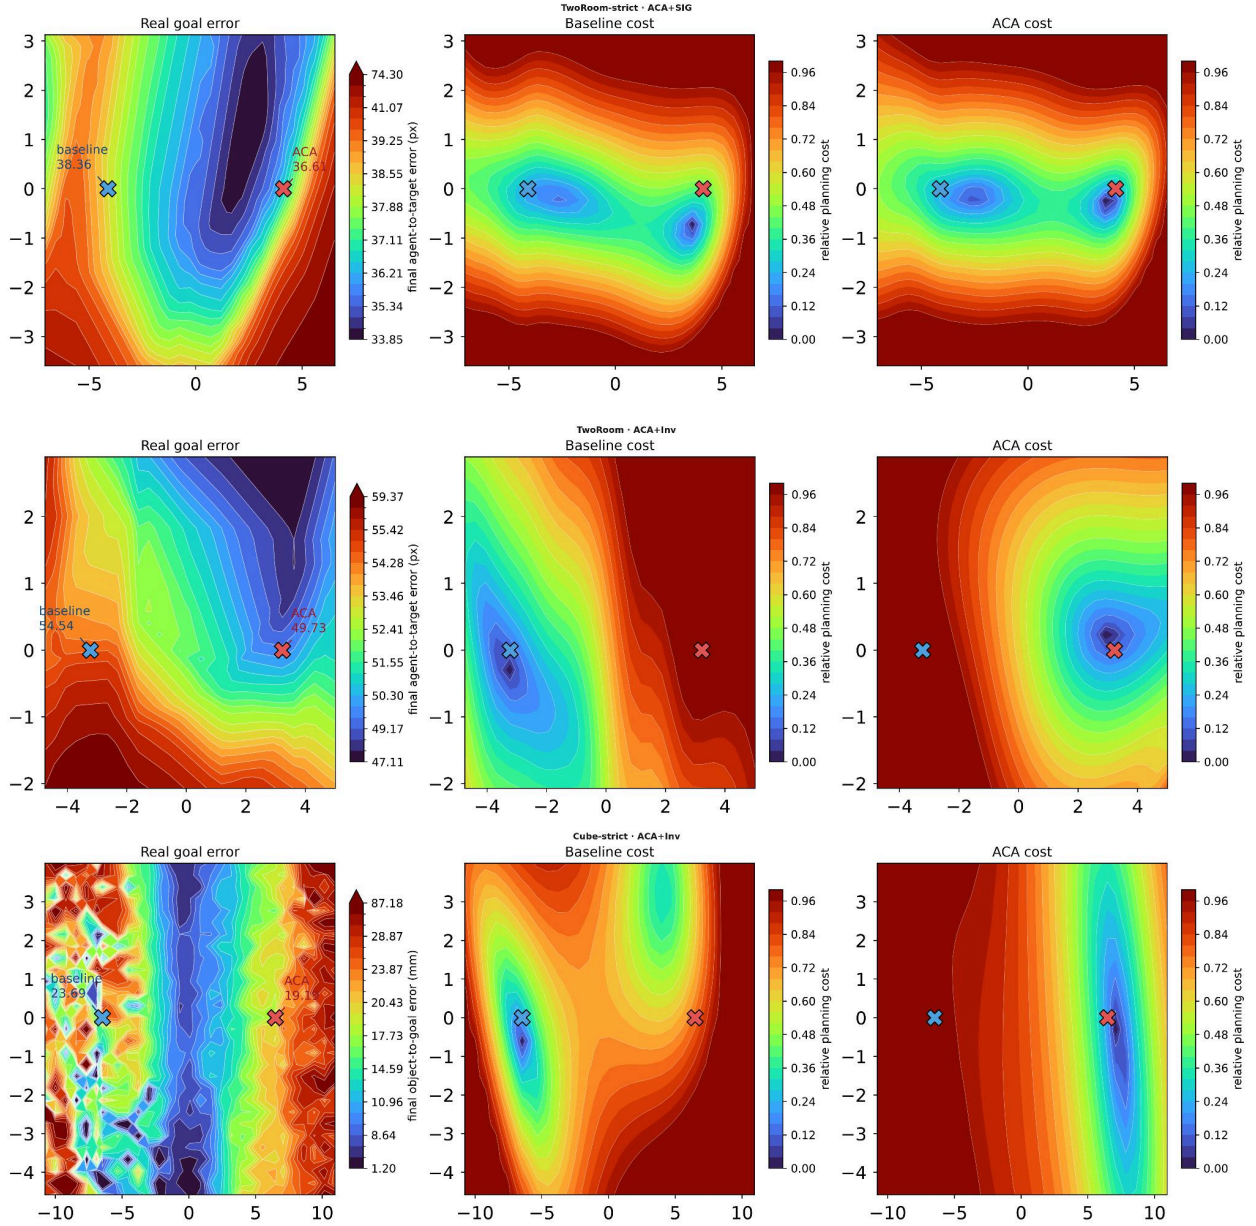

(c)

Figure 13: Additional visualizations of planning costs and physical outcomes. Each triplet shows real goal error, baseline planning cost, and ACA planning cost for the same action plans on a shared two-dimensional slice. The marked plans illustrate how model-based action selection translates into physical goal attainment across the displayed environments and base models.

Table 6: Ablation of action search and regularization with SMWM trained on 5% of the training data. Success rates (%) are reported as mean $\pm$ standard deviation over five planner seeds. An asterisk denotes the CLEAR strict evaluation protocol.

Method	Reacher	OGBench-Cube	OGBench-Cube*
SMWM	48.0 $\pm$ 3.8	65.4 $\pm$ 3.3	24.0 $\pm$ 2.4
SMWM + Random-ACA	53.4 $\pm$ 1.7	66.8 $\pm$ 2.5	25.6 $\pm$ 4.0
SMWM + Gradient-norm penalty	52.0 $\pm$ 6.9	70.4 $\pm$ 2.5	31.0 $\pm$ 3.0
SMWM + ACA	56.8 $\pm$ 3.7	74.0 $\pm$ 2.4	36.4 $\pm$ 4.2

H Ablation of Action Search and Regularization

We examine how the candidate search direction and the form of action-based regularization affect planning performance. Using SMWM as the base model, we compare ACA with random-direction comparisons and direct action-gradient regularization. Both variants retain the forward-prediction and inverse-dynamics objectives and replace only the ACA term.

Comparison objectives. **Random-ACA** replaces the negative-gradient search direction with a uniformly sampled unit vector while retaining the same nominal perturbation radius, action-space projection, and factual-counterfactual comparison:

$$\begin{aligned}\hat{a}_t^{\text{rand}} &= \Pi_{\mathcal{A}}(a_t + \rho u_t), \quad u_t \sim \text{Unif}(\mathbb{S}^{d_a-1}), \\ \mathcal{L}_{\text{rand}} &= \mathbb{E}_{\mathcal{B}, \{u_\tau\}} \left[\left[\frac{1}{|\mathcal{B}|} \sum_{\tau \in \mathcal{B}} (E_\phi(a_t; \tau) - E_\phi(\hat{a}_t^{\text{rand}}; \tau)) \right]_+ \right].\end{aligned}\tag{18}$$

This variant evaluates the contribution of directing comparisons toward alternatives with lower prediction error. **Gradient-norm penalty** directly regularizes the sensitivity of the factual prediction error to the conditioning action:

$$\mathcal{L}_{\text{grad}} = \mathbb{E}_\tau [\rho \|g_t\|_2], \quad g_t = \nabla_a E_\phi(a; \tau)|_{a=a_t}.\tag{19}$$

Optimizing this penalty requires differentiating through g_t , which introduces mixed second-order derivatives with respect to actions and model parameters. ACA instead stops gradients through the searched candidate and therefore avoids these second-order derivatives through the action-search procedure. For locally smooth errors and small unprojected steps, ignoring numerical stabilization, the minibatch ACA penalty is approximately $\hat{\mathcal{L}}_{\text{ACA}}(\mathcal{B}) \approx \frac{\rho}{|\mathcal{B}|} \sum_{\tau \in \mathcal{B}} \|g_t\|_2$. The gradient-norm control captures this leading-order behavior, while ACA evaluates the actual error difference at the perturbed action.

Importantly, this approximation concerns the gradient of the *prediction error*, rather than the action sensitivity of the predictor itself. Let

$$r_t = P_\phi(z_t, a_t) - z_{t+1}, \quad J_t = \left. \frac{\partial P_\phi(z_t, a)}{\partial a} \right|_{a=a_t}.$$

Then

$$\nabla_a E_\phi(a_t; \tau) = 2J_t^\top r_t.$$

Hence, reducing the factual error gradient does not in general imply reducing the predictor’s action Jacobian. In particular, an accurate action-sensitive predictor may satisfy $r_t = 0$ and therefore $\nabla_a E_\phi(a_t; \tau) = 0$, while still having $J_t \neq 0$. Thus, the first-order approximation above should not be interpreted as showing that ACA necessarily makes the predictor locally action-invariant. At the same time, ACA alone does not exclude an action-independent solution; we therefore regard it as a local comparison regularizer within the joint training objective.

Table 7: Standard deviation of success rates across five planner seeds under the 25-step, 2-plan evaluation protocol (in percentage points). The main results is in Table 1.

Environment	LeWM		SMWM	
	Baseline	+ ACA	Baseline	+ ACA
Cube	2.88	1.73	1.64	3.35
Cube-strict	3.36	2.77	3.03	2.39
Reacher	3.11	2.19	3.58	2.65
Push-T	2.35	3.85	3.21	2.30
TwoRoom	1.53	1.22	1.10	1.10
TwoRoom-strict	2.68	3.51	2.12	2.59

Table 8: Sample standard deviation of success rates across five planner seeds under the 25-step, 1-plan evaluation protocol (in percentage). The main result is shown in Table 4.

Environment	LeWM		SMWM	
	Baseline	+ ACA	Baseline	+ ACA
Cube	2.55	1.58	1.64	1.87
Cube-strict	3.74	2.17	3.96	4.97
Reacher	2.65	2.51	2.88	2.79
Push-T	2.70	2.12	1.67	3.35
TwoRoom	0.84	1.79	2.07	1.41
TwoRoom-strict	1.00	2.51	5.17	4.76

Experimental setup. We use the same 5% training subset within each environment and a shared planning protocol across variants. Reacher models are trained for 20 epochs and OGBench-Cube models for 10 epochs, using cosine learning-rate annealing from 10^{-4} . The regularized variants use $(\rho, \lambda_{ACA}) = (0.05, 1.0)$ on Reacher and $(0.25, 1.5)$ on OGBench-Cube, with λ_{ACA} weighting the corresponding additional objective. We evaluate Cube under both the standard and CLEAR strict protocols.

Results and analysis. Table 6 shows that both controls improve mean planning success over SMWM, suggesting that local action comparisons and error-gradient regularization each provide useful training signals. ACA achieves the highest mean success rate across all three evaluation settings. Its advantage over Random-ACA supports the value of directing comparisons toward actions that challenge the factual explanation. Relative to the gradient-norm penalty, ACA improves success by 4.8, 3.6, and 5.4 percentage points on Reacher, OGBench-Cube, and OGBench-Cube*, respectively. The advantage also holds under the stricter Cube success criterion, supporting its usefulness when goal attainment requires greater physical precision. Together, these results favor explicit factual-counterfactual comparisons at a finite perturbation radius over the tested random-direction and local gradient-norm alternatives.

I Variability Across Planner Seeds

Tables 7, 8, 9 summarize the standard deviations across five planner random seeds for each fixed trained checkpoint, expressed in percentage points. These results cover the main experiments in this paper. This evaluation follows the benchmark protocol adopted from SMWM; we therefore keep the trained checkpoint fixed and vary the stochastic planner seed for both baseline and ACA models. Across the evaluated environments and protocols, the standard deviations are generally remain comparable in magnitude between the baseline and ACA. These statistics characterize the variability introduced by stochastic planning and provide additional context for interpreting the corresponding mean performance.

Table 9: Standard deviation of success rates across five planner seeds under the 50-step, 1-plan evaluation protocol (in percentage points). The main result is shown in Table 5.

Environment	LeWM		SMWM	
	Baseline	+ ACA	Baseline	+ ACA
Cube	3.29	1.41	3.24	2.30
Cube-strict	1.87	2.24	1.79	3.54
Reacher	2.82	3.12	3.96	3.63
Push-T	1.14	2.39	4.69	2.30
TwoRoom	3.54	4.16	1.52	0.55
TwoRoom-strict	4.16	2.30	3.83	2.78

J Discussion

Positioning ACA. The approaches discussed in section 7 emphasize preserving action-relevant information and making predictions useful for decision making. Our work makes the connection between these requirements explicit through the action evaluations induced by the predictor. For latent action-conditioned world models exemplified by joint-embedding approaches, planning evaluates candidate actions through predicted latent trajectories. The predictor therefore determines not only what future is imagined, but also which action appears preferable. We examine this connection at the level of individual transitions. This makes the prediction-planning gap concrete as a discrepancy between model preference and physical target attainment. It also provides a direct training opportunity: the factual action-consequence pair supplies a reference for supervising the same comparisons that expose the discrepancy. ACA turns this reference into a local objective that penalizes the error advantage assigned to searched alternatives. In this way, ACA complements the approaches above by translating the requirement of decision-relevant prediction into explicit comparison supervision on the existing forward predictor, without additional outcome labels for the alternatives or a separate evaluation module.

A shift in generalization requirements. In standard supervised prediction, generalization primarily concerns transfer from a finite training sample to unseen examples, with training and deployment typically organized around the same predictive task. Methods such as SAM [17] seek to improve the model generalization performance on unseen data distribution within this framework. Action-conditioned world models used for planning extend this requirement: they learn dynamics from transitions that have occurred, but are subsequently queried to imagine futures under candidate actions for a given goal. Actions thus change from conditions supplied by the dataset to variables actively varied and selected during decision making. The learned dynamics must also be reused across new combinations of action sequences and goals. Transfer therefore occurs not only across examples, but also across uses of the learned knowledge: from accounting for recorded experience to reasoning about and selecting possible actions. This requirement persists even when the environment and its physical dynamics remain unchanged, because transitions covered by data-collection behavior need not cover the possibilities that goal-directed planning must compare. Generalization in world models consequently concerns both prediction on unseen transitions and whether those predictions remain useful under action variation, multi-step composition, and changing goals. The prediction-planning gap reflects a possible disconnect between these requirements: generalization on the predictive task does not automatically imply effective use of the learned dynamics for planning.

K Scope and limitation

Our study focuses on latent action-conditioned world models (mainly JEPA-style models empirically) on simulated visual control tasks, other architectures are not discussed and considered here. We believe extending ACA to larger world models and real-world robotic systems is a promising direction for further validation.