

BEFORE ATTENTION SINKS FORM: HIDDEN-STATE GEOMETRY REVEALS AND MODULATES THEIR FORMATION

Fan Yang, Yue Song*
College of AI, Tsinghua University

ABSTRACT

Attention sinks are usually studied after they have formed. We ask whether a measurable hidden-state change appears beforehand and whether changing that geometry alters what happens later. To remove network depth as a shortcut, we compare prompts in the same model and at the same layer. When sink timing varies across prompts, simple spectral summaries of the hidden states add information beyond current attention, with the clearest prompt-specific signal in a short window about two to three layers before sink formation. The predictive strength varies across cohorts, so we treat the spectrum as a readout of a pre-sink state change rather than a universal warning statistic. The signal is broader than one measured extreme activation. We then modify only the singular values of the post-layer hidden states after current attention has already been computed. These interventions change later sink behavior in Qwen2.5, GLM-Z1, and GPT-OSS relative to norm-matched random spectral perturbations. In Qwen2.5, the immediate suppressive effect is accompanied by a reduction in next-layer query–key preference for position 0, and the learned spectral directions remain stable when estimated from substantially less training data. Together, the results show that attention sinks are preceded by a short spectral reorganization of hidden states, and directly perturbing this geometry can causally alter subsequent sink formation. The source code for the observational analyses, spectral interventions, and robustness experiments is available at <https://github.com/fyangRobert/attention-sink-geometry>

1 INTRODUCTION

Attention sinks are a widely observed behavior in transformer-based large language models (LLMs): a large fraction of attention can concentrate on an early or special token even when that token is not important to the current prediction (Xiao et al., 2024). They also matter for long-context inference and KV-cache management, where retaining sink tokens can stabilize generation (Xiao et al., 2024; Su and Yuan, 2025). Yet most existing work studies sinks after they have already appeared. Much less is known about what happens in the hidden states before a sink forms.

Our main finding is simple: **attention sinks are preceded by a short spectral reorganization of hidden states, and directly perturbing this geometry can causally alter subsequent sink formation.** The first part is observational: hidden-state geometry changes before the attention pattern becomes visible. The second part is causal: modifying the same geometry after the current layer has already finished computing attention can change sink behavior in later layers.

Studying the observational part requires a strict control for network depth. Sink formation is often tied to a characteristic layer, so a model can appear to predict future sink formation simply by learning where it is in the network. We therefore compare prompts only within the same model and at the same current layer. In this setting, model identity and depth are fixed, and the question is whether prompts that have not yet formed a sink already differ in their hidden states according to how soon a sink will subsequently appear.

*Corresponding author.

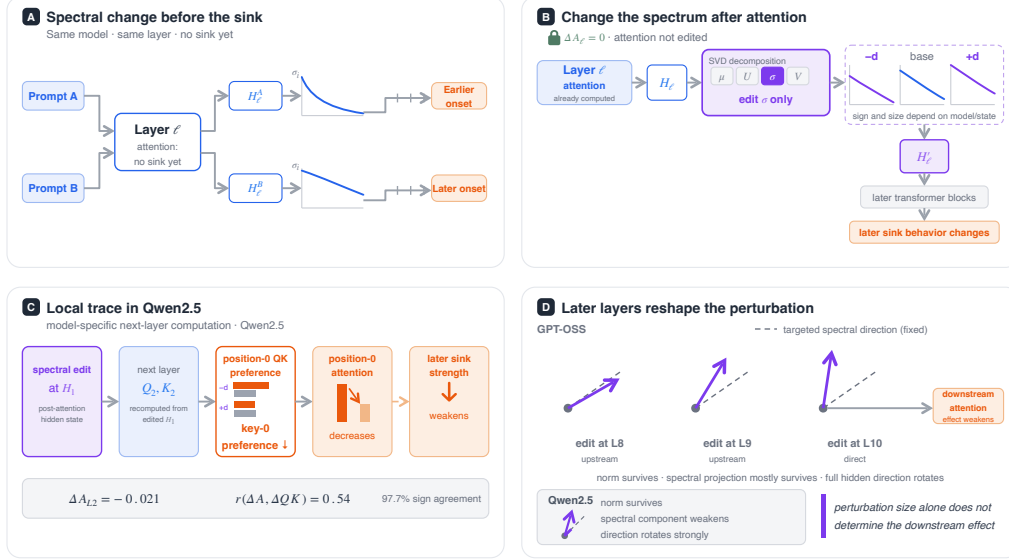


Figure 1: **Overview of the observational and causal analyses.** (A) We compare prompts in the same model and at the same layer before either has formed a sink, and ask whether their hidden-state spectra already differ before their later sink timing diverges. (B) After the source-layer attention has been computed, we modify only the singular values of the post-layer hidden state while keeping the token mean and singular subspaces fixed; current attention is therefore unchanged, and we measure how later sink behavior responds. (C) In Qwen2.5, the immediate effect of the spectral edit is associated with a change in the next layer’s relative QK preference for position 0 and a corresponding change in position-0 attention. (D) Tracking the perturbation across layers shows that its norm can survive while its full hidden-state direction rotates and its targeted spectral component may either persist or weaken, helping explain why the downstream effect depends on where the edit is introduced.

We measure this structure using simple summaries of the singular spectrum of the prompt-specific token-by-hidden-state matrix. Where sink timing varies across prompts, these spectral features add information beyond current attention. The pooled effect extends over several short horizons, but the clearest prompt-specific evidence under strict within-cell evaluation is concentrated roughly two to three layers before sink formation. Its predictive strength varies across prompt cohorts, so we interpret the spectrum as a readout of a pre-sink representation change rather than as a universal warning statistic.

The spectral change is not well explained by a single unusually large activation. Compact measures of hidden-state amplitude and concentration leave substantial incremental spectral information, whereas broader descriptions of the distributed activation state contain much of the same predictive information. Qwen3 provides a complementary timing example: 10 prompts form sinks at layer 3 and 40 at layer 7, yet under a stringent criterion the abrupt extreme-activation event occurs at layer 6 for both groups. Its timing therefore cannot explain the prompt-specific difference between early and late sink formation.

We next intervene directly on the spectral geometry. The edit is applied after the source layer has already computed attention and changes only the singular values of the post-layer hidden state, while preserving the token mean, singular subspaces, and centered spectral energy. Random spectral directions are matched to the same realized perturbation norm. These spectrum-only edits change later sink behavior in Qwen2.5, GLM-Z1, and GPT-OSS, while the source-layer attention remains unchanged. The effect is not universal in sign: the naturally observed near-state direction suppresses later sink strength in Qwen2.5 and GLM-Z1, whereas the frozen GPT-OSS direction strengthens its later full-attention sink endpoint. Thus the spectrum is a causally actionable coordinate of the hidden state without being a one-dimensional “toward-sink” axis.

Table 1: **Key results and their reference points.** For observational rows, AP is the prompt-grouped out-of-fold average precision for predicting future sink formation at the specified horizon. We report the attention-only baseline $AP(\mathcal{A})$ and the gain from adding hidden-state spectral features, $\Delta AP = AP(\mathcal{A} + S) - AP(\mathcal{A})$. Comparisons are made within the same model and current layer. Intervention rows instead report changes in later sink strength under controlled post-layer spectral edits and therefore do not use AP.

Question	What is compared	Main result	What it means
Does the spectrum add information before a sink forms?	Current attention only ($\mathcal{A}$) vs. current attention plus spectrum ($\mathcal{A} + S$), with model and layer matched.	Exact 1: $AP .857 \rightarrow .913$ ($\Delta AP = +.056, [.028, .087]$). Strict within-cell: Within 2 $+ .107$ $+.048, .155$; Within 3 $+ .053$ $+.002, .101$; Within 4 $-.021$ $[-.037, .029]$.	The extra information is clearest about two to three layers before the sink.
Does changing the spectrum change later sink behavior?	For the learned direction, opposite signs ($+d$ vs. $-d$) are compared at the same perturbation size. That directional gap is then tested against gaps from norm-matched random spectral directions.	Later-sink directional gap: Qwen2.5: $-.00833, p = .0308$; GLM-Z1: $-.01525, p = .0308$; GPT-OSS: $+.05625$, two-sided $p = .0462$; 30/30 fresh prompts have the same positive sign.	Yes, but the direction and size of the effect depend on model and state.
What changes immediately after the Qwen2.5 edit?	Opposite signs of the learned spectral direction are compared at the same perturbation size; source-layer attention is unchanged.	Next-layer position-0 attention changes by $-.0214$. The QK-preference change tracks the attention change: $r = .544$, with 97.7% sign agreement.	The immediate suppressive effect is associated with lower next-layer preference for position 0.
Can the edit direction be estimated from less data?	Directions estimated from reduced training sets are compared with the full-data direction or with an independently estimated half-sample direction.	Qwen2.5: disjoint-half direction cosine .979. GPT-OSS: half-data effect $+.05634$ vs. full-data effect $+.05625$ (effect ratio 1.002).	The learned direction and its downstream effect are stable under substantial data reduction.

The downstream effect also depends on what later transformer blocks do to the perturbation. In Qwen2.5, the immediate suppressive effect is accompanied by a reduction in the next layer’s relative query–key preference for position 0. Farther downstream, GPT-OSS can preserve both perturbation norm and most of the targeted spectral component while rotating the full hidden-state displacement and sharply weakening the attention effect. Qwen2.5 shows a related but different pattern: the perturbation norm survives, but much of the targeted spectral component is filtered and the remaining hidden-state change is strongly reoriented. These results help explain why the effect of a spectral edit depends on where it is introduced.

Contributions. We make three contributions:

- **Pre-sink state change.** We identify a short spectral reorganization before sink formation using same-model, same-layer comparisons, and characterize the cohort dependence and boundary conditions of this observational signal.
- **Controlled spectral intervention.** We show that modifying only post-layer singular values can change later sink behavior while current attention remains fixed, with evidence from Qwen2.5, GLM-Z1, and a frozen GPT-OSS confirmation against norm-matched random directions.
- **Local and cross-layer explanation.** We trace the immediate Qwen2.5 effect to reduced next-layer position-0 query–key preference and show that later transformer blocks reshape the perturbation, explaining why its downstream effect depends on source layer and model state.

2 RELATED WORK

Attention sinks. StreamingLLM showed that keeping early sink tokens can stabilize streaming generation (Xiao et al., 2024). Later work studied where sinks appear, how training, normalization,

context length, and data distribution affect them, and how sink-aware methods can improve KV-cache management (Yu et al., 2024; Gu et al., 2025; Barbero et al., 2025; Su and Yuan, 2025). Mechanistic work has related sinks to active–dormant attention heads and the joint emergence of value-state drains and residual-state peaks (Guo et al., 2024), while a recent geometric account interprets sink tokens as reference frames that anchor representational spaces (Ruscio et al., 2025). Large residual activations have also been linked to sink behavior (Sun et al., 2024), while representation compression has been associated with related sink phenomena (Queipo-de Llano et al., 2025). We instead ask what changes *within a forward pass before* the sink appears for a particular prompt and whether directly changing that hidden-state geometry alters later sink formation.

Hidden-state geometry. Transformer representations vary systematically across layers in anisotropy, dominant directions, rank, clustering, and signal propagation (Ethayarajh, 2019; Timkey and van Schijndel, 2021; Dong et al., 2021; Noci et al., 2022; Kedia et al., 2024; Geshkovski et al., 2023). Recent work connects layerwise and spectral geometry to attention and representation dynamics (Viswanathan et al., 2025; Li et al., 2026; Cancedda, 2024), and spectral transformations have been used to remove information from neural representations (Shao et al., 2023). Cancedda’s spectral filters partition the singular directions of the model’s vocabulary embedding and unembedding matrices; our object is different: the singular spectrum of the prompt-specific token-by-hidden-state matrix at each layer. We use this spectrum first to measure a short pre-sink change and then to test that geometry directly.

Interventions in hidden representations. Causal tracing and activation patching measure downstream effects of replacing or restoring hidden states (Meng et al., 2022); related work steers models with learned activation directions (Li et al., 2023; Turner et al., 2023; Zou et al., 2023; Lai et al., 2025). Our intervention keeps the token mean and singular subspaces fixed, changes only the singular values, and compares the result with random spectral perturbations of the same size.

Taken together, prior work explains how attention sinks behave after they appear and provides general tools for intervening on hidden representations. What remains unclear is whether a prompt-specific representation change appears *before* a sink forms and whether directly changing that geometry alters later sink behavior. These are the two questions we test below.

3 MEASURING THE PRE-SINK CHANGE

This section defines the two tests used throughout the paper. First, we ask whether the current hidden state contains prompt-specific information about future sink formation while model and current layer are held fixed. Second, we define a post-layer spectrum-only edit that leaves current attention unchanged, allowing later changes to be tested directly. We use later layers only to determine when the sink forms. The first two subsections define the observational test; the last defines the intervention.

3.1 DEFINING WHEN A SINK FORMS

For prompt i , let $A_{a,q,k}^{(i,\ell)}$ be the attention weight from query q to key k in head a . We focus on position $k = 0$ and average over late queries,

$$\bar{a}_a^{(i,\ell)}(q_{\min}) = \frac{1}{T_i - q_{\min}} \sum_{q=q_{\min}}^{T_i-1} A_{a,q,0}^{(i,\ell)}. \quad (1)$$

The fraction of heads whose average exceeds ε is

$$s_\varepsilon^{(i,\ell)}(q_{\min}) = \frac{1}{N_h} \sum_a \mathbf{1}\{\bar{a}_a^{(i,\ell)}(q_{\min}) > \varepsilon\}. \quad (2)$$

With $q_{\min} = 16$, $\varepsilon = 0.3$, and $\theta = 0.5$, the primary sink-formation layer is

$$\tau_i = \min\{\ell : s_\varepsilon^{(i,\ell)}(q_{\min}) \geq \theta\}. \quad (3)$$

We study the canonical position-0 sink throughout; whether the same precursor appears before sinks at other token positions is outside the scope of this work. We analyze only $\ell < \tau_i$. Because a

sink-like state does not always remain present after its first appearance, we also repeat the analysis with definitions requiring the condition to hold for two or three consecutive layers.

To measure how early the hidden-state change can be detected, we use

$$y_{i,\ell,h}^{\text{exact}} = \mathbf{1}\{\tau_i - \ell = h\}, \quad y_{i,\ell,h}^{\text{within}} = \mathbf{1}\{1 \leq \tau_i - \ell \leq h\}, \quad (4)$$

for $h \in \{1, 2, 3, 4, 6\}$. The first asks whether the sink forms exactly h layers later; the second asks whether it forms within the next h layers. These are analysis labels rather than a proposed deployed warning system. Threshold and context-length checks are in Appendix C.

3.2 HIDDEN-STATE SPECTRUM AND SAME-LAYER EVALUATION

Let $H_i^{(\ell)} \in \mathbb{R}^{T_i \times d}$ be the hidden-state matrix after layer ℓ . We center it across tokens,

$$\tilde{H}_i^{(\ell)} = H_i^{(\ell)} - \mathbf{1}\bar{h}_i^{(\ell)\top}, \quad (5)$$

and compute its singular values. The spectral family $\mathcal{S}$ contains five summaries—log-log slope, spectral entropy, effective rank, leading singular energy, and top-five energy—together with nearby layerwise changes. These statistics describe how variation across token representations is distributed across hidden directions. Full definitions are in Appendix A.1.

For each target, we keep only model-layer groups containing both prompts whose sinks form soon and prompts whose sinks form later. Within such a group, model and current depth are identical. We compare an attention feature family $\mathcal{A}$ with $\mathcal{A} + \mathcal{S}$ using ℓ_2 -regularized logistic models. All rows from one prompt stay in the same fold; we use 5-fold grouped outer evaluation, 4-fold grouped inner model selection, fold-local preprocessing, and prompt-level bootstrap uncertainty. Average precision (AP) is the primary metric. Stricter tests remove model-layer spectral offsets or evaluate AP directly inside each matched group.

Evaluation Metric. For a target horizon h , each pre-sink observation receives a binary label: positive if a sink forms at the specified future horizon (Exact- h), or within the next h layers (Within- h), and negative otherwise. We use average precision (AP) to measure how well the current state ranks positive prompts above negative prompts. Our primary quantity is the incremental out-of-fold performance

$$\Delta\text{AP} = \text{AP}(\mathcal{A} + \mathcal{S}) - \text{AP}(\mathcal{A}), \quad (6)$$

where $\mathcal{A}$ is the current-attention baseline and $\mathcal{S}$ is the hidden-state spectral feature family. Thus $\Delta\text{AP} > 0$ means that the hidden-state spectrum adds information about whether a sink will form soon beyond what is already available from current attention. Unless otherwise stated, AP is computed from prompt-grouped out-of-fold predictions in the matched model-layer cohort; stricter within-cell analyses evaluate the same ranking question separately inside each matched group.

Primary result and controls. For the primary Exact 1 target, the attention baseline achieves $\text{AP} = .857$, while adding spectral features increases performance to .913, giving $\Delta\text{AP} = +.056$ with a prompt-bootstrap 95% confidence interval of $[.028, .087]$. The increment remains positive after all threshold-derived sink-score features are removed from the attention baseline ($\Delta\text{AP} = +.085$ $[.051, .123]$), showing that the result is not driven by reusing threshold-based quantities that also define when the sink first appears. Across future horizons, the pooled association extends through roughly four layers, while strict within-cell and sustained-onset analyses place the clearest prompt-specific signal about two to three layers before the sink forms.

3.3 DIRECT SPECTRAL INTERVENTION

Prediction alone does not show that the spectral change matters. For the causal experiment, write the centered post-layer state as

$$\tilde{H} = H - \mathbf{1}\mu^\top = U \text{diag}(\sigma) V^\top. \quad (7)$$

Using training data only, we estimate a direction d in normalized log-spectrum space from naturally occurring state differences. At test time we modify the leading 32 singular values (or all available nonzero values),

$$\log \sigma' = \log \sigma + \eta d, \quad (8)$$



Figure 2: **The spectral increment is concentrated in a short pre-sink window.** (A) In the primary pooled matched-depth analysis, adding spectral features to current attention improves prediction over several short horizons but not at six layers. (B) The pattern remains after removing model-layer spectral means using training-fold statistics. (C) When ranking is evaluated entirely within matched model-layer cells, the clearest prompt-specific gains occur at Within 2 and Within 3, while the Within 4 estimate is near zero. Points show ΔAP and horizontal bars show prompt-bootstrap 95% confidence intervals; the vertical dashed line marks $\Delta AP = 0$.

rescale them to preserve centered Frobenius energy, and reconstruct

$$H' = \mathbf{1}\mu^\top + U \text{diag}(\sigma') V^\top. \quad (9)$$

The token mean and singular subspaces remain fixed. For each prompt and direction, η is chosen so that

$$\rho = \frac{\|H' - H\|_F}{\|H\|_F} \quad (10)$$

matches a fixed budget. Random spectral directions are calibrated to the same ρ , controlling for the effect of an equally large but untargeted change.

The edit is applied after layer ℓ has already computed its attention. Therefore

$$A'_\ell = A_\ell, \quad (11)$$

and the experiment asks whether later attention changes systematically. Every causal run verifies zero change in the source-layer sink statistic. Complete construction and random-direction controls are in Appendix E.

4 THE PRE-SINK SPECTRAL CHANGE

This section tests the first half of our main claim: whether spectral geometry changes before a sink forms and how close to onset that change is most clearly visible.

The same-layer comparison is meaningful only when a model has both a measurable pre-sink interval and prompt-to-prompt variation in sink timing. Qwen2.5, Qwen3, GLM-4, and GLM-Z1 provide usable support in the primary setting; the full support table and model-specific counts are in Appendix A.3. Figure 2 gives the main temporal result.

The primary pooled Exact 1 comparison improves from $AP(\mathcal{A}) = .857$ to $AP(\mathcal{A} + \mathcal{S}) = .913$, giving $\Delta AP = +.056$ with 95% CI $[.028, .087]$. The stricter within-cell analysis is more informative about timing: Within 2 gives $+0.107$ $[.048, .155]$, Within 3 gives $+0.053$ $[.002, .101]$, and Within 4 is near zero. Table 2 collects the few additional results needed to interpret this pattern; the full horizon grids and sensitivity analyses are deferred to Appendix B.

Table 2: **Main observational results.** Each row states the comparison before the spectral gain is reported. The strict same-model, same-layer result localizes the clearest prompt-specific signal to the next two to three layers.

Question	What is compared	Main result	Takeaway
Does the spectrum add information?	Attention only vs. attention + spectrum, with model and layer matched.	Exact 1: $AP .857 \rightarrow .913$; $\Delta AP = +.056$ [.028, .087].	Spectrum adds information beyond current attention.
When is the clearest prompt-specific signal?	Ranking is evaluated only among prompts in the same model and current layer.	Within 2: $+.107$ [.048, .155]; Within 3: $+.053$ [.002, .101]; Within 4: $-.021$ [-.037, .029].	The clearest signal is about two to three layers before the sink.
Does the result depend on threshold-derived attention features?	Continuous attention only vs. continuous attention + spectrum.	Exact 1: $AP .833 \rightarrow .918$; Within 2: $.793 \rightarrow .889$; Within 6: $.899 \rightarrow .912$, with CI including zero.	The short-range result does not come from reusing the onset threshold.
Is the effect size stable across prompt cohorts?	The same frozen Qwen3 analysis is evaluated on the expanded cohort and on the unseen post-audit subset.	$N = 500$, Exact 2: $\Delta AP = +.232$ [.117, .340]; unseen $N = 372$: $+.102$ [-.035, .223].	The short transition persists as a pattern, but predictive strength is cohort dependent.

The robustness checks support a hierarchy of claims rather than a universal horizon. Removing model-layer spectral means preserves the pooled short-range increment, while ranking entirely within matched model-layer cells localizes the clearest prompt-specific evidence to Within 2 and Within 3. The same localization survives a two-block sustained onset definition. Equal model weighting, leave-one-model-out refits, nonlinear attention baselines, and a prompt-shuffling null provide complementary checks. Importantly, the expanded Qwen3 cohort does not justify a universal two-layer predictor: after removing the 128 prompts examined in an earlier strengthening audit, the unseen 372-prompt Exact 2 estimate remains positive but its interval includes zero. We therefore emphasize the short representation change, not a fixed predictive effect size. Full numerical results and the overlap audit are in Appendix B.

4.1 WHAT DOES THE SPECTRAL CHANGE REFLECT?

The spectrum is not well described as a detector of one exceptional activation. Compact hidden-state amplitude and concentration controls leave a substantial positive spectral increment, whereas broader descriptions of the distributed activation state reduce the remaining increment toward zero. Capacity-matched nuisance, subset, random-projection, and prompt-alignment controls show that this overlap requires genuine prompt-specific activation information but is not unique to one handcrafted basis. A complementary Qwen3 timing audit reaches the same qualitative conclusion from a different angle: 10 prompts form a sink at block 3 and 40 at block 7, while the stringent extreme-activation event occurs at block 6 for both groups across thresholds from 2×10^3 to 2×10^4 . Thus the measured extreme-event depth cannot explain the prompt-specific difference in sink timing. We interpret the spectrum as a compact readout of a broader hidden-state reorganization, not as a complete causal mechanism. The full conditioning, capacity-control, and timing analyses are in Appendix D.

Taken together, the observational evidence supports a short, prompt-specific representation change rather than a universal predictor or a detector of one extreme activation. These analyses show when the spectral change appears and what information it overlaps with, but they do not show that the geometry matters for later computation. We therefore turn next to a direct intervention on the spectrum.

5 CAUSAL EFFECTS OF SPECTRAL INTERVENTION

Prediction alone does not show that the pre-sink geometry matters. We therefore edit only the singular values of the post-layer hidden state after the source layer has already computed attention, while preserving the token mean, singular subspaces, and centered spectral energy. Random spectral directions are calibrated to the same realized hidden-state norm, and every reported run verifies

Table 3: **Main causal and cross-layer results.** Intervention effects are directional contrasts between opposite signs of the learned spectral direction at matched perturbation size; their empirical p values are computed against norm-matched random spectral directions.

Test	What is compared	Main result	Takeaway
Qwen2.5 interven- tion	Opposite signs of the learned direction at $\rho = .05$; the resulting gap is tested against matched random directions.	Future sink-strength gap = $-.00833$; empirical $p = .0308$.	Changing the spectrum suppresses later sink strength in this setting.
GLM-Z1 interven- tion	Opposite signs of the learned direction at $\rho = .025$; the same matched-random test is used.	Future sink-strength gap = $-.01525$; empirical $p = .0308$.	Independent cross-model support; the sign is again suppressive.
GPT-OSS frozen test	Frozen L10 learned direction at $\rho = .025$; later sink strength is averaged over full-attention layers 11, 13, and 15.	Gap = $[.04983, .06267]$; $p = .0462$; 30/30 prompts positive.	Fresh-cohort confirmation with the opposite sign.
Qwen2.5 next-layer trace	Opposite signs of the learned direction at the same budget, inspected at the next attention layer.	Position-0 attention: $-.0214$; QK-attention correlation: $r = .544$; 97.7% sign agreement.	The immediate suppressive effect tracks lower position-0 QK preference.
Direction stability	Directions estimated from reduced data vs. full-data or independent half-sample estimates.	Qwen2.5 disjoint-half cosine $.979$; GPT-OSS: half-data effect $.05634$ vs. full-data $.05625$.	The learned direction is not fragile to training-set reduction.
Cross-layer change	Upstream edits propagated to the same hidden state vs. a direct local edit.	GPT-OSS: 96–100% spectral projection retained, hidden cosine $.65-.81$; Qwen2.5: 24% retained, cosine $.18$.	Later blocks can preserve perturbation size while changing its direction and downstream effect.

zero change in the source-layer sink statistic. Table 3 summarizes the main intervention, local-trace, stability, and propagation results; full random-direction tests, dose responses, diagnostics, and construction details are in Appendix E.

Across Qwen2.5, GLM-Z1, and GPT-OSS, the supported causal statement is deliberately limited: **changing the singular spectrum after a layer has finished computing can change sink behavior in later layers while leaving the current layer’s attention unchanged.** Qwen2.5 provides a more local view of the first downstream attention computation: the suppressive edit reduces position-0 attention at layer 2, and this change closely tracks a reduction in relative position-0 query–key preference. This is a model-specific computational trace, not evidence that the same QK route or sign must hold across architectures.

The cross-layer measurements explain why the same nominal edit can have different effects at different source layers. In GPT-OSS, upstream perturbations reach the local layer with norms comparable to or larger than the direct edit and retain roughly 96–100% of the targeted spectral projection, yet the full hidden-state displacement rotates substantially and the downstream effect becomes much weaker. Qwen2.5 shows a related but different pattern: the norm survives, but only about 24% of the targeted spectral projection remains and the hidden displacement is strongly reoriented. Transformer blocks therefore reshape the intervention; perturbation size alone does not determine its downstream effect. Full propagation measurements are in Appendix E.

Together, these results show that changing the spectrum can change later attention, while subsequent transformer blocks determine how strongly and in what direction that change is expressed.

Table 4: **Main boundary conditions.** Lack of an estimable comparison is not treated as negative evidence for the underlying spectral phenomenon.

Setting	Boundary	Consequence
Gemma / Llama	Sink appears very early or is present at the first measured layer.	Little or no ordinary pre-sink interval is available.
Qwen3, $T = 256$	499/500 prompts first cross at layer 7.	Prompt-specific matched-depth timing is effectively non-identifiable.
Qwen2.5, $T = 256$	All 429 crossing prompts first cross at layer 4.	No onset-depth variation exists among crossing prompts.
GLM-Z1, $T = 256$	Onset remains spread across several layers.	The strict same-layer analysis remains estimable and again localizes to Within 2–3.
Fresh GLM-4 / Qwen3 causal preparation	The pre-specified near/far support required by the frozen direction rule is absent.	The planned comparison is not replaced post hoc with a different grouping.
GPT-OSS / Qwen3.6	Position-0 visibility depends on attention type / sink-like states can disappear and reappear.	The ordinary single persistent-onset target is not architecture invariant.

6 SCOPE AND BOUNDARY CONDITIONS

The matched-depth analysis requires a measurable pre-sink interval and prompt-to-prompt variation in onset depth; the causal direction rule likewise requires its pre-specified support groups to exist. Table 4 summarizes the main settings in which one of these requirements changes or fails.

These cases separate absence of evidence from absence of a measurable target. Longer context can collapse the prompt variation needed by the same-layer analysis, while attention architecture can change what “sink formation” means. GPT-OSS is therefore evaluated at later full-attention checkpoints, and Qwen3.6 is treated as a recurrent sink-like process rather than an ordinary persistent-onset model. Complete threshold, context-length, support, and architecture-specific audits are in Appendices C and F.

7 DISCUSSION AND LIMITATIONS

The evidence supports two linked claims. First, attention sinks are preceded by a short spectral reorganization of hidden states. Same-layer comparisons remove network depth as a shortcut, with the clearest prompt-specific evidence about two to three layers before sink formation. The expanded Qwen3 cohort shows that the effect can be strong, but the post-audit holdout shows that its magnitude is cohort dependent; we therefore interpret it as a short representation change rather than a universal onset predictor.

Second, directly changing this geometry can alter later sink behavior. Post-layer edits leave current attention fixed and separate from norm-matched random spectral perturbations in Qwen2.5, GLM-Z1, and GPT-OSS. The frozen GPT-OSS confirmation and half-data direction tests further show that the effect is not tied to one fragile direction estimate. These experiments establish functional dependence, not a practical control policy.

The interventions also show why no universal direction or local mechanism should be expected. In Qwen2.5, the near-state direction is suppressive and is associated with lower next-layer position-0 query–key preference. Farther downstream, GPT-OSS and Qwen2.5 reshape the perturbation differently: its norm can survive while the full hidden-state direction rotates and the targeted spectral component persists or is filtered. Thus the two–three-layer window is an observational localization, not a universal point of maximal causal sensitivity.

Several limitations remain. We study only the canonical position-0 sink; support is uneven across models and prompt cohorts, and longer context can make the matched-depth task non-identifiable. Singular-value edits may also leave naturally visited states; norm-matched controls, KL checks, direction-stability tests, and source-attention invariance reduce but do not eliminate this concern.

Larger perturbations can cause broader functional changes, and GPT-OSS and Qwen3.6 show that a single persistent sink-onset definition is not architecture invariant.

8 CONCLUSION

Attention sinks are preceded by a short spectral reorganization of hidden states, with the clearest same-layer evidence in a roughly two–three-layer window but cohort-dependent predictive strength. Directly changing the post-layer spectrum can alter sink formation in later layers while current attention remains fixed. In Qwen2.5, the immediate suppressive effect is accompanied by reduced next-layer query–key preference for position 0; farther downstream, transformer layers can rotate or weaken the perturbation. The spectrum therefore captures an important part of the pre-sink state without being a complete description of what determines the sink.

REPRODUCIBILITY STATEMENT

All observational analyses keep prompts grouped across folds, fit preprocessing and model selection on training data only, and use later layers only to define when a sink subsequently forms. Prompt hashes are used to audit overlap between the original, expanded, and post-audit holdout cohorts. Intervention directions are estimated from training data only; natural and random spectral edits are norm matched, applied after source-layer attention is computed, and audited for zero source-layer sink change. GPT-OSS freezes its source layer, direction, perturbation size, and future full-attention outcome before evaluation on the separate 30-prompt cohort. The appendix and supplement report full feature definitions, support counts, alternative sink definitions, direction-stability splits, random-direction tests, hashes, seeds, KL/top-1 diagnostics, and cross-layer measurements. Pre-specified comparisons without sufficient support are not replaced by post-hoc groupings.

AI USE STATEMENT

In this work, we used generative AI tools for limited assistance with code development, LaTeX assistance, and language editing. Their use was restricted to improving code implementation and the clarity, grammar, and readability of the manuscript; they were not used to generate, alter, or determine the reported experimental results. All AI-assisted text and code were reviewed, tested, and verified by the authors. The authors retain full responsibility for the accuracy, validity, and integrity of the final manuscript, including its text, claims, experimental results, code, and accompanying artifacts.

REFERENCES

- Federico Barbero, Alvaro Arroyo, Xiangming Gu, Christos Perivolaropoulos, Michael M. Bronstein, Petar Veličković, and Razvan Pascanu. Why do llms attend to the first token? In *Conference on Language Modeling*, 2025.
- Nicola Cancedda. Spectral filters, dark signals, and attention sinks. *arXiv preprint arXiv:2402.09221*, 2024.
- Yihe Dong, Jean-Baptiste Cordonnier, and Andreas Loukas. Attention is not all you need: Pure attention loses rank doubly exponentially with depth. In *Proceedings of the 38th International Conference on Machine Learning*, volume 139 of *Proceedings of Machine Learning Research*. PMLR, 2021.
- Kawin Ethayarajh. How contextual are contextualized word representations? comparing the geometry of BERT, ELMo, and GPT-2 embeddings. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 55–65. Association for Computational Linguistics, 2019. doi: 10.18653/v1/D19-1006.
- Borjan Geshkovski, Cyril Letrouit, Yury Polyanskiy, and Philippe Rigollet. The emergence of clusters in self-attention dynamics. In *Advances in Neural Information Processing Systems*, volume 36, pages 57026–57037, 2023. doi: 10.52202/075280-2493.

- Xiangming Gu, Tianyu Pang, Chao Du, Qian Liu, Fengzhuo Zhang, Cunxiao Du, Ye Wang, and Min Lin. When attention sink emerges in language models: An empirical view. In *International Conference on Learning Representations*, 2025.
- Tianyu Guo, Druv Pai, Yu Bai, Jiantao Jiao, Michael I. Jordan, and Song Mei. Active-dormant attention heads: Mechanistically demystifying extreme-token phenomena in llms, 2024. URL <https://arxiv.org/abs/2410.13835>.
- Akhil Kedia, Mohd Abbas Zaidi, Sushil Khyalia, Jungho Jung, Harshith Goka, and Haejun Lee. Transformers get stable: An end-to-end signal propagation theory for language models. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 23449–23531. PMLR, 2024.
- Wen Lai, Alexander Fraser, and Ivan Titov. Joint localization and activation editing for low-resource fine-tuning. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 32206–32227. PMLR, 2025.
- Kenneth Li, Oam Patel, Fernanda Viégas, Hanspeter Pfister, and Martin Wattenberg. Inference-time intervention: Eliciting truthful answers from a language model. In *Advances in Neural Information Processing Systems*, volume 36, 2023.
- Yanhong Li, Ming Li, Karen Livescu, and Jiawei Zhou. On the predictive power of representation dispersion in language models. In *International Conference on Learning Representations*, 2026.
- Kevin Meng, David Bau, Alex Andonian, and Yonatan Belinkov. Locating and editing factual associations in GPT. In *Advances in Neural Information Processing Systems*, volume 35, 2022.
- Lorenzo Noci, Sotiris Anagnostidis, Luca Biggio, Antonio Orvieto, Sidak Pal Singh, and Aurelien Lucchi. Signal propagation in transformers: Theoretical perspectives and the role of rank collapse. In *Advances in Neural Information Processing Systems*, volume 35, 2022.
- Enrique Queipo-de Llano, Álvaro Arroyo, Federico Barbero, Xiaowen Dong, Michael Bronstein, Yann LeCun, and Ravid Shwartz-Ziv. Attention sinks and compression valleys in llms are two sides of the same coin. *arXiv preprint arXiv:2510.06477*, 2025.
- Valeria Ruscio, Umberto Nanni, and Fabrizio Silvestri. What are you sinking? a geometric approach on attention sink. In *Advances in Neural Information Processing Systems*, volume 38, 2025. doi: 10.52202/085713-4116. URL https://proceedings.neurips.cc/paper_files/paper/2025/hash/b2c4b7d34b3d96b9dc12f7bce424b7ae-Abstract-Conference.html.
- Shun Shao, Yftah Ziser, and Shay B. Cohen. Gold doesn’t always glitter: Spectral removal of linear and nonlinear guarded attribute information. In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, pages 1611–1622, Dubrovnik, Croatia, 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.eacl-main.118.
- Zunhai Su and Kehong Yuan. KVSink: Understanding and enhancing the preservation of attention sinks in KV cache quantization for LLMs. In *Conference on Language Modeling*, 2025.
- Mingjie Sun, Xinlei Chen, J. Zico Kolter, and Zhuang Liu. Massive activations in large language models. In *Conference on Language Modeling*, 2024.
- William Timkey and Marten van Schijndel. All bark and no bite: Rogue dimensions in transformer language models obscure representational quality. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 4527–4546. Association for Computational Linguistics, 2021. doi: 10.18653/v1/2021.emnlp-main.372.
- Alexander Matt Turner, Lisa Thiergart, Gavin Leech, David Udell, Juan J. Vazquez, Ulisse Mini, and Monte MacDiarmid. Steering language models with activation engineering. *arXiv preprint arXiv:2308.10248*, 2023.
- Karthik Viswanathan, Yuri Gardinazzi, Giada Panerai, Alberto Cazzaniga, and Matteo Biagetti. The geometry of tokens in internal representations of large language models. *arXiv preprint arXiv:2501.10573*, 2025.

Guangxuan Xiao, Yuandong Tian, Beidi Chen, Song Han, and Mike Lewis. Efficient streaming language models with attention sinks. In *International Conference on Learning Representations*, 2024.

Zhongzhi Yu, Zheng Wang, Yonggan Fu, Huihong Shi, Khalid Shaikh, and Yingyan Celine Lin. Unveiling and harnessing hidden attention sinks: Enhancing large language models without training through attention calibration. In *Proceedings of the 41st International Conference on Machine Learning*, 2024.

Andy Zou, Long Phan, Sarah Chen, James Campbell, Phillip Guo, Richard Ren, Alexander Pan, Xuwang Yin, Mantas Mazeika, Ann-Kathrin Dombrowski, Shashwat Goel, Nathaniel Li, Michael J. Byun, Zifan Wang, Alex Mallen, Steven Basart, Sanmi Koyejo, Dawn Song, Matt Fredrikson, J. Zico Kolter, and Dan Hendrycks. Representation engineering: A top-down approach to AI transparency. *arXiv preprint arXiv:2310.01405*, 2023.

APPENDIX CONTENTS

A	Supplementary Methods	14
A.1	Feature definitions	14
A.2	Same-layer evaluation and implementation checks	15
A.3	Model-level sink patterns used for the main comparison	16
B	Additional Evidence for the Pre-Sink Spectral Change	16
B.1	Full horizon results	16
B.2	Expanded Qwen3 cohort and post-audit holdout	17
B.3	Removing threshold-derived attention features	17
B.4	How much support comes from each model?	18
B.5	Removing residual model–layer differences	18
B.6	Alternative sink definitions and equal model weighting	18
B.7	Nonlinear attention baselines and a prompt-shuffling test	19
B.8	Leave-one-model-out sensitivity	20
B.9	Generalization across prompt families	20
C	Robustness to Sink Definition and Context Length	21
C.1	Changing the sink threshold and query window	21
C.2	What happens at longer context lengths?	21
D	Additional Tests of the Extreme-Activation Explanation	22
D.1	Conditioning on other activation measurements	22
D.2	Is the broader activation summary special?	23
D.3	Qwen3: the extreme event is depth-locked across onset groups	24
E	Additional Intervention and Cross-Layer Results	25
E.1	Intervention construction	25
E.2	Qwen2.5 and GLM-Z1	25
E.3	GPT-OSS frozen confirmation	26
E.4	Local Qwen2.5 query–key trace	26
E.5	Direction-estimation robustness	27
E.6	How the perturbation changes across layers	27
F	Architecture-Specific Cases	28
F.1	Why GPT-OSS needs a different sink measure	28
F.2	Why Qwen3.6 does not have one persistent sink-formation layer	28
G	Exploratory Jacobian Analysis	30
H	Summary of Claims and Evidence	31

A SUPPLEMENTARY METHODS

This section gives the full feature definitions and evaluation procedures behind the main experiments. Later appendix sections report the complete statistical results, robustness checks, intervention experiments, cross-layer measurements, and architecture-specific cases.

A.1 FEATURE DEFINITIONS

This subsection gives the feature definitions used to measure the pre-sink transition and to test what information that transition summarizes. Let L denote the number of measured blocks and let $\bar{a}_a^{(i,\ell)}$ denote the per-head late-query attention defined in Section 3.1. The normalized depth is

$$d_\ell = \frac{\ell}{\max(L-1, 1)}. \quad (12)$$

Define

$$\alpha^{(i,\ell)} = \frac{1}{N_h} \sum_a \bar{a}_a^{(i,\ell)}, \quad \nu_i(q_{\min}) = \frac{1}{T_i - q_{\min}} \sum_{q=q_{\min}}^{T_i-1} \frac{1}{q+1}, \quad (13)$$

where ν_i is the attention that position 0 would receive under uniform attention over all causally available keys. The attention enrichment and log enrichment are

$$E^{(i,\ell)} = \frac{\alpha^{(i,\ell)}}{\nu_i}, \quad L^{(i,\ell)} = \log \frac{\max(\alpha^{(i,\ell)}, 10^{-12})}{\max(\nu_i, 10^{-12})}. \quad (14)$$

The attention family $\mathcal{A}$ consists of d_ℓ , the mean, standard deviation, and maximum across the headwise values $\bar{a}_a^{(i,\ell)}$, ν_i , $E^{(i,\ell)}$, $L^{(i,\ell)}$, and sink-head fractions $s_\varepsilon^{(i,\ell)}$ for $\varepsilon \in \{0.2, 0.3, 0.4, 0.5\}$. For

$$x \in \{\alpha, E, L, s_{0.2}, s_{0.3}, s_{0.4}, s_{0.5}\}, \quad (15)$$

we additionally include the backward difference

$$\Delta^- x_\ell = x_\ell - x_{\ell-1}, \quad (16)$$

with the first measured block initialized to zero.

For the spectral family, singular values are restricted to finite values and clamped below at 10^{-8} before fitting. For each statistic

$$z \in \{\alpha_{\text{spec}}, r_{\text{eff}}, H_{\text{spec}}, p_1, E_5\}, \quad (17)$$

where

$$E_5 = \frac{\sum_{j \leq 5} \sigma_j^2}{\sum_j \sigma_j^2}, \quad (18)$$

the spectral family $\mathcal{S}$ contains the post-block value z_ℓ^{post} , the current-block shift

$$\Delta^{\text{block}} z_\ell = z_\ell^{\text{post}} - z_\ell^{\text{pre}}, \quad (19)$$

and the trailing shift

$$\Delta^{\text{trail}} z_\ell = z_\ell^{\text{post}} - z_{\ell-1}^{\text{post}}, \quad (20)$$

with the first trailing shift initialized to zero. Thus every feature assigned to block ℓ is available no later than the completion of that block.

The activation-state families used to interpret the pre-sink transition are summarized in Table 5. Activation statistics are computed over valid-token entries. For a branch tensor Z , “max/RMS” denotes

$$\frac{\max |Z|}{\sqrt{\text{mean}(Z^2)}}, \quad (21)$$

and branch sink-norm ratios denote the sink-token ℓ_2 norm divided by the mean ℓ_2 norm over the remaining valid tokens. These families range from compact measurements of a single extreme activation to broader descriptions of distributed activation structure.

Table 5: Activation-state families used to interpret the pre-sink transition. The distributed family contains 18 amplitude/outlier variables and is intentionally broader than the compact hidden-state controls.

Family	Variables / operational definition
QK preference	Sink log-probability mean/max, sink-versus-best-competitor log-probability margin mean/max, and attention entropy mean/min.
Value magnitude	Sink-position value-vector norm mean/max across attention heads.
Attention-value	Sink attention-weighted value contribution mean/max and its ratio to the total attention-output norm mean/max.
Branch scales	Attention-output/input Frobenius-norm ratio, MLP-output/input ratio, and block-update/input ratio.
Compact hidden outlier	Hidden maximum absolute activation, hidden max/RMS ratio, and sink hidden-token norm ratio.
Hidden outlier + concentration	Compact hidden-outlier family plus hidden top-1 and top-5 elementwise squared-energy ratios.
Distributed multi-branch state	Max-absolute and max/RMS statistics for hidden input, attention output, MLP output, block output, gate preactivation, up preactivation, and gated MLP activation, together with sink-token norm ratios for hidden, attention-output, MLP-output, and block-output branches.

The direct Qwen3 timing audit uses a separate stringent marker,

$$\frac{\max |H^{(\ell)}|}{\text{median } |H^{(\ell)}|} \geq 10^4, \quad (22)$$

and this marker should not be confused with the compact hidden-outlier family used in the conditional analyses.

A.2 SAME-LAYER EVALUATION AND IMPLEMENTATION CHECKS

All pre-sink analyses use prompt-grouped outer and inner splits, fold-local preprocessing, and held-out prediction. For the model-layer deconfounding sensitivity, let $c = (m, \ell)$ index a matched cell and let S_{icj} denote spectral feature j . Within each inner or outer training split we compute

$$\mu_{cj}^{\text{train}} = \frac{1}{|\mathcal{I}_c^{\text{train}}|} \sum_{i \in \mathcal{I}_c^{\text{train}}} S_{icj}, \quad (23)$$

and replace validation/test features by

$$S_{icj} - \mu_{cj}^{\text{train}}. \quad (24)$$

The z-scored variant additionally divides by the corresponding training-cell standard deviation. No held-out prompt contributes to these statistics.

Separately, cell-stratified evaluation computes AP inside each eligible matched model–layer cell before macro or row-weighted aggregation. Because model and layer are constant within such a cell, any cell-specific constant cannot improve the within-cell ranking.

A group is marked *non-estimable* if prompt-grouped nested cross-validation cannot keep both classes in every required split. We do not replace the primary procedure with a weaker validation rule simply to retain such groups. Attention, spectral, and activation tables are aligned by model, prompt, and layer identifiers before fitting.

As an implementation audit, the original Qwen2.5 alignment check yields maximum absolute discrepancies of 8.39×10^{-8} for continuous attention and 6.81×10^{-8} for the sink score. Direct recomputation for Qwen3 reproduces the stored attention, spectral α , spectral- α shift, and sink score exactly. The supplementary package records prompt hashes, matched-cell counts, random seeds, input hashes, and feature manifests.

A.3 MODEL-LEVEL SINK PATTERNS USED FOR THE MAIN COMPARISON

The same-layer analysis requires both a measurable interval before sink formation and prompt-to-prompt variation in the formation layer. Table 6 summarizes the eight model settings used to determine where that comparison is available.

Table 6: Sink-formation patterns across the evaluated models. The first four provide the main same-layer comparison; the remaining models show settings where the same target is difficult to define or estimate.

Model	Prompts	T	Observed sink behavior	Role
Qwen2.5-7B	50	64	sinks often form near layer 4, with prompt variation	main
Qwen3-8B	50	64	sinks form mainly near layers 3 or 7	main
GLM-4-32B	50	64	delayed formation with limited timing variation	main
GLM-Z1-32B	50	64	sink timing varies substantially across prompts	main
Gemma 3-12B	20	64	sinks appear early and strengthen later	boundary
Llama 3.1-8B	20	64	sinks are present at the first measured layer	boundary
GPT-OSS-20B	20	256	visibility of position 0 depends on attention type	boundary
Qwen3.6-27B	50	64, 256	sink-like states can appear, disappear, and reappear	boundary

B ADDITIONAL EVIDENCE FOR THE PRE-SINK SPECTRAL CHANGE

The main text shows that the hidden-state spectrum contains information about later sink formation beyond current attention, with the clearest prompt-specific signal about two to three layers before the sink appears. This section reports the full horizon grid and tests whether that result depends on the attention baseline, one model, or residual differences between layers.

B.1 FULL HORIZON RESULTS

Table 7 gives the complete primary matched-depth horizon grid. The primary pooled confidence intervals exclude zero for both Exact and Within targets through horizon 4 and include zero at horizon 6.

The pooled improvements remain visible through horizon 4 and disappear by horizon 6. The stricter within-group analyses below give the more conservative two–three-layer timing emphasized in the main text.

Table 7: **The pooled spectral gain is visible through horizon 4 and is absent by horizon 6.** Complete pooled matched-depth results for the pre-sink transition. AP is reported for current attention ($\mathcal{A}$) and current attention plus hidden-state spectral geometry ($\mathcal{A} + S$), followed by paired Δ AP and prompt-bootstrap 95% confidence intervals.

Target	h	$\mathcal{A}$	$\mathcal{A} + S$	Δ AP	95% CI
Exact	1	.857	.913	+0.056	[.028,.087]
Exact	2	.826	.867	+0.042	[.011,.073]
Exact	3	.691	.799	+0.108	[.034,.162]
Exact	4	.754	.824	+0.070	[.010,.135]
Exact	6	.850	.854	+0.005	[−.022,.040]
Within	1	.857	.913	+0.056	[.026,.088]
Within	2	.822	.894	+0.073	[.036,.113]
Within	3	.824	.876	+0.052	[.021,.085]
Within	4	.814	.892	+0.078	[.034,.122]
Within	6	.905	.907	+0.002	[−.014,.015]

B.2 EXPANDED QWEN3 COHORT AND POST-AUDIT HOLDOUT

To increase prompt-level support without changing the $T = 64$ measurement rule, we apply the same Qwen3 pipeline to 500 frozen WikiText prompts that are disjoint from the original 50-prompt cohort. Their onset counts are $\{2 : 2, 3 : 41, 4 : 1, 7 : 456\}$. The largest exact-horizon gain occurs at Exact 2, where the full attention baseline gives Δ AP = +.232 [.117, .340] and the continuous-attention-only baseline gives +.195 [.062, .322]. The corresponding full-baseline gains are +.033 [−.038, .104] at Exact 1, +.079 [−.046, .199] at Exact 3, and approximately zero at Exact 4 and Exact 6. Thus the expanded cohort is consistent with a short transition rather than a monotone long-horizon gain.

The 500-prompt set contains all 128 prompts used in an earlier strengthening audit. To avoid treating that subset as independent evidence, we explicitly partition it out using prompt hashes and rerun the frozen analysis on the remaining 372 prompts. Their onset counts are $\{2 : 1, 3 : 33, 4 : 1, 7 : 337\}$. The full-baseline Exact 2 estimate remains positive at +.102 but its bootstrap interval includes zero, [−.035, .223]; the continuous-attention-only value is +.020 [−.108, .132]. Within 2 and Within 3 are also near zero on this post-audit holdout. We therefore report the 500-prompt result as additional support for the short-window pattern but not as a second independent replication of the earlier 128-prompt audit, and we treat the size of the predictive gain as cohort dependent.

B.3 REMOVING THRESHOLD-DERIVED ATTENTION FEATURES

The primary onset label is defined from a thresholded sink score, and the attention family $\mathcal{A}$ contains threshold-derived sink-score features. To test whether this reuse creates a circular advantage for the spectral family, we replay the historical primary pipeline after removing every current and backward-difference feature of the form `sink_score_eps_*`. No replacement feature is added. Before this sensitivity was run, the stored historical out-of-fold predictions were reproduced to machine precision, fixing the exact primary preprocessing and nested-CV pipeline.

Table 8: **The short-range spectral gain remains after threshold-derived attention features are removed.** The baseline retains continuous attention, enrichment, depth, fixed effects, and the original nested-CV procedure.

Target	$\mathcal{A}_{\text{cont}}$	$\mathcal{A}_{\text{cont}} + S$	Δ AP	95% CI
Exact 1	.833	.918	+0.085	[.051,.123]
Within 2	.793	.889	+0.096	[.055,.137]
Within 3	.787	.867	+0.080	[.042,.121]
Within 4	.802	.896	+0.094	[.045,.141]
Within 6	.899	.912	+0.013	[−.003,.031]

The short-range spectral improvement remains after removing threshold-derived attention features. The Within 6 interval still includes zero. The result therefore does not arise from using the same thresholded quantity both to define sink formation and to describe current attention.

Table 9: Matched support by model and horizon. Entries in the four middle columns are matched layers / positive rows. The final column reports the model-level Exact 1 Δ AP and 95% confidence interval.

Model	Exact 1	Within 2	Within 3	Within 4	Exact-1 Δ AP [CI]
GLM-4	1/3	1/3	1/3	1/3	+.203 [−.033, .951]
GLM-Z1	5/43	7/84	8/118	9/151	+.032 [−.018, .097]
Qwen2.5	1/36	2/72	3/108	4/144	+.007 [0, .020]
Qwen3	1/10	2/20	3/30	3/30	−.094 [−.288, .025]

B.4 HOW MUCH SUPPORT COMES FROM EACH MODEL?

The amount of matched support varies substantially across models and horizons. Table 9 makes this concentration explicit. In particular, three models contribute only one matched layer to the Exact 1 analysis, and GLM-4 contributes only three positive rows.

The model-level Exact 1 estimates should therefore not be interpreted as four replicated standalone effects. The Qwen2.5 interval touches zero, the GLM-Z1 interval crosses zero, GLM-4 is extremely imprecise, and Qwen3 has a negative point estimate with a wide interval. Our Exact 1 claim is therefore a pooled statement. The better-supported temporal conclusion concerns the bounded multi-block interval, for which matched support increases substantially at the Within 2 and Within 3 horizons.

B.5 REMOVING RESIDUAL MODEL-LAYER DIFFERENCES

The primary estimator pools predictions across matched cells. To test whether model-layer-specific spectral local location contributes to this result, Table 10 reports separately refit fold-local centering and z-scoring analyses together with strict cell-stratified AP. The untransformed estimates from this sensitivity pipeline are not used to replace the primary values in Table 7.

Table 10: **The strict prompt-specific signal is clearest at Within 2 and Within 3 and is not evident at Within 4.** Entries are Δ AP with prompt-bootstrap 95% confidence intervals. “Centered” and “z-scored” are pooled predictions after fold-local model-layer transformation of spectral features. Cell-stratified columns aggregate AP differences evaluated entirely within matched cells.

Target	Centered pooled	Z-scored pooled	Cell macro	Cell row-weighted
Exact 1	+.057 [.017, .098]	+.040 [.001, .078]	+.169 [−.002, .217]	+.096 [−.023, .151]
Within 2	+.068 [.029, .109]	+.022 [−.018, .065]	+.107 [.048, .155]	+.102 [.048, .149]
Within 3	+.054 [.024, .088]	+.018 [−.010, .046]	+.053 [.002, .101]	+.053 [.006, .105]
Within 4	+.068 [.034, .102]	+.014 [−.028, .055]	−.021 [−.037, .029]	−.003 [−.016, .019]

The Exact 1 cell-macro point estimate is particularly sensitive to very small cells and is therefore not interpreted by its magnitude. More generally, these controls support a hierarchy of claims rather than a single universal horizon. Removing model-layer means preserves the pooled increment through four blocks. Under the stricter requirement that ranking occur entirely within matched cells, the cleanest prompt-specific evidence occurs at Within 2 and Within 3, while Within 4 is no longer evident.

Cell-wise z-scoring further attenuates the longer horizons. Because this transformation changes both model-layer-specific scale and the effective regularization geometry, we do not interpret the attenuation as a unique decomposition of stage and prompt information. We therefore use the two-three-block interval as the cleanest estimate of the prompt-specific transition window.

B.6 ALTERNATIVE SINK DEFINITIONS AND EQUAL MODEL WEIGHTING

First crossing is an operational definition of when the sink first forms, not an assumption that the state is permanently absorbing. We therefore define a two-block sustained onset

$$\tau_i^{(2)} = \min\{\ell : s_{\varepsilon}^{(i,\ell)} \geq \theta, s_{\varepsilon}^{(i,\ell+1)} \geq \theta\}, \quad (25)$$

and analogously audit three consecutive blocks. Under the two-block definition, the strict within-cell macro increments are

$$\begin{aligned} &+.165 [.031, .275], \quad +.217 [.105, .258], \quad +.079 [.032, .135], \\ &+.045 [-.017, .108], \quad -.022 [-.088, .029]. \end{aligned} \quad (26)$$

for Exact 1, Within 2, Within 3, Within 4, and Within 6, respectively. Thus the robust strict localization remains concentrated at approximately two to three blocks. Requiring three consecutive sink-like blocks gives the same qualitative localization and is treated as a secondary sensitivity.

The episode audit also clarifies what “onset” means across models. Qwen2.5 usually remains in the sink-like state after the first crossing, and Qwen3 does so for most prompts. GLM-4 usually exhibits a long first episode with brief interruptions/re-entry, whereas GLM-Z1 is genuinely episodic: every audited prompt has multiple sink-like episodes under the primary threshold. We therefore use *first crossing* when discussing the primary target and reserve “persistent onset” for settings in which persistence is actually observed.

Unequal row counts across models are another possible pooled confound. Reweighting models equally leaves the spectral increment positive with bootstrap intervals above zero at the main horizons: $+.042 [.017, .070]$ for Exact 1, $+.056 [.028, .088]$ for Within 2, $+.037 [.014, .059]$ for Within 3, and $+.061 [.030, .092]$ for Within 4. Model-level effects remain heterogeneous, but the pooled transition does not depend on one model contributing more rows.

B.7 NONLINEAR ATTENTION BASELINES AND A PROMPT-SHUFFLING TEST

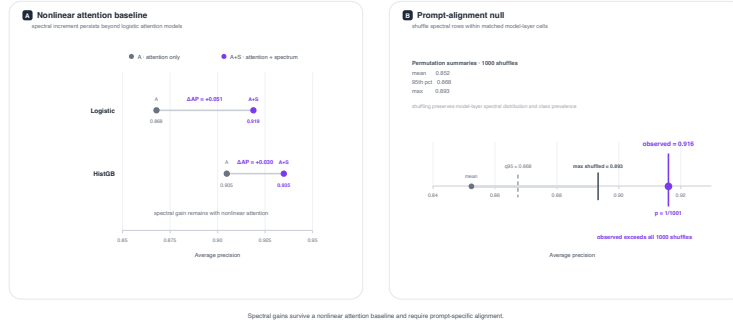


Figure 3: Spectral gains survive a nonlinear attention baseline and depend on prompt-specific alignment. (A) Adding spectral features improves average precision under both the logistic attention baseline and a nonlinear HistGradientBoosting baseline, showing that the spectral increment is not specific to the linear classifier. (B) In the layer-preserving permutation test, complete spectral-feature rows are shuffled across prompts within each matched model–layer cell, preserving cell-level spectral distributions and class prevalence while destroying prompt-specific alignment. The observed $A + S$ performance (AP = 0.9160) exceeds the maximum of all 1000 shuffled replicates (0.8933); the permutation mean is 0.8524, the 95th percentile is 0.8675, and the add-one Monte-Carlo value is $p = 1/1001$.

For each permutation replicate, the complete spectral-feature row is shuffled across prompts separately within each model–layer cell. This preserves the spectral distribution and class prevalence associated with every cell while destroying prompt-specific spectral alignment.

The observed AP is 0.9160, the permutation mean is 0.8524, the 95th percentile is 0.8675, and the maximum among 1000 shuffled replicates is 0.8933. Thus the observed statistic exceeds every permutation replicate, with add-one Monte-Carlo

$$p = \frac{1}{1001}. \quad (27)$$

Table 11: **No single model is required for the pooled Exact 1 effect.** Leave-one-model-out Δ AP with prompt-bootstrap 95% confidence intervals.

Excluded model	Exact 1	Within 2	Within 3	Within 4
	+.061	+.130	+.053	+.049
GLM-4	[.028, .095] +.155	[.074, .187] +.021	[.022, .085] +.038	[−.008, .101] +.074
GLM-Z1	[.047, .262] +.165	[.006, .039] +.229	[.008, .067] +.166	[.035, .115] +.152
Qwen2.5	[.078, .264] +.030	[.138, .314] +.043	[.082, .241] +.057	[.074, .221] +.072
Qwen3	[.006, .056]	[.018, .072]	[.025, .092]	[.031, .116]

This permutation pipeline is separately refit, so its absolute AP should not be substituted for the primary pooled value in Table 7.

B.8 LEAVE-ONE-MODEL-OUT SENSITIVITY

Table 11 reports complete leave-one-model-out refits. These use a separately refit sensitivity pipeline and therefore test dependence on model inclusion rather than re-estimating the primary pooled result.

Every leave-one-model-out Exact 1 point estimate is positive. The Within 4 interval crosses zero only when GLM-4 is excluded. These results indicate that no single model drives the pooled effect; they do not imply that every model exhibits a strong standalone effect at every horizon.

B.9 GENERALIZATION ACROSS PROMPT FAMILIES

A formal five-family GLM-Z1 analysis leaves out one complete prompt family in each outer fold and selects regularization strength using only the remaining training families. Table 12 shows substantial family- and horizon-dependence. The reasoning family has $AP = 1$ for both $\mathcal{A}$ and $\mathcal{A} + \mathcal{S}$ in these targets, so its ΔAP is exactly zero because of ceiling performance rather than failed discrimination.

The transfer signal is therefore heterogeneous across domains and horizons. Within 3 is the most consistently positive target in this experiment, but we do not interpret the result as a prompt-family-invariant property of the transition.

Table 12: **Prompt-family transfer is heterogeneous, with Within 3 the most consistently positive horizon.** GLM-Z1 five-family leave-one-family-out spectral increments. “Positive” counts held-out families with $\Delta\text{AP} > 0$.

Target	Mean	Median	Range	Positive
Exact 1	+.150	.000	[−.052, .760]	2/5
Within 2	+.122	+.009	[−.001, .547]	3/5
Within 3	+.087	+.040	[0, .316]	4/5
Within 4	−.005	+.019	[−.096, .027]	3/5

C ROBUSTNESS TO SINK DEFINITION AND CONTEXT LENGTH

The main analysis treats onset depth as a continuous, prompt-dependent quantity. This section examines whether the broad formation patterns used to define the measurable pre-sink regime are stable to the operational sink definition and to context length.

C.1 CHANGING THE SINK THRESHOLD AND QUERY WINDOW

The full 24-configuration grid varies

$$q_{\min} \in \{8, 16\}, \quad \varepsilon \in \{0.2, 0.3, 0.4, 0.5\}, \quad \theta \in \{0.4, 0.5, 0.6\}. \quad (28)$$

Table 13 reports the resulting onset ranges. Qwen2.5 retains median onset 4 in all 24 configurations and Qwen3 retains median onset 7 in all 24 configurations, while GLM-4 and GLM-Z1 show wider threshold-dependent changes in onset depth. Finer categorical descriptions also vary within the grid.

Table 13: **Median onset is stable for Qwen2.5 and Qwen3 but more threshold-dependent for the GLM models.** Threshold and late-query sensitivity over 24 configurations. “Label counts” report operational regime assignments across the grid.

Model	Onset fraction range	Median-onset range	Label counts across 24 cells
Qwen2.5	[.72, 1.00]	4–4	fixed-depth partial 19; clustered 5
Qwen3	[1.00, 1.00]	7–7	deterministic 14; clustered 10
GLM-4	[1.00, 1.00]	5–8	deterministic 15; clustered 9
GLM-Z1	[.98, 1.00]	6–11	dispersed 15; deterministic 5; clustered 4

The stability of the median onset for Qwen2.5 and Qwen3 supports the broad formation pattern used in the main analysis. The variation in categorical labels reinforces our choice to treat continuous onset distributions as the primary object and regime labels as operational summaries.

C.2 WHAT HAPPENS AT LONGER CONTEXT LENGTHS?

An initial Qwen3 nested-context audit uses the same 30 source texts truncated to 64, 256, and 1024 tokens. Median onset remains block 7 at all three lengths under both fixed and proportional late-query windows. At 64 tokens, 28/30 prompts onset at block 7 and two at block 3. At 256 and 1024 tokens, all 30 prompts onset at block 7. This suggested that longer context might collapse the prompt-to-prompt onset variation required by the matched-depth task.

We therefore repeat the $T = 256$ Qwen3 audit on a frozen cohort of 500 long-form WikiText source texts constructed by sequentially concatenating non-empty WikiText-103 rows until at least 1400 Qwen3 tokens are reached. The construction exactly reproduces the original 30 long-context source texts before extending the cohort. All 500 prompts cross the sink criterion: 499/500 first cross at block 7 and one at block 3. Hence 99.8% of prompts share the same onset depth. The few nominally mixed layers are generated by that single exceptional prompt, so prompt-grouped matched-depth discrimination is effectively non-identifiable. We therefore do not collect a 500-prompt Qwen3 spectral cohort at $T = 256$.

Using the same 500 frozen source texts, GLM-Z1 remains identifiable. Its two-block sustained-onset distribution is

$$\{6 : 100, 7 : 260, 11 : 66, 12 : 3, 16 : 71\}, \quad (29)$$

where the notation reports onset block and prompt count. The corresponding long-context hidden-state experiment uses the same source cohort and evaluates spectral information only after confirming mixed current-layer support.

Table 14: **At $T = 256$, the strict GLM-Z1 signal again concentrates at Within 2–3 and is near zero at longer horizons.** Results use the frozen 500-source cohort. K1 is the first crossing; K2 requires two consecutive sink-like blocks. Macro within-cell ΔAP is reported with prompt-bootstrap 95% confidence intervals.

Onset definition	Within 2	Within 3	Within 4	Within 6
K1	+ .124 [.056, .241]	+ .066 [.038, .094]	− .005 [− .026, .014]	− .001 [− .012, .009]
K2	+ .201 [.172, .244]	+ .079 [.063, .096]	− .047 [− .097, .014]	+ .005 [− .005, .015]

A Qwen2.5 timing-only audit on the same 500-source pool gives a similar identifiability boundary. Of 500 prompts, 429 cross the primary sink criterion and all 429 first cross at block 4; the remaining 71 do not cross in the measured range. Because the crossing prompts have no onset-depth variation, we do not collect a large spectral cohort for this setting.

The long-context result therefore separates two possibilities that are otherwise easy to conflate. Qwen3 and Qwen2.5 do not provide evidence against a spectral transition at $T = 256$; their matched-depth questions are not estimable because onset is nearly or completely depth locked. GLM-Z1 retains prompt-dependent onset variation on the same source cohort, and in that identifiable regime the strict spectral signal again localizes to approximately two to three blocks.

D ADDITIONAL TESTS OF THE EXTREME-ACTIVATION EXPLANATION

The main text interprets the pre-sink spectral transition as a compact observational readout of information broadly distributed across the current activation state rather than as a detector of a single extreme activation. This section reports two complementary tests of that interpretation. We first ask how much incremental spectral information remains after conditioning on other measurements of the current activation state. We then use Qwen3 to ask whether a sharply defined extreme-activation event occurs early enough, and varies enough across prompts, to account for prompt-specific sink timing.

D.1 CONDITIONING ON OTHER ACTIVATION MEASUREMENTS

For a candidate activation-state family $\mathcal{M}$, define the conditional spectral increment

$$\Delta_{\mathcal{M}} = AP(\mathcal{A} + \mathcal{M} + \mathcal{S}) - AP(\mathcal{A} + \mathcal{M}). \quad (30)$$

A positive value means that spectral geometry retains predictive information after conditioning on $\mathcal{M}$, whereas a value near zero means that $\mathcal{M}$ already contains much of the predictive information contributed by the spectral features. A negative value indicates no positive incremental benefit from adding $\mathcal{S}$ in that fitted model. Thus, $\Delta_{\mathcal{M}}$ measures predictive redundancy between the spectral features and the conditioning state; it does not establish causal mediation.

Figure 4 shows the same qualitative pattern in two complementary conditioning analyses. Compact hidden-state controls leave a substantial positive spectral increment. Likewise, conditioning on individual local computational families—query–key preference, value magnitude, attention–value statistics, or branch scales—does not consistently remove the incremental spectral information. In contrast, broader descriptions of the activation state reduce the remaining spectral increment to approximately zero.

The result therefore suggests that the spectrum overlaps with information distributed across the current activation state rather than merely tracking one local activation or branch. This is a statement about predictive overlap, not a causal decomposition: these conditioning analyses do not identify which hidden-state variables generate the spectral change or mediate its relation to sink formation.

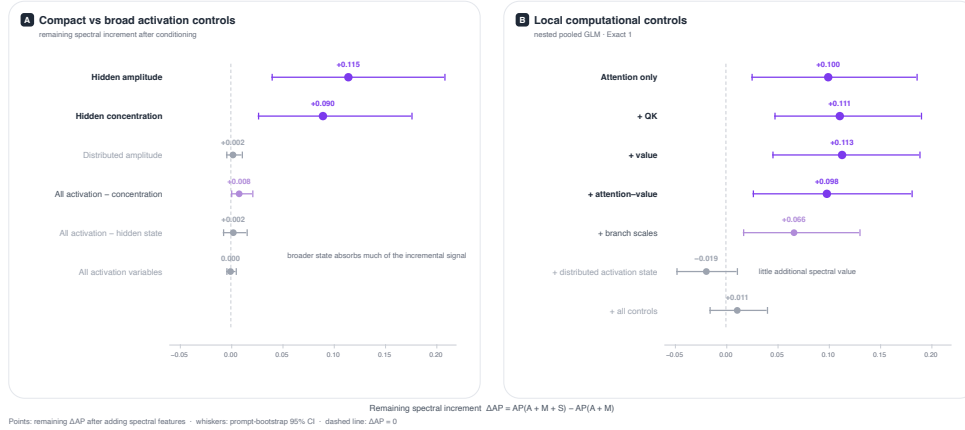


Figure 4: **Broader activation-state controls contain more of the predictive information carried by the spectrum.** (A) Compact hidden-state amplitude and concentration controls leave a substantial positive spectral increment, whereas broader activation-state descriptions reduce the remaining increment toward zero. (B) In the nested pooled-GLM Exact 1 analysis, local computational families—including query–key preference, value magnitude, attention–value statistics, and branch scales—also leave a positive spectral increment, while conditioning on the distributed activation state leaves little additional spectral value. Points show the remaining Δ AP after adding spectral features, horizontal bars show prompt-bootstrap 95% confidence intervals, and the vertical dashed line marks Δ AP = 0. These comparisons measure predictive redundancy, not causal mediation.

D.2 IS THE BROADER ACTIVATION SUMMARY SPECIAL?

The distributed 18-dimensional activation-state control in Figure 4 removes most of the positive remaining spectral increment. This overlap alone, however, does not show whether the control is informative because of its specific content or simply because it is a relatively rich feature family. We therefore evaluate three capacity-matched control families on the same pooled GLM-4/GLM-Z1 cohort.

Prompt-aligned nuisance dimensions. We augment the compact hidden-state controls with 18 deterministic prompt-aligned nuisance dimensions. Across 20 constructions, the remaining spectral increments have means +.160, +.177, +.163, and +.105 for Exact 1, Within 2, Within 3, and Within 4, respectively. None of the 20 nuisance controls reduces the remaining spectral increment as much as the real structured 18-dimensional activation state at any horizon (add-one empirical $p = 1/21$). Thus, dimensionality and prompt alignment alone do not explain the overlap between the broader activation measurements and the spectral features.

Alternative genuine activation summaries. We next draw 18-dimensional subsets from a 24-dimensional complementary non-spectral activation pool. Across 25 draws, the structured state’s remaining spectral increment lies well inside the distribution obtained from alternative activation summaries rather than forming a unique outlier. The add-one fractions of random subsets that reduce the remaining spectral increment at least as much as the structured state are .231, .154, .615, and .769 across Exact 1 and Within 2–4.

Gaussian random projections. Finally, within each CV training fold we impute and scale the same 24-dimensional activation pool, project it to 18 dimensions with a Gaussian random projection, and rescale before fitting. Across 25 projections, the add-one fractions that reduce the remaining spectral increment at least as much as the structured state are .154, .269, .462, and .846 for Exact 1 and Within 2–4. The projected activation state can therefore recover much of the same predictive content without preserving the semantics of the handcrafted coordinates.

For completeness, we also shuffle complete structured 18-dimensional vectors across prompts within each model–layer group. This destroys their prompt-specific alignment while preserving the within-

cell distribution of the activation-state features. Across 200 shuffles, positive spectral increments reappear at every horizon, and none of the shuffled controls reduces the remaining spectral increment as much as the real prompt-aligned state ($p = 1/201$). Thus, the reduction depends on genuine prompt-specific activation information, whereas the nuisance, subset, and random-projection controls show that this information is not unique to one handcrafted 18-dimensional basis.

Taken together, these controls support a simple interpretation. Broader, prompt-specific descriptions of the activation state contain information that overlaps substantially with the spectral features, but no single handcrafted 18-dimensional basis is uniquely responsible for that overlap. The spectrum therefore appears to provide a compact readout of information distributed across the current hidden state rather than a proxy for one specially chosen activation family.

D.3 QWEN3: THE EXTREME EVENT IS DEPTH-LOCKED ACROSS ONSET GROUPS

Conditional redundancy provides one test of the single-outlier explanation. Qwen3 provides a complementary temporal test: does the abrupt extreme-activation event occur early enough, and vary enough across prompts, to account for the prompt-specific difference in sink timing?

The direct Qwen3 audit recomputes exact hidden-activation statistics on the same 50 formal prompts and reproduces the stored attention and spectral records. Under the primary onset definition, 10 prompts form an attention sink at block 3 and 40 at block 7.

At the 10^4 maximum-to-median criterion, all 50 prompts remain below the extreme-activation threshold before block 6 and first cross it at block 6. We additionally sweep the criterion from 10^2 to 3×10^4 . For every stringent threshold from 2×10^3 through 2×10^4 , both onset groups remain locked to first crossing at block 6. Lower thresholds detect moderate pre-existing outliers earlier, while four prompts fail to cross the 3×10^4 threshold.

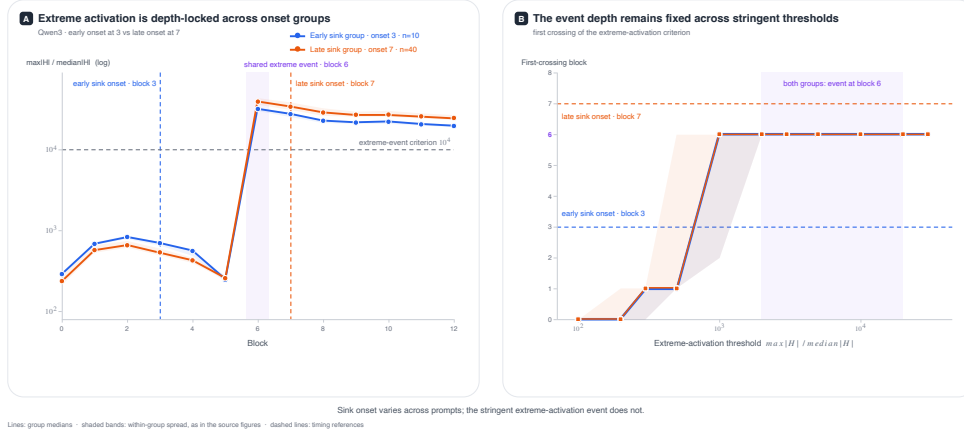


Figure 5: **Qwen3 sink timing varies across prompts while the stringent extreme-activation event remains depth-locked.** (A) Median maximum-to-median hidden-activation ratio, with interquartile bands, for prompts whose sinks form at block 3 versus block 7. Under the 10^4 criterion, both groups exhibit the same abrupt extreme-activation event at block 6, after the early-onset group has already formed a sink and one block before the dominant late-onset group does. (B) Sweeping the extreme-activation criterion shows that this shared event depth is not specific to the single 10^4 threshold. Across stringent thresholds from 2×10^3 to 2×10^4 , both onset groups first cross at block 6 even though their sink onsets remain at blocks 3 and 7. The figure therefore shows a timing mismatch: the stringent extreme-event depth does not encode the prompt-specific difference in sink onset.

The timing mismatch rules out a simple explanation in which this stringent extreme-activation event is a necessary precursor whose depth determines sink onset for every prompt. In particular, the early-onset group has already formed a sink three blocks before the event appears. For the dominant late-onset group, however, the event remains closely associated with sink formation, occurring one block beforehand. We therefore do not interpret this experiment as showing that extreme activations

are unrelated to sinks; rather, their measured event depth cannot explain the prompt-to-prompt distinction between block-3 and block-7 sink formation in this Qwen3 setting.

Together with the conditional activation-state analyses and the capacity-matched controls, this timing result supports a consistent interpretation: spectral geometry is a compact observational readout of information broadly distributed across the current activation state, rather than merely a detector of one abrupt extreme-activation event. These analyses narrow the interpretation of the spectral precursor but do not identify a unique causal mechanism for sink formation.

E ADDITIONAL INTERVENTION AND CROSS-LAYER RESULTS

This section provides the experiment-level evidence behind the causal summary in the main text. We first give the exact intervention and matched-random construction, then report the Qwen2.5 and GLM-Z1 tests, the frozen GPT-OSS confirmation, the Qwen2.5 next-layer QK trace, direction-estimation stability, and cross-layer propagation. Together these analyses separate the core causal effect from the diagnostics used to explain its model- and layer-dependent magnitude.

E.1 INTERVENTION CONSTRUCTION

For every causal experiment we intervene on the centered post-block hidden state $\tilde{H} = U \text{diag}(\sigma) V^\top$. The train-only direction d is constructed in normalized log-spectrum coordinates. For delayed-onset models, d is the difference between near- and far-state group means within a fixed model-layer support cell. In the frozen Qwen2.5 layer-1 preparation, the near group is $1 \leq \tau - \ell \leq 3$, while the far group is $\tau - \ell > 3$ together with prompts that do not cross in the measured range; already-crossed prompts are excluded. This rule is recovered exactly from the stored preparation artifacts and reconstructs the frozen direction to machine precision. For GPT-OSS, d separates prompts with high and low later sink strength for a fixed architecture-aware endpoint. The direction is mean centered and normalized before use.

Only the leading spectral coordinates are edited. The token mean, left singular subspace, and right singular subspace are preserved. Edited singular values are rescaled to preserve centered spectral energy before reconstruction. For each prompt, sign, and direction, a binary search chooses the intervention coefficient η so that the realized hidden perturbation

$$\frac{\|H' - H\|_F}{\|H\|_F} \quad (31)$$

matches the requested budget to within 5×10^{-4} . Random spectral directions are generated in the same spectral coordinate system and receive the same realized-norm calibration. The zero-edit path is an identity bypass rather than a reconstruction, avoiding numerical changes from an unnecessary SVD round trip.

The hook is placed after block ℓ . Therefore A_ℓ is computed before the hidden state is edited, and any causal effect must enter through $A_{\ell+1}$: or later hidden-state computation. All reported causal runs verify that the source-layer sink statistic remains unchanged.

E.2 QWEN2.5 AND GLM-Z1

Qwen2.5 shows a reproducible directional effect under norm matching. The observational near-state sign suppresses rather than increases later sink strength relative to the opposite sign, illustrating why the direction is best treated as a state coordinate rather than a “toward-sink” vector. The tie-aware random-direction empirical p values are .0615, .0308, and .0154 for 2.5%, 5%, and 10% budgets, respectively, with natural future directional gaps $-.00536$, $-.00833$, and $-.01726$.

GLM-Z1 provides an independent cross-model corroboration. Table 15 reports the results against 64 realized-norm-matched random directions.

The combined through-origin dose slope is negative and lies outside the paired 64-direction random null (empirical $p = .0308$). A post-hoc distance-to-onset audit shows, however, that the pooled

Table 15: **GLM-Z1 separates from the matched random-direction null across the tested budgets, with the smallest budget giving the cleanest functional-damage profile.** Natural gap is near-state minus far-state later sink strength. Random intervals are the empirical 2.5–97.5 percentile ranges over 64 realized-norm-matched spectral directions. The reported p values use the stored matched random-direction empirical test.

Budget	Natural gap	Random 95% interval	Empirical p
.025	−.01525	[−.01205, .00946]	.0308
.050	−.02976	[−.02773, .02174]	.0308
.100	−.05022	[−.04574, .03433]	.0462

effect is strongly state dependent. For prompts with $r = \tau - \ell \leq 4$, the natural gaps are small and positive across the three budgets; for $r \geq 8$, they are −.0531, −.0990, and −.1750, each outside the corresponding matched random-direction range. These subgroup results are used as a heterogeneity diagnostic rather than as separately confirmed effects. We therefore do not claim that maximal causal susceptibility universally coincides with the two–three-block observational precursor window.

E.3 GPT-OSS FROZEN CONFIRMATION

GPT-OSS alternates sliding and full attention. The preparation stage therefore scores each candidate source layer by mean sink strength over its next three full-attention layers. The selected sources are layer 9 (full attention) and layer 10 (sliding attention), both with future targets 11, 13, 15; their train-derived spectral directions have cosine 0.9907. A consensus direction is frozen before intervention.

The initial six-prompt pilot finds a much larger natural directional effect at layer 10 than at layer 9. A layer-8/layer-9/layer-10 sandwich extension shows that the result is not a generic sliding-versus-full distinction: the layer-8 sliding source is approximately null, the layer-9 full source is small, and the layer-10 sliding source immediately before full-attention layer 11 is large.

All design choices are then frozen and evaluated on a disjoint 30-prompt cohort from a separate frozen WikiText prompt pool using 64 random directions. Table 16 summarizes the confirmatory result.

Table 16: **The frozen GPT-OSS intervention gives a positive fresh-cohort effect on all 30 prompts.** The test is run at layer 10 with $\rho = .025$ and uses mean sink strength over full-attention layers 11, 13, and 15 as the endpoint.

Quantity	Value
Prompts	30
Natural high-minus-low effect	+.05625
Bootstrap 95% CI	[.04983, .06267]
Prompt sign consistency	30 positive / 0 zero / 0 negative
Random median	−.00269
Random 2.5–97.5 percentile range	[−.05538, .05548]
One-sided empirical p	.0308
Two-sided empirical p	.0462
Mean natural KL	.0107
Maximum source-layer sink change	0

The natural KL is comparable to the random-direction distribution, so the pre-specified directional effect is not explained by a systematically larger generic output disturbance. The positive sign is also consistent across every fresh prompt.

E.4 LOCAL QWEN2.5 QUERY–KEY TRACE

To identify the first attention computation changed by the Qwen2.5 layer-1 intervention, we compare $+d$, the unedited state, and $-d$ at layer 2 while reusing the frozen direction and $\rho = .05$. The source-layer sink statistic is unchanged exactly. Relative to $-d$, the $+d$ edit reduces mean

position-0 attention at layer 2 by $-.02142$ with prompt-bootstrap 95% CI $[-.02419, -.01846]$; 48/50 prompts have a negative change. The corresponding threshold-based sink-score difference is $-.02714$ $[-.04143, -.01357]$.

For each prompt and head, define the relative position-0 query-key preference from the attention probabilities as

$$M_{qk} = \log p(k = 0) - \log \max_{k \neq 0} p(k), \quad (32)$$

which equals the corresponding pre-softmax logit difference within a fixed query row. Across prompt-head pairs, ΔM_{qk} tracks the change in position-0 attention with correlation $r = .544$ and bootstrap 95% CI $[.395, .671]$; the two changes agree in sign for 97.7% of pairs. The position-0 value-vector norm does not show comparable directional agreement (sign agreement 33.9%). We therefore use the query-key result as a local computational trace of the Qwen2.5 suppression, not as a universal causal decomposition of sink formation.

E.5 DIRECTION-ESTIMATION ROBUSTNESS

For Qwen2.5, exact reconstruction of the stored layer-1 preparation yields cosine 0.9999999999999999 with the frozen direction and maximum coordinate error 1.29×10^{-15} . The full training support contains 25 near prompts and 10 far prompts. Across 2000 repeated partitions into two non-overlapping halves, the cosine between a half-data direction and the full-data direction has median .9947 and empirical 2.5–97.5 percentile interval $[.9750, .9987]$. The stricter cosine between two independently estimated, disjoint half-data directions has median .9789 and interval $[.9022, .9947]$; the minimum across all 2000 partitions is .808. When the half-A direction is projected onto the held-out half-B prompts, the near-minus-far projection gap has median .597 and is positive in 2000/2000 partitions.

For GPT-OSS, 12 deterministic half-training directions are estimated from only 17 of the 35 preparation prompts and then evaluated with the frozen layer-10, $\rho = .025$, 30-prompt test cohort, and layer-11/13/15 endpoint. Their cosine with the full-data direction has median .9858 and empirical range $[.9740, .9916]$. The median causal effect is $+.05634$ with range $[+.05553, +.05660]$, compared with $+.05625$ for the full-data direction. The effect-retention ratio has median 1.002 and range $[.987, 1.006]$, and all 12 directions preserve the positive causal sign. These are empirical ranges over deterministic data splits, not confidence intervals; significance against random directions is still provided by the separate 64-direction frozen test.

E.6 HOW THE PERTURBATION CHANGES ACROSS LAYERS

The causal effect of a spectral edit depends strongly on source layer. To understand why, we compare propagated upstream perturbations with the direct local edit at the same downstream hidden state.

In GPT-OSS, the layer-10 direct edit is the reference perturbation immediately before full-attention layer 11. A layer-9 perturbation reaches H_{10} with relative hidden norm about 3.0%, and a layer-8 perturbation reaches it with about 3.5%, both at least as large as the 2.5% direct edit. The projection of the propagated log-spectrum displacement onto the frozen spectral direction retains approximately 100% and 96% of the direct value, respectively. Nevertheless, the centered hidden displacement has cosine only about 0.81 (layer 9 source) and 0.65 (layer 8 source) with the direct layer-10 edit. The causal effect on layer 11 correspondingly collapses or changes sign. This is consistent with block-wise reorientation of the perturbation even when the targeted spectral coordinate is preserved.

Qwen2.5 shows a different form of transport. The direct layer-1 edit has relative hidden norm about 2.51%. Injecting the same frozen spectral direction one block earlier at layer 0 produces a layer-1 displacement of about 2.84%, but only about 24% of the direct spectral projection survives and the cosine with the direct layer-1 hidden displacement is about 0.18. Here the intervening block both filters the targeted spectral mode and strongly reorients the surviving perturbation.

These transport results do not constitute a separate random-direction significance test. Their role is mechanistic: after causal specificity has been established, they explain why the same nominal spectral deformation can have sharply different downstream effects depending on where it is inserted.

F ARCHITECTURE-SPECIFIC CASES

The following models are included to delimit the conditions under which the pre-sink transition and a persistent onset can be meaningfully defined. They are not treated as additional independent phenomena or as members of the four-model matched-depth cohort used to establish the primary transition.

Gemma forms sinks early and strengthens them later, Llama is already saturated at the first measured layer, GPT-OSS has a structural visibility constraint, and Qwen3.6 repeatedly enters and leaves sink-like states.

F.1 WHY GPT-OSS NEEDS A DIFFERENT SINK MEASURE

In GPT-OSS, attention architecture itself constrains whether the candidate sink position can receive nonzero mass. Once position 0 leaves a local sliding-attention window, zero attention to that position is structurally enforced, whereas full-attention layers can continue to assign attention to it. Consequently, absence of a measured sink at a local layer need not represent the same latent state as below-threshold sink strength at a full-attention layer.

For this reason GPT-OSS is not included in the ordinary persistent-onset matched-depth cohort. The causal experiments instead define an architecture-aware endpoint using subsequent full-attention layers. This turns the structural boundary into a controlled test: a spectral deformation inserted after a local layer can be evaluated by whether it changes later sink strength at globally visible full-attention layers. The resulting layer-10 intervention and fresh-cohort confirmation are reported in Appendix E.

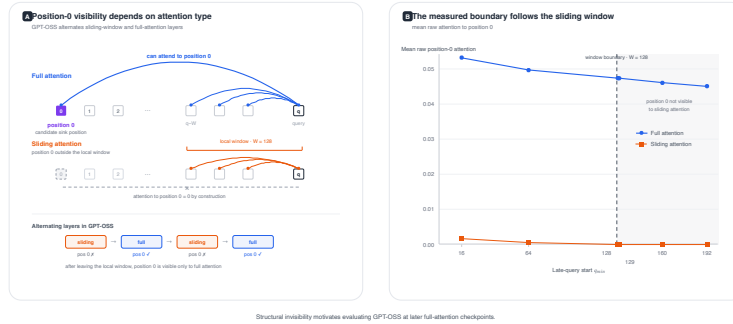


Figure 6: **GPT-OSS requires an architecture-aware sink measure because position-0 visibility depends on attention type.** (A) Full-attention layers can attend to position 0 from arbitrarily late queries, whereas in a sliding-attention layer position 0 becomes structurally inaccessible once it leaves the local window; zero attention in that regime is therefore enforced by the architecture rather than evidence that a sink-like state has disappeared. (B) The measured position-0 attention follows this visibility boundary: full-attention layers retain nonzero mass, while sliding-attention layers approach structural zero once position 0 is outside the local window. This motivates evaluating the GPT-OSS causal intervention at subsequent full-attention checkpoints rather than defining a single persistent position-0 sink onset across all layers.

F.2 WHY QWEN3.6 DOES NOT HAVE ONE PERSISTENT SINK-FORMATION LAYER

Qwen3.6-27B contains 64 raw blocks, of which 16 are full-attention checkpoints at raw layers

$$3, 7, \dots, 63. \quad (33)$$

Under the primary $q_{\min} = 16$ protocol at $T = 64$, 45/50 prompts cross the sink threshold at least once and 41 first cross at raw layer 15. At $T = 256$, only 27/50 prompts cross, with first crossings distributed across raw layers 15, 47, 55, and 59 in counts 11/6/5/5.

The more stable qualitative property is not the depth of the first crossing but its non-persistence. At $T = 256$, accepted fractions rise to 11/50 at layer 15 and fall to 0/50 at layer 19, then rise again to 11/50 at layer 47 and fall to 0/50 at layer 51. Only 5/27 first crossings remain accepted at the next full-attention checkpoint.

The later-query $q_{\min} = 64$ analysis uses the 45 prompts with a nonempty late-query region. It shifts first crossing later—2 prompts at layer 47, 5 at layer 55, and 10 at layer 59—while preserving the recurrent, non-persistent pattern. Only 5/17 first crossings remain accepted at the next full-attention checkpoint.

Thus exact first-crossing depth is sensitive to context length and query window, whereas repeated appearance and disappearance at full-attention checkpoints is the more stable qualitative pattern.

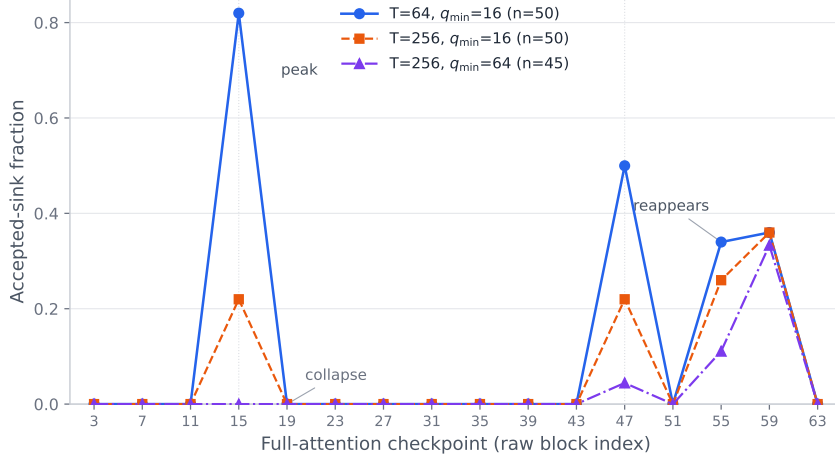


Figure 7: **Qwen3.6 hybrid-attention boundary.** Accepted sink-state fractions are shown only at the 16 full-attention checkpoints. The recurrent peak–collapse–reappearance pattern persists across context length and query-window choices, whereas the location and prevalence of the first threshold crossing vary substantially. This behavior supports treating Qwen3.6 as a recurrent, architecture-gated sink regime rather than an ordinary persistent-onset process.

Table 17: **Qwen3.6 first crossings are often non-persistent and shift with context length and query window.** “Next-checkpoint persistence” is evaluated only for prompts with a first crossing and an observed subsequent full-attention checkpoint.

Setting	Eligible prompts	Any crossing	First-crossing raw layers (counts)	Next-checkpoint persistence
$T = 64, q_{\min} = 16$	50	45	15 (41), 47 (2), 55 (1), 59 (1)	—
$T = 256, q_{\min} = 16$	50	27	15 (11), 47 (6), 55 (5), 59 (5)	5/27
$T = 256, q_{\min} = 64$	45	17	47 (2), 55 (5), 59 (10)	5/17

No robust extension of the matched-depth signal. A fixed-target nested-CV analysis does not show a robust positive spectral increment in the recurrent Qwen3.6 regime. At $T = 256, q_{\min} = 16$, predicting the dominant layer-15 crossing from one, two, or three raw blocks earlier gives

$$\Delta AP = -.180 [-.437, .037], \quad +.179 [-.066, .406], \quad -.078 [-.290, .149], \quad (34)$$

respectively.

At $q_{\min} = 64$, where the dominant crossing shifts to layer 59, the corresponding increments are

$$-.006 [-.081, .068], \quad -.032 [-.177, .078], \quad -.136 [-.272, .002]. \quad (35)$$

On the 45-prompt common cohort, a three-block $q_{\min} = 16$ analysis yields an isolated

$$+.230 [.009, .563] \quad (36)$$

with only six positives, but this does not replicate under $q_{\min} = 64$.

We therefore do not interpret the current Qwen3.6 results as evidence for a robust architecture-invariant spectral increment. Qwen3.6 does not provide evidence against the pre-sink transition identified in the delayed persistent-onset models; rather, it shows that the target being measured—a single persistent sink onset—is itself not architecture invariant.

G EXPLORATORY JACOBIAN ANALYSIS

This exploratory analysis asks whether local Jacobian measurements explain the spectral change. It is not used as evidence for the main claim.

The five-route Jacobian variables alone predict spectral- α shifts with

$$R_{\text{OOF}}^2 = 0.665, \quad (37)$$

and the observed association exceeds a 1000-replicate within-prompt circular-shift null, with

$$p = \frac{1}{1001}. \quad (38)$$

However, a flexible model-specific polynomial-depth baseline achieves

$$R_{\text{OOF}}^2 = 0.846, \quad (39)$$

and combining depth with the route variables increases this only to

$$R_{\text{OOF}}^2 = 0.850. \quad (40)$$

Thus the route variables track spectral evolution, but provide only marginal additional explanatory power beyond flexible model-specific depth dynamics.

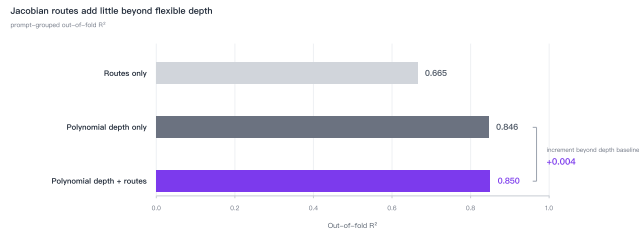


Figure 8: **Route-to-spectrum regression with nonlinear depth control.** Jacobian route variables explain spectral- α shifts under prompt-grouped out-of-fold evaluation, but most of this explanatory power is shared with flexible model-specific nonlinear depth. Adding route variables to the polynomial-depth baseline yields only a marginal improvement ($R_{\text{OOF}}^2 : 0.846 \rightarrow 0.850$; $\Delta R^2 = 0.004$).

The Jacobian measurements therefore track the same broad evolution with depth but add little once flexible depth dynamics are known. We do not use this analysis as independent evidence for the mechanism behind sink formation.

H SUMMARY OF CLAIMS AND EVIDENCE

The main text reports only the anchor results needed to follow the argument. Table 18 provides a single quantitative index of the main observational, robustness, causal, mechanistic, and boundary experiments. Unless otherwise stated, bracketed intervals are prompt-bootstrap 95% confidence intervals; empirical ranges are labeled explicitly.

Table 18: **Complete quantitative summary of the main empirical evidence.** The table consolidates the results used to support or delimit the paper’s claims; experiment-specific tables and figures provide the full context.

Analysis	Comparison / setting	Main quantitative result	Role in the paper
Observational evidence			
Primary pooled horizon grid	Current attention $\mathcal{A}$ vs. attention plus spectrum $\mathcal{A} + \mathcal{S}$, matched by model and current layer	Exact 1–6 ΔAP : $+.056, +.042, +.108, +.070, +.005$. Within 1–6: range $+.056, +.073, +.052, +.078, +.002$.	Shows a short-range spectral increment beyond current zero through horizon 4 and include attention. zero at horizon 6.
Strict within-cell timing	AP is computed only among prompts in the same model and current layer	Exact 1: $+.169$ $[-.002, .217]$; Within 2: $+.107$ $[-.048, .155]$; Within 3: $+.053$ $[-.002, .101]$; Within 4: $-.021$ $[-.037, .029]$.	Localizes the clearest prompt-specific signal to roughly two to three layers.
Continuous-attention control	Remove all threshold-derived sink-score features from the attention baseline	Exact 1: $.833 \rightarrow .918$ $(+.085)$ $[-.051, .123]$; Within 2: $.793 \rightarrow .889$ $(+.096)$ $[-.055, .137]$; Within 3: $+.080$ $[-.042, .121]$; Within 4: $+.094$ $[-.045, .141]$; Within 6: $+.013$ $[-.003, .031]$.	Rules out reuse of the onset threshold as the explanation for the short-range gain.
Expanded Qwen3 cohort	Frozen $T = 64$ analysis on 500 prompts, followed by an unseen 372-prompt post-audit subset	$N = 500$, Exact 2: $+.232$ $[-.117, .340]$; continuous-attention-only: $+.195$ $[-.062, .322]$. Unseen $N = 372$, Exact 2: $+.102$ $[-.035, .223]$; continuous-only: $+.020$ $[-.108, .132]$.	Shows a strong short-window result in the expanded cohort but weaker out-of-audit predictive strength.
Sustained-onset sensitivity	Require two consecutive sink-like layers instead of first crossing	Strict within-cell: Exact 1 $+.165$ $[-.031, .275]$; Within 2 $+.217$ $[-.105, .258]$; Within 3 $+.079$ $[-.032, .135]$; Within 4 $+.045$ $[-.017, .108]$; Within 6 $-.022$ $[-.088, .029]$.	Shows that the two–three-layer localization is not specific to first crossing.
Nonlinear baseline	Logistic and HistGradientBoosting attention-only baselines, each compared with the same model after adding spectrum	Logistic: AP $.868 \rightarrow .919$ ($\Delta\text{AP} = +.051$). HistGB: $.905 \rightarrow .935$ ($\Delta\text{AP} = +.030$).	Shows that the spectral increment is not an artifact of a linear attention-only classifier.

Continued on next page

Table 18 continued

Analysis	Comparison / setting	Main quantitative result	Role in the paper
Prompt-alignment null	Shuffle complete spectral rows across prompts within each matched model-layer cell	Observed AP = .9160; null mean = .8524; 95th percentile = .8675; gain maximum = .8933; add-one Monte-Carlo $p = 1/1001$.	Shows that the gain depends on prompt-specific spectral alignment.
Long-context GLM-Z1	Strict matched-layer analysis at $T = 256$ on the frozen 500-source cohort	K1: Within 2 +.124 [.056, .241], Within 3 +.066 [.038, .094], Within 4 -.005 [-.026, .014], Within 6 -.001 [-.012, .009], K2: +.201 [.172, .244], +.079 [.063, .096], -.047 [-.097, .014], +.005 [-.005, .015].	Shows the same short-window localization when long-context onset variation remains identifiable.
Causal interventions and local trace			
Qwen2.5 intervention	Opposite signs of the frozen learned direction; each directional gap is tested against norm-matched random spectral directions	Budgets .025/.05/.10: future gaps -.00536, -.00833, -.01726; empirical $p = .0615, .0308, .0154$. Source-layer sink change = 0.	Establishes a dose-consistent suppressive causal effect in Qwen2.5.
GLM-Z1 intervention	Opposite signs of the learned direction vs. 64 matched random directions	Budgets .025/.05/.10: natural gaps -.01525, -.02976, -.05022; random 95% ranges [-.01205, .00946], [-.02773, .02174], [-.04574, .03433]; $p = .0308, .0308, .0462$.	Independent cross-model causal corroboration with state-dependent magnitude.
GPT-OSS frozen confirmation	Frozen L10 direction, $\rho = .025$, evaluated on 30 fresh prompts; endpoint is mean sink strength at full-attention layers 11/13/15	Natural effect +.05625 [.04983, .06267]; 30 positive / 0 zero / 0 negative; random median -.00269; random empirical range [-.05538, .05548]; one-sided $p = .0308$; two-sided $p = .0462$; mean KL .0107; maximum source-layer sink change = 0.	Strongest frozen fresh-cohort causal confirmation.
Qwen2.5 next-layer trace	Frozen layer-1 edit; compare opposite signs at layer 2	Position-0 attention difference -.02142 [-.02419, -.01846]; sink-score difference [-.04143, -.01357]; $r(\Delta A, \Delta M_{qk}) = .544$ [.395, .671]; 97.7% sign agreement; value-norm sign agreement 33.9%.	Links the immediate suppressive effect to reduced next-layer position-0 QK preference.
Direction robustness	Re-estimate directions from reduced preparation data	Qwen2.5: half-vs-full cosine median .9947 (empirical 2.5–97.5% [.9750, .9987]); disjoint-half cosine median .9789 [.9022, .9947]; held-out near-minus-far projection positive in 2000/2000 splits. GPT-OSS: half-vs-full cosine median .9858 (range [.9740, .9916]); half-data effect median +.05634 vs. full +.05625; effect-retention median 1.002 (range [.987, 1.006]); 12/12 preserve sign.	Shows that the learned directions and the GPT-OSS effect are not fragile to substantial data reduction.

Cross-layer propagation and boundaries

Continued on next page

Table 18 continued

Analysis	Comparison / setting	Main quantitative result	Role in the paper
GPT-OSS propagation	Layer-8/9 upstream edits compared with the direct layer-10 edit at the same downstream state	Upstream relative hidden norms about 3.5% and 3.0% vs. 2.5% direct; targeted spectral projection retains about 96% and 100%; hidden-displacement cosine with the direct edit about .65 and .81.	Shows that norm and the targeted spectral component can survive while the full hidden perturbation rotates and the causal effect weakens.
Qwen2.5 propagation	Layer-0 upstream edit compared with the direct layer-1 edit	Direct relative norm 2.51%; upstream displacement at layer 1 2.84%; about 24% of the targeted spectral projection remains; hidden-displacement cosine about .18.	Shows a second form of reshaping in which the targeted spectral component is also strongly filtered.
Long-context identifiability	Frozen $T = 256$ timing audits	Qwen3: 499/500 first cross at layer 7. Qwen2.5: 429/500 cross and all 429 first cross at layer 4; 71 do not cross. GLM-Z1 retains distributed onset support and remains estimable.	Separates failure of the comparison from negative evidence about the spectral phenomenon.
Qwen3.6 recurrent boundary	Full-attention checkpoints under three context/query settings	$T = 64, q_{\min} = 16$: 45/50 cross. $T = 256, q_{\min} = 16$: 27/50 cross, with 5/27 persisting to the next checkpoint. $T = 256, q_{\min} = 64$: 17/45 cross, with 5/17 persisting. Fixed-target ΔAP estimates are not robust across query windows.	Shows that a single persistent sink-onset layer is not an architecture-invariant target.

Table 19 summarizes how these quantitative results map to the paper’s claims and where each conclusion stops.

Taken together, these checks support the same conclusion as the main text: **attention sinks are preceded by a short spectral reorganization of hidden states, and directly perturbing this geometry can causally alter subsequent sink formation.**

The additional analyses also define the limits of this statement. The approximately two–three-layer timing is an observational result rather than a universal causal window; the size of the predictive gain is cohort dependent; the spectrum is not a complete description of the hidden state; and some architectures or prompt distributions do not provide enough variation to define the same sink-formation problem.

Table 19: Summary of the main claims, the experiments that support them, and the limits of those conclusions.

Claim	Main evidence	Limitation
The hidden-state spectrum changes before a sink forms	Same-layer $\mathcal{A}$ versus $\mathcal{A} + S$ prediction; removal of threshold-derived attention features; prompt shuffling; nonlinear attention baselines; expanded Qwen3 cohort	The primary estimate is pooled, model-level support is uneven, and the stricter Qwen3 post-audit holdout shows weaker cohort-dependent prediction.
The clearest prompt-specific signal appears about two to three layers before sink formation	Full horizon grid; removal of model-layer means; evaluation inside matched groups; sustained-sink definitions; $T = 256$ GLM-Z1 result	The pooled signal extends farther, and two to three layers is not a universal causal window.
The spectral change is broader than one measured extreme activation	Compact outlier controls; capacity-matched activation measurements; random projections; Qwen3 timing experiment	These prediction tests do not identify a unique causal mechanism.
Changing the spectrum can change later sink formation	Post-layer singular-value edits; norm-matched random directions; Qwen2.5 and GLM-Z1 results; frozen 30-prompt GPT-OSS confirmation; half-data direction stability	The sign and size depend on model and state, and larger edits can cause broader functional changes.
The immediate Qwen2.5 suppression enters the next attention computation through a lower position-0 QK preference	Layer-1 post-block edit; layer-2 prompt-head QK-margin trace; source-attention invariance	This is a local diagnostic in one model and does not establish a universal QK mechanism.
Later transformer layers change the perturbation	GPT-OSS layer-8/9/10 propagation; Qwen2.5 layer-0-to-1 propagation	The cross-layer experiment covers two model families and is not claimed as a universal law.
The same experiment cannot be applied in every setting	Qwen3 and Qwen2.5 long-context timing collapse; GLM-Z1 long-context comparison; fresh Qwen3/GLM-4 support tests; GPT-OSS and Qwen3.6 architecture-specific cases	Lack of a usable comparison does not show that the underlying spectral phenomenon is absent.