

SHARPEN WITHOUT SEARCH: ON-POLICY DISTILLATION OF SEQUENCE-LEVEL POWER DISTRIBUTION

Erfan Baghaei Potraghloo^{u†*}, Seyedarmin Azizi^{u†}, Arya Fayyazi^u, Saeid Shokoufa^u, Mehdi Kamal^u, Souvik Kunduⁱ, Massoud Pedram^u

^uUniversity of Southern California, Los Angeles, USA

ⁱIntel AI, USA

[†] Equal contribution authors.

ABSTRACT

A language model can give a correct answer more probability than any single incorrect answer and still usually sample an incorrect one, because the incorrect answers together hold more probability. The *power distribution* raises each complete answer’s probability to a power above one and renormalizes, shifting probability toward answers the model finds most likely (sharpening). Sampling from it improves reasoning without changing parameters, but needs many scored candidates per query. We show that a model can instead be trained to produce such answers in one generation. On-policy power distillation (OPPD) runs a sequential Monte Carlo sampler in which the model being trained generates candidates and a frozen teacher’s power distribution weights them; the same probabilities weight each answer in a maximum-likelihood update. Training raises single-generation accuracy by up to 23.0 points on MATH500 and 27.3 on GSM8K over the untrained model at the same temperature, and one generation scores 2.4 and 3.5 points above published power sampling with 64 candidates, recovering 94% of the gain that 16 candidates give the untrained model. For context, against GRPO trained with verified rewards from the same checkpoint and budget, OPPD scores 3.8, 4.0 and 5.4 points higher on MATH500, GSM8K and AIME using no reference answers; the two are complementary, and OPPD applied after GRPO adds up to 9.3 points. Trained only on mathematics, OPPD raises HumanEval accuracy by up to 5.3 points. One loss coefficient moves the sharpening exponent the model absorbs between 1.19 and 2.02, against 1.14 for ordinary on-policy distillation, and it rises mostly on the model’s own answers. Gains hold across model families and sizes, including a model already trained with verified rewards, where lowering the temperature gives nothing and OPPD adds 4.4 points on MATH500. Code: <https://github.com/ArminAzizi98/OPPD>.

1 INTRODUCTION

Let p be an autoregressive language model that assigns probability $p(y | x) = \prod_t p(y_t | x, y_{<t})$ to an answer y given a prompt x , where the *prefix* $y_{<t}$ denotes the tokens before position t . Sampling from p can return an incorrect answer even when the correct answer is more probable than any single incorrect one, because the incorrect answers together hold more probability. The *power distribution* with exponent $\alpha \geq 1$,

$$\pi_\alpha(y | x) = \frac{p(y | x)^\alpha}{Z_\alpha(x)}, \quad Z_\alpha(x) = \sum_{y'} p(y' | x)^\alpha, \quad (1)$$

where $Z_\alpha(x)$ is the normalizing constant, moves probability toward the most probable answers, an effect we call *sharpening*. Under π_α , the ratio between the probabilities of two answers is their ratio under p raised to the power α . Drawing samples from π_α instead of from p raises reasoning accuracy by amounts comparable to reinforcement-learning post-training, without changing any parameter

*Corresponding author: baghaeip@usc.edu.

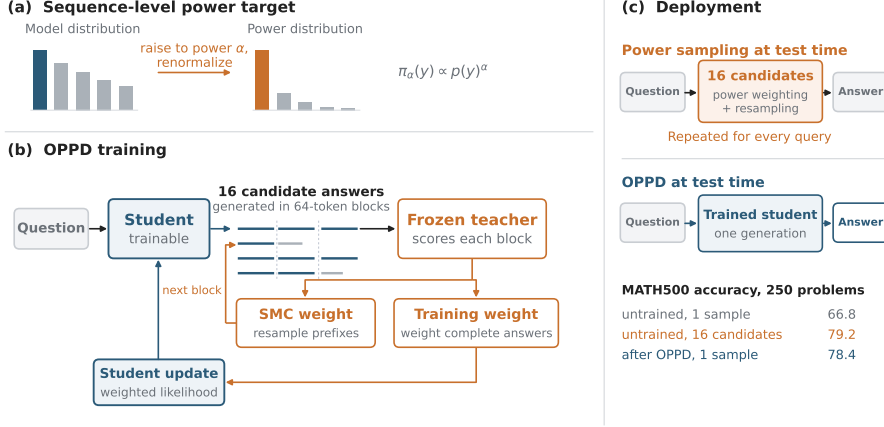


Figure 1: OPPD moves power sampling from inference time into training. (a) The power distribution gives each complete answer a probability proportional to the model’s probability of that answer raised to the power α . (b) One training step: (1) the trainable student generates its own candidate answers, (2) the candidates grow in blocks of tokens, and (3) a frozen teacher scores each new block. (4) The teacher probabilities give two weights. The importance weight (“SMC weight”) decides which partial answers are discarded or duplicated, and the training weight sets how much each complete answer contributes to the student update. (c) Power sampling generates and scores 16 candidates for every query, while the trained student generates one answer and obtains 94% of the sampler’s gain on MATH500 (Table 9).

(Karan & Du, 2026; Ji et al., 2026). On 250 MATH500 problems, Qwen2.5-Math-7B scores 66.8% when it generates one answer and 79.2% when a sampler with sixteen candidates draws approximate samples from π_α . This sampler, however, has to run again for every query.

In this paper we ask whether this cost can be paid once, during training. Ordinary distillation trains a student to match a teacher’s next-token probabilities. The next-token probabilities of π_α , however, depend on all possible continuations of the prefix, so no teacher forward pass computes them. Samples from π_α can therefore only be drawn approximately, by a sampler run at inference time. Our method, on-policy power distillation (OPPD), trains the student on the output of such a sampler, the sequential Monte Carlo (SMC) sampler of Azizi et al. (2026). This sampler extends N candidate answers in blocks of tokens and gives each candidate an importance weight, which measures how much more probable it is under π_α than under the distribution that generated it. When these weights become too uneven, it replaces low-weight candidates with copies of high-weight ones. In OPPD the student generates the candidates and a frozen teacher defines π_α ; in self-distillation, the teacher is a copy of the initial student. The teacher probabilities that set the importance weights also give each complete answer a training weight, and the student is updated by weighted maximum likelihood on its own answers (Figure 1). A second loss term, the token-level anchor with coefficient λ , keeps the student’s next-token distributions near those of the teacher at temperature $1/\alpha$.

Contributions. (1) A training method that uses no reference answers, verifier or reward model, in which one teacher forward pass per block of tokens supplies both the importance weights and the training weights. (2) A trained model that replaces the sampler, scoring above published power sampling with 64 candidates on the same model and obtaining 94% of the gain that sixteen candidates give the untrained model. (3) A reference point for the size of this gain. Group Relative Policy Optimization (GRPO) trains on verified rewards computed from reference answers, so it uses information OPPD never reads. Trained from the same checkpoint for the same number of steps, OPPD scores higher on MATH500, GSM8K and AIME, and we trace the difference to training groups in which every sampled answer receives the same reward and GRPO gets no learning signal. Applied after GRPO, OPPD improves the model further, so the two are complementary. We are not proposing OPPD as a replacement for reinforcement learning from verified rewards, and we compare against one standard implementation at one budget rather than against that literature. (4) A measurement of how much sharpening the student absorbs, as an exponent fitted between the student’s token

probabilities and those of its initialization (Section 4). This exponent decreases monotonically as λ increases and rises mainly on the answers the student writes itself. A quantity measured before training predicts the best λ for each model.

2 BACKGROUND

2.1 SHARPENING COMPLETE ANSWERS VERSUS SHARPENING TOKENS

Lowering the sampling temperature is cheaper and may appear to have the same effect, but the two operations differ. Sampling at temperature τ is *token-level*: it replaces each next-token distribution by one proportional to its probabilities raised to the power $1/\tau$, renormalizing at every position. The power distribution is *sequence-level*: (1) renormalizes once, over complete answers. Temperature therefore compares next tokens without information about the answers they lead to, while the power distribution gives little total probability to answers that begin with a prefix whose continuations are all uncertain. In the two-token example of Appendix A, the power distribution at $\alpha = 2$ places 0.213 on answers beginning with the uncertain token and temperature $1/2$ places 0.308 there.

2.2 DRAWING SAMPLES FROM THE POWER DISTRIBUTION

The constant Z_α in (1) sums over every possible answer and cannot be computed, so samples from π_α are drawn approximately with sequential Monte Carlo (Doucet et al., 2001; Del Moral, 2004; Del Moral et al., 2006). The sampler extends N candidate answers in parallel, which the SMC literature calls particles. The next token of each candidate is drawn from a *proposal distribution* q_t , any distribution that depends only on the prompt and the prefix. With p_T the model whose power distribution is sampled (the teacher in OPPD), each candidate carries an *importance weight*, the product of the *incremental importance weights*

$$\omega_t = \frac{p_T(y_t \mid x, y_{<t})^\alpha}{q_t(y_t \mid x, y_{<t})}, \quad (2)$$

over its tokens so far. Candidate i thus has importance weight $\tilde{W}_t^{(i)} = \prod_{s \leq t} \omega_s^{(i)}$ after t tokens. Rescaling these weights to sum to one gives the *normalized importance weights* $W^{(i)}$. The *effective sample size*, $\text{ESS} = (\sum_i (W^{(i)})^2)^{-1}$, approximates the number of candidates with non-negligible weight: it equals N when all weights are equal and 1 when one candidate holds all of the weight. When the ESS falls below a threshold, the sampler *resamples* the candidates: it discards low-weight candidates, duplicates high-weight ones and resets all weights to be equal. Resampling moves computation toward high-weight prefixes while the answers are still being written (Appendix F).

The effective sample size measures a divergence. The *Rényi divergence* of order β between distributions P and Q is

$$D_\beta(P\|Q) = \frac{1}{\beta - 1} \log \sum_y P(y)^\beta Q(y)^{1-\beta}, \quad \beta > 0, \beta \neq 1, \quad (3)$$

with $\beta = 1$ defined by continuity as the Kullback–Leibler (KL) divergence (Rényi, 1961). Let q be the proposal probability of a complete answer and $w = \pi_\alpha/q$, its importance weight divided by Z_α . Then $\mathbb{E}_q[w] = 1$ and $\mathbb{E}_q[w^2] = e^{D_2(\pi_\alpha\|q)}$, so for large N

$$\text{ESS}/N \approx \mathbb{E}_q[w]^2 / \mathbb{E}_q[w^2] = e^{-D_2(\pi_\alpha\|q)}. \quad (4)$$

The ESS measured while the sampler runs therefore estimates a divergence between π_α and the proposal distribution, which we use in Section 5.3.

Theorem 1 (Best proposal distribution that depends only on the prefix). *Consider all proposal distributions that are positive wherever p_T is. The unique choice that minimizes the conditional variance of the incremental importance weight (2) is to sample from the teacher at temperature $1/\alpha$, that is $q_t^*(v) \propto p_T(v \mid x, y_{<t})^\alpha$. Under this choice ω_t equals $Z_t = \sum_u p_T(u \mid x, y_{<t})^\alpha$ whatever token is drawn.*

This is the locally optimal proposal distribution of Doucet et al. (2000), written for the power distribution; the proof is in Appendix C. The Rényi entropy $H_\alpha(p) = \frac{1}{1-\alpha} \log \sum_v p(v)^\alpha$ is small when p is concentrated, and $\log Z_t = (1-\alpha)H_\alpha(p_T(\cdot | x, y_{<t}))$, so summing over positions gives the log importance weight of an answer under q^* ,

$$\log \tilde{W} = (1-\alpha) \sum_t H_\alpha(p_T(\cdot | x, y_{<t})), \quad (5)$$

which is non-positive because $\alpha > 1$. A candidate therefore keeps its weight when the teacher was confident at every position of its answer and loses weight where the teacher was uncertain. This is the sampler’s only selection rule, and it uses only the teacher’s output probabilities.

As usual in SMC, the sampler does not estimate the twist function $V_t = \sum_{y_{>t}} p_T(y_{>t} | y_{1:t})^\alpha$, on which the next-token distribution of π_α depends. Weighting and resampling correct for it.

3 METHOD

We want the student p_ϕ , with parameters ϕ , to minimize $D_\beta(\pi_\alpha || p_\phi)$ for some $\beta > 0$. Because Z_α cannot be computed, π_α can be neither evaluated nor sampled exactly, and the gradient of the divergence has both problems. Section 3.1 rewrites the gradient to avoid both, and Sections 3.2–3.4 supply the samples, the proposal and the loss, following steps (1) to (4) of Figure 1b.

3.1 WHAT THE GRADIENT REQUIRES

Theorem 2 (Gradient of the Rényi divergence). *For every $\beta > 0$, $\nabla_\phi D_\beta(\pi_\alpha || p_\phi) = -\mathbb{E}_{\bar{\pi}^{(\beta)}}[\nabla_\phi \log p_\phi(y)]$, where $\bar{\pi}^{(\beta)} \propto p_T^{\alpha\beta} p_\phi^{1-\beta}$.*

The factor $\frac{1}{\beta-1}$ in (3) cancels the factor $(1-\beta)$ from the chain rule for every β , and Z_α , which does not depend on ϕ , drops out of the gradient although it appears in the objective (Appendix C). One estimator therefore serves every β , which makes β a free parameter. In practice, answers can be drawn from any q positive wherever $\bar{\pi}^{(\beta)}$ is, weighted by $\bar{\pi}^{(\beta)}(y)/q(y)$, and used in weighted maximum likelihood, the estimator of reweighted wake-sleep (Bornschein & Bengio, 2015) and of Markovian score climbing (Naesseth et al., 2020) applied here to the Rényi family. Holding the weights constant during differentiation is exact, since the derivation accounts for how $\bar{\pi}^{(\beta)}$ depends on ϕ (Appendices H and O).

3.2 WHERE THE ANSWERS COME FROM

The weight $\bar{\pi}^{(\beta)}(y)/q(y) \propto p_T(y)^{\alpha\beta} p_\phi(y)^{1-\beta}/q(y)$ needs three numbers at every token: the teacher’s $\log p_T(y_t)$, the student’s $\log p_\phi(y_t)$ and the proposal’s $\log q_t(y_t)$. When the student is the proposal distribution, the sampler of Section 2.2 already computes all three: (2) requires $\log p_T(y_t)$ and $\log q_t(y_t)$, and the student computes $\log p_\phi(y_t)$ while generating the token. This choice adds no model evaluations, and one teacher forward pass per block supplies both the importance weights that decide resampling and the weights of Theorem 2 (step (4) of Figure 1b). Because the weighted answers are its own, the student is trained on the prefixes its own errors lead to (Kim & Rush, 2016; Agarwal et al., 2024; Gu et al., 2024).

3.3 CHOOSING THE PROPOSAL TEMPERATURE

The proposal distribution can be the student as it stands, $q_t = p_\phi$, or the student at temperature $1/\alpha$, $q_t \propto p_\phi^\alpha$. With $q_t = p_\phi$,

$$\log \omega_t = \underbrace{\alpha(\log p_T(y_t) - \log p_\phi(y_t))}_{\text{teacher-student difference}} + \underbrace{(\alpha-1) \log p_\phi(y_t)}_{\text{student's log-probability of its own draw}}. \quad (6)$$

Only the first term carries information useful for training. The second depends only on which token the student happened to sample, so its distribution is the same for good and bad answers. Its standard deviation is 4.6 nats (natural-log units) per token at $\alpha = 4$. Over a block of $\Delta = 64$ tokens, the log importance weights of two candidates then differ by about $4.6\sqrt{64} \approx 37$ nats for

reasons unrelated to their content. One candidate then receives all of the normalized weight, and the measured ESS/N stays at $1/N = 0.0625$ from the first block onward (Appendix N). The proposal $q_t \propto p_\phi^\alpha$ is the variance-optimal choice of Theorem 1 with the student in place of the teacher, and with it $\log q_t(y_t) = \alpha \log p_\phi(y_t) - \log Z_t^\phi$ with $Z_t^\phi = \sum_u p_\phi(u \mid x, y_{<t})^\alpha$, and $\log \omega_t = \alpha(\log p_T(y_t) - \log p_\phi(y_t)) + \log Z_t^\phi$. The second term of (6) disappears, and $\log Z_t^\phi$ depends on the prefix but not on the token drawn, so it adds no sampling noise. With this proposal, the measured ESS/N during training lies between 0.39 and 0.64 for every model we train.

3.4 THE LOSS

Theorem 2 averages over $\bar{\pi}^{(\beta)}$, but the candidates are drawn from q . Self-normalized importance sampling corrects for this mismatch by assigning candidate i the *training weight*

$$\tilde{A}^{(i)} = \frac{\bar{\pi}^{(\beta)}(y^{(i)})}{q(y^{(i)})}, \quad \bar{A}^{(i)} = \frac{\tilde{A}^{(i)}}{\sum_{j=1}^N \tilde{A}^{(j)}}, \quad \sum_{i=1}^N \bar{A}^{(i)} = 1. \quad (7)$$

Both $\bar{\pi}^{(\beta)}$ and q factor over tokens, and their products over hundreds of tokens underflow, so we accumulate the logarithm one token at a time:

$$\log \tilde{A}^{(i)} = \sum_t \left[\alpha \beta \log p_T(y_t^{(i)} \mid \cdot) + (1 - \beta) \log p_\phi(y_t^{(i)} \mid \cdot) - \log q_t(y_t^{(i)} \mid \cdot) \right], \quad (8)$$

where each term is conditioned on x and $y_{<t}^{(i)}$, and p_ϕ is the value recorded when the token was drawn. Any constant common to all candidates cancels in the normalization. The training weight is distinct from the importance weight of (2), which decides when the sampler resamples the candidates. Their per-token increments agree at $\beta = 1$, but the sum in (8) restarts at each block boundary while the importance weight accumulates from the start of the answer.

Replacing the expectation in Theorem 2 by the weighted average over the N candidates gives a consistent gradient estimate with bias of order $1/N$. Holding $\bar{A}^{(i)}$ fixed during differentiation makes the estimate the gradient of a loss, and dividing the loss by the mean answer length $\bar{T} = \frac{1}{N} \sum_i T_i$ keeps its scale independent of answer length (Appendix H). Writing $\pi_T^{(\alpha)} \propto p_T^\alpha$ for the teacher’s next-token distribution at temperature $1/\alpha$, the objective is

$$\mathcal{L}(\phi) = \underbrace{-\frac{1}{\bar{T}} \sum_i [\bar{A}^{(i)}]_{\text{sg}} \sum_t \log p_\phi(y_t^{(i)} \mid x, y_{<t}^{(i)})}_{\text{sequence-level term}} + \underbrace{\lambda \frac{1}{\bar{T}N} \sum_{i,t} \text{KL}(\pi_T^{(\alpha)} \parallel p_\phi)}_{\text{token-level anchor}}, \quad (9)$$

where $[\cdot]_{\text{sg}}$ is held fixed during differentiation and both KL arguments are conditioned on x and $y_{<t}^{(i)}$.

The sequence-level term is the core of the method: its optimum is π_α , it is the only term that uses information about complete answers, and it is the only term left when $\lambda = 0$. The token-level anchor does not follow from Theorem 2 and moves the attainable optimum toward the teacher at temperature $1/\alpha$, the token-level sharpening of Section 2.1. We include it because this forward KL is mass-covering: it penalizes the student for giving little probability to tokens that $\pi_T^{(\alpha)}$ considers likely. It therefore resists the concentration of all probability onto one answer, a failure we observe on models whose outputs already have little diversity. The coefficient λ trades closeness to π_α against this protection (Section 5.3). The training weights multiply a log-likelihood rather than a divergence, because a weighted token-level divergence cannot reach π_α (Appendix G).

3.5 IMPLEMENTATION

The student generates $N = 16$ candidates at temperature $1/\alpha$ in blocks of $\Delta = 64$ tokens. The teacher scores all $N\Delta$ new tokens of a block in one forward pass, which reduces the sequential teacher calls for a T -token answer from T to T/Δ . Three details affect correctness: the importance and training weights use separate accumulators; recorded training weights are renormalized after every resampling step, so that duplicated candidates are not counted more than once (Appendix Q); and finished candidates are charged the mean per-token decrease in log importance weight of unfinished ones, so that stopping early does not raise a candidate’s weight (Appendix P).

4 MEASURING ABSORBED SHARPENING

Higher accuracy alone does not show that the student moved toward π_α , so we test a consequence that is specific to this movement. Let p_{base} be the model the student was initialized from, and let a *context* c be a prompt with a prefix. If training sharpened the student relative to p_{base} with some exponent a , so that $p_\phi \approx p_{\text{base}}^a/Z$, then

$$\log p_\phi(v | c) = a \log p_{\text{base}}(v | c) - \log Z(c), \quad (10)$$

which is a line of slope a in $\log p_{\text{base}}(v | c)$ at each context c . A slope of 1 means that no sharpening was absorbed, and a slope of α means that the student equals p_{base} at temperature $1/\alpha$. We estimate the slope by least squares of $\log p_\phi$ on $\log p_{\text{base}}$ over the 200 tokens most likely under p_{base} , weighted by $p_{\text{base}}(v | c)$ so that the near-zero tail does not dominate. We report the median slope across contexts as the *absorbed exponent* $\alpha_{\text{eff}}(p_{\text{base}} \rightarrow p_\phi)$. In self-distillation $\alpha_{\text{eff}}(p_{\text{base}} \rightarrow p_T) = 1.000$ exactly, so no measured increase can come from copying a sharper model; with a larger teacher, the control is ordinary on-policy distillation against the same teacher. The slope is dominated by noise when p_{base} is close to deterministic, so we report α_{eff} only where the entropy of p_{base} is large enough for the fit to separate the models, and a direct entropy measurement elsewhere. Appendix M gives both and validates the estimator on synthetic logits.

5 EXPERIMENTS

Setup. Our main experiments use Qwen2.5-Math-7B (Yang et al., 2024) in self-distillation, which makes the control of Section 4 exact. We repeat the training on Qwen3-8B-Base (Yang et al., 2025), Llama-3.1-8B-Instruct (Grattafiori et al., 2024), Qwen3-14B-Base and deepseek-math-7b-r1 (Shao et al., 2024), and use Qwen2.5-Math-1.5B as the student for the sweep over λ . Training prompts are GSM8K questions (Cobbe et al., 2021) except in Appendix B.12, and no reference answer is used in training. We set $\alpha = 4$, increased linearly from 1 over the first 20% of steps, with $N = 16$ candidates, blocks of $\Delta = 64$ tokens, resampling when the ESS falls below $N/2$, and $\beta = 0.7$. Training runs for 300 steps at two prompts per step (Appendix J). We generate four answers per problem for 200 problems each from GSM8K and MATH500 (Lightman et al., 2024), graded with the reference power-sampling implementation. We do the same for AIME 2024 and 2025 pooled (60 problems, 3500-token limit; 4096 for Qwen3-14B-Base). *pass@1* is the fraction of the four answers that are correct, averaged over problems, and *best-of-4* counts a problem solved if any answer is correct. The paired standard error on a *pass@1* difference is about 2.9 points. Our baseline is ordinary on-policy distillation against the teacher at temperature $1/\alpha$, which is (9) with the anchor alone and no training weights or resampling. Our measurements of the untrained model are within 3 points of published numbers, in both directions (Appendix K). Qwen2.5-Math-7B improves under many training signals, including rewards uncorrelated with correctness (Shao et al., 2025), so the replications on other families in Section 5.4 carry as much of the claim as this model does.

5.1 ACCURACY

Generating one answer at temperature $1/\alpha$, the model trained with OPPD scores 2.4 points above published power sampling with 64 candidates on MATH500 and 3.5 points above it on GSM8K (Table 1). Two further seeds score 79.50 and 81.25 on MATH500, so every run exceeds published power sampling (Appendix B.2). At temperature 1, this model gains 23.0 and 27.3 points over the untrained model and 11.0 and 11.6 points over ordinary on-policy distillation. Best-of-4 also rises on both benchmarks, so the model solves more problems rather than repeating the same answer. Lowering the temperature to $1/\alpha$ requires no training, so comparing models at that temperature separates the contribution of training from that of decoding. At this temperature, ordinary on-policy distillation loses 1.9 and 1.8 points relative to the untrained model, both within one standard error, while OPPD gains 8.4 and 15.0. The single-answer result also matches published GRPO on MATH500, 78.5 against 78.0 (Table 1). The published numbers come from a different evaluation protocol. Under ours, on the same 250 problems, the sixteen-candidate sampler scores 79.2 and OPPD 78.4 (Table 9). On 250 MATH500 problems, sixteen candidates add 12.4 points for the untrained model, of which OPPD obtains 11.6 (94%) with a single generation. Running the sampler on the trained model adds only 1.6 more (Appendix B.1).

Table 1: Self-distillation on `Qwen2.5-Math-7B`. The published rows are for the same model. Generating a single answer, the model trained with OPPD scores above power sampling with 64 candidates and matches GRPO, which uses reference answers during training.

	MATH500		GSM8K	
	pass@1	best-of-4	pass@1	best-of-4
<i>sampling at temperature 1</i>				
untrained	50.25	82.0	59.25	91.0
on-policy distillation (baseline)	62.25	86.5	74.88	93.5
OPPD, $\lambda = 1$	64.00	84.0	79.38	96.0
OPPD, $\lambda = 0$	73.25	88.5	86.50	95.5
<i>sampling at temperature $1/\alpha$</i>				
untrained	70.13	85.0	76.13	92.5
on-policy distillation (baseline)	68.25	84.0	74.38	90.0
OPPD, $\lambda = 1$	72.88	83.5	86.88	93.0
OPPD, $\lambda = 0$	78.50	86.0	91.13	95.5
<i>published for this model</i>				
power sampling, 64 candidates (Azizi et al., 2026)	76.1	—	87.6	—
GRPO (Azizi et al., 2026)	78.0	—	—	—

5.2 COMPARISON WITH TRAINING ON VERIFIED REWARDS

GRPO shows how large a gain is usually available when reference answers can be used. We train the two methods from the same checkpoint to put OPPD on that scale, not to argue that one should replace the other, and they compose.

We train OPPD and GRPO (Shao et al., 2024) from the same `Qwen3-8B-Base` checkpoint for 300 optimizer steps each. At each step, both draw two prompts and sample sixteen answers of at most 1024 tokens per prompt, so each generates 9,600 answers. Our GRPO is the standard version, with one optimization pass over each batch of samples and a binary reward from the evaluation grader. Both runs are small next to published GRPO training, 600 prompt draws of at most 1024 tokens each, so the comparison bounds neither method at a larger budget. OPPD scores higher on all three benchmarks (Table 13), by 3.75 points on MATH500, 4.00 on GSM8K and 5.42 on AIME, each between one and two standard errors and all three with the same sign. GRPO learns only from groups of answers whose rewards differ, and 234 of the 600 groups (39%) gave every answer the same reward and no gradient, while every prompt drawn produced a gradient for OPPD (Appendix B.10).

The two methods also combine. Applied to a `Qwen2.5-Math-7B` checkpoint that GRPO had already trained from 50.25 to 64.00 on MATH500 and 59.25 to 71.00 on GSM8K, OPPD adds 9.25 and 8.38 more, 3.1 and 2.8 standard errors (Table 7), and AIME pass@1 rises from 10.83% with either method alone to 12.92% with both (Appendix B.11).

5.3 EVIDENCE THAT THE STUDENT MOVES TOWARD THE POWER DISTRIBUTION

Training should reduce $D_\beta(\pi_\alpha \| p_\phi)$, and (4) lets us check this on held-out problems by measuring ESS/N with each model as the proposal. The implied divergence $\hat{D}_2 = -\log(\text{ESS}/N)$ falls by 21.6% on `Qwen2.5-Math-7B` and by 26.6%, 24.7% and 12.6% at $N = 4, 16$ and 64 on `Qwen3-8B-Base`. Along the answers of the model trained at $\lambda = 0$, the untrained model’s token entropy is 0.32 times its entropy along its own answers, against 0.47 for ordinary on-policy distillation (Appendix B.3).

On the λ sweep, where `Qwen2.5-Math-1.5B` is trained with `Qwen2.5-Math-7B` as the teacher, the absorbed exponent decreases as λ increases across all five settings. It is 2.02 with the sequence-level term alone and 1.14 for ordinary on-policy distillation, and moving λ from 0.5 to 2 changes it only from 1.28 to 1.19 (Figure 2, Table 10). On contexts written by the initialization rather than by the model itself, ordinary distillation gives almost the same value and OPPD does

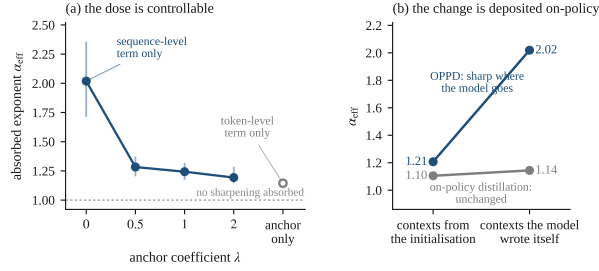


Figure 2: (a) The absorbed exponent α_{eff} decreases monotonically as the anchor coefficient λ increases, across five settings; bars are interquartile ranges over per-context fits. (b) The same estimator on contexts written by the initialization and on the model’s own answers. The two agree for ordinary on-policy distillation, while for OPPD the estimate is much higher on its own answers, as expected when the training signal comes only from those answers. Exact values in Table 10.

not (1.207 against 2.019), as expected when the signal comes only from the student’s own answers (Appendix B.4).

The best value of λ depends on the model, and the MATH500 gain an untrained model gets from lowering its temperature to $1/\alpha$ predicts it. This gain is 19.9 points on Qwen2.5-Math-7B, which does best at $\lambda = 0$, and 0.6 on Llama-3.1-8B-Instruct, which does best at $\lambda = 1$ and loses 4.75 points of MATH500 without the anchor. A large gain means that sharpening is still available, so Qwen3-8B-Base (13.0) is trained at $\lambda = 0$ (Appendix B.8).

5.4 OTHER MODELS AND SCALE

On Qwen3-8B-Base at temperature 1, OPPD raises MATH500 from 65.50 to 78.25 and GSM8K from 78.00 to 95.13, which are 4.3 and 5.8 standard errors. Both scores are above ordinary on-policy distillation (75.00 and 93.00), and best-of-4 rises on both. On Llama-3.1-8B-Instruct at $\lambda = 1$, OPPD gains 3.25 and 3.13 points over the untrained model and 2.75 on MATH500 over ordinary on-policy distillation (Table 11). On Qwen3-14B-Base at $\lambda = 0$ and temperature 1, OPPD reaches 84.00 on MATH500, 95.88 on GSM8K and 16.25 on AIME, above the untrained model’s best at either temperature (82.00, 92.38 and 12.92), and adds 18.50 points on MATH500 against 12.75 on Qwen3-8B-Base (Table 5).

deepseek-math-7b-r1 (Shao et al., 2024), from a third family, was already trained with verified rewards, and lowering its temperature to $1/\alpha$ gains +0.00 points on MATH500. OPPD at the prescribed $\lambda = 1$ raises MATH500 from 47.12 to 51.50 (95% interval [+0.88, +7.88]) and GSM8K from 85.38 to 87.75 (Appendix B.7).

Because the method uses no reference answers, its training questions can come from any source: training Llama-3.1-8B-Instruct on 4000 OpenR1-Math-220k problem statements gives 51.13 on MATH500 and 85.88 on GSM8K, against 52.50 and 85.38 with GSM8K prompts (Appendix B.12).

5.5 CODE GENERATION

HumanEval (Chen et al., 2021) scores a model’s implementation of a Python function, given its signature, by running unit tests. We evaluate the OPPD checkpoints of four models (two for Qwen2.5-Math-7B) and the GRPO checkpoint of Section 5.2, each with its default generation configuration.

OPPD raises HumanEval pass@1 on all four models, by 3.51 to 5.34 points (Table 2). The 95% interval excludes zero in every case except Qwen2.5-Math-7B at $\lambda = 0$, the setting of Table 1. The GRPO checkpoint gains 1.98 points, with an interval that includes zero.

Table 2: HumanEval, 164 problems, four samples each, pass@1. Every trained model was trained on mathematics questions only. Δ is trained minus untrained pass@1 on the same problems, with a 95% interval from a paired bootstrap (100,000 resamples).

model	training	untrained	trained	Δ [95% interval]
Qwen3-8B-Base	OPPD, $\lambda = 0$	76.52	81.86	+5.34 [+1.83, +8.84]
Qwen3-8B-Base	GRPO	76.52	78.51	+1.98 [-1.68, +5.64]
Qwen3-14B-Base	OPPD, $\lambda = 0$	80.18	83.69	+3.51 [+0.30, +6.71]
Llama-3.1-8B-Instruct	OPPD, $\lambda = 1$	63.41	68.14	+4.73 [+0.76, +8.69]
Qwen2.5-Math-7B	OPPD, $\lambda = 0$	42.53	46.49	+3.96 [-0.30, +8.23]
Qwen2.5-Math-7B	OPPD, $\lambda = 1$	42.53	47.87	+5.34 [+1.07, +9.76]

6 RELATED WORK

Power sampling and sequential Monte Carlo. Karan & Du (2026) introduce Metropolis–Hastings sampling from the power distribution (1) and show that it matches reinforcement-learning post-training on reasoning benchmarks. Azizi et al. (2026) replace the serial Markov chain with the batch-parallel sampler we use, and Ji et al. (2026) approximate the next-token distribution of π_α with sampled continuations. All three methods run at inference time. Tomihari & Sato (2026) show that the power distribution is the closed-form optimum of KL-regularized reinforcement learning when the reward is the model’s own sequence log-probability, and derive power self-distillation, which trains a model on samples a power sampler produced and reaches accuracy at or above power sampling at much lower inference cost. Moving the cost of power sampling into training is therefore established. OPPD differs in where the training answers come from and in what is optimized: the student is the sampler’s proposal distribution, so the answers are its own and one teacher pass per block serves both the sampler and the update, and the objective is the Rényi family (3) rather than supervised learning on stored samples. OPPD trains on-policy, the setting for which on-policy distillation was introduced (Agarwal et al., 2024; Gu et al., 2024). SMC has also been used to steer language models toward constraints (Lew et al., 2023) and for inference with learned twist functions (Zhao et al., 2024), and Hu et al. (2024) learn to sample intractable posteriors with GFlowNet objectives. We do not learn a twist function (Section 2.2).

Distillation and post-training. Sequence-level knowledge distillation trains a student on answers generated by the teacher (Kim & Rush, 2016; Hinton et al., 2015), and on-policy variants train on answers the student generates and the teacher scores. Methods that use verified rewards, such as GRPO (Shao et al., 2024), need to know whether each answer is correct. Methods that reward a model’s own confidence instead include entropy minimization (Agarwal et al., 2025), self-certainty (Zhao et al., 2025), negative token entropy (Prabhudesai et al., 2025) and majority-vote rewards (Zuo et al., 2025), and Huang et al. (2025) analyze self-improvement as sharpening against the model’s own judgments. With the proposal of Theorem 1 and $\beta = 1$, (5) makes our training weight a softmax over the negative Rényi entropy accumulated along each answer, a confidence weighting whose scores come from a frozen teacher and are used inside a sampler. OPPD needs only the questions, so it applies where those methods cannot be run, and it can also be applied to a model those methods have already trained. Yue et al. (2025) argue that such methods mostly re-weight answers the model could already produce, as power sampling does.

7 CONCLUSION

OPPD trains a model toward the sequence-level power distribution of a teacher, so that one generation replaces the sampler. The trained model scores above published power sampling with 64 candidates, matches GRPO trained from the same checkpoint and budget without reading reference answers, and improves a model that verified rewards have already trained. One loss coefficient controls the sharpening.

REFERENCES

- Rishabh Agarwal, Nino Vieillard, Yongchao Zhou, Piotr Stanczyk, Sabela Ramos, Matthieu Geist, and Olivier Bachem. On-policy distillation of language models: Learning from self-generated mistakes. In *International Conference on Learning Representations*, 2024.
- Shivam Agarwal, Zimin Zhang, Lifan Yuan, Jiawei Han, and Hao Peng. The unreasonable effectiveness of entropy minimization in LLM reasoning. *arXiv preprint arXiv:2505.15134*, 2025.
- Seyedarmin Azizi, Erfan Baghaei Potraghloo, Mino Ahmadi, Souvik Kundu, and Massoud Pedram. Power-SMC: Low-latency sequence-level power sampling for training-free LLM reasoning. *arXiv preprint arXiv:2602.10273*, 2026.
- Jörg Bornschein and Yoshua Bengio. Reweighted wake-sleep. In *International Conference on Learning Representations*, 2015.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*, 2021.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- Pierre Del Moral. *Feynman-Kac Formulae: Genealogical and Interacting Particle Systems with Applications*. Springer, 2004.
- Pierre Del Moral, Arnaud Doucet, and Ajay Jasra. Sequential Monte Carlo samplers. *Journal of the Royal Statistical Society Series B*, 68(3):411–436, 2006.
- Tim Dettmers, Mike Lewis, Sam Shleifer, and Luke Zettlemoyer. 8-bit optimizers via block-wise quantization. In *International Conference on Learning Representations*, 2022.
- Arnaud Doucet and Adam M Johansen. A tutorial on particle filtering and smoothing: Fifteen years later. *Handbook of Nonlinear Filtering*, 2009.
- Arnaud Doucet, Simon Godsill, and Christophe Andrieu. On sequential Monte Carlo sampling methods for Bayesian filtering. *Statistics and Computing*, 10(3):197–208, 2000.
- Arnaud Doucet, Nando de Freitas, and Neil Gordon (eds.). *Sequential Monte Carlo Methods in Practice*. Springer, 2001.
- Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, et al. The Llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- Yuxian Gu, Li Dong, Furu Wei, and Minlie Huang. MiniLLM: Knowledge distillation of large language models. In *International Conference on Learning Representations*, 2024.
- Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. Distilling the knowledge in a neural network. *arXiv preprint arXiv:1503.02531*, 2015.
- Edward J Hu, Moksh Jain, Eric Elmoznino, Younesse Kaddar, Guillaume Lajoie, Yoshua Bengio, and Nikolay Malkin. Amortizing intractable inference in large language models. In *International Conference on Learning Representations*, 2024.
- Audrey Huang, Adam Block, Dylan J Foster, Dhruv Rohatgi, Cyril Zhang, Max Simchowitz, Jordan T Ash, and Akshay Krishnamurthy. Self-improvement in language models: The sharpening mechanism. In *International Conference on Learning Representations*, 2025.
- Hugging Face. Open R1: A fully open reproduction of DeepSeek-R1. <https://github.com/huggingface/open-rl>, 2025.

- Xiaotong Ji, Rasul Tutunov, Matthieu Zimmer, and Haitham Bou Ammar. Scalable power sampling: Unlocking efficient, training-free reasoning for LLMs via distribution sharpening. *arXiv preprint arXiv:2601.21590*, 2026.
- Aayush Karan and Yilun Du. Reasoning with sampling: Your base model is smarter than you think. In *International Conference on Learning Representations*, 2026.
- Yoon Kim and Alexander M Rush. Sequence-level knowledge distillation. In *Empirical Methods in Natural Language Processing*, 2016.
- Alexander K Lew, Tan Zhi-Xuan, Gabriel Grand, and Vikash K Mansinghka. Sequential Monte Carlo steering of large language models using probabilistic programs. In *ICML Workshop on Sampling and Optimization in Discrete Space*, 2023.
- Hunter Lightman, Vineet Kosaraju, Yura Burda, Harri Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let’s verify step by step. In *International Conference on Learning Representations*, 2024.
- Christian A Naeseth, Fredrik Lindsten, and David Blei. Markovian score climbing: Variational inference with $KL(p||q)$. In *Advances in Neural Information Processing Systems*, 2020.
- Mihir Prabhudesai, Lili Chen, Alex Ippoliti, Katerina Fragkiadaki, Hao Liu, and Deepak Pathak. Maximizing confidence alone improves reasoning. *arXiv preprint arXiv:2505.22660*, 2025.
- Alfréd Rényi. On measures of entropy and information. *Berkeley Symposium on Mathematical Statistics and Probability*, 1961.
- Rulin Shao, Shuyue Stella Li, Rui Xin, Scott Geng, Yiping Wang, Sewoong Oh, Simon Shaolei Du, Nathan Lambert, Sewon Min, Ranjay Krishna, Yulia Tsvetkov, Hannaneh Hajishirzi, Pang Wei Koh, and Luke Zettlemoyer. Spurious rewards: Rethinking training signals in RLVR. *arXiv preprint arXiv:2506.10947*, 2025.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, Y.K. Li, Y. Wu, and Daya Guo. DeepSeekMath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
- Akiyoshi Tomihari and Issei Sato. Power distribution bridges sampling, self-reward RL, and self-distillation. *arXiv preprint arXiv:2605.04542*, 2026.
- An Yang, Baosong Yang, Beichen Zhang, et al. Qwen2.5 technical report. *arXiv preprint arXiv:2412.15115*, 2024.
- An Yang, Anfeng Li, Baosong Yang, et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025.
- Yang Yue, Zhiqi Chen, Rui Lu, Andrew Zhao, Zhaokai Wang, Yang Yue, Shiji Song, and Gao Huang. Does reinforcement learning really incentivize reasoning capacity in LLMs beyond the base model? In *Advances in Neural Information Processing Systems*, 2025.
- Stephen Zhao, Rob Brekelmans, Alireza Makhzani, and Roger Grosse. Probabilistic inference in language models via twisted sequential Monte Carlo. In *International Conference on Machine Learning*, 2024.
- Xuandong Zhao, Zhewei Kang, Aosong Feng, Sergey Levine, and Dawn Song. Learning to reason without external rewards. *arXiv preprint arXiv:2505.19590*, 2025.
- Yuxin Zuo, Kaiyan Zhang, Shang Qu, Li Sheng, Xuekai Zhu, Biqing Qi, Youbang Sun, Ganqu Cui, Ning Ding, and Bowen Zhou. TTTL: Test-time reinforcement learning. *arXiv preprint arXiv:2504.16084*, 2025.

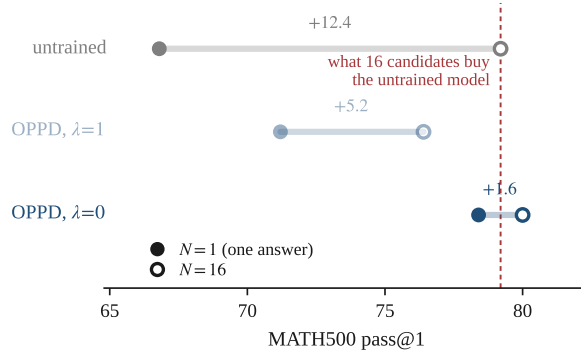


Figure 3: Accuracy against inference cost on MATH500, with $n=250$ problems. Sixteen candidates add 12.4 points for the untrained model. OPPD obtains 11.6 of these points with a single generation, and running the sampler on the trained model adds only 1.6 more. Both markers on each row are measured values, and no interpolation between them is implied. Exact values in Table 9.

A THE TWO-TOKEN EXAMPLE

Section 2.1 states that sharpening complete answers differs from sharpening tokens. The following example shows the difference on a small case.

Consider a vocabulary of two tokens and answers of length two, with $p(a) = 0.6$, $p(a | a) = 0.9$ and $p(a | b) = p(b | b) = 0.5$. Multiplying gives $p(aa) = 0.54$, $p(ab) = 0.06$ and $p(ba) = p(bb) = 0.20$. Setting $\alpha = 2$:

	aa	ab	ba	bb	total on answers starting with b
power distribution, $\alpha = 2$	0.777	0.010	0.107	0.107	0.213
temperature $\tau = 1/2$	0.684	0.008	0.154	0.154	0.308

The power distribution assigns less probability to answers beginning with b , 0.213 against 0.308. It does so because every continuation of b is uncertain, so no answer beginning with b can reach a high total probability. Temperature cannot represent this, because at the first token it compares 0.6 against 0.4 with no information about the answers those two tokens lead to. The power distribution accounts for how probable the continuations of each prefix are, and temperature does not. This is the information that OPPD transfers into the model parameters.

B EXTENDED EXPERIMENTAL RESULTS

This appendix gives in full the results summarized in Section 5.

B.1 RUNNING THE SAMPLER ON THE TRAINED MODEL

On the untrained model, sixteen candidates add 12.4 points. With a single generation, OPPD obtains 11.6 of these 12.4 points (94%), and running the sampler on the trained model adds only 1.6 more (Figure 3). Figure 1c shows the same comparison, between a sampler run on every query before training and one ordinary generation after it. The gain from candidates falls from 12.4 to 5.2 to 1.6 points as training places more weight on the sequence-level term (untrained, $\lambda = 1$, $\lambda = 0$). The $N=1$ value of 78.4 here and the 78.50 of Table 1 are both the MATH500 accuracy of the same trained model generating one answer at temperature $1/\alpha$, measured under two protocols: 250 problems with one sample, and 200 problems with four. The two values agree to within 0.1 points, which checks the two protocols against each other.

Table 3: OPPD, $\lambda = 0$, self-distilled on Qwen2.5-Math-7B with three training seeds, 300 steps each. Seed 0 is the model of Table 1.

	MATH500		GSM8K	
	pass@1	best-of-4	pass@1	best-of-4
<i>sampling at temperature 1</i>				
seed 0	73.25	88.5	86.50	95.5
seed 1	71.50	88.5	85.88	95.5
seed 2	74.63	89.5	89.50	95.5
mean	73.13	88.8	87.29	95.5
<i>sampling at temperature $1/\alpha$</i>				
seed 0	78.50	86.0	91.13	95.5
seed 1	79.50	86.0	92.63	94.5
seed 2	81.25	88.0	91.88	95.0
mean	79.75	86.7	91.88	95.0

Table 4: Left: ESS/ N with each model as the proposal distribution, and the divergence $\hat{D}_2$ to the power distribution that it implies through (4). Right: the untrained model’s token entropy along the answers each trained model writes (own), along its own answers (base), and the ratio of the two. The baseline is ordinary on-policy distillation.

proposal distribution	ESS/ N	$\hat{D}_2$		own	base	ratio	MATH@1
untrained	0.561	0.579	baseline	0.138	0.292	0.47	62.25
OPPD, $\lambda = 1$	0.602	0.508	OPPD, $\lambda = 1$	0.127	0.273	0.47	64.00
OPPD, $\lambda = 0$	0.635	0.454	OPPD, $\lambda = 0$	0.096	0.296	0.32	73.25

B.2 TRAINING SEEDS

We trained the configuration of Table 1 with two further random seeds under the settings of Section 5. Sampled at temperature $1/\alpha$, the three runs score 78.50 to 81.25 on MATH500 and 91.13 to 92.63 on GSM8K (Table 3). Every run exceeds published power sampling with 64 candidates, by 2.4 to 5.2 points on MATH500 and 3.5 to 5.0 on GSM8K, and every run matches or exceeds published GRPO on MATH500. At temperature 1 the gain over the untrained model is 21.3 to 24.4 points on MATH500 and 26.6 to 30.3 on GSM8K.

B.3 DIVERGENCE AND ENTROPY MEASUREMENTS

Training should reduce $D_\beta(\pi_\alpha \| p_\phi)$, and identity (4) lets us check this independently on held-out problems by reading the ESS when each model is the proposal distribution. We write $\hat{D}_2 = -\log(\text{ESS}/N)$ for the divergence that this identity implies, which is (3) at $\beta = 2$ between π_α and the model used as the proposal. The measured divergence falls by 21.6%, and it falls more at $\lambda = 0$ than at $\lambda = 1$ (Table 4, left).

The first row of this table needs explanation. Its proposal distribution is the teacher at temperature $1/\alpha$, which Theorem 1 identifies as the best proposal among those that depend only on the prefix, and yet both trained models do better. This does not contradict the theorem, which fixes a prefix and minimizes the variance of the next incremental importance weight. The variation that remains, described by (5), comes from differences between the prefixes that different candidates reach. A trained model cannot improve on q^* at a fixed prefix, but it can write answers whose prefixes give more uniform importance weights. The right half of Table 4 measures this effect. Sharpening complete answers favors answers of high total probability, which by (5) are answers along which the teacher is confident throughout. Along the answers written by the model trained at $\lambda = 0$, the untrained model’s token entropy is 0.32 times its entropy along its own answers, against 0.47 for ordinary on-policy distillation. Of the three models, the most accurate has the lowest ratio.

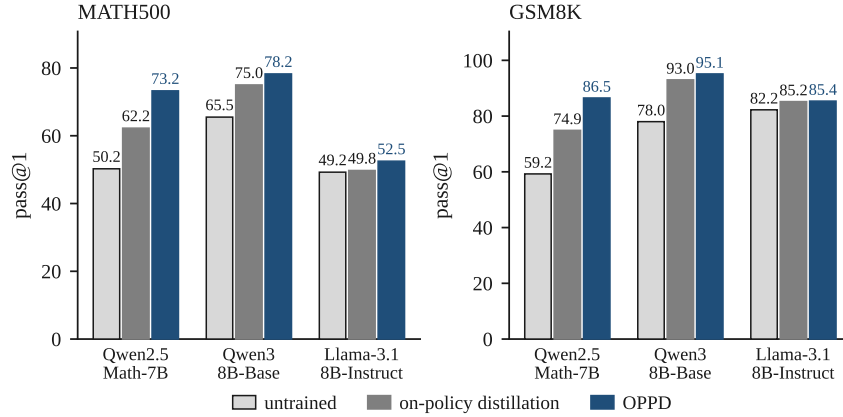


Figure 4: Replication across three models, each sampled with its default generation configuration: temperature 1, and for Llama-3.1-8B-Instruct temperature 0.6 with nucleus (top- p) sampling at $p = 0.9$. OPPD improves on both the untrained model and ordinary on-policy distillation on every model and both benchmarks. Exact values in Table 11; best-of-4 and the temperature-1/ α rows are in Appendix L.

B.4 THE COEFFICIENT λ CONTROLS THE ABSORBED EXPONENT

The absorbed exponent decreases as λ increases, across all five settings (Figure 2a). With the sequence-level term alone it rises by 1.02 above one, to about half of α , against a rise of 0.14 for ordinary on-policy distillation. The interquartile ranges of the two extreme settings do not overlap. The relationship is not linear: removing the anchor entirely moves α_{eff} from 1.28 to 2.02, whereas moving λ from 0.5 to 2 moves it only from 1.28 to 1.19. Even a small coefficient on the mass-covering anchor suppresses most of the available sharpening, which is consistent with its forward-KL form.

The change appears on the answers the student writes. The estimator can be run on two sets of contexts. One set comes from answers written by the initialization, and the other from answers written by the trained model itself. The two estimates agree for ordinary on-policy distillation (1.105 and 1.144) and differ for OPPD (1.207 and 2.019) (Table 10, right, and Figure 2b). Measuring on a model’s own answers therefore does not raise the estimate in general, only for the model trained with the sequence-level term. On-policy training predicts this asymmetry. The training signal comes only from answers that the student generates, so the parameters should change mainly along those answers, and a method trained on text written by the teacher would not produce this pattern.

B.5 REPLICATION ON TWO FURTHER MODELS

On Qwen3-8B-Base, OPPD gains 12.75 and 17.13 points over the untrained model, which are 4.3 and 5.8 standard errors, and best-of-4 rises on both benchmarks. The divergence measurement gives the same result for every number of candidates we tested: $\hat{D}_2$ falls from 0.494 to 0.362 at $N=4$, from 0.712 to 0.536 at $N=16$, and from 0.851 to 0.744 at $N=64$. These are reductions of 26.6%, 24.7% and 12.6%, consistent with the 21.6% measured on Qwen2.5-Math-7B. Values of $\hat{D}_2$ are not comparable across numbers of candidates, because more candidates explore more of the distribution, so each comparison is made at a fixed N .

On Llama-3.1-8B-Instruct, OPPD gains 3.25 and 3.13 points over the untrained model, and 2.75 points on MATH500 over ordinary on-policy distillation. The two methods differ more in best-of-4 than in pass@1: ordinary on-policy distillation lowers MATH500 best-of-4 by 4.0 points relative to the untrained model, while OPPD lowers it by 1.0.

Table 5: Qwen3-14B-Base, 300 steps at $\lambda = 0$, evaluated at both decoding temperatures. Sampled at temperature 1, OPPD scores above the untrained model at either temperature in pass@1 on all three benchmarks, and in best-of-4 on MATH500 and AIME.

	MATH500		GSM8K		AIME	
	pass@1	best-of-4	pass@1	best-of-4	pass@1	best-of-4
<i>sampling at temperature 1</i>						
untrained	65.50	86.5	87.62	97.5	8.75	25.0
OPPD	84.00	93.0	95.88	97.0	16.25	28.3
<i>sampling at temperature $1/\alpha$</i>						
untrained	82.00	89.0	92.38	96.0	12.92	20.0
OPPD	85.50	91.0	95.75	96.5	15.42	25.0

Table 6: deepseek-math-7b-rl, 300 steps at $\lambda = 1$, 200 problems and four samples per problem. Δ is the pass@1 of OPPD minus that of the untrained model on the same problems, with a 95% interval from a paired bootstrap over problems (100,000 resamples).

sampling	task	untrained	OPPD	Δ [95% interval]
temperature 1	MATH500	47.12	51.50	+4.38 [+0.88, +7.88]
	GSM8K	85.38	87.75	+2.38 [+0.00, +4.75]
temperature $1/\alpha$	MATH500	47.12	49.88	+2.75 [-0.38, +6.00]
	GSM8K	86.00	86.88	+0.88 [-0.75, +2.38]

B.6 SCALING TO A LARGER MODEL

The models above have 7 to 8B parameters. To test whether the method still works at a larger scale, we ran it on Qwen3-14B-Base, whose authors report it as comparable to Qwen2.5-32B-Base (Yang et al., 2025). All settings were those of Section 5 except the learning rate, which was 3×10^{-6} . We used $\lambda = 0$, as the rule of Appendix B.8 prescribes, and evaluated both the untrained and the trained model at both decoding temperatures.

With both models sampled at temperature $1/\alpha$, OPPD gains 3.50 points on MATH500, 3.37 on GSM8K and 2.50 on AIME (Table 5). The more informative comparison is across the two temperatures. Lowering the temperature requires no training and raises the untrained model to 82.00, 92.38 and 12.92, its better result of the two temperatures we evaluate. OPPD sampled at temperature 1, without any change to decoding, reaches 84.00, 95.88 and 16.25, above the untrained model’s best on every benchmark.

OPPD also keeps more of the model’s diversity, as measured by best-of-4, than lowering the temperature does. Lowering the temperature reduces the untrained model’s best-of-4 on two of the three benchmarks, from 97.5 to 96.0 on GSM8K and from 25.0 to 20.0 on AIME, a cost of the higher pass@1 that a lower temperature gives. OPPD at temperature 1 scores 93.0, 97.0 and 28.3 in best-of-4, above the untrained model at either temperature on MATH500 and AIME. The gains are largest on MATH500, where OPPD adds 18.50 points at temperature 1, against the 12.75 it adds on Qwen3-8B-Base.

B.7 A THIRD MODEL FAMILY

deepseek-math-7b-rl differs from the models above in two ways that matter for this measurement. It comes from a third model family, and it has already been trained with verified rewards on mathematics, so reinforcement learning has already moved its probability toward correct answers.

Before training, lowering its sampling temperature from 1 to $1/\alpha$ leaves MATH500 at 47.12 and moves GSM8K from 85.38 to 86.00, gains of +0.00 and +0.62 points. The rule of Appendix B.8 prescribes $\lambda = 1$ for a model that gains this little from a lower temperature, and we fixed $\lambda = 1$ from this measurement before training began.

Table 7: OPPD applied to a checkpoint that has already been trained with verified rewards. The second row is that checkpoint. GRPO moves the untrained model from 50.25 to 64.00 on MATH500, and OPPD adds a further 9.25 points.

	MATH500 pass@1	GSM8K pass@1
untrained model	50.25	59.25
after GRPO with verified rewards	64.00	71.00
GRPO, then OPPD, $\lambda = 1$	72.13	79.75
GRPO, then OPPD, $\lambda = 0$	73.25	79.38

OPPD scores above the untrained model in every row of Table 6. At temperature 1, MATH500 rises 4.38 points with a 95% interval of $[+0.88, +7.88]$, and GSM8K rises 2.38 points.

This model allows a direct comparison of the two operations of Section 2.1. Lowering the temperature, the token-level operation, gives +0.00 points on MATH500. Sequence-level sharpening through OPPD gives 4.38 points on the same benchmark and the same problems. On a model where token-level sharpening gives no further gain, sequence-level sharpening still raises accuracy.

B.8 CHOOSING λ FROM THE UNTRAINED MODEL

Removing the anchor term costs Llama-3.1-8B-Instruct 4.75 points of MATH500 accuracy and 5.5 points of best-of-4. On Qwen2.5-Math-7B the same change gains 9.25 points, so the best coefficient differs between models. A quantity measured on the untrained model predicts which case applies: how much the model gains from lowering its sampling temperature, which reflects how much sharpening is still available.

model	MATH500 gain from temperature $1/\alpha$	better λ
Qwen2.5-Math-7B	+19.9	0
Qwen3-8B-Base	+13.0	0 (only λ trained)
Llama-3.1-8B-Instruct	+0.6	1

A model that gains a lot from a lower temperature still has sharpening available and tolerates $\lambda = 0$, the strongest setting. A model that gains almost nothing is already sharp, and sharpening it further costs accuracy and best-of-4. On these three models, a single evaluation of the untrained model identifies the better λ .

B.9 APPLYING OPPD AFTER TRAINING WITH VERIFIED REWARDS

Table 1 compares our result with published GRPO on the same model. Reinforcement learning with verified rewards and OPPD might move probability toward the same answers, in which case applying one after the other would give no further gain. We tested this by taking a checkpoint of Qwen2.5-Math-7B that had already been trained with GRPO on verified rewards and training it further with OPPD. All other settings were those of Section 5.

Training with verified rewards moves the untrained model from 50.25 to 64.00 on MATH500 and from 59.25 to 71.00 on GSM8K. OPPD then adds a further 9.25 and 8.38 points, which are 3.1 and 2.8 standard errors (Table 7). Both settings of λ give gains of a similar size, 8.12 and 8.75 points at $\lambda = 1$, so this model is not sensitive to the anchor coefficient in the way that the instruction-tuned model of Appendix B.8 was.

The two procedures can therefore be combined: training with verified rewards does not already provide what OPPD adds, although both start from the same untrained model and improve the same benchmarks. Because the two gains add up, OPPD is useful both where verified rewards are unavailable, as in Table 1, and as a further step after training with them.

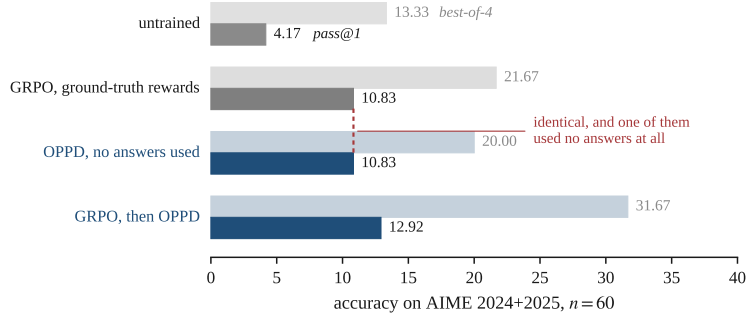


Figure 5: AIME 2024 and 2025 pooled, $n=60$ problems, four answers each. OPPD reaches the same pass@1 as training with verified rewards without using reference answers, and applying it after that training exceeds either method alone. Best-of-4 rises to 31.67, so the combined model solves problems that the untrained model does not solve in four attempts. The same evaluation on Qwen3-8B-Base gives 7.08 untrained and 14.17 with OPPD. Exact values in Table 12.

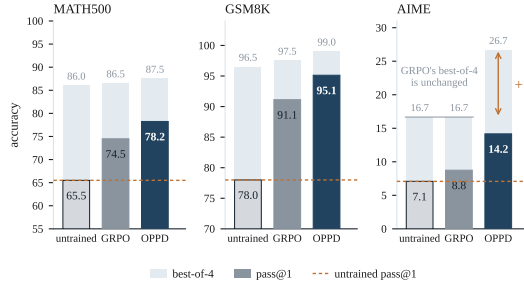


Figure 6: OPPD and GRPO trained from the same Qwen3-8B-Base checkpoint with an equal budget. Solid bar: pass@1; pale extension: best-of-4; dashed line: untrained pass@1.

B.10 EQUAL-BUDGET COMPARISON WITH GRPO

Appendix B.9 applied OPPD to a checkpoint that others had trained with GRPO. This shows that the two can be combined, but it does not say how large the gain from OPPD is beside a method that reads reference answers. Here we train both ourselves, from the same starting model and with the same budget. The comparison uses one standard implementation of GRPO at one budget, and we draw no conclusion from it about the wider family of reinforcement-learning methods that use verified rewards.

What is held equal. Both methods run for 300 optimizer steps. At each step both draw two prompts and sample sixteen answers of at most 1024 tokens per prompt, so each method generates 9,600 answers over the run. GRPO additionally uses a reference answer for every training question, which OPPD never does.

Our GRPO implementation is the standard one, with a single optimization pass over each batch of samples. For each prompt it samples sixteen answers, called a group, and scores each with a binary reward from the grader used for evaluation. The advantage of each answer is its reward minus the group mean, divided by the group standard deviation. With a single pass, the model that generated the samples is the model being updated, so the ratio between the new and the sampling probabilities is one and the clipping range is inactive.

OPPD scores higher on all three benchmarks (Figure 6), by 3.75 points on MATH500, 4.00 on GSM8K and 5.42 on AIME. Each margin is between one and two standard errors, so none is conclusive on its own, but all three favor the method that uses no reference answers.

Best-of-4, shown as the pale extensions in Figure 6, separates the two methods more clearly than pass@1. On MATH500 and GSM8K both methods raise it, GRPO by 0.5 and 1.0 points and OPPD

by 1.5 and 2.5. On AIME they differ: GRPO leaves best-of-4 at 16.67, the same as the untrained model, while OPPD raises it to 26.67. A method that raises pass@1 without raising best-of-4 selects more reliably among answers the model could already produce. Raising both means that the model solves problems it did not solve in four attempts before, and on the hardest of the three benchmarks only OPPD does so. AIME has only 60 problems, so the pass@1 margins there are imprecise.

Groups that give GRPO no training signal. GRPO learns from a group only when the rewards in it differ. If all sixteen answers earn the same reward, the group mean equals every reward, all advantages are zero, and the prompt contributes no gradient. Our logs record how often this happened: 234 of GRPO’s 600 prompt draws (39%) had uniform rewards and produced no gradient. These draws still cost computation, because the answers had to be generated before their rewards could be compared.

This fraction is higher than the average reward rate would suggest. Late in training, the mean reward ranged from 0.06 to 0.97 across steps. If every answer succeeded independently at the average of these rates, fewer than 2% of groups of sixteen would have uniform rewards. Observing 39% therefore means that difficulty is not spread evenly across prompts. A given problem tends to be either easy for the model, so that most of the sixteen answers succeed, or too hard, so that almost none do. Both cases tend to give uniform rewards and zero advantages, so mainly problems of intermediate difficulty provide a learning signal.

OPPD does not have this problem, because its training weights come from the teacher’s probabilities rather than from a correctness check. Sixteen answers that are all incorrect still differ in the total probability the teacher assigns them, so their training weights still differ. The measured ESS stayed between $0.39N$ and $0.64N$ throughout training, so no group’s weight concentrated on a single candidate, and every prompt drawn produced a gradient.

The two methods also place different requirements on the training data. GRPO needs a reference answer that a grader can check, and of the 12,000 OpenRL-Math-220k items we examined, 8,236 had one. The rest give their answer in a form that the grader cannot match to a single expression, such as a pair of values or a multiple-choice letter. OPPD uses only the question, so all 12,000 items were available to it.

B.11 RESULTS ON AIME

MATH500 and GSM8K are solved often enough by the untrained model that a large part of each score is already available before training. We therefore also evaluate on AIME, a competition benchmark on which a 7B model rarely succeeds. We pool the 2024 and 2025 problem sets, giving 60 problems, and generate four answers for each. All rows use the same 3500-token generation limit, which keeps the prompt and the answer inside the model’s context window.

The untrained model solves 4.17% of AIME problems on a single attempt. Training it with GRPO on verified rewards raises that to 10.83%, and OPPD, which uses no reference answers, reaches the same 10.83% (Figure 5). The two methods reach this number with different requirements: GRPO needs to know whether every training answer was correct, while OPPD needs only the questions.

Applying OPPD after GRPO exceeds either method alone, reaching 12.92%. Best-of-4 separates the three more clearly, at 21.67 for GRPO, 20.00 for OPPD, and 31.67 for the two together. The combined model solves 31.67% of these problems within four attempts, where the untrained model solves 13.33%, so it solves problems that the untrained model does not solve in four attempts. Selecting among answers the untrained model already produces cannot give such a gain.

The AIME result holds on a second model. We repeated the evaluation on Qwen3-8B-Base, a stronger and more recent starting point than Qwen2.5-Math-7B. The untrained model solves 7.08% of AIME problems on a single attempt, and OPPD raises that to 14.17%, with best-of-4 going from 16.67 to 26.67. Single-answer accuracy at least doubles on both models, and 14.17% is the highest AIME result among our 7B and 8B models, so the pattern does not depend on starting from a model that rarely solves these problems.

Table 8: Qwen2.5-Math-1.5B trained twice from the same starting point, 300 steps each, differing only in which model scores the candidates. Scoring against the student’s own distribution matches or exceeds scoring against a $4\times$ larger teacher.

teacher	MATH500		GSM8K	
	pass@1	best-of-4	pass@1	best-of-4
none (untrained)	49.75	77.0	57.88	88.5
Qwen2.5-Math-7B	58.25	82.5	67.63	89.5
the student itself	59.88	82.5	73.25	91.0

The gain also transfers to problems harder than those used in training. The training prompts are GSM8K questions, which are grade-school word problems, while the gain appears on competition problems that the model solves only occasionally.

B.12 TRAINING ON A DIFFERENT PROMPT SOURCE

Because the method uses no reference answers, the training questions can come from any source. We repeated the training on Llama-3.1-8B-Instruct using 4000 problem statements from OpenR1-Math-220k (Hugging Face, 2025). A corpus assembled from competition sources may contain problems that also appear in the benchmark. We therefore removed every training prompt whose normalized form matched an evaluation problem, so no benchmark question appeared during training.

Training on this corpus gives results within one standard error of training on GSM8K questions: MATH500 is 51.13 against 52.50 and GSM8K is 85.88 against 85.38, differences of 1.4 and 0.5 points against a standard error of 2.9. Of the configurations trained on this model, this one also has the highest best-of-4 (tied on GSM8K): 69.0 against the untrained model’s 69.5 on MATH500, and 94.0 against 92.5 on GSM8K, while pass@1 rises on both benchmarks. One training run per model, on questions from any source, is therefore sufficient. The method needs a supply of questions, not questions matched to the evaluation.

B.13 TRAINING AGAINST THE STUDENT ITSELF OR A LARGER TEACHER

Our main results use the student as its own teacher. Section 5 chose self-distillation for a measurement reason: $\alpha_{\text{eff}}(p_{\text{base}} \rightarrow p_{\text{T}})$ is then exactly 1.000, so no measured sharpening can come from copying a stronger model. The choice also follows from the purpose of the method: OPPD redistributes probability that the student already assigns, so the distribution that should be sharpened is the student’s own.

Standard distillation practice suggests the opposite, namely that a larger teacher should do better. We tested this on Qwen2.5-Math-1.5B, training it twice for 300 steps with $\lambda = 1$ and otherwise identical settings, once against Qwen2.5-Math-7B as teacher and once against itself.

Both settings improve on the untrained model, by 8.50 and 9.75 points with the larger teacher and by 10.13 and 15.37 points with the student itself (Table 8). Self-distillation is ahead by 5.62 points on GSM8K, which is 1.5 standard errors, and by 1.63 on MATH500, which is within noise. The two benchmarks together show that scoring against the student’s own distribution loses nothing relative to a teacher four times its size, and on one benchmark it does better.

This agrees with how the method works. OPPD uses the scoring model’s ranking of complete answers, and that ranking indicates where to move probability only if the probability belongs to the model being trained. A larger teacher defines a power distribution that is not the student’s own, so part of the gradient goes into closing the gap between the two models rather than into sharpening the student. Self-distillation removes this competing objective, so the method does not need a larger model to learn from.

Both runs used $\lambda = 1$, chosen for the larger-teacher setting. We did not test whether $\lambda = 0$ changes their order, or how the comparison changes as the gap between teacher and student grows.

Table 9: Each model used as the proposal distribution of the sampler, on MATH500 with $n=250$ and every candidate graded. Generating a single answer, OPPD at $\lambda = 0$ comes within 0.8 points of the untrained model with sixteen candidates.

proposal distribution	$N=1$	$N=16$	gain from candidates	best candidate	ESS/ N
untrained	66.8	79.2	+12.4	82.4	0.561
OPPD, $\lambda = 1$	71.2	76.4	+5.2	79.6	0.602
OPPD, $\lambda = 0$	78.4	80.0	+1.6	81.6	0.635

B.14 WHERE THE SAMPLER’S GAIN COMES FROM

Grading every candidate separates two things that the sampler does: it discards candidates while answers are being written, and at the end it re-ranks the finished answers by importance weight. If the importance weights carried information about correctness, the total normalized weight on correct candidates would exceed the fraction of candidates that are correct. Across eleven measurements spanning three models and three numbers of candidates, the two agree to within 0.5 points in every case. This includes self-distillation, where teacher and student share an architecture. Choosing the answer by weighted draw, by highest weight, or by majority vote gives the same result throughout (Appendix R).

The teacher’s probabilities therefore carry no useful information for ranking finished answers. All of the sampler’s gain comes from discarding candidates while the answers are still being written and their continuations still differ. Once the answers are complete, the teacher’s probabilities no longer separate correct from incorrect candidates. This has a consequence for a family of methods: re-ranking complete answers by model probability should not be expected to help, whereas intervening during generation should.

C PROOFS

Proof of Theorem 1. Fix a prefix and write $p(v) := p_T(v \mid x, y_{<t})$. For a proposal q the incremental importance weight is $\omega(v) = p(v)^\alpha / q(v)$, and its mean is proposal-independent: $\mathbb{E}_q[\omega] = \sum_v q(v) p(v)^\alpha / q(v) = Z_t$. Minimizing the variance is therefore equivalent to minimizing $\mathbb{E}_q[\omega^2] = \sum_v p(v)^{2\alpha} / q(v)$ subject to $\sum_v q(v) = 1$. With Lagrangian $\sum_v p(v)^{2\alpha} / q(v) + \mu(\sum_v q(v) - 1)$, stationarity gives $-p(v)^{2\alpha} / q(v)^2 + \mu = 0$, hence $q(v) = p(v)^\alpha / \sqrt{\mu}$, and normalization fixes $\sqrt{\mu} = Z_t$. Substituting, $\omega(v) \equiv Z_t$ for all v , so the conditional variance is zero and the minimizer is unique. $\square$

Proof of Theorem 2. Let $S = \sum_y \pi_\alpha(y)^\beta p_\phi(y)^{1-\beta}$, so $D_\beta = \frac{1}{\beta-1} \log S$. Differentiating and using $\nabla_\phi p_\phi = p_\phi \nabla_\phi \log p_\phi$,

$$\nabla_\phi S = \sum_y \pi_\alpha^\beta (1-\beta) p_\phi^{-\beta} \nabla_\phi p_\phi = (1-\beta) \sum_y \pi_\alpha^\beta p_\phi^{1-\beta} \nabla_\phi \log p_\phi.$$

Then $\nabla_\phi D_\beta = \frac{1}{\beta-1} \nabla_\phi S / S = - \sum_y \frac{\pi_\alpha^\beta p_\phi^{1-\beta}}{S} \nabla_\phi \log p_\phi = -\mathbb{E}_{\pi(\beta)}[\nabla_\phi \log p_\phi]$, since $\frac{1-\beta}{\beta-1} = -1$ for every $\beta \neq 1$; the $\beta \rightarrow 1$ case follows by continuity and gives the gradient of $\text{KL}(\pi_\alpha \| p_\phi)$. The normalizer Z_α does not depend on ϕ and drops out. $\square$

D TABLES CORRESPONDING TO THE FIGURES

Figures 3, 2, 4 and 5 present these measurements graphically. The exact values follow.

E NOTATION AND DEFINITIONS

This section defines the terms used in the paper, for readers who are not familiar with all of them.

Table 10: Left: the absorbed exponent decreases as λ increases, across five settings, with Qwen2.5-Math-1.5B as the student, $\alpha = 4$, and contexts taken from the answers each model writes itself. Right: the same estimator on two sets of contexts. Only the model trained with the sequence-level term measures higher on its own answers. The baseline is ordinary on-policy distillation.

	$\alpha_{\text{eff}}(p_{\text{base}} \rightarrow p_\phi)$	IQR		contexts from base	own answers	ratio
OPPD, $\lambda = 0$	2.019	[1.713, 2.356]	baseline	1.105	1.144	1.04
OPPD, $\lambda = 0.5$	1.283	[1.204, 1.372]	OPPD, $\lambda = 0$	1.207	2.019	1.67
OPPD, $\lambda = 1$	1.243	[1.172, 1.319]				
OPPD, $\lambda = 2$	1.193	[1.144, 1.286]				
baseline	1.144	[1.110, 1.178]				

Table 11: Replication at each model’s default generation configuration. Left: Qwen3-8B-Base, temperature 1. Right: Llama-3.1-8B-Instruct, temperature 0.6 with nucleus sampling at $p = 0.9$. On Llama-3.1-8B-Instruct, lowering the sampling temperature to $1/\alpha$ gains only 0.6 points on MATH500, so gains measured here come from training rather than from decoding. The baseline is ordinary on-policy distillation.

Qwen3-8B-Base					Llama-3.1-8B-Instruct				
	MATH		GSM			MATH		GSM	
	@1	@4	@1	@4		@1	@4	@1	@4
untrained	65.50	86.0	78.00	96.5	untrained	49.25	69.5	82.25	92.5
baseline	75.00	86.5	93.00	97.5	baseline	49.75	65.5	85.20	94.0
OPPD, $\lambda=0$	78.25	87.5	95.13	99.0	OPPD, $\lambda=0$	47.75	63.0	85.75	91.5
					OPPD, $\lambda=1$	52.50	68.5	85.38	93.0
					<i>OpenR1 prompts</i>	51.13	69.0	85.88	94.0

Prompts, answers, probabilities. x is the prompt, $y = (y_1, \dots, y_T)$ an answer of T tokens, and $y_{<t}$ the prefix before position t . A token is a short piece of text. A language model factors $p(y \mid x) = \prod_t p(y_t \mid x, y_{<t})$, and $p(\cdot \mid x, y_{<t})$, as a function of the next token, is a *next-token distribution*.

Temperature. Sampling at temperature τ replaces each next-token distribution $p(\cdot)$ by one proportional to $p(\cdot)^{1/\tau}$. Temperature $\tau = 1$ is ordinary sampling, and $\tau < 1$ makes likely tokens more likely, which is token-level *sharpening*. The power distribution sharpens complete answers instead (Section 2.1).

pass@1 and best-of-4. We draw four independent answers per problem. *pass@1* is the fraction correct, averaged over problems; it estimates the chance a single answer is correct. *best-of-4* counts a problem solved if at least one of the four is correct. A method that raises *pass@1* while *best-of-4* holds or rises is solving more problems. A method that raises *pass@1* while *best-of-4* falls is producing the same answer more consistently. The gap between the two metrics shows how much the model’s success depends on which sample is drawn.

Entropy and nats. Entropy measures how spread out a distribution is, and it is zero when one outcome is certain. We report it in *nats*, the unit that natural logarithms give. For the models studied here, a next-token entropy of a few tenths of a nat means that the model is already confident.

Divergences. $\text{KL}(P\|Q)$ measures how different P is from Q . It is zero if and only if the two agree, and it is not symmetric, so the two orderings behave differently as objectives. Forward KL, $\text{KL}(P\|Q)$ with P the distribution being approximated, is *mass-covering*: it heavily penalizes Q for assigning little probability where P assigns some, and it tolerates Q being broad. Reverse KL, $\text{KL}(Q\|P)$, is *mode-seeking*: it penalizes Q for assigning probability where P assigns little. The Rényi divergence $D_\beta(P\|Q) = \frac{1}{\beta-1} \log \sum_y P(y)^\beta Q(y)^{1-\beta}$ is a family indexed by $\beta > 0$, equal to KL at $\beta = 1$; it is zero exactly when $P = Q$ and positive otherwise. The Rényi entropy is $H_\alpha(p) = \frac{1}{1-\alpha} \log \sum_v p(v)^\alpha$.

Table 12: AIME 2024 and 2025 pooled, $n=60$ problems, four answers each. OPPD reaches the same pass@1 as training with verified rewards without using reference answers. Applying it after that training exceeds either method alone, and best-of-4 rises to 31.67, so the combined model solves problems that the untrained model does not solve in four attempts.

	pass@1	best-of-4
untrained Qwen2.5-Math-7B	4.17	13.33
after GRPO with verified rewards	10.83	21.67
OPPD, no reference answers	10.83	20.00
GRPO, then OPPD, $\lambda = 0$	12.92	31.67
untrained Qwen3-8B-Base	7.08	16.67
Qwen3-8B-Base with OPPD	14.17	26.67

Table 13: OPPD and GRPO trained from the same Qwen3-8B-Base checkpoint for 300 steps each, generating 9,600 answers each, then evaluated with the same code. GRPO uses a reference answer for every training question, and OPPD uses none. The two runs used the same GSM8K prompt set.

	MATH500		GSM8K		AIME	
	pass@1	best-of-4	pass@1	best-of-4	pass@1	best-of-4
untrained	65.50	86.0	78.00	96.5	7.08	16.67
GRPO, reference answers	74.50	86.5	91.13	97.5	8.75	16.67
OPPD, no reference answers	78.25	87.5	95.13	99.0	14.17	26.67

Distillation. Distillation trains a *student* p_ϕ , with parameters ϕ , to behave like a *teacher* p_T . In *off-policy* distillation the teacher writes examples and the student reproduces them. In *on-policy* distillation the student writes answers and the teacher scores them, so the student learns to continue from its own mistakes. *Self-distillation* initializes both from the same model, which rules out that a measured change comes from the student copying a stronger model.

Stop-gradient. $[\cdot]_{\text{sg}}$ denotes a quantity held fixed during differentiation.

Uncertainty. With 200 problems and four samples each, the paired standard error on a difference between two methods on the same problems is ≈ 2.9 points, written 1σ . Differences of 1σ or less are not treated as real. For per-context estimates we report the interquartile range (IQR), the range of the middle half of the measurements.

F EXTENDED BACKGROUND ON THE SAMPLER

Importance sampling. To estimate averages under a distribution $\pi = \gamma/Z$, where γ can be evaluated but Z cannot, draw samples from a proposal distribution q and weight each sample by $w(y) = \gamma(y)/q(y)$, which measures how much more π favors the sample than q does. The self-normalized estimate is $\mathbb{E}_\pi[f] \approx \sum_i w(y^{(i)})f(y^{(i)}) / \sum_i w(y^{(i)})$, and the division removes Z . This estimator is consistent rather than unbiased, with bias of order $1/N$.

Computing the weights incrementally. When importance sampling is applied to complete answers in one step, the weights vary over many orders of magnitude and one sample dominates. Defining unnormalized distributions over prefixes, $\gamma_t(y_{1:t}) = p_T(y_{1:t} \mid x)^\alpha$, and updating the weights by (2) gives the same total weight γ_T/q , while letting the sampler monitor the weights and resample during generation.

Resampling. When the ESS falls below κN (we use $\kappa = 0.5$), the candidates are resampled with probability proportional to their normalized importance weights, and all weights are reset to be equal. We use systematic resampling, which is unbiased and has lower variance than multinomial resampling (Doucet & Johansen, 2009). Duplicated candidates diverge again because their next

tokens are sampled independently. Any unbiased resampling scheme leaves the distribution being approximated unchanged and affects only the variance and the diversity of the candidates.

What the weights select for. Equation (5) states that, under the variance-optimal proposal, a candidate’s log importance weight is $(1 - \alpha)$ times the sum of the Rényi entropies of the teacher’s next-token distributions along its answer. Since $\alpha > 1$ makes $(1 - \alpha)$ negative, candidates whose prefixes the teacher is confident about keep their weight, and candidates that pass through uncertain positions lose it. No reward model, verifier or reference answer is used at any point.

G WHY A WEIGHTED TOKEN-LEVEL KL CANNOT REACH THE POWER DISTRIBUTION

An alternative objective multiplies a per-token KL divergence to the teacher at temperature $1/\alpha$ by the training weight of each answer, $\sum_{i,t} [\bar{A}^{(i)}]_{\text{sg}} \text{KL}(\pi_T^{(\alpha)}(\cdot | y_{<t}^{(i)}) \| p_\phi(\cdot | y_{<t}^{(i)}))$. This objective cannot reach π_α . A divergence multiplied by a nonnegative scalar has the same minimizer as the divergence itself, so for every context c that is visited, the optimal $p_\phi(\cdot | c)$ is $\pi_T^{(\alpha)}(\cdot | c)$ whatever the weights are. Weights placed outside a divergence change *which contexts contribute*, but they never change *the distribution matched at each context*. The attainable optimum is therefore the teacher at temperature $1/\alpha$, which Section 2.1 shows differs from π_α .

The underlying reason is that the next-token distribution of π_α is proportional to $p_T(v | y_{<t})^\alpha V_t(y_{1:t}v)$, where the twist function $V_t = \sum_{y_{>t}} p_T(y_{>t} | y_{1:t})^\alpha$ sums over all continuations. Setting $V_t \equiv \text{const}$ leaves exactly the teacher at temperature $1/\alpha$, and a factor missing *inside* the divergence cannot be supplied by a weight *outside* it. Equation (9) instead places the weights on a log-likelihood, where they change the distribution being fitted.

H THE DERIVATION IN FULL

This appendix derives the loss from the objective step by step. It repeats material from Section 3 in a form that can be checked line by line, and it contains no new results.

H.1 WHAT WE ARE MINIMIZING

Fix a prompt x . The student p_ϕ , with parameters ϕ , assigns probability $p_\phi(y | x)$ to each complete answer y . The power distribution of (1), with the teacher p_T in place of p , is

$$\pi_\alpha(y | x) = \frac{p_T(y | x)^\alpha}{Z_\alpha(x)}, \quad Z_\alpha(x) = \sum_{y'} p_T(y' | x)^\alpha.$$

We choose an order $\beta > 0$ and minimize the Rényi divergence (3) between the power distribution and the student,

$$\mathcal{J}(\phi) = D_\beta(\pi_\alpha \| p_\phi) = \frac{1}{\beta - 1} \log S(\phi), \quad S(\phi) = \sum_y \pi_\alpha(y)^\beta p_\phi(y)^{1-\beta},$$

where the dependence on x is omitted. Minimizing $\mathcal{J}$ is equivalent to minimizing $\log S$ when $\beta > 1$ and to maximizing it when $\beta < 1$; the factor $\frac{1}{\beta-1}$ handles the sign, which is why the gradient below has one form for every β .

H.2 THE GRADIENT OF THAT OBJECTIVE

Differentiate S with respect to ϕ . Only the factor $p_\phi(y)^{1-\beta}$ depends on ϕ , and $\frac{\partial}{\partial \phi} p_\phi^{1-\beta} = (1 - \beta) p_\phi^{-\beta} \nabla_\phi p_\phi$, so

$$\nabla_\phi S = \sum_y \pi_\alpha(y)^\beta (1 - \beta) p_\phi(y)^{-\beta} \nabla_\phi p_\phi(y).$$

Use the identity $\nabla_\phi p_\phi = p_\phi \nabla_\phi \log p_\phi$, which holds wherever $p_\phi > 0$, to replace $\nabla_\phi p_\phi(y)$:

$$\nabla_\phi S = (1 - \beta) \sum_y \pi_\alpha(y)^\beta p_\phi(y)^{1-\beta} \nabla_\phi \log p_\phi(y).$$

Now differentiate $\mathcal{J} = \frac{1}{\beta-1} \log S$:

$$\nabla_\phi \mathcal{J} = \frac{1}{\beta-1} \cdot \frac{\nabla_\phi S}{S} = \frac{1-\beta}{\beta-1} \sum_y \frac{\pi_\alpha(y)^\beta p_\phi(y)^{1-\beta}}{S} \nabla_\phi \log p_\phi(y).$$

The prefactor $\frac{1-\beta}{\beta-1}$ equals -1 for every $\beta \neq 1$. Define

$$\bar{\pi}^{(\beta)}(y) = \frac{\pi_\alpha(y)^\beta p_\phi(y)^{1-\beta}}{S},$$

which is nonnegative and sums to one over y , so it is a probability distribution. Then

$$\nabla_\phi D_\beta(\pi_\alpha \| p_\phi) = - \sum_y \bar{\pi}^{(\beta)}(y) \nabla_\phi \log p_\phi(y) = - \mathbb{E}_{\bar{\pi}^{(\beta)}} [\nabla_\phi \log p_\phi(y)], \quad (11)$$

which is Theorem 2. The case $\beta = 1$ follows by continuity and gives the gradient of $\text{KL}(\pi_\alpha \| p_\phi)$.

Substituting $\pi_\alpha = p_T^\alpha / Z_\alpha$ into the definition of $\bar{\pi}^{(\beta)}$ gives $\bar{\pi}^{(\beta)} \propto p_T^{\alpha\beta} p_\phi^{1-\beta}$, with the factor $Z_\alpha^{-\beta}$ absorbed into the normalizer S . This is why the intractable Z_α never appears in the gradient even though it appears in the objective.

H.3 WHY THE WEIGHTS CAN BE TREATED AS CONSTANTS

Equation (11) contains $\bar{\pi}^{(\beta)}$, which depends on ϕ through $p_\phi^{1-\beta}$. It might appear that differentiating a loss whose weights are computed from ϕ and then held fixed would miss a term. It does not, because (11) is already the complete gradient. The differentiation in Appendix H.2 was applied to the full expression for $\mathcal{J}$, including the dependence of $\bar{\pi}^{(\beta)}$ on ϕ , and every resulting term was collected. In the right-hand side, $\bar{\pi}^{(\beta)}$ appears only as a weight. Any implementation that evaluates those weights and holds them fixed while differentiating $\log p_\phi$ therefore computes (11) exactly, not an approximation of it. Appendix O confirms this numerically against brute-force enumeration.

H.4 FROM AN EXPECTATION TO A WEIGHTED AVERAGE

We cannot evaluate the sum in (11), because it runs over every possible answer, and we cannot draw samples from $\bar{\pi}^{(\beta)}$, because computing its normalizer S requires the same sum. Instead, we draw answers from a proposal distribution q and correct for the mismatch.

Let $y^{(1)}, \dots, y^{(N)}$ be answers drawn from q , and suppose $q(y) > 0$ wherever $\bar{\pi}^{(\beta)}(y) > 0$. For any function f ,

$$\mathbb{E}_{\bar{\pi}^{(\beta)}} [f(y)] = \sum_y \bar{\pi}^{(\beta)}(y) f(y) = \sum_y q(y) \frac{\bar{\pi}^{(\beta)}(y)}{q(y)} f(y) = \mathbb{E}_q \left[\frac{\bar{\pi}^{(\beta)}(y)}{q(y)} f(y) \right],$$

where the middle step multiplies and divides by $q(y)$, which is legitimate because $q(y) > 0$ on the support. The ratio $\bar{\pi}^{(\beta)}(y)/q(y)$ is the importance weight of y for estimating expectations under $\bar{\pi}^{(\beta)}$. We call its self-normalized version the training weight, to keep it distinct from the sampler's importance weight for π_α .

Two problems remain: the right-hand side is still an expectation, which we replace by the sample average over the N answers, and $\bar{\pi}^{(\beta)}$ is known only up to the constant S , which we cannot compute. The *self-normalized* form handles both. Write $\tilde{A}^{(i)} = \bar{\pi}^{(\beta)}(y^{(i)})/q(y^{(i)})$ for the unnormalized ratio, using any convenient constant multiple of $\bar{\pi}^{(\beta)}$, and let

$$\bar{A}^{(i)} = \frac{\tilde{A}^{(i)}}{\sum_{j=1}^N \tilde{A}^{(j)}}, \quad \text{so that} \quad \sum_{i=1}^N \bar{A}^{(i)} = 1.$$

Any constant common to all $\tilde{A}^{(i)}$ cancels between the numerator and the denominator, so the unknown S and the unknown $Z_\alpha^{-\beta}$ both drop out. The self-normalized estimate is

$$\mathbb{E}_{\tilde{\pi}^{(\beta)}}[f(y)] \approx \sum_{i=1}^N \tilde{A}^{(i)} f(y^{(i)}),$$

which is consistent, with bias of order $1/N$ (Doucet et al., 2001). This is the sense in which Section 3.4 obtains the training weights from self-normalized importance sampling: they are the ratios $\tilde{\pi}^{(\beta)}/q$ evaluated at the sampled answers and rescaled to sum to one. Taking $f = \nabla_\phi \log p_\phi$ and substituting into (11),

$$\nabla_\phi D_\beta(\pi_\alpha \| p_\phi) \approx - \sum_{i=1}^N \tilde{A}^{(i)} \nabla_\phi \log p_\phi(y^{(i)}). \quad (12)$$

H.5 COMPUTING THE WEIGHTS TOKEN BY TOKEN

Both $\tilde{\pi}^{(\beta)}$ and q factor over tokens, so their ratio does too. Writing the factorization out,

$$\tilde{A}^{(i)} \propto \frac{\prod_t p_T(y_t^{(i)} | x, y_{<t}^{(i)})^{\alpha\beta} \prod_t p_\phi(y_t^{(i)} | x, y_{<t}^{(i)})^{1-\beta}}{\prod_t q_t(y_t^{(i)} | x, y_{<t}^{(i)})},$$

and taking logarithms turns each product into a sum:

$$\log \tilde{A}^{(i)} = \sum_t \left[\alpha\beta \log p_T(y_t^{(i)} | \cdot) + (1-\beta) \log p_\phi(y_t^{(i)} | \cdot) - \log q_t(y_t^{(i)} | \cdot) \right],$$

which is (8). Working in logarithms is necessary, because each factor is a probability below one and the product underflows to zero in floating point after a few hundred tokens. The three quantities in the bracket are the same three that the sampler evaluates at every token, which is the sense in which the sampler and the loss share their computation.

H.6 FROM THE GRADIENT TO A SCALAR LOSS

Equation (12) is a gradient estimate, but automatic differentiation requires a scalar loss. Consider

$$\mathcal{L}_{\text{seq}}(\phi) = - \sum_{i=1}^N [\tilde{A}^{(i)}]_{\text{sg}} \log p_\phi(y^{(i)} | x),$$

where $[\cdot]_{\text{sg}}$ means the enclosed value is treated as a constant by the differentiation. Differentiating, the constants pass through and

$$\nabla_\phi \mathcal{L}_{\text{seq}} = - \sum_{i=1}^N \tilde{A}^{(i)} \nabla_\phi \log p_\phi(y^{(i)} | x),$$

which is exactly the right-hand side of (12). A gradient step on $\mathcal{L}_{\text{seq}}$ is therefore a gradient step on $D_\beta(\pi_\alpha \| p_\phi)$, up to the error of the estimate. Appendix H.3 justifies the stop-gradient.

Finally, we expand $\log p_\phi(y^{(i)} | x) = \sum_t \log p_\phi(y_t^{(i)} | x, y_{<t}^{(i)})$, so that the loss is a sum over tokens. Dividing by $T = \frac{1}{N} \sum_i T_i$ keeps the magnitude of the loss from growing with answer length, which would otherwise tie the effective learning rate to how long the answers are. The result is the sequence-level term of (9).

I THE SIMPLEST CASE OF THE LOSS

Setting $\beta = 1$ reduces (8) to a sum of the log incremental importance weights of (2). Substituting the proposal $q_t \propto p_\phi^\alpha$ and using $\log Z_t^\phi = (1-\alpha)H_\alpha(p_\phi)$,

$$\log \tilde{A}^{(i)} = \alpha \left[\log p_T(y^{(i)} | x) - \log p_\phi(y^{(i)} | x) \right] - (\alpha-1) \mathcal{H}^{(i)}, \quad \mathcal{H}^{(i)} = \sum_t H_\alpha(p_\phi(\cdot | x, y_{<t}^{(i)})).$$

At initialization in self-distillation the first bracket vanishes and $\bar{A}^{(i)} = \text{softmax}_i(-(\alpha - 1)\mathcal{H}^{(i)})$, a softmax over the negative total Rényi entropy along each answer, scaled by $\alpha - 1$. With $\lambda = 0$ the loss is then maximum likelihood on the student’s own answers, each weighted by how confident the student was along it. As training proceeds, the first bracket becomes nonzero and shifts weight toward answers that the frozen teacher rates more highly than the current student does.

J FULL EXPERIMENTAL CONFIGURATION

Models. Qwen2.5-Math-7B (main, self-distillation), Qwen3-8B-Base, Qwen3-14B-Base, Llama-3.1-8B-Instruct, deepseek-math-7b-rl, and Qwen2.5-Math-1.5B as student with Qwen2.5-Math-7B as teacher for the λ sweep. In self-distillation teacher and student are initialized from the same checkpoint; the teacher is then frozen.

Sampler. $\alpha = 4$, increased linearly from 1 over the first 20% of training steps; $N = 16$ candidates; block length $\Delta = 64$; resampling when $\text{ESS} < N/2$; systematic resampling; $\beta = 0.7$; the proposal distribution is the student at temperature $1/\alpha$. The teacher’s next-token distributions are truncated to the top 64 tokens and renormalized. The probability retained by the truncation is logged, and it exceeds 0.98 throughout except on the first block of unusually long prompts.

Optimization. 300 steps, two prompts per step, learning rate 5×10^{-6} (3×10^{-6} for Qwen3-14B-Base and 1×10^{-5} for the Qwen2.5-Math-1.5B students) with 10 warmup steps, no weight decay, gradient clipping at 1.0, 8-bit AdamW (Dettmers et al., 2022), gradient checkpointing, microbatch size 1 in the gradient phase, 1024 generated tokens during training (2048 for deepseek-math-7b-rl, whose answers are longer).

Evaluation. Four samples per problem, 200 problems each from GSM8K and MATH500, 2048 generated tokens (3072 for Llama-3.1-8B-Instruct and 4096 for deepseek-math-7b-rl, whose answers are longer). We use the prompt builder, answer parser and grader of the reference power-sampling implementation so that our numbers are directly comparable with published measurements on the same models. Temperature-1 rows use each model’s own generation configuration, which is temperature 1 with no truncation for the Qwen models and temperature 0.6 with nucleus sampling at $p = 0.9$ for Llama-3.1-8B-Instruct. Temperature- $1/\alpha$ rows set $\tau = 0.25$ explicitly and keep the rest of that configuration, so Llama-3.1-8B-Instruct is sampled there with nucleus sampling at $p = 0.9$.

Prompt formats. Each model is trained and evaluated with the same prompt format. deepseek-math-7b-rl uses the instruction its model card specifies.

Training corpora. GSM8K training-split questions throughout, except Appendix B.12, which uses 4000 problem statements from OpenR1-Math-220k. In both cases only the question text is used. For the latter we remove any training prompt whose normalized form (lowercased, alphanumeric characters only, first 400 characters) matches any evaluation problem, so no benchmark question appears in training.

K VALIDATION OF THE EVALUATION CODE

Before training we evaluate the untrained model and compare with published numbers for the same model, to establish that our decoding, parser and generation length reproduce the setting those numbers were produced in.

untrained Qwen2.5-Math-7B	measured	published	difference
MATH500, temperature 1	50.25	49.6	+0.65
GSM8K, temperature 1	59.25	62.2	−2.95
MATH500, temperature $1/\alpha$	70.13	69.0	+1.13
GSM8K, temperature $1/\alpha$	76.13	77.3	−1.17

Differences are within 3 points and run in both directions, consistent with sampling variation on a 200-problem subset rather than a systematic difference in protocol. All comparisons in the paper use this evaluation.

L COMPLETE ACCURACY TABLES

Table 11 reports the replication models at each model’s default generation configuration. The tables below give both decoding temperatures.

Table 14: Qwen3-8B-Base, both decoding temperatures.

	MATH500		GSM8K	
	pass@1	best-of-4	pass@1	best-of-4
<i>temperature 1</i>				
untrained	65.50	86.0	78.00	96.5
on-policy distillation	75.00	86.5	93.00	97.5
OPPD, $\lambda = 0$	78.25	87.5	95.13	99.0
<i>temperature $1/\alpha$</i>				
untrained	78.50	87.0	93.75	98.0
on-policy distillation	79.00	86.5	95.00	98.0
OPPD, $\lambda = 0$	81.00	86.5	94.88	97.0

Table 15: Llama-3.1-8B-Instruct. Lowering the decoding temperature gains only +0.6 and +1.25 on this model, so improvements measured at its default configuration (temperature 0.6, nucleus sampling at $p = 0.9$) come from training rather than from decoding.

	MATH500		GSM8K	
	pass@1	best-of-4	pass@1	best-of-4
untrained, default configuration	49.25	69.5	82.25	92.5
untrained, temperature $1/\alpha$	49.88	66.5	83.50	93.0
on-policy distillation	49.75	65.5	85.20	94.0
OPPD, $\lambda = 0$	47.75	63.0	85.75	91.5
OPPD, $\lambda = 1$	52.50	68.5	85.38	93.0
OPPD, $\lambda = 1$, OpenR1 prompts	51.13	69.0	85.88	94.0

M COMPLETE DIVERGENCE AND ABSORBED-EXPONENT MEASUREMENTS

Divergence to the power distribution for different numbers of candidates. Appendix B.5 summarizes these measurements, and the full table follows. The divergence $\hat{D}_2 = -\log(\text{ESS}/N)$ is not comparable across rows, because more candidates explore more of the distribution and the measured spread of the weights grows with N for any fixed proposal. Comparisons are meaningful only within a row.

candidates N	ESS/ N		$\hat{D}_2$ per block		
	untrained	OPPD	untrained	OPPD	reduction
4	0.610	0.696	0.494	0.362	26.6%
16	0.490	0.585	0.712	0.536	24.7%
64	0.427	0.475	0.851	0.744	12.6%

Because the ESS measures the divergence from the power distribution to the proposal distribution, the trained model is also a more efficient proposal for the sampler than the model it was trained from. Fewer candidates are therefore wasted if the sampler is run after training.

Absorbed exponent on both sets of contexts, Qwen2.5-Math-1.5B sweep. Table 10 reports the measurements on each model’s own answers. Both sets of contexts are given here, with the token entropies. The base entropies differ between rows because each row’s contexts are written by a different model, so only the fraction of the base-to-target entropy gap that training closes is comparable across rows.

	$\alpha_{\text{eff}}(p_{\text{base}} \rightarrow p_{\phi})$		entropy on own contexts (nats)		
	base ctx.	own ctx.	base	trained	target
OPPD, $\lambda = 0$	1.207	2.019	0.268	0.087	0.052
OPPD, $\lambda = 0.5$	—	1.283	0.218	0.138	0.045
OPPD, $\lambda = 1$	1.165	1.243	0.277	0.203	0.056
OPPD, $\lambda = 2$	1.137	1.193	0.300	0.224	0.062
baseline	1.105	1.144	0.302	0.241	0.061

Validation of the estimator. On synthetic logits with a known exponent, the estimator returns a correctly to four decimal places for $a \in \{1, 1.5, 2, 3, 4\}$. It returns 1.998 when the sharpened model is also perturbed by noise, and -0.008 for a model unrelated to the reference.

A resolution limit of the estimator. The fitted slope in (10) is a covariance divided by the variance of $\log p_{\text{base}}$ under weights p_{base} . When p_{base} is close to deterministic, that variance approaches zero and the slope is dominated by noise. For the 7B and 8B models, the entropy of p_{base} along the trained models’ own answers is 0.096 to 0.138 nats, and all trained models give α_{eff} between 1.11 and 1.25, with no separation between them. We therefore report α_{eff} only where the entropy of p_{base} is large enough (0.22 to 0.30 nats in the Qwen2.5-Math-1.5B sweep), and use the direct entropy measurement of Table 4 for the larger models. Outside this range, values of α_{eff} mostly reflect noise.

N WHY THE STUDENT AT TEMPERATURE 1 FAILS AS A PROPOSAL

Section 3.3 states that using the student at temperature 1 as the proposal distribution makes the sampler fail. The second term of (6), $(\alpha - 1) \log p_{\phi}(y_t)$, has a standard deviation of about 4.6 nats per token at $\alpha = 4$. Across a block of $\Delta = 64$ tokens, the spread between candidates is therefore about $4.6\sqrt{64} \approx 37$ nats, against a usable range of $\log N = \log 16 \approx 2.8$ nats. With this proposal, ESS/N stays at $1/N$ from the first block onward, which makes the sampler equivalent to selecting one candidate at random. The failure raises no error and produces no unusual value in the training log. The normalized importance weights are a softmax over the log importance weights, so a gap of 35 nats between the two largest gives the second a relative weight of $e^{-35} \approx 6 \times 10^{-16}$. Resampling then replaces all N candidates with copies of one. From that point on, the candidates carry a single distinct answer and no longer approximate π_{α} , and the estimator of Theorem 2 has a single sample. With the student at temperature $1/\alpha$ as the proposal, this term cancels exactly, and the measured ESS/N during training lies between 0.39 and 0.64 for every model we train.

As a check on the algebra, setting the student equal to the teacher makes the teacher–student difference term vanish, so by Theorem 1 the incremental importance weights should be identical for every candidate. The measured ESS/N in this configuration is 0.998.

O IMPLEMENTATION CORRECTNESS

Several results concern distributions rather than accuracy, so we verify the implementation independently of any benchmark with fifty automated checks on small randomly initialized models, which run the same code as training.

- Theorem 2, and the exactness of holding the weights fixed, against brute-force enumeration and numerical differentiation: agreement to 10^{-10} for $\beta \in \{0.25, 0.5, 1, 2, 5\}$.
- Log-probabilities recorded during generation and recomputed in the gradient step agree to 4.8×10^{-7} with resampling forced at every block. This tests token alignment and the reordering of the attention key-value cache for student and teacher.

- Loss and gradient match a direct reference implementation to 10^{-6} and 3×10^{-8} , and accumulating gradients over microbatches matches a single backward pass to 7×10^{-9} .
- The total variation distance between the sampler’s output distribution and π_α , computed by exhaustive enumeration on a small model, decreases monotonically in N (0.166, 0.095, 0.065 at $N = 4, 16, 64$) against 0.112 for the untrained model. This is the $O(1/N)$ behavior expected of a correct sampler.
- With the student equal to the teacher, Theorem 1 predicts equal weights, and the measured ESS/N is 0.998 against a theoretical 1.000.

These checks found three defects before any reported run: the amplification of training weights at resampling (Section 3.5), activation memory that grew with N instead of with the microbatch size, and proposal log-probabilities that were discarded.

P CORRECTING THE WEIGHT ADVANTAGE OF STOPPING EARLY

Equation (5) implies that the log importance weight decreases at every token. A candidate that emits the end-of-sequence token keeps its weight fixed while unfinished candidates continue to lose weight, so stopping early gains weight for reasons unrelated to answer quality. For long chains of reasoning, this would train the model to stop reasoning early, and the loss curve would give no sign of it.

We charge each finished candidate the mean per-token increment in log importance weight of the unfinished ones. This is the same constant for every finished candidate at a given step, so the normalized weights among unfinished candidates are unchanged, and only the comparison between finished and unfinished candidates is corrected. As a diagnostic, we use the mean answer length weighted by the normalized importance weights minus the unweighted mean length, which should be near zero.

We measure this diagnostic in a controlled setting where student and teacher are the same model, so that the per-token decrease is identical across candidates and any preference for length comes from the weight accounting:

	weighted minus unweighted length	ESS/ N
without the correction	−25.9 tokens	0.084
with the correction	+0.13 tokens	0.997

Q RESAMPLING AND THE TRAINING WEIGHTS

Resampling duplicates candidates. The training weights already recorded for earlier blocks are stored per candidate, so a duplicated candidate carries its ancestor’s recorded weight once per copy. Without a correction, the total training weight on an earlier block grows with every resampling step (a block that survives k steps is amplified by up to N^k), and the opening tokens of every answer come to dominate the loss. Neither the loss value nor any standard diagnostic shows this.

Duplication is how resampling represents weight, so the recorded training weights must be renormalized to compensate. After each resampling step, we renormalize the stored training weights of every earlier block to sum to one across candidates. The test suite of Appendix O checks this property automatically.

The sampler and the loss also keep separate weight accumulators. The sampler’s accumulator uses (2) and decides when to resample. Replacing it with the training weight, which depends on β , would stop the sampler from approximating π_α . The loss accumulator uses (8), is reset at every block boundary, and supplies $\bar{A}^{(i)}$. Their per-token increments agree at $\beta = 1$, but for every β they accumulate over different windows. We write the training weight with the letter A to keep it distinct from the importance weight W .

R SELECTING AMONG FINISHED ANSWERS

Table 16: Percentage of candidates that are correct, against the total normalized importance weight on correct candidates. If the teacher’s probabilities ranked finished answers usefully, the weight on correct candidates would exceed the percentage correct.

model	proposal, N	% correct	weight on correct	difference
1.5B	untrained, 16	53.5	53.0	−0.45
	trained, 16	49.8	49.7	−0.06
Qwen2.5-Math-7B	untrained, 16	78.9	78.8	−0.10
	OPPD $\lambda=1$, 16	76.4	76.7	+0.32
	OPPD $\lambda=0$, 16	80.0	80.1	+0.15
Qwen3-8B-Base	untrained, 4	81.20	81.04	−0.16
	untrained, 16	82.40	82.34	−0.06
	untrained, 64	76.72	76.63	−0.09
	OPPD, 4	81.30	81.46	+0.16
	OPPD, 16	80.10	80.18	+0.08
	OPPD, 64	80.06	79.86	−0.20