

GRAMMAR-GUIDED CODE WATERMARKING WITH GREEN TEMPERATURE

Hyundong Jin, Hyeseon An, Soohan Lim, Yo-Sub Han

Department of Computer Science

Yonsei University, Seoul, Republic of Korea

{tuzi04,hsan,aness1219,emmous}@yonsei.ac.kr

ABSTRACT

Large language model watermarking embeds detectable statistical signals during decoding, but the resulting changes to token probabilities can degrade generation quality. This trade-off is particularly important for code, where small changes in token selection can break syntax or alter program behavior. Existing code watermarking methods mitigate this risk through entropy-based insertion or syntax-aware token selection, but they do not directly construct the watermark over the set of continuations admitted by the current grammar state. We propose Grammar-Guided Code Watermarking with Green Temperature (GTCW), which integrates grammar-constrained decoding with probability-aware watermarking. At each decoding step, GTCW restricts the candidate set to grammar-admissible tokens and partitions this support into keyed green and red subsets. At eligible high-entropy positions, green temperature reweights the green tokens according to the model’s relative preferences, strengthening the watermark signal while retaining the grammar constraint. Across five models and five benchmarks spanning four programming languages, GTCW achieves a mean AUROC of 73.61%, compared with 67.83% for the strongest baseline, while maintaining a mean Pass@1 of 59.18% versus 59.58% for unwatermarked generation. Our implementation is available at <https://github.com/hyundong98/GTCW>.

1 INTRODUCTION

Large language models are increasingly used to generate executable code that can be directly incorporated into software systems (Hou et al., 2024). Unlike transient model interactions, generated code may be copied, modified, and redistributed independently of the model or service that produced it, making its provenance difficult to recover after generation. Reliable attribution of model-generated

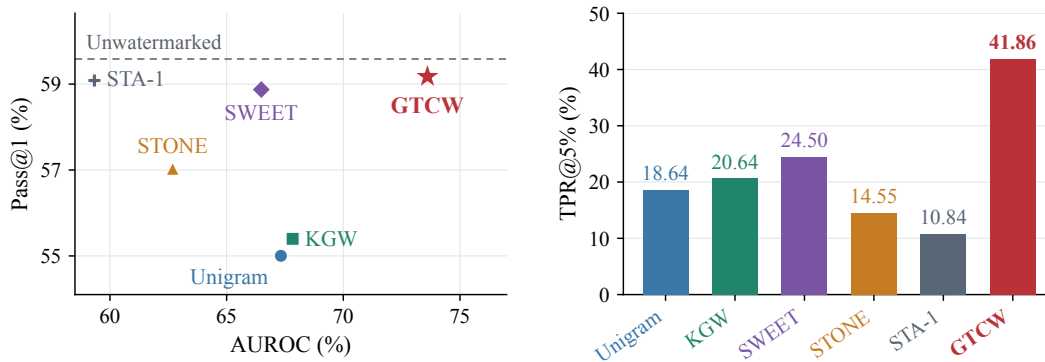


Figure 1: AUROC-Pass@1 tradeoff (left) and TPR@5%FPR (right), averaged equally over five models, five benchmarks, and three seeds. The star marks GTCW and the dashed line denotes unwatermarked Pass@1 in the left panel.

code is therefore becoming increasingly important as code generation is adopted more broadly in software development. Generation-time watermarking addresses this problem by embedding a detectable statistical signal into the generated code without retraining the underlying model (Kirchenbauer et al., 2023; Zhao et al., 2024; Dathathri et al., 2024).

Many generation-time watermarks partition candidate tokens into keyed green and red sets and modify the sampling distribution in favor of the green set (Kirchenbauer et al., 2023; Zhao et al., 2024; Mao et al., 2025; Guo et al., 2024). For code, however, perturbing token probabilities can break syntax or alter program behavior. Existing code watermarking methods reduce this risk through entropy-based insertion or lexical and structural constraints (Lee et al., 2024; Kim et al., 2026; Guan et al., 2024; Guo & Cheng, 2025). These approaches improve the choice of watermark carriers, but do not directly construct the watermark over the token set admitted by the current grammar state. A second source of distortion comes from how the selected tokens are reweighted. Common green-list methods apply the same additive bias to all green tokens, including those that the model originally assigns low probability (Kirchenbauer et al., 2023; Lee et al., 2024; Kim et al., 2026). In code generation, promoting such weak candidates can move probability mass toward syntactically or functionally undesirable continuations rather than preserving the model’s relative preference within the green set.

We propose Grammar-Guided Code Watermarking with Green Temperature (GTCW) to address both carrier selection and probability reweighting in code watermarking. For carrier selection, grammar-constrained decoding restricts the candidate set to admissible continuations, and GTCW constructs the keyed green and red partition only within this support. For probability reweighting, green temperature operates at eligible high-entropy positions and adjusts green tokens according to their model logits. This gives greater emphasis to candidates already preferred by the model rather than uniformly boosting all green tokens. Detection replays the same grammar and keyed partitioning procedure on the observed completion without requiring stored generation traces.

We evaluate GTCW on five models and five benchmarks covering Python, C++, Java, and Go. Across the 25 model-benchmark configurations, GTCW achieves a mean AUROC of 73.61%, compared with 67.83% for the strongest baseline, while its mean Pass@1 is 59.18% compared with 59.58% for unwatermarked generation. At TPR@5%FPR, GTCW reaches 41.86%, compared with 24.50% for the strongest baseline. Figure 1 summarizes these aggregate results.

2 RELATED WORK

LLM watermarking. Generation-time watermarking embeds a detectable statistical pattern during decoding through logit modification or alternative sampling procedures (Kirchenbauer et al., 2023; Zhao et al., 2024; Kuditipudi et al., 2024; Dathathri et al., 2024; Wang et al., 2025). KGW introduced the soft green-list framework, which partitions candidate tokens into keyed green and red sets while biasing generation toward the green subset (Kirchenbauer et al., 2023). Unigram watermarking uses a fixed keyed partition and provides formal robustness guarantees under editing and paraphrasing (Zhao et al., 2024). STA-1 introduces an unbiased sampling rule aimed at reducing distortion in low-entropy regimes (Mao et al., 2025). Unbiased and distortion-free watermarking methods more broadly seek to preserve the original output distribution while retaining a detectable signal (Hu et al., 2024; Kuditipudi et al., 2024; Chen et al., 2025). These methods are directly applicable to pretrained models without code-specific training, which makes them natural references for our decoding-time setting, but they do not account for the grammatical structure that restricts token choice in code. Beyond additive green-list biasing, Permute-and-Flip develops a stable watermarkable decoder whose watermarking scheme preserves the underlying sampling distribution (Zhao et al., 2025). This direction is related to our goal of reducing watermark-induced distortion, but it redesigns the sampling rule itself and is not specialized to code or grammar-constrained carrier selection. We therefore treat it as a complementary general decoding approach rather than a code-specific baseline.

Code watermarking. Code watermarking methods explicitly address the stronger structural constraints of program generation. SWEET restricts watermark scoring to high-entropy positions (Lee et al., 2024), while STONE avoids watermarking syntax-critical tokens and applies the watermark only to non-syntactic categories (Kim et al., 2026). Both operate at decoding time without addi-

tional training, making them direct baselines for our setting. Other approaches incorporate learned structural information. CodeIP trains a type predictor and constrains next-token sampling according to predicted code-token types (Guan et al., 2024). ACW uses AST-aware training signals and semantic substitutability to adapt watermark insertion (Guo & Cheng, 2025). These approaches rely on learned or type-based structural guidance. In contrast, GTCW requires no auxiliary training and constructs a keyed partition directly over the token set admitted by the current grammar state. CodeGenGuard also uses training-based structural information, but targets model ownership rather than output attribution (Yang et al., 2026). It encodes watermarks through semantics-preserving transformations and verifies ownership using a trained watermark mechanism and trigger prompts. It is therefore complementary rather than directly comparable to our decoding-time output watermark.

Grammar-constrained generation. Programming languages are commonly described by context-free or closely related grammatical abstractions. This makes grammar constraints a natural way to restrict code generation to structurally valid continuations. A line of work on grammar-constrained decoding enforces such constraints during LLM generation. SynCode uses CFG-based masking to restrict generation to tokens consistent with a target grammar, while XGrammar improves structured-generation efficiency through optimized grammar execution and persistent parser-state management (Ugare et al., 2025; Dong et al., 2025). In GTCW, watermark construction is defined over the state-dependent admissible support of the current grammar state, and the keyed green partition is formed only over permitted tokens.

3 GRAMMAR-GUIDED CODE WATERMARKING WITH GREEN TEMPERATURE

GTCW addresses two sources of distortion in code watermarking: the mismatch between vocabulary-level green partitions and the tokens that are actually admissible under the current program state, and the probability distortion introduced by uniformly biasing selected green tokens. We first formalize the former issue and then introduce grammar-guided partitioning, which constructs the watermark directly over the admissible token support. We next present green temperature for reweighting green candidates according to the model’s relative preferences, followed by the corresponding replay-based detection procedure.

3.1 CONDITIONAL GREEN-RATE DISTORTION

Let x denote the prompt and $y = (y_1, \dots, y_T)$ the generated continuation. At decoding step t , $y_{<t}$ is the generated prefix and $\ell_t(v)$ is the model logit for token v . The parser state s_t determines the admissible token set $\mathcal{A}_t$ under the current grammar state. Conventional green-list watermarks construct a pseudo-random partition over the model vocabulary $\mathcal{V}$, with a nominal green fraction γ . Let $\mathcal{G}_t \subseteq \mathcal{V}$ denote the green set at decoding step t . For code generation, however, only a subset $\mathcal{A}_t \subseteq \mathcal{V}$ is admissible at a given program state. The effective green fraction among admissible tokens is therefore

$$\hat{\gamma}_t = \frac{|\mathcal{A}_t \cap \mathcal{G}_t|}{|\mathcal{A}_t|}. \quad (1)$$

If the green partition were sampled independently of $\mathcal{A}_t$, we would expect $\mathbb{E}[\hat{\gamma}_t] = \gamma$. For a realized partition, however, $\hat{\gamma}_t$ can deviate from the nominal green fraction. This deviation is particularly relevant for context-dependent watermarks. Their partition seeds are commonly derived from a recent token window, so repeated local token contexts can reproduce the same green-red partition. Consequently, deviations in $\hat{\gamma}_t$ may recur rather than average out across decoding steps.

Moreover, the same local token context can occur under different parser states with different admissible supports, while still inducing the same vocabulary-level partition. For code watermarking, the relevant distribution is the one conditioned on tokens that can actually continue the current program. This motivates constructing the green-red partition directly over the state-dependent admissible support, rather than partitioning the full vocabulary and conditioning on it afterward.

3.2 GRAMMAR-GUIDED PARTITIONING

To maintain the target green fraction within the admissible support, GTCW constructs the green-red partition directly over $\mathcal{A}_t$. Let $n_t = |\mathcal{A}_t|$, and let c_t contain the most recent w token identifiers. The

Grammar-Guided Code Watermarking with Green Temperature (GTCW)

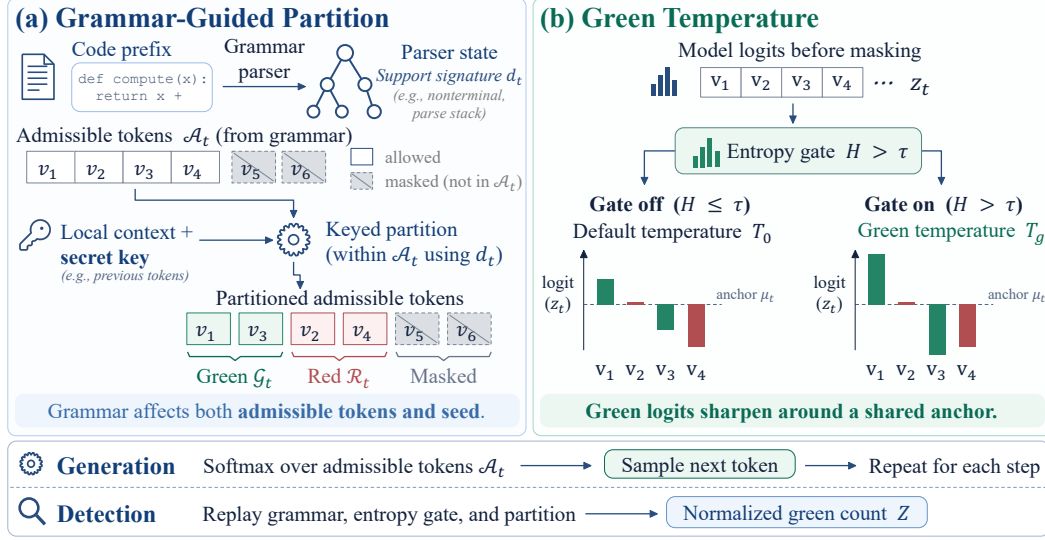


Figure 2: Overview of GTCW. (a) Grammar restricts the token support and contributes to keyed partitioning over admissible tokens. (b) At entropy-eligible positions, green temperature sharpens green logits around a shared anchor.

support signature d_t is derived from the current admissible-token set. A keyed hash $\mathcal{H}_k$ combines this signature with the local token context. For $n_t > 1$, we set

$$h_t = \mathcal{H}_k(d_t, c_t), \quad m_t = \min\{n_t - 1, \max\{1, \lfloor \gamma n_t + \frac{1}{2} \rfloor\}\}. \quad (2)$$

The seed h_t induces a pseudo-random ranking of $\mathcal{A}_t$, and the first m_t tokens form the green set $\mathcal{G}_t$. The remaining tokens are red. This choice keeps both sets nonempty while maintaining the green fraction $\gamma_t = m_t/n_t$ close to the target γ . When $n_t \leq 1$, we set $\mathcal{G}_t = \emptyset$ and insert no watermark.

Including d_t in the seed makes green membership depend on both the recent token context and the current admissible support. The same local context can therefore induce different green-red partitions under different grammar states. As a result, a partition associated with one admissible support is not directly reusable under another. States with the same support signature and token context deterministically share the same partition.

3.3 GREEN TEMPERATURE

After constructing the green-red partition, the remaining question is how to reweight the selected green tokens. A standard additive bias shifts all green logits by the same amount, regardless of their original model probabilities. Instead, green temperature adjusts green tokens according to their relative model preferences, while leaving red logits unchanged within the admissible support.

We apply the watermark only at sufficiently uncertain decoding steps. Let $p_t = \text{softmax}(\ell_t)$ denote the model distribution before grammar masking or watermarking. With entropy threshold τ , we define

$$H_t = - \sum_{v \in \mathcal{V}} p_t(v) \log p_t(v), \quad a_t = e_t \mathbf{1}[H_t > \tau] \mathbf{1}[n_t > 1]. \quad (3)$$

Here e_t is a binary carrier gate that suppresses watermark insertion during long comment or whitespace runs in C++ and Java. The grammar constraint remains active even when $a_t = 0$.

Let T_0 be the default sampling temperature and $T_g < T_0$ the green temperature, and define $\beta = 1/T_g - 1/T_0$. We center the adjustment around the log-mean-exp of the admissible logits,

$$\mu_t = \log \left(\frac{1}{|\mathcal{A}_t|} \sum_{v \in \mathcal{A}_t} \exp(\ell_t(v)) \right). \quad (4)$$

The adjusted logits are

$$\tilde{\ell}_t(v) = \begin{cases} \ell_t(v)/T_0 + a_t\beta(\ell_t(v) - \mu_t)\mathbf{1}[v \in \mathcal{G}_t], & v \in \mathcal{A}_t, \\ -\infty, & v \notin \mathcal{A}_t. \end{cases} \quad (5)$$

Conditioned on generating a source token, we sample from $q_t(v) \propto \exp(\tilde{\ell}_t(v))$. Termination and control tokens are handled separately from this source-token distribution. At an eligible position, the adjusted logit of a green token can equivalently be written as

$$\frac{\mu_t}{T_0} + \frac{\ell_t(v) - \mu_t}{T_g}. \quad (6)$$

Green temperature preserves the ordering among green tokens while sharpening their relative preferences. For two green tokens $u, v \in \mathcal{A}_t$ at an eligible position,

$$\frac{q_t(u)}{q_t(v)} = \exp\left(\frac{\ell_t(u) - \ell_t(v)}{T_g}\right). \quad (7)$$

Thus, green tokens already preferred by the model receive greater relative emphasis, rather than all green tokens receiving the same boost. In contrast, a uniform additive bias changes the probability mass assigned to the green set while leaving the relative distribution within that set unchanged. The anchor makes the transformation invariant to a common shift of the logits.

3.4 DETECTION

Detection takes the completed code, separating the known code prefix from the generated continuation, and replays the generation states using the original model, grammar, and secret key. Before consuming token y_t , the detector reconstructs the admissible set $\mathcal{A}_t$, watermark eligibility a_t , and green set $\mathcal{G}_t$. We score the eligible positions

$$\mathcal{T} = \{t \mid a_t = 1, y_t \in \mathcal{A}_t\}. \quad (8)$$

For each $t \in \mathcal{T}$, let $I_t = \mathbf{1}[y_t \in \mathcal{G}_t]$ and $\gamma_t = m_t/n_t$. Under an idealized random-partition null, I_t has mean γ_t and variance $\gamma_t(1 - \gamma_t)$. We therefore use the normalized green count

$$Z = \frac{\sum_{t \in \mathcal{T}} (I_t - \gamma_t)}{\sqrt{\sum_{t \in \mathcal{T}} \gamma_t(1 - \gamma_t)}}. \quad (9)$$

A larger Z indicates stronger evidence that the continuation follows the keyed green partitions. If an observed token is inadmissible or parsing fails, replay stops and retains the evidence accumulated over the admissible prefix. If no eligible position is available, no finite detection score is produced, and the output is retained in evaluation as having no watermark evidence. Detection requires model inference to reconstruct the entropy gate, but does not require stored generation traces.

4 EXPERIMENTS

4.1 EXPERIMENTAL SETTINGS

We evaluate GTCW across five instruction-tuned code generation models and five benchmarks covering Python, C++, Java, and Go, including HumanEval+, MBPP+, and multilingual subsets of HumanEvalPack, with functional correctness measured by execution-based tests (Liu et al., 2023; Muennighoff et al., 2024). We compare against Unigram, KGW, SWEET, STONE, and STA-1, together with an unwatermarked Base reference, using matched prompts and sampling configurations for each model-benchmark setting. We report AUROC and TPR@5%FPR for watermark detection and Pass@1 for functional correctness, retaining all generated samples and comparing watermarked outputs against matched unwatermarked completions. Results are averaged over three random seeds with equal weight across model-benchmark configurations. The main table reports Qwen2.5-Coder (3B/7B) and Llama3.1 (8B), while the complete five-model results are provided in Appendix C.1. Sensitivity, ablation, and code-transformation evaluations use Qwen2.5-Coder (3B). The transformation evaluation includes identifier renaming, formatting, comment removal, dead-code insertion, control-flow transformations, and LLM rewriting. Detailed experimental settings and metric definitions are provided in Appendix B.

Table 1: Detection and functional correctness. AUC, T@5, and P@1 denote AUROC, TPR@5%FPR, and Pass@1, respectively. Values are mean percentages over three seeds. Gray shading indicates GTCW. Bold and underline mark the best and second-best watermarked methods, respectively, based on unrounded values.

Model	Method	HumanEval+			MBPP+			HumanEvalPack								
		Python			Python			C++			Java			Go		
		AUC	T@5	P@1	AUC	T@5	P@1	AUC	T@5	P@1	AUC	T@5	P@1	AUC	T@5	P@1
Qwen2.5-C (3B)	Base	—	—	67.9	—	—	52.1	—	—	52.2	—	—	71.8	—	—	51.2
	Unigram	68.1	18.9	65.0	82.4	38.5	43.5	75.5	28.5	46.8	67.2	16.9	63.4	71.2	15.5	45.7
	KGW	68.1	22.0	63.4	81.2	39.7	47.6	<u>76.7</u>	<u>33.9</u>	45.3	65.5	14.4	66.9	68.6	22.0	47.6
	SWEET	68.9	24.4	68.7	84.4	41.8	50.8	71.0	30.1	53.9	<u>68.5</u>	25.8	71.1	72.8	29.3	48.2
	STONE	63.3	11.2	67.1	74.3	24.1	47.1	66.4	16.3	49.2	61.8	11.4	<u>70.3</u>	63.7	16.1	46.5
	STA-1	57.9	7.9	70.5	70.5	20.0	<u>51.2</u>	62.8	11.2	<u>51.0</u>	59.8	11.4	69.3	60.5	8.9	51.8
	GTCW	77.6	49.2	<u>69.5</u>	96.5	83.6	51.8	81.1	51.4	50.0	75.9	37.2	<u>70.3</u>	86.4	56.5	<u>49.2</u>
Qwen2.5-C (7B)	Base	—	—	77.0	—	—	61.3	—	—	63.6	—	—	79.3	—	—	63.2
	Unigram	60.5	12.2	74.4	80.6	32.6	53.1	67.3	17.3	60.4	<u>59.2</u>	9.4	78.9	62.7	10.2	61.8
	KGW	<u>60.6</u>	7.9	75.2	<u>79.4</u>	<u>40.0</u>	55.0	67.9	15.5	56.9	60.9	8.7	<u>74.6</u>	60.6	<u>11.8</u>	59.4
	SWEET	57.0	3.9	76.8	75.4	27.3	<u>60.0</u>	59.1	11.6	<u>62.6</u>	53.8	<u>11.2</u>	77.2	57.7	8.3	63.0
	STONE	59.3	10.8	76.6	69.8	20.9	57.6	58.7	7.5	62.0	55.7	6.7	77.6	58.2	10.8	63.0
	STA-1	57.3	10.0	77.2	65.6	15.8	60.9	58.6	8.1	63.2	55.1	7.9	76.0	55.6	7.3	60.2
	GTCW	60.9	21.5	<u>77.0</u>	88.3	56.0	59.5	64.8	27.4	58.1	56.7	16.1	80.1	<u>62.6</u>	20.9	<u>62.2</u>
Llama3.1 (8B)	Base	—	—	50.6	—	—	57.8	—	—	40.0	—	—	53.1	—	—	32.9
	Unigram	<u>70.2</u>	21.5	46.8	<u>63.4</u>	12.3	56.4	76.7	24.6	34.2	70.2	22.4	45.5	71.0	26.0	23.8
	KGW	66.6	23.0	48.4	63.0	<u>15.5</u>	55.8	76.7	31.3	33.5	70.3	25.2	47.6	73.9	25.6	30.9
	SWEET	69.9	<u>27.2</u>	49.4	62.1	15.1	57.0	81.2	<u>41.5</u>	36.8	<u>73.3</u>	<u>33.3</u>	51.6	82.6	47.0	30.5
	STONE	65.5	16.9	48.0	60.6	12.9	56.4	69.6	21.5	<u>36.8</u>	63.4	13.0	51.4	69.0	22.0	29.5
	STA-1	55.7	10.4	<u>51.4</u>	56.0	9.0	<u>57.6</u>	64.8	14.6	39.2	59.1	17.1	<u>52.0</u>	62.1	13.4	36.0
	GTCW	78.6	45.9	53.1	66.6	27.7	58.6	90.5	76.2	33.7	79.6	47.0	52.4	92.8	73.0	<u>31.5</u>

4.2 MAIN RESULTS

Table 1 compares the three models across five benchmarks. Across these 15 model-benchmark settings, GTCW achieves the highest TPR@5%FPR in every setting and the highest AUROC in 12 of 15 settings. The advantage is particularly pronounced on Qwen2.5-Coder (3B) and Llama3.1 (8B), while Qwen2.5-Coder (7B) shows a smaller AUROC margin but retains the same consistent advantage at the low-FPR operating point. At the same time, GTCW remains competitive in Pass@1 across the benchmarks, showing that the stronger detection is achieved without substantially degrading functional correctness. Appendix C.1 extends the comparison to Qwen3.5 (9B) and Gemma4 (12B). Across all five models and five benchmarks, GTCW achieves mean AUROC of 73.61% and TPR@5%FPR of 41.86%, improving over the strongest baselines by 5.78 and 17.36 percentage points, respectively. Its mean Pass@1 is 59.18%, compared with 59.58% for Base.

Variation across models. The magnitude of the detection gain varies noticeably across models. GTCW is particularly effective on Qwen2.5-Coder (3B) and Llama3.1 (8B), while the AUROC margin becomes smaller on Qwen2.5-Coder (7B). This variation appears to be related less to parameter count itself than to how each model distributes probability over watermarkable positions. Green temperature is active only when the model retains sufficient uncertainty among grammar-admissible candidates, so a model that produces sharper distributions can provide fewer opportunities to accumulate watermark evidence. This interpretation is consistent with Qwen2.5-Coder, where finite-score coverage drops from 88.48% at 3B to 66.51% at 7B despite the two checkpoints belonging to the same code-specialized family. Even in the 7B setting, however, GTCW retains the highest TPR@5%FPR on all five benchmarks, suggesting that the selected carrier positions remain effective when available.

Variation across benchmarks. The benchmark differences reflect a different interaction between grammar constraints and the semantic requirements of the generated code. MBPP+ combines strong

detection with almost unchanged Pass@1 relative to Base, suggesting that many of its watermarkable decisions can be reweighted without changing the final program behavior. Go similarly provides strong detection, although with a somewhat larger correctness decrease.

C++ shows a different pattern. Although GTCW maintains high detection performance, it exhibits the largest mean Pass@1 decrease among the evaluated benchmarks. Our grammar filters token choices according to syntactic admissibility, but it does not enforce type consistency, API usage, or program semantics. This distinction is particularly relevant for C++, where a continuation can remain grammatically admissible while a small token-level change still affects compilation or execution behavior. The result therefore highlights the role of grammar guidance as a protective constraint rather than a complete correctness guarantee. Despite these language-dependent effects, GTCW preserves aggregate functional correctness close to Base while maintaining substantially stronger detection. The following ablation further separates the roles of grammar guidance and green temperature in this trade-off.

4.3 ABLATION STUDY

Table 2 separates the two central design choices of GTCW: restricting watermarking through grammar guidance and replacing uniform additive bias with green temperature. The results show complementary roles, with grammar guidance primarily protecting functional correctness and green temperature providing the larger gain in detectability.

Table 2: Ablation of grammar guidance and green temperature on Qwen2.5-Coder (3B). All settings use the same entropy gate. AUC, T@5, and P@1 denote AUROC, TPR@5%FPR, and Pass@1. Values are mean percentages over three seeds.

Setting	HumanEval+			MBPP+			HumanEvalPack						AVG					
	Python			Python			C++		Java		Go							
	AUC T@5 P@1	AUC T@5 P@1	AUC T@5 P@1	AUC T@5 P@1	AUC T@5 P@1	AUC T@5 P@1	AUC T@5 P@1	AUC T@5 P@1	AUC T@5 P@1	AUC T@5 P@1	AUC T@5 P@1	AUC T@5 P@1	AUC T@5 P@1					
w/o Gram.	76.4	36.4	63.2	96.0	76.5	52.2	83.1	57.3	49.0	76.4	40.7	69.7	85.0	60.0	45.5	83.4	<u>54.2</u>	55.9
w/o T_g	68.7	27.0	69.7	86.8	50.4	50.0	72.3	35.4	<u>49.4</u>	67.8	21.3	68.9	76.7	29.9	50.0	74.5	32.8	<u>57.6</u>
GTCW	77.6	49.2	<u>69.5</u>	96.5	83.6	<u>51.8</u>	<u>81.1</u>	<u>51.4</u>	50.0	<u>75.9</u>	<u>37.2</u>	70.3	86.4	<u>56.5</u>	<u>49.2</u>	83.5	55.6	58.2

Grammar guidance. Grammar guidance primarily improves functional correctness. Removing it lowers mean Pass@1 from 58.16% to 55.93%, while mean AUROC changes only from 83.51% to 83.38%. The correctness gain is especially large on HumanEval+ and Go, where grammar guidance improves Pass@1 by 6.30 and 3.66 points, respectively. This behavior matches the intended role of grammar guidance. By restricting watermarking to tokens admitted by the current grammar state, GTCW avoids shifting probability toward syntactically inadmissible continuations while retaining opportunities to embed the watermark. The detection effect is more benchmark-dependent, but the aggregate AUROC remains essentially unchanged while Pass@1 improves by 2.23 points. Thus, grammar guidance acts primarily as a quality-preserving mechanism rather than the main source of watermark strength.

Green temperature. Green temperature provides the larger gain in watermark detectability. With grammar guidance and the entropy gate fixed, replacing green temperature with additive bias reduces mean AUROC from 83.51% to 74.46% and mean TPR@5%FPR from 55.6% to 32.8%. GTCW improves both detection metrics on all five benchmarks, showing that the advantage is consistent across Python, C++, Java, and Go. Importantly, this stronger signal does not come at the expense of average functional correctness. Mean Pass@1 increases slightly from 57.60% with additive bias to 58.16% with green temperature. This supports the motivation for green temperature. Rather than uniformly boosting every green token, it uses the model’s existing preferences to favor stronger green candidates. Together with the grammar ablation, these results show a clear division of labor between the two components.

Table 3: Sensitivity to green temperature T_g on Qwen2.5-Coder (3B) with $T_0 = 1$. AUC, T@5, and P@1 denote AUROC, TPR@5%FPR, and Pass@1. Values are mean percentages over three seeds. Gray shading indicates the default $T_g = 0.5$.

T_g	HumanEval+			MBPP+			HumanEvalPack								
	Python			Python			C++			Java			Go		
	AUC	T@5	P@1	AUC	T@5	P@1	AUC	T@5	P@1	AUC	T@5	P@1	AUC	T@5	P@1
0.3	78.0	51.8	69.3	96.7	84.9	52.4	82.9	54.3	47.8	76.6	38.4	70.1	87.1	59.1	48.6
0.4	77.9	50.8	69.3	96.7	84.3	52.1	82.2	52.6	49.0	76.3	38.2	70.5	86.9	58.9	48.0
0.5	77.6	49.2	69.5	96.5	83.6	51.8	81.1	51.4	50.0	75.9	37.2	70.3	86.4	56.5	49.2
0.6	76.4	46.5	68.7	95.6	81.0	51.5	79.1	47.6	49.8	74.3	34.3	69.9	84.7	51.4	49.0
0.7	73.8	38.6	68.7	93.3	72.2	52.6	76.7	44.7	50.2	72.1	28.3	70.3	82.0	43.5	48.8

4.4 GREEN TEMPERATURE SENSITIVITY

Table 3 varies T_g from 0.3 to 0.7 while keeping all other settings fixed. Lower green temperatures consistently strengthen detection. As T_g approaches the base temperature $T_0 = 1$, the green-temperature adjustment becomes weaker, and both AUC and T@5 decrease across all five benchmarks. Mean AUROC falls from 84.25% at $T_g = 0.3$ to 79.58% at 0.7, while mean TPR@5%FPR decreases from 57.7% to 45.5%. This trend follows directly from the green-temperature transformation. As T_g decreases, probability becomes increasingly concentrated on green candidates already assigned high logits by the model, yielding a stronger watermark signal.

At the same time, overall performance is not overly sensitive to moderate changes in T_g . In particular, detection remains relatively stable around the default. Mean AUROC differs by only 0.75 points between $T_g = 0.3$ and 0.5, with the larger decline appearing as T_g moves closer to T_0 . Functional correctness is even less sensitive and does not follow a monotonic trend. Across the displayed range, mean Pass@1 varies only from 57.63% to 58.16%. This stability suggests that stronger multiplicative reweighting need not directly translate into lower code quality. Since green temperature sharpens preferences among already favored candidates rather than uniformly promoting weak green tokens, a stronger watermark can remain compatible with the concentrated token choices that are often effective for code generation. The default $T_g = 0.5$ attains the highest mean Pass@1 while remaining close to the strongest detection settings. We therefore use $T_g = 0.5$ as a balanced operating point between watermark strength and functional correctness.

4.5 DETECTION AFTER CODE TRANSFORMATIONS

We evaluate detection after six transformation families: identifier renaming, formatting, comment removal, dead-code insertion, control-flow transformations, and LLM rewriting. Table 4 reports detection after each transformation, with the clean outputs shown as a reference. Across the 13 transformation settings, GTCW achieves the highest average TPR@5%FPR at 27.2% and ranks first or second in T@5 in every setting. Its average AUROC is 70.1%, second to Unigram at 73.2%. This mirrors the main evaluation: the most consistent advantage of GTCW appears at the low-FPR operating point, even when overall AUROC varies across transformations. Details of the transformation protocol are provided in Appendix B.5.

Local code transformations. GTCW remains particularly strong under comment removal and control-flow changes. It achieves the highest AUC and T@5 after comment removal and under all three control-flow settings. The comment-removal result is notable because it shows that the detectable signal is not concentrated in comments alone. Likewise, the control-flow results indicate that local structural changes can preserve substantial watermark evidence even when the generated syntax is reorganized. Identifier renaming and formatting have a larger effect. Under renaming, GTCW has the highest T@5 at 25% and 50% strength and remains second at 75% and 100%. After formatting, its AUROC decreases to 67.8%, but it still retains the highest T@5 at 27.5%. These results suggest that the watermark is not tied to a single lexical feature, although changes to the token sequence and local grammar state can weaken replayed evidence.

Table 4: Detection after code transformations on Qwen2.5-Coder (3B). AUC and T@5 denote AUROC and TPR@5%FPR. Values average five benchmarks and three seeds. AVG averages the 13 transformation settings, excluding Clean. Gray shading indicates GTCW, with bold and underline marking the best and second-best methods.

Transformation	Setting	Unigram		KGW		SWEET		STONE		STA-1		GTCW	
		AUC	T@5	AUC	T@5	AUC	T@5	AUC	T@5	AUC	T@5	AUC	T@5
Clean	—	72.9	23.6	72.0	26.4	<u>73.1</u>	<u>30.3</u>	65.9	15.8	62.3	11.9	83.5	55.6
Renaming	25%	73.5	24.6	67.3	24.4	72.0	23.3	64.5	17.3	60.6	12.0	<u>73.2</u>	29.2
	50%	74.3	<u>26.1</u>	66.9	23.7	71.3	22.7	63.7	17.8	59.5	12.0	<u>72.4</u>	27.8
	75%	75.1	26.3	65.0	22.6	<u>70.8</u>	21.6	63.1	17.7	59.1	11.8	69.6	<u>25.0</u>
	100%	75.4	26.4	64.0	22.4	<u>70.0</u>	21.3	62.9	17.5	58.1	11.2	69.4	<u>24.6</u>
Formatting	Normalized	73.3	<u>26.3</u>	<u>69.1</u>	24.4	67.7	22.3	68.3	17.9	60.6	11.0	67.8	27.5
Comment removal	Incl. docstrings	59.6	10.8	<u>67.4</u>	<u>19.5</u>	65.1	17.6	61.7	12.2	55.1	5.9	71.2	29.5
Dead code	1 insertion	78.8	28.0	52.6	13.3	67.2	13.1	63.7	12.0	50.5	6.4	<u>71.4</u>	<u>25.1</u>
	3 insertions	84.1	37.1	35.4	7.1	66.0	12.5	62.1	10.7	38.5	3.0	<u>68.4</u>	<u>23.4</u>
	5 insertions	85.5	42.7	29.5	6.3	65.7	13.0	61.2	9.8	35.2	3.0	<u>67.7</u>	<u>24.7</u>
Control flow	1 step	72.3	23.2	72.0	<u>26.3</u>	<u>72.5</u>	26.0	65.7	15.6	61.1	11.0	76.6	37.7
	3 steps	72.3	23.3	71.7	25.7	71.8	<u>26.2</u>	65.5	15.8	60.4	10.7	76.5	36.0
	5 steps	<u>72.4</u>	23.0	71.8	26.2	72.1	<u>26.9</u>	65.6	15.3	60.0	10.5	76.0	36.3
LLM rewriting	GPT-5 mini	<u>55.1</u>	8.4	48.8	6.4	55.7	5.5	49.9	4.5	51.3	4.7	51.4	<u>6.8</u>
AVG		73.2	<u>25.1</u>	60.1	19.1	68.3	19.4	62.9	14.2	54.6	8.7	<u>70.1</u>	27.2

Dead-code insertion. Under dead-code insertion, GTCW remains the second-best method in both AUC and T@5 for all three strengths. Unigram instead increases as more dead code is inserted, reaching 85.5% AUC and 42.7% T@5 at five insertions. Because newly inserted tokens can themselves alter the detector statistic, this increase should be interpreted as behavior under the transformed sequence rather than preservation of the original token-level evidence.

LLM rewriting. LLM rewriting is the most disruptive transformation for all methods. For GTCW, AUROC falls to 51.4% and T@5 to 6.8%, while the other methods also approach weak detection in this setting. Unlike local edits, an LLM rewrite can simultaneously change token identities, local contexts, and grammar states throughout the completion, disrupting the keyed partitions reconstructed during replay. Extensive rewriting therefore remains the most challenging transformation for the current method.

5 CONCLUSION

We presented GTCW, a grammar-guided code watermarking method that constructs keyed green-red partitions over grammar-admissible tokens and uses green temperature to strengthen the watermark according to the model’s existing token preferences. Across five models and five benchmarks spanning four programming languages, GTCW achieves a mean AUROC of 73.61% and TPR@5%FPR of 41.86%, improving over the strongest corresponding baselines by 5.78 and 17.36 percentage points, respectively. Its mean Pass@1 is 59.18%, about 0.4 points below the unwatermarked reference, showing that the stronger detection is achieved while largely preserving functional correctness. In particular, GTCW attains the highest TPR@5%FPR in all 25 model-benchmark configurations. Ablations reveal complementary roles for the two components. Grammar guidance improves mean Pass@1 by 2.23 points with little change in aggregate AUROC, while green temperature improves mean AUROC by 9.05 points and substantially strengthens low-FPR detection over additive bias with grammar retained. These results show that grammar guidance primarily protects generation quality, while green temperature provides the stronger detectable signal. GTCW also retains competitive detection under a range of local code transformations, although LLM rewriting substantially weakens the signal. Improving detection after large structural rewrites and reducing the runtime overhead of the current implementation are important directions for future work.

AI USE STATEMENT

In this work, we used generative AI tools to assist with the implementation of experimental code. We have not used generative AI tools for other tasks requiring disclosure, and the rest of the required-disclosure tasks are not applicable to this work. Additionally, we used generative AI tools to edit the manuscript for readability and language polishing. We have reviewed all AI-assisted work. AI-assisted experimental code was manually reviewed and tested for correctness, and all AI-assisted manuscript edits were reviewed by the authors. We take responsibility for the final content of this work, including text, claims, or artifacts produced with the aid of generative AI.

REFERENCES

- Ruibo Chen, Yihan Wu, Junfeng Guo, and Heng Huang. Improved unbiased watermark for large language models. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics*, volume 1, pp. 20587–20601, 2025.
- Sumanth Dathathri, Abigail See, Sumedh Ghaisas, Po-Sen Huang, Rob McAdam, Johannes Welbl, Vandana Bachani, Alex Kaskasoli, Robert Stanforth, Tatiana Matejovicova, Jamie Hayes, Nidhi Vyas, Majd Al Meray, Jonah Brown-Cohen, Rudy Bunel, et al. Scalable watermarking for identifying large language model outputs. *Nature*, 634(8035):818–823, 2024.
- Yixin Dong, Charlie F. Ruan, Yaxing Cai, Ruihang Lai, Ziyi Xu, Yilong Zhao, and Tianqi Chen. XGrammar: Flexible and efficient structured generation engine for large language models. In *Proceedings of the 8th Conference on Machine Learning and Systems*, volume 7, 2025.
- Batu Guan, Yao Wan, Zhangqian Bi, Zheng Wang, Hongyu Zhang, Pan Zhou, and Lichao Sun. CodeIP: A grammar-guided multi-bit watermark for large language models of code. In *Findings of the Association for Computational Linguistics: EMNLP 2024*, pp. 9243–9258, 2024.
- Yuxuan Guo, Zhiliang Tian, Yiping Song, Tianlun Liu, Liang Ding, and Dongsheng Li. Context-aware watermark with semantic balanced green-red lists for large language models. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pp. 22633–22646, 2024.
- Zhimeng Guo and Minhao Cheng. Practical and effective code watermarking for large language models. In *Advances in Neural Information Processing Systems*, volume 38, pp. 74155–74185, 2025.
- Xinyi Hou, Yanjie Zhao, Yue Liu, Zhou Yang, Kailong Wang, Li Li, Xiapu Luo, David Lo, John Grundy, and Haoyu Wang. Large language models for software engineering: A systematic literature review. *ACM Transactions on Software Engineering and Methodology*, 33(8):220:1–220:79, 2024.
- Zhengmian Hu, Lichang Chen, Xidong Wu, Yihan Wu, Hongyang Zhang, and Heng Huang. Unbiased watermark for large language models. In *Proceedings of the 12th International Conference on Learning Representations*, pp. 45408–45436, 2024.
- Jungin Kim, Shinwoo Park, and Yo-Sub Han. Marking code without breaking it: Code watermarking for detecting LLM-generated code. In *Findings of the Association for Computational Linguistics: EACL 2026*, pp. 3990–4002, 2026.
- John Kirchenbauer, Jonas Geiping, Yuxin Wen, Jonathan Katz, Ian Miers, and Tom Goldstein. A watermark for large language models. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202, pp. 17061–17084, 2023.
- Rohith Kuditipudi, John Thickstun, Tatsunori Hashimoto, and Percy Liang. Robust distortion-free watermarks for language models. *Transactions on Machine Learning Research*, 2024.
- Taehyun Lee, Seokhee Hong, Jaewoo Ahn, Ilgee Hong, Hwaran Lee, Sangdoo Yun, Jamin Shin, and Gunhee Kim. Who wrote this code? watermarking for code generation. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics*, volume 1, pp. 4890–4911, 2024.

- Jiawei Liu, Chunqiu Steven Xia, Yuyao Wang, and Lingming Zhang. Is your code generated by ChatGPT really correct? rigorous evaluation of large language models for code generation. In *Advances in Neural Information Processing Systems*, volume 36, pp. 21558–21572, 2023.
- Minjia Mao, Dongjun Wei, Zeyu Chen, Xiao Fang, and Michael Chau. Watermarking large language models: An unbiased and low-risk method. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics*, volume 1, pp. 7939–7960, 2025.
- Niklas Muennighoff, Qian Liu, Armel Randy Zebaze, Qinkai Zheng, Binyuan Hui, Terry Yue Zhuo, Swayam Singh, Xiangru Tang, Leandro von Werra, and Shayne Longpre. OctoPack: Instruction tuning code large language models. In *Proceedings of the 12th International Conference on Learning Representations*, pp. 7604–7623, 2024.
- Shubham Ugare, Tarun Suresh, Hangoo Kang, Sasa Misailovic, and Gagandeep Singh. SynCode: LLM generation with grammar augmentation. *Transactions on Machine Learning Research*, 2025.
- Zongqi Wang, Tianle Gu, Baoyuan Wu, and Yujiu Yang. MorphMark: Flexible adaptive watermarking for large language models. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics*, volume 1, pp. 4842–4860, 2025.
- Borui Yang, Mingxuan Ma, Liyao Xiang, Nan Chen, Xin Zhang, Linghe Kong, and Xinghao Jiang. CodeGenGuard: A watermark for code generation models. In *Proceedings of the 14th International Conference on Learning Representations*, pp. 128214–128244, 2026.
- Xuandong Zhao, Prabhanjan Ananth, Lei Li, and Yu-Xiang Wang. Provable robust watermarking for AI-generated text. In *Proceedings of the 12th International Conference on Learning Representations*, pp. 43738–43772, 2024.
- Xuandong Zhao, Lei Li, and Yu-Xiang Wang. Permute-and-Flip: An optimally stable and watermarkable decoder for LLMs. In *Proceedings of the 13th International Conference on Learning Representations*, pp. 32468–32496, 2025.

A DETAILED ALGORITHM

Algorithms 1 and 2 provide the detailed generation and replay procedures for GTCW. The notation follows Section 3.

Partition implementation. The implementation derives the support signature d_t by hashing a grammar identifier together with the packed admissible-token mask. A keyed hash then combines d_t with the most recent w token identifiers to obtain the partition seed. The seed induces a deterministic pseudo-random ranking of the admissible tokens, of which m_t are assigned to the green set according to Eq. 2. We use HMAC-SHA256 for the keyed hash and SplitMix64 for token ranking. Generation and replay detection use the same deterministic procedure.

A.1 GENERATION

The entropy gate is evaluated before grammar masking and watermark reweighting, so it reflects the original model uncertainty. The grammar constraint remains active even when watermark insertion is disabled. For C++ and Java, the carrier gate e_t becomes zero after 16 consecutive comment tokens or four consecutive whitespace tokens in code. The counters reset when the corresponding run ends and are reconstructed during replay detection. Non-finite model logits are excluded from entropy and sampling computations. In all evaluated settings, logits of grammar-admissible source tokens are finite, so $\mathcal{B}_t = \mathcal{A}_t$.

Algorithm 1 GTCW source-token generation

Require: Prompt x , model f_θ , grammar, key k , and $\gamma, \tau, w, T_0, T_g$

- 1: Initialize the parser from the benchmark prefix and set $y \leftarrow ()$
- 2: **for** each source-token decoding step t **do**
- 3: $\ell_t \leftarrow f_\theta(x, y_{<t})$
- 4: $\mathcal{A}_t \leftarrow$ source-token IDs admitted by the parser
- 5: $\mathcal{F}_t \leftarrow \{v \mid \ell_t(v) \text{ is finite}\}$
- 6: $\mathcal{B}_t \leftarrow \mathcal{A}_t \cap \mathcal{F}_t$
- 7: $p_t(v) \leftarrow \exp(\ell_t(v)) / \sum_{u \in \mathcal{F}_t} \exp(\ell_t(u))$
- 8: $H_t \leftarrow -\sum_{v \in \mathcal{F}_t} p_t(v) \log p_t(v)$
- 9: Set e_t from the comment and whitespace counters
- 10: $\tilde{\ell}_t(v) \leftarrow \ell_t(v)/T_0$ for $v \in \mathcal{B}_t$, and $-\infty$ otherwise
- 11: **if** $e_t = 1$ and $H_t > \tau$ and $|\mathcal{A}_t| > 1$ **then**
- 12: $c_t \leftarrow$ the last w token identifiers from the prompt and current prefix
- 13: Construct support signature d_t from the current grammar state
- 14: $h_t \leftarrow \mathcal{H}_k(d_t, c_t)$
- 15: Set m_t by Eq. 2 and rank $\mathcal{A}_t$ using h_t
- 16: $\mathcal{G}_t \leftarrow$ the first m_t tokens in the ranking
- 17: $\mu_t \leftarrow \log(\sum_{v \in \mathcal{B}_t} \exp(\ell_t(v)) / |\mathcal{B}_t|)$
- 18: **for** $v \in \mathcal{G}_t \cap \mathcal{B}_t$ **do**
- 19: $\tilde{\ell}_t(v) \leftarrow \mu_t/T_0 + (\ell_t(v) - \mu_t)/T_g$
- 20: **end for**
- 21: **end if**
- 22: Sample y_t from $\text{softmax}(\tilde{\ell}_t)$ over $\mathcal{B}_t$, append it to y , and consume it in the parser
- 23: Update the comment and whitespace counters
- 24: **end for**
- 25: **return** y

Algorithm 1 describes the distribution conditioned on generating a source token. Special control tokens do not belong to the carrier set and are handled separately. Termination is allowed only when the parser state and completion policy permit it. When termination is available, the implementation applies a common offset to source-token logits to preserve the unwatermarked grammar-constrained probability of continuing versus stopping without changing the relative probabilities among source tokens. An empty finite admissible support cannot define a sampling distribution and is treated as a generation failure. Failed generations remain in the evaluation denominator.

A.2 DETECTION BY REPLAY

Detection operates on the completed code, consisting of the original code prefix and the observed continuation. The detector reconstructs the model context using the code prefix and the fixed prompting template, and obtains teacher-forced logits over the observed continuation. At each step, it reconstructs the grammar state, entropy gate, and keyed green-red partition before consuming the observed token. No generation-time trace or watermark metadata needs to be stored. Admissible states with a single candidate are replayed normally but contribute no watermark evidence. Replay terminates when the observed token is inadmissible, parsing fails, or no admissible token remains. Evidence accumulated before termination is retained, so a finite score may be obtained from a partially replayed completion.

Algorithm 2 Replay-based detection on a candidate completion

Require: Code prefix x , continuation y , original model, grammar, key k , and γ, τ, w

```

1: Initialize the parser from the code prefix  $x$ 
2:  $S \leftarrow 0, V \leftarrow 0$ 
3: for  $t = 1, \dots, |y|$  do
4:   Obtain  $\mathcal{A}_t$  from the current parser state, stopping on a parse error
5:   if  $y_t \notin \mathcal{A}_t$  then
6:     Stop replay
7:   end if
8:   if  $|\mathcal{A}_t| > 1$  then
9:      $\ell_t \leftarrow f_\theta(x, y_{<t})$ 
10:     $\mathcal{F}_t \leftarrow \{v \mid \ell_t(v) \text{ is finite}\}$ 
11:     $p_t(v) \leftarrow \exp(\ell_t(v)) / \sum_{u \in \mathcal{F}_t} \exp(\ell_t(u))$ 
12:     $H_t \leftarrow - \sum_{v \in \mathcal{F}_t} p_t(v) \log p_t(v)$ 
13:    Reconstruct  $e_t$  from the comment and whitespace counters
14:    if  $e_t = 1$  and  $H_t > \tau$  then
15:       $c_t \leftarrow$  the last  $w$  token identifiers from  $x$  and  $y_{<t}$ 
16:      Construct support signature  $d_t$  from the current grammar state
17:       $h_t \leftarrow \mathcal{H}_k(d_t, c_t)$ 
18:      Set  $m_t$  by Eq. 2 and rank  $\mathcal{A}_t$  using  $h_t$ 
19:       $\mathcal{G}_t \leftarrow$  the first  $m_t$  tokens in the ranking
20:       $\gamma_t \leftarrow m_t / |\mathcal{A}_t|$ 
21:       $S \leftarrow S + \mathbf{1}[y_t \in \mathcal{G}_t] - \gamma_t$ 
22:       $V \leftarrow V + \gamma_t(1 - \gamma_t)$ 
23:    end if
24:  end if
25:  Consume  $y_t$  in the parser, stopping if consumption fails
26:  Update the comment and whitespace counters
27: end for
28: return  $S/\sqrt{V}$  if  $V > 0$ , and no score otherwise

```

B EXPERIMENTAL DETAILS

B.1 IMPLEMENTATION AND DECODING SETTINGS

For each task and seed, all methods generate one sampled completion using the same decoding configuration. We use temperature $T_0 = 1.0$, top- $p = 1.0$, no top- k filtering, a repetition penalty of 1.0, and a maximum of 512 new tokens. Models are loaded in bfloat16. The watermark is applied only to the generated continuation, while preceding tokens remain available to context-dependent watermarking methods. For GTCW, we use $\gamma = 0.5$, entropy threshold $\tau = 0.9$ nats, green temperature $T_g = 0.5$, and context width $w = 1$. Experiments use seeds 42, 43, and 44.

Baseline implementations. We integrate Unigram, KGW, SWEET, STONE, and STA-1 into the same evaluation pipeline (Zhao et al., 2024; Kirchenbauer et al., 2023; Lee et al., 2024; Kim et al., 2026; Mao et al., 2025). Unigram uses a fixed keyed partition, while KGW uses a context-dependent

partition. SWEET additionally applies an entropy gate with threshold 0.9. All baselines use $\gamma = 0.5$. The additive-bias methods Unigram, KGW, SWEET, and STONE use $\delta = 2.0$, while STA-1 does not use an additive-bias parameter. These settings are fixed across models and benchmarks. Only GTCW applies grammar constraints in the main comparison. The ablations separately remove grammar guidance and replace green temperature with additive bias.

STONE implementation and settings. For a fair comparison, we make two corrections to the publicly released STONE implementation. First, we correct the scored-token count used by the detector so that its normalization reflects the positions selected for watermarking. Second, we set `prefix.length=1`, which makes the green-red partition depend on the preceding token rather than remaining fixed across decoding steps. We use $\gamma = 0.5$ and $\delta = 2.0$, consistent with the other additive green-list baselines. All reported STONE results use this corrected configuration for both generation and detection.

B.2 DATASETS, PROMPTS, AND METRICS

Benchmarks and test suites. We evaluate HumanEval+ and MBPP+ through EvalPlus using 164 and 378 tasks, respectively (Liu et al., 2023). Functional correctness is measured on the full augmented test suites. For C++, Java, and Go, we use the 164-task HumanEvalPack subset for each language together with its execution tests (Muennighoff et al., 2024).

Continuation prompts. All benchmarks are evaluated as code continuation tasks. Each model receives an unfinished code prefix through the following template.

```
Complete the following <language> code. Return only the
completed code without explanations.

<benchmark prefix>
```

We apply the checkpoint-specific chat template and prefill the assistant response with the same benchmark prefix so that generation continues the code directly. The prefix, including trailing whitespace, is preserved exactly. Generated presentation wrappers such as code fences are removed before evaluation, after which the language-specific pipeline reconstructs the executable program. For replay detection, the original code prefix is retained and the fixed model prompt is reconstructed from the same template.

Negative class. The negative class consists of unwatermarked completions generated with the same model, task, decoding configuration, and seed as the corresponding watermarked outputs. This controls for differences in model family, prompting, and task content when measuring watermark evidence. Accordingly, the reported detection results characterize separation from matched unwatermarked model outputs rather than human-written code.

AUROC and score coverage. For one model-benchmark-seed setting, let z_i^+ and z_j^- denote the positive and negative detection scores, with class sizes N_+ and N_- . Missing or non-finite scores in either class receive a common value below all finite scores. AUROC is computed as

$$A = \frac{1}{N_+ N_-} \sum_{i=1}^{N_+} \sum_{j=1}^{N_-} \left(\mathbf{1}[z_i^+ > z_j^-] + \frac{1}{2} \mathbf{1}[z_i^+ = z_j^-] \right). \quad (10)$$

Let b_i indicate whether the original score is finite. Finite-score coverage is $C = N^{-1} \sum_i b_i$. For GTCW, missing scores can arise when no eligible watermark position is available or when grammar replay terminates before watermark evidence is obtained.

TPR@5%FPR. For threshold u , an output is detected only if its score is finite and at least u . Writing the corresponding decisions as $D_i^+(u)$ and $D_j^-(u)$,

$$\text{TPR}(u) = \frac{\sum_i D_i^+(u)}{N_+}, \quad \text{FPR}(u) = \frac{\sum_j D_j^-(u)}{N_-}. \quad (11)$$

Let $\mathcal{U}$ contain the distinct finite negative scores together with a value immediately above their maximum. For target false positive rate α , we use

$$u_\alpha = \min\{u \in \mathcal{U} \mid \text{FPR}(u) \leq \alpha\}, \quad \text{TPR@}\alpha = \text{TPR}(u_\alpha). \quad (12)$$

We use $\alpha = 0.05$ throughout the reported $\text{TPR@5\%FPR}$ results. Unscorable outputs remain in the class denominators and are never detected. Because thresholds are selected from observed negative scores without interpolation, the achieved FPR can be below 5%.

Functional correctness and joint detection. Let P_i indicate whether completion i passes all required execution tests. With one completion per task and seed, Pass@1 is $N^{-1} \sum_i P_i$. Using the same threshold u_α , we additionally measure detection among correct outputs and joint correctness and detection,

$$Q_\alpha = \frac{\sum_i P_i D_i^+(u_\alpha)}{\sum_i P_i}, \quad J_\alpha = \frac{1}{N_+} \sum_i P_i D_i^+(u_\alpha). \quad (13)$$

Here Q_α is the detection rate conditioned on functional correctness, while J_α is the fraction of all watermarked outputs that are both correct and detected. The threshold is calibrated on the full negative set and is not recomputed for the correct-output subset. Failed generations and test failures remain in the corresponding denominators.

Aggregation. Metrics are first computed for each model, benchmark, and seed. Table entries average the three seeds, and overall results weight model-benchmark settings equally so that benchmarks with more tasks do not receive greater weight. Transformation results similarly average the five benchmarks and three seeds on Qwen2.5-Coder (3B), with the reported AVG giving equal weight to the 13 transformation settings.

B.3 MODELS

We evaluate five instruction-tuned checkpoints from several model families. Qwen2.5-Coder 3B and 7B provide a code-specialized pair at two model scales,¹ allowing us to examine whether the watermark behaves consistently within the same family. Qwen3.5 9B² extends the evaluation beyond the Qwen2.5-Coder architecture, while Llama3.1 8B³ and Gemma4 12B⁴ broaden the comparison across distinct model families and tokenizers. Gemma4 is also the largest checkpoint in our evaluation. We abbreviate Qwen2.5-Coder as Qwen2.5-C in tables. Sensitivity, ablation, and transformation experiments use Qwen2.5-Coder (3B) as a fixed source model.

B.4 GRAMMARS

We use grammars for Python, C++, Java, and Go together with an independent Rust grammar engine for admissible-token computation. The Python grammar is adapted from the Lark Python grammar used by SynCode (Ugare et al., 2025), with string literals separated from comments. The Java and Go grammars are similarly adapted to the benchmark continuation setting. For C++, we use a task-oriented grammar designed for function completion. It permits some constructions beyond a strict language specification, so grammar admissibility guarantees only compatibility with the grammar and does not imply successful compilation or functional correctness. Execution tests are used separately to evaluate these properties. Since benchmark prefixes are not always complete translation units, parser-side adapters provide the surrounding context required to initialize the grammar state. C++ and Java use synthetic function-body wrappers, while Go may use a virtual package prefix. These wrappers affect only parser initialization and are not added to the code presented to the model. Grammar definitions, lexer information, token bytes, and admissibility data are precompiled into artifacts consumed by the Rust runtime. Generation and replay detection use the same grammar artifacts and parser implementation.

¹Qwen/Qwen2.5-Coder-3B-Instruct and Qwen/Qwen2.5-Coder-7B-Instruct.

²Qwen/Qwen3.5-9B.

³meta-llama/Llama-3.1-8B-Instruct.

⁴google/gemma-4-12B-it.

B.5 CODE TRANSFORMATION EVALUATION PROTOCOL

We evaluate six transformation families with 13 settings on Qwen2.5-Coder (3B) outputs from the five benchmarks and seeds 42, 43, and 44. Each transformation is applied independently to the corresponding clean completion, and only the generated continuation is modified. The original code prefix is preserved for reconstruction and replay detection. All watermarking methods are evaluated with the same transformation implementations and strength settings. Local edit selection uses deterministic per-record seeds derived from the record identity, method, transformation, and setting. The LLM rewrite is stochastic but uses the same request procedure across all methods. Matched clean Base completions serve as the negative class for all transformation settings. Consequently, the reported metrics characterize detection after transformation relative to the clean negative distribution and may also reflect transformation-induced score shifts. The reported AVG averages the 13 transformation settings and excludes the clean reference.

Identifier renaming. We rename 25%, 50%, 75%, or 100% of eligible local variables. Tree-sitter is used to identify declarations and references within the generated continuation. We exclude ambiguous bindings, references that cross the code-prefix boundary or nested functions, and member or API identifiers. Selected variables and their accepted references are assigned fresh names that do not collide with existing identifiers or language keywords. The requested rate is measured over eligible variables.

Formatting and comment removal. Formatting uses Black for Python, clang-format for C++, google-java-format for Java, and gofmt for Go. A temporary boundary marker is used to separate the preserved code prefix from the formatted continuation. Comment removal deletes removable comments while preserving line structure. For Python, docstrings in the generated continuation are also removed, with `pass` inserted when required to keep a body nonempty. Comments in the code prefix and protected directives such as Go build directives are left unchanged.

Dead-code insertion. We request 1, 3, or 5 insertions at eligible statement boundaries inside functions. Each insertion adds a constant-false branch containing a local dummy assignment. For Go, the inserted block also includes a blank-identifier use of the dummy variable. Insertion sites are selected in deterministic pseudorandom order. When fewer eligible sites are available, all available sites are used and the achieved insertion count is recorded.

Control-flow transformations. We request 1, 3, or 5 nonoverlapping edits at eligible syntax nodes. The implemented transformations include double negation of conditions, condition inversion with branch exchange, expansion of an else-if chain into nested branches, and equivalent Boolean-literal rewrites. Each requested step corresponds to one selected edit site. Overlapping or unsupported sites are excluded, and the achieved number of edits is recorded when fewer sites are available than requested.

LLM rewriting. We use `gpt-5-mini` to generate one rewritten continuation through a structured JSON response. The request includes the language, preserved code prefix, and original completion, and asks for changes to control flow, data flow, or implementation structure while preserving the public API and program behavior. The response is restricted to code and may not introduce additional tests or Markdown wrappers. For MBPP+, where the generated continuation may include the function declaration, the public function name and signature are preserved. Invalid responses, unresolved prefix echoes, unchanged rewrites, and request failures are retried up to three times. If all attempts fail, the original completion is retained. The rewriter receives neither the watermark key nor detector feedback.

Validation and failure handling. After transformation, the preserved code prefix and transformed continuation must pass Tree-sitter parsing. Transformations that fail this check fall back to the original completion. Successful partial transformations are retained, and both requested and achieved strengths are recorded. All outputs, including unchanged and failed transformations, remain in the reported metrics. These transformations are designed to preserve program behavior, but functional tests are not rerun after transformation.

Detection and aggregation. Watermark scores are recomputed on the transformed continuation using the original code prefix and the corresponding method configuration. For SWEET, model entropy is recomputed on the transformed token sequence using the generation-time entropy threshold. STONE uses its corrected detector with `prefix_length=1` and $\delta = 2.0$. AUROC and TPR@5%FPR follow Appendix B.2. Results are averaged equally over the five benchmarks and three seeds, and AVG gives equal weight to the 13 transformation settings while excluding the clean reference.

B.6 EXPERIMENTAL ENVIRONMENT

Experiments were run on Rocky Linux 9.6 with an AMD Ryzen Threadripper 9960X 24-core CPU, 250 GiB of system memory, and NVIDIA RTX PRO 6000 Blackwell Max-Q GPUs with approximately 96 GiB of memory each. Each model process uses a single GPU. The system uses NVIDIA driver 580.105.08 and CUDA 13.0. The software environment uses Python 3.12.13, PyTorch 2.13.0 with CUDA 13.0, Transformers 5.14.1, and SynCode 0.4.16. The Rust grammar backend is version 0.2.0 and is built with Rust 1.98.0 using the Rust 2021 edition. Models are loaded in bfloat16. For code formatting, we use Black 26.5.1 for Python, clang-format 23.1.0 for C++, google-java-format 1.28.0 for Java, and gofmt from Go 1.26.5 for Go. The execution environment uses GCC 11.5.0 for C++ and OpenJDK 17.0.18 for Java. Tree-sitter 0.25.2 is used with language bindings 0.25.0 for Python, 0.23.4 for C++, 0.23.5 for Java, and 0.25.0 for Go.

C ADDITIONAL EXPERIMENTAL RESULTS

This section provides additional analyses that complement the main results from several perspectives. We first report the complete model-benchmark breakdown, including results on the additional recent open-weight models Qwen3.5 (9B) and Gemma4 (12B), and show that the main detection trends remain consistent beyond the models highlighted in the main text. We then examine detection specifically on functionally correct outputs using the conditional and joint metrics defined in Appendix B.2, followed by wall-clock runtime measurements of the current implementation. Finally, qualitative code examples illustrate how different watermarking methods distribute their signal across generated code and how GTCW combines grammar admissibility, carrier selection, and green-temperature reweighting at the token level.

C.1 FULL MAIN RESULTS

Table 5 extends the main evaluation with two additional recent open-weight models, Qwen3.5 (9B) and Gemma4 (12B). The main trend observed in the models reported in the main text remains visible in these additional results, particularly at the low-FPR operating point. On Qwen3.5, GTCW achieves the highest AUC and T@5 on all five benchmarks. The T@5 gains are especially pronounced on C++ and Go, where GTCW reaches 47.8 and 52.2, compared with 31.7 and 22.2 for the strongest baseline, respectively. On Gemma4, the AUC advantage is less uniform, but GTCW still achieves the highest T@5 on all five benchmarks. This distinction is most visible on C++, Java, and Go, where AUROC is competitive rather than uniformly best while low-FPR detection remains strongest.

The correctness results also show that the detection gains do not follow a single quality pattern across models. Qwen3.5 exhibits some P@1 degradation on the HumanEvalPack languages, whereas Gemma4 remains close to Base on C++ and Java and does not show a consistent loss across the other benchmarks. Together, these results extend the detectability-correctness behavior observed in the main text to two additional recent open-weight models and show that the most consistent advantage of GTCW is its detection strength at low false-positive rates.

C.2 DETECTION ON FUNCTIONALLY CORRECT OUTPUTS

For code watermarking, detection on functionally correct outputs is particularly important because only these completions constitute usable solutions. We therefore complement the overall detection results with the conditional and joint metrics defined in Appendix B.2. Q measures the fraction

Table 5: Full detection and functional-correctness results across five models and five benchmarks. AUC denotes AUROC, T@5 denotes TPR@5%FPR, and P@1 denotes Pass@1. Values are mean percentages over three seeds. Gray shading indicates GTCW. Bold and underline mark the best and second-best watermarked methods, respectively, based on unrounded values.

Model	Method	HumanEval+			MBPP+			HumanEvalPack								
		Python			Python			C++			Java			Go		
		AUC	T@5	P@1	AUC	T@5	P@1	AUC	T@5	P@1	AUC	T@5	P@1	AUC	T@5	P@1
Qwen2.5-C (3B)	Base	—	—	67.9	—	—	52.1	—	—	52.2	—	—	71.8	—	—	51.2
	Unigram	68.1	18.9	65.0	82.4	38.5	43.5	75.5	28.5	46.8	67.2	16.9	63.4	71.2	15.5	45.7
	KGW	68.1	22.0	63.4	81.2	39.7	47.6	<u>76.7</u>	<u>33.9</u>	45.3	65.5	14.4	66.9	68.6	22.0	47.6
	SWEET	68.9	24.4	68.7	84.4	41.8	50.8	71.0	30.1	53.9	68.5	25.8	71.1	72.8	29.3	48.2
	STONE	63.3	11.2	67.1	74.3	24.1	47.1	66.4	16.3	49.2	61.8	11.4	<u>70.3</u>	63.7	16.1	46.5
	STA-1	57.9	7.9	70.5	70.5	20.0	<u>51.2</u>	62.8	11.2	<u>51.0</u>	59.8	11.4	69.3	60.5	8.9	51.8
	GTCW	77.6	49.2	<u>69.5</u>	96.5	83.6	51.8	81.1	51.4	50.0	75.9	37.2	<u>70.3</u>	86.4	56.5	<u>49.2</u>
Qwen2.5-C (7B)	Base	—	—	77.0	—	—	61.3	—	—	63.6	—	—	79.3	—	—	63.2
	Unigram	60.5	12.2	74.4	80.6	32.6	53.1	67.3	17.3	60.4	59.2	9.4	78.9	62.7	10.2	61.8
	KGW	<u>60.6</u>	7.9	75.2	79.4	40.0	55.0	67.9	15.5	56.9	60.9	8.7	<u>74.6</u>	60.6	<u>11.8</u>	59.4
	SWEET	57.0	3.9	76.8	75.4	27.3	<u>60.0</u>	59.1	11.6	<u>62.6</u>	53.8	<u>11.2</u>	77.2	57.7	8.3	63.0
	STONE	59.3	10.8	76.6	69.8	20.9	57.6	58.7	7.5	62.0	55.7	6.7	77.6	58.2	10.8	63.0
	STA-1	57.3	10.0	77.2	65.6	15.8	60.9	58.6	8.1	63.2	55.1	7.9	76.0	55.6	7.3	60.2
	GTCW	60.9	21.5	<u>77.0</u>	88.3	56.0	59.5	64.8	27.4	58.1	56.7	16.1	80.1	<u>62.6</u>	20.9	<u>62.2</u>
Qwen3.5 (9B)	Base	—	—	73.0	—	—	66.8	—	—	66.9	—	—	79.9	—	—	63.8
	Unigram	63.9	14.6	68.5	61.8	12.8	64.1	71.4	22.4	60.0	<u>66.7</u>	15.2	71.8	66.7	16.7	53.9
	KGW	67.5	19.1	72.4	66.0	<u>18.8</u>	63.2	<u>74.0</u>	31.7	57.1	62.8	14.0	72.0	67.9	16.5	55.1
	SWEET	64.2	15.2	73.0	62.8	18.3	66.1	<u>68.7</u>	29.5	<u>65.5</u>	64.7	27.0	79.3	70.1	<u>22.2</u>	63.2
	STONE	62.5	11.8	70.3	60.5	12.8	64.0	66.1	21.1	62.4	59.1	12.2	74.6	64.3	16.1	59.8
	STA-1	57.3	7.9	74.8	57.5	7.9	67.6	59.0	11.8	66.9	59.8	9.8	75.8	57.8	9.8	<u>60.6</u>
	GTCW	72.2	36.4	<u>73.8</u>	69.1	33.4	<u>66.5</u>	75.5	47.8	63.0	69.2	31.3	<u>76.8</u>	82.7	52.2	56.1
Llama3.1 (8B)	Base	—	—	50.6	—	—	57.8	—	—	40.0	—	—	53.1	—	—	32.9
	Unigram	70.2	21.5	46.8	63.4	12.3	56.4	76.7	24.6	34.2	70.2	22.4	45.5	71.0	26.0	23.8
	KGW	66.6	23.0	48.4	63.0	<u>15.5</u>	55.8	76.7	31.3	33.5	70.3	25.2	47.6	73.9	25.6	30.9
	SWEET	69.9	<u>27.2</u>	49.4	62.1	15.1	57.0	<u>81.2</u>	<u>41.5</u>	<u>36.8</u>	<u>73.3</u>	<u>33.3</u>	51.6	<u>82.6</u>	<u>47.0</u>	30.5
	STONE	65.5	16.9	48.0	60.6	12.9	56.4	69.6	21.5	36.8	63.4	13.0	51.4	69.0	22.0	29.5
	STA-1	55.7	10.4	<u>51.4</u>	56.0	9.0	<u>57.6</u>	64.8	14.6	39.2	59.1	17.1	<u>52.0</u>	62.1	13.4	36.0
	GTCW	78.6	45.9	53.1	66.6	27.7	58.6	90.5	76.2	33.7	79.6	47.0	52.4	92.8	73.0	<u>31.5</u>
Gemma4 (12B)	Base	—	—	52.0	—	—	61.6	—	—	53.5	—	—	52.6	—	—	45.5
	Unigram	<u>66.4</u>	22.8	<u>52.9</u>	59.3	13.6	59.2	61.1	15.7	50.2	58.2	13.8	50.2	<u>61.7</u>	12.0	44.9
	KGW	65.8	18.3	51.2	62.2	13.8	60.4	64.6	17.1	<u>53.5</u>	62.8	15.0	47.4	62.2	15.2	44.7
	SWEET	65.2	32.5	51.8	57.8	<u>25.6</u>	61.6	58.7	24.4	54.5	56.9	21.5	52.6	55.5	<u>18.5</u>	46.8
	STONE	60.1	16.9	52.0	59.5	15.4	60.8	59.8	13.0	52.2	59.2	12.6	45.5	57.2	10.0	44.9
	STA-1	59.8	11.8	51.2	58.0	10.5	<u>61.7</u>	58.6	10.4	52.9	55.6	9.8	<u>52.2</u>	58.7	8.3	45.7
	GTCW	70.7	47.2	70.9	<u>60.1</u>	29.4	62.7	<u>62.8</u>	30.5	52.9	<u>61.7</u>	29.1	51.6	57.3	19.7	48.0

of functionally correct watermarked outputs that are detected, while J measures the fraction of all watermarked outputs that are both functionally correct and detected.

Table 6 shows that GTCW achieves the strongest result under both measures. Among functionally correct outputs, GTCW detects 28.01%, compared with 14.50% for the strongest baseline, SWEET. Its joint success rate is 15.80%, nearly twice SWEET’s 8.16%. Thus, GTCW places detectable watermark evidence in a substantially larger fraction of outputs that also satisfy the execution tests.

The conditional detection rate of GTCW is lower than its overall TPR@5%FPR of 41.86%, and the same trend appears for all baselines. This shows that detection measured over all generated outputs does not fully reflect watermark retention in functionally correct code. The gap is especially relevant for code generation, where detection on incorrect completions contributes little to provenance of usable programs.

GTCW has finite-score coverage of 74.07%, similar to SWEET at 74.42%. Both methods can produce unscorable outputs when no entropy-eligible position is available, while GTCW additionally relies on successful grammar replay. Unscorable outputs remain in the denominators of Q and J as defined in Appendix B.2.

Table 6: Detection on functionally correct outputs at TPR@5%FPR. Q denotes detection among correct outputs, and J denotes outputs that are both correct and detected. Coverage is the fraction with finite scores. Values are percentages averaged over five models, five benchmarks, and three seeds.

Method	Pass@1	Detected among correct (Q)	Correct and detected (J)	Coverage	FPR
Base	59.58	—	—	—	—
Unigram	55.00	10.12	5.29	100.00	4.84
KGW	55.40	12.51	6.70	99.97	4.85
SWEET	58.87	14.50	8.16	74.42	3.74
STONE	57.03	9.84	5.38	99.90	4.83
STA-1	59.08	7.73	4.58	100.00	4.84
GTCW	59.18	28.01	15.80	74.07	4.46

C.3 GENERATION WALL-CLOCK TIME

We additionally measure wall-clock generation time and token throughput. Timing includes model generation and the online watermarking procedure, with device synchronization, but excludes model loading, offline grammar precompilation, replay detection, and functional evaluation. For each model-benchmark-seed setting, we first average completion time, generated token count, and per-completion token throughput, and then average the resulting values equally across settings. Token counts refer to raw generated tokens before cleanup.

As shown in Table 7, GTCW requires 11.50 seconds per completion, compared with 4.28 seconds for Base and 4.40–4.62 seconds for the other watermarking methods. Its mean throughput is 17.24 tokens per second, compared with 63.07–64.93 for the other methods. Although the grammar backend is implemented in Rust and grammar artifacts are precompiled, the current GTCW implementation is not yet optimized for runtime and introduces substantial online overhead. We regard this as an implementation limitation of the current system. Further optimization of the integration between model decoding and grammar-state processing may reduce this cost.

Table 7: Generation wall-clock time, output length, and throughput. Values are averaged equally over five models, five benchmarks, and three seeds. Throughput is averaged per completion.

Method	Seconds/completion	Tokens/completion	Tokens/second
Base	4.28	175.85	64.88
Unigram	4.62	192.68	64.93
KGW	4.56	187.60	63.70
SWEET	4.41	179.10	63.37
STONE	4.46	180.10	63.07
STA-1	4.40	178.45	63.49
GTCW	11.50	158.01	17.24

C.4 GENERATED CODE EXAMPLES

Figure 3 shows functionally correct and detected outputs for MBPP+/796, which asks for the sum of all values in a dictionary. All methods use Qwen2.5-Coder (3B) with the same code prefix, and every displayed completion passes the full MBPP+ test suite.

The examples highlight how the methods differ in where watermark evidence is introduced. Unigram, KGW, and STA-1 apply their watermarking rule broadly across generated positions, including identifiers, syntax, and comments. For example, in the STA-1 output, repeated occurrences of the

local identifier `sum` are independently watermarkable. Such broad carrier selection provides many opportunities to accumulate signal, but also perturbs token choices at positions that may be important for the generated program. STONE excludes some syntax-critical token categories, but in this example a substantial portion of its scored signal appears in comments. SWEET instead uses entropy gating to avoid low-entropy positions. Its concise completion happens to contain only three scored positions, all of which are green.

GTCW uses a more restrictive carrier condition that combines grammar admissibility, the carrier gate e_t , and the entropy gate. Its advantage therefore does not come from watermarking a broader set of positions. Rather, green temperature strengthens the signal within the selected admissible positions while preserving the model’s relative preference among green candidates. In the displayed completion, ten positions are scored and nine are green. The remaining scored red token further illustrates that GTCW biases, rather than forces, the green choice. Overall, the example reflects the intended design of GTCW: strong watermark evidence from selectively chosen positions without requiring broad token-level perturbation.

Prompt

```
"""
Write function to find the sum of all items in the
→ given dictionary.
assert return_sum({'a': 100, 'b':200, 'c':300}) == 600
"""
```

Base (unwatermarked)

```
def return_sum(data):
    total = 0
    for key, value in data.items():
        total += value
    return total
```

Unigram

Z = 2.81 G/N = 45/67

```
def return_sum(given dict):
    a = 0 # initializing a variable to store
→ the sum
    for i in given dict.values(): # iterating
→ through the values in the dictionary
        a += i # adding each value to the sum
    return a # returning the sum after
→ iterating through all values
```

KGW

Z = 2.67 G/N = 26/36

```
def return_sum(given dict):
    a = sum(dict(given dict).values()) # Using
→ sum function and .values() to add all items
→ together.
    return a
```

SWEET

Z = 1.73 G/N = 3/3

```
def return_sum(given dict):
    a = sum(dict(given dict).values())
    return a
```

STONE

Z = 2.21 G/N = 27/40

```
def return_sum(given dict):
    a = 0 # initializing sum variable
    for i in given dict.values():
        a += i # adding each item value in the
→ dictionary to the sum variable
    return(a) # returning the final sum value
```

STA-1

Z = 2.81 G/N = 45/67

```
def return_sum(a dict):
    # Initialize sum to zero
    sum = 0
    # Loop through each key in the dictionary
    for key in a dict:
        # Add the value of each key to the sum
        sum += a dict.get(key)
    # Return the total sum
    return sum
```

GTCW

Z = 2.53 G/N = 9/10

```
def return_sum(d):
    # Initialize variables
    total_sum = 0
    # Loop through each value in the dictionary
    for item in d.values():
        # Add each item's value to the total sum
        total_sum += item
    # Return the computed sum
    return total_sum
```

█ Scored green tokens
 █ Scored red tokens
 Unscored tokens are uncolored. ¶ marks scored newlines. Arrows mark display-only wrapping.

Figure 3: Functionally correct and detected outputs for MBPP+/796 using Qwen2.5-Coder (3B). All displayed completions pass the augmented tests and exceed their corresponding TPR@5%FPR detection thresholds. Z denotes the detector score and G/N the number of green tokens among scored positions. Green highlighting marks scored green tokens.