

MAGICBEANSTALK: ESCAPING THE RLVR ZERO ADVANTAGE TRAP WITH RECURSIVE DATA SYNTHESIS

Ximing Lu^{1,*}, Aviral Kumar^{2,4}, Jan Kautz⁴, Yejin Choi³, David Acuna^{4,*}

¹University of Washington ²Carnegie Mellon University

³Stanford University ⁴NVIDIA

lux32@cs.washington.edu, dacunamarrer@nvidia.com

ABSTRACT

Data-centric scaling of RLVR has largely focused on collecting or generating verifiable training problems. However, corpus size alone does not determine whether the dataset provides a useful learning signal for a target policy. To guide the synthesis of effective RLVR data, we analyze the RLVR objective and experimentally characterize dataset effectiveness as a function of its problems, the target policy, and the training rollout budget. Under this characterization, we show that a large open-source math corpus pooled from widely used RLVR datasets falls almost entirely into a *zero-advantage trap*: for a fixed target policy and rollout budget, roughly **88%** of its problems are solved in every rollout or failed in every rollout. Filtering concentrates what remains, but it can only select, discarding the hard problems. Effective synthetic problems should therefore require the reasoning operations and compositions required to solve those hard problems. Yet their difficulty must be calibrated, so that some target-policy rollouts succeed, some fail, and at least one complete correct solution fits within the training budget. Prompting a teacher to vary hard problems directly does not achieve this. Guided by these empirical design principles, we introduce **MagicBeanStalk**, a top-down decomposition and bottom-up recursive data-synthesis algorithm that grows seed problems into families of substantively new, policy- and budget-calibrated training problems while preserving the seeds’ reasoning blueprints. Across 8 math reasoning benchmarks, continual RLVR on MagicBeanStalk problems improves gpt-oss-120b from 61.2 to **69.8 (+8.6)** and DeepSeek v4 Flash from 72.4 to **77.9 (+5.4)** on a 16K-token budget. Training on the full 78K source corpus improves gpt-oss-120b by only +1.1 and its best filtered subset by +5.8. In finance, we synthesize over 14K verifiable training problems from only 340 solutions and improve Qwen3 by **+6.9** and **+2.4** points on SecQue and FinanceBench, respectively.

1 INTRODUCTION

Reinforcement learning with verifiable rewards (RLVR) has become key for improving reasoning models, but as policies become stronger, scaling RLVR increasingly becomes a data problem requiring a continual supply of verifiable data. Existing efforts have expanded this supply by collecting human-authored problems for math, coding and other domains (Chen et al., 2025; Luo et al., 2025; Albalak et al., 2025; Cui et al., 2025; Lu et al., 2025), as well as by developing procedural environments that can generate multiple problems per environment (Stojanovski et al., 2025; Lacombe et al., 2025; Zeng et al., 2025). However, sourcing high-quality human problems become increasingly hard as we run out of internet data. And procedural environments are typically hand-engineered, limited to a set of domains, and often produce problems that vary surface details within a fixed reasoning structure. As a result, recent approaches synthesize surrogate tasks from Internet data (Lu et al., 2026), yet more data does not necessarily ensure the problems provide useful learning signal for a target policy and training budget.

In this work, we return to the binary-reward RLVR objective and characterize dataset effectiveness as a function of three interacting components: the problems it contains, the target policy, and the

*Core contributors.

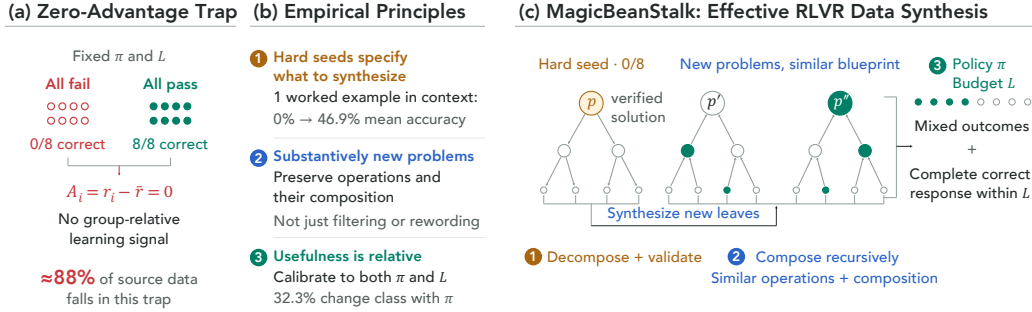


Figure 1: **MagicBeanStalk synthesizes RLVR data from hard seeds to escape the zero-advantage trap.** (a) For a fixed policy π and budget L , all-failure and all-success rollout groups yield zero advantage; $\approx 88\%$ of a 78K math corpus falls in this trap for `gpt-oss-120b` at 32K. (b) Three empirical principles: hard seeds specify what to synthesize; synthetic problems must be substantively new yet preserve the seed’s reasoning operations and their composition; and usefulness is relative to π and L . (c) MBS applies them in order: the seed’s verified teacher trace is decomposed top-down into subproblems that help a student solve their parent (1); harder new leaves are synthesized and recursively composed bottom-up into parallel trees p' , p'' (2); synthetic root problems with mixed target-policy rollouts and a complete correct response within L are kept (3).

training rollout budget. Using this characterization and a set of controlled experiments, we design key principles to guide the synthesis of effective RLVR data. We demonstrate that more data does not necessarily lead to better downstream performance, and a large corpus can provide little learning signal when most problems fall into what we call the **zero-advantage trap** (i.e. problems are either too easy or too hard for the target policy under the training budget). Specifically, in a corpus of approximately 78K open-source math problems, roughly 88% fall into this trap for `gpt-oss-120b` at a 32K rollout budget. Filtering alone is limited to selection, and disregards the hard problems that sits at the frontier of the target policy and expose the reasoning capabilities the policy lacks.

Our key insight is to repurpose the hard problems as seeds from which to grow substantively new problems whose solutions require the same reasoning operations, but whose difficulty is calibrated to produce mixed rollout outcomes and admit at least one complete correct solution within the training budget. However, the obvious baseline—directly prompting a strong teacher to produce variations of the hard seed—performs no better than training on the best problems already present in the corpus.

This motivates a more structured construction, **MagicBeanStalk** (MBS). MBS is a top-down decomposition and bottom-up recursive synthesis method that grows a small collection of seeds into families of policy- and budget-calibrated RLVR problems. MBS decomposes each seed into a validated tree of simpler subproblems, synthesizes substantively new leaf problems, and recombines them while preserving the seed’s reasoning blueprint (Figure 1). MBS escapes the trap where direct synthesis does not: from hard seeds on which `gpt-oss-120b` scores 0/8, it produces in-budget Goldilocks problems for 74.7% of seeds versus 43.8% for direct synthesis. In a matched training control on a shared seed population, MBS reaches 69.2, versus 63.9 for direct synthesis and 65.3 for training on the seeds themselves. On `gpt-oss-120b`, continual RLVR raises the avg across 8 math reasoning benchmarks (AIME 24/25, AMC, HMMT-F/N, Minerva, Olympiad, Omega-500) from 61.2 to **69.8** (+8.6 points) at a 16K-token budget. The same data applied to DeepSeek v4 Flash raises its average from 72.4 to **77.9** (+5.4 points) under the same budget. Further, MBS gains persist at 24K and 32K and on MathArenaApex (Dekoninck et al., 2026) they exceed the best baseline’s gain at every budget. Beyond math, we also apply MBS to finance, a specialized domain where annotation is expensive and verifiable RL data is scarce. Starting from only 340 expert-curated seed questions, MBS synthesizes over 14,000 grounded financial reasoning problems. Continual RLVR on this data improves Qwen3-4B by +6.9 pass@1 on SecQue and +2.4 on FinanceBench.

2 DESIGN PRINCIPLES FOR EFFECTIVE RLVR DATA SYNTHESIS

To derive design principles for useful RLVR data synthesis, we first characterize when a problem provides learning signal for a target policy under a fixed training rollout budget. Consider a verified

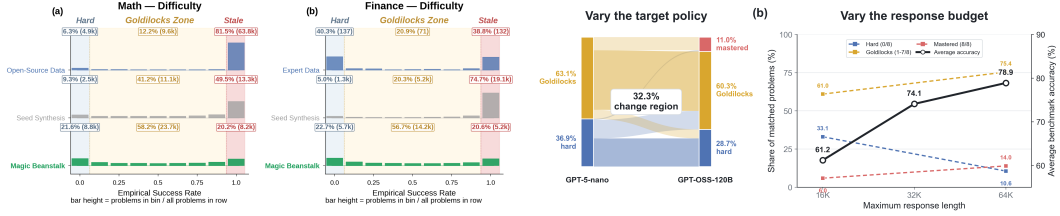


Figure 2: **Effective RLVR data synthesis must account for the problem, target policy, and response budget.** **Difficulty distributions (left):** Empirical success-rate distributions from `gpt-oss-120b` rollouts per problem in math and finance. We denote problems with 0/8, 1–7/8, and 8/8 correct responses as *hard*, *Goldilocks*, and *stale/mastered*, respectively; each bar height is the fraction of problems in that row. Roughly **88% of the corpus falls in the zero-advantage trap** providing no learning signal, whereas MagicBeanStalk places 58.2% of its math problems and 56.7% of its finance problems in the Goldilocks band. **Policy and budget dependence (right):** The two panels on (b) use the problem subset that GPT-5-nano does not solve in every rollout excluding most of the stale mass on the left. Holding the problems and 32K response limit fixed, changing the target policy reclassifies 32.3% of problems. Holding `gpt-oss-120b` fixed, increasing the response limit from 16K to 64K reduces the fraction of hard problems from 33.1% to 10.6%. Black curve reports avg accuracy. Difficulty depends on the problem, policy, and rollout budget.

problem (p, a^*) , a target policy π , and a rollout budget L . We sample N responses $(\tau_i, a_i) \sim \pi(\cdot | p; L)$, where τ_i is the reasoning trace and a_i is the final answer. We score each answer with a binary verifier, $r_i = R(p, a_i) \in \{0, 1\}$, using the reference answer a^* . The empirical success rate and the corresponding group-relative advantage estimate are:

$$\bar{r}_{\pi, L}(p) = \frac{1}{N} \sum_{j=1}^N r_j, \quad \hat{A}_i(p) = r_i(p) - \bar{r}_{\pi, L}(p). \quad (1)$$

In a mixed group, $\hat{A}_i$ is positive for a successful response and negative for an unsuccessful response. When all responses receive the same reward, $\hat{A}_i = 0$ for every response, and the sampled group provides no within-problem advantage signal. We refer to this failure mode as the **zero-advantage trap**. These are empirical finite-sample classifications depending on rollout counts, they do not establish absolute inability/mastery. Further, we call problems satisfying $0 < \bar{r}_{\pi, L}(p) < 1$ the policy’s *Goldilocks band*. This implies some rollouts succeed and others fail, yielding a nonzero group-relative learning signal. The definition is explicitly relative to the target policy π and the rollout budget L and counts.

The zero advantage trap and the goldilock bands. More data does not always means better performance. We characterize the learning signal available in a large corpus of open-source mathematical reasoning problems using the success rate. The corpus combines problem from DAPO-Math-17K (Yu et al., 2025b), Skywork-OR1-RL-Data (He et al., 2025), Turing Open-RL (Patil et al., 2026), and a subset of StackMathQA Zhang (2024), and contains approximately 78,000 problems. For each problem, we sample $N = 8$ responses from `gpt-oss-120b` using rollout budget L . Despite the size of the corpus, only 12.2% of its problems fall within the observed Goldilocks band ($L = 32K$). As shown in Figure 2, most problems are solved in all rollouts and therefore have empirical success rate $\bar{r}_{\pi, L}(p) = 1$ while a 6.3% are not solved in any rollout. Therefore, roughly **88% of the corpus falls in the zero-advantage trap**. They contribute no group-relative advantage. A matched downstream control experiment further shows that the Goldilocks subset and a stricter subset that additionally demonstrates in-budget solvability outperform a proxy preserving the full corpus distribution, despite using an order of magnitude fewer problems. (Figure 3(b)) Thus, more RLVR data does not necessarily means better downstream performance. (Appendix B.1 for more)

Difficulty is relative to the policy and training budget. Crucially, whether a problem provides useful signal depends on both the target policy and the rollout budget. Holding the problems and a 32K response limit fixed, changing the target policy reclassifies 32.3% of problems among the zero-success, Goldilocks, and fully solved regions. Holding the policy fixed, increasing the response limit from 16K to 64K reduces the fraction of apparently hard problems from 33.1% to 10.6% (Figure 2). A truncated response therefore does not establish that the policy lacks the required reasoning capability. It establishes only that no complete solution was produced within budget. We

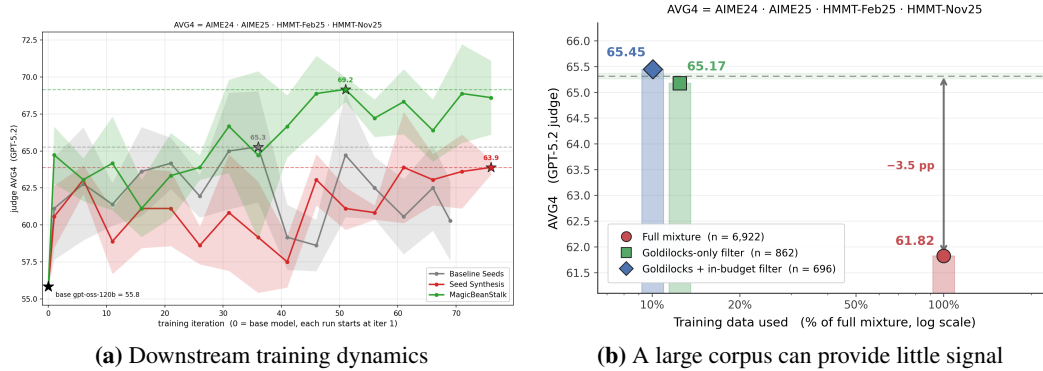


Figure 3: **MBS improves beyond seed training and direct synthesis. Filtering shows that more data alone is not enough but discards the hard problems the target policy is not able to solve yet.** (a) Starting from the same base policy, we compare one epoch of training on fixed seed problems and the same amount of qualified seed-synthesis and MBS problems. All derived from the same fixed seed population. Seed synthesis does not surpass seed-only training, whereas MBS provides a clear additional gain. In this control experiment, the seed population mixes goldilocks and hard problems, so that seed-only training is a meaningful baseline. (b) Holding the base policy, training recipe, and evaluation fixed, we train on a 6,922-problem proxy that preserves the source mixture’s difficulty distribution, on its 862-problem Goldilocks subset, and on the 696-problem subset that additionally demonstrates in-budget solvability. Both filtered subsets outperform the full proxy while using fewer problems.

say that a problem has demonstrated *in-budget solvability* if at least one correct response terminates normally (i.e. without reaching the rollout limit). Difficulty is consequently a property of the tuple. Therefore, generated problems should be calibrated to the target policy and training rollout budget, producing both successful and unsuccessful rollouts while admitting at least one complete correct response within budget. Filtering alone, however, can only select from problems a corpus already contains. Filtering cannot create new problems targeting capabilities absent from the filtered subset.

Hard problems are specifications for what data to synthesize. Hard problems play a paradoxical role in RLVR. Problems with zero observed success provide no group-relative advantage in the sampled group, yet their verified solutions identify reasoning operations and compositions to target through synthesis. We refer to the essential reasoning operations exposed by a verified solution and how those operations are composed as *reasoning blueprints*. We define a *verified hard problem* as a solvable problem for which $\bar{r}_{\pi, L}(p) = 0$ and the sampled responses terminate normally. The termination requirement ensures that the observed failures are not artifact of the rollout budget. To test whether these blueprints provide actionable specifications, we study 98 hard math seeds and obtain verified traces from a pool of 5 frontier models. For each seed, we generate one simpler subproblem instantiating some of its blueprint operations and provide its verified solution as a single in-context example. We verify that it does not reveal the original solution. This intervention enables the target policy to solve at least one rollout for 78/98 seeds (79.6%) and raises mean accuracy on the original problems from 0% to 46.9%. Thus, hard problems are not merely training examples. Their verified solutions provide specifications of what skill a synthetic problem should target. Moreover, among the 43 seeds with at least two verified blueprints obtained with different teachers, 90.7% produce the same blueprint or a compatible variant. This further suggests that the blueprint primarily reflects the problem’s structure rather than a particular teacher style. (See Appendix B.3 for more)

Direct prompting a teacher to generate variations is not enough. Filtering can only select from problems a corpus already contains while hard seeds specify the reasoning the policy is missing and left out during filtering. A simple way to synthesize problem starting with hard seeds is to provide the problem, reasoning trajectory, and its verified solution to a strong teacher. Then perform rejection sampling on quality control, goldilocks and in-budget solvability. This baseline is straightforward and we experimentally observed it often retains the mathematical techniques used by the seed. In a controlled set of experiments, however, we observed **seed synthesis provides no clear gain beyond the seeds**. Figure 3(a) shows the training curves. We experimentally found two main reasons for this. (1) **seed synthesis preserves techniques but often makes shallow variants**. We study this behavior

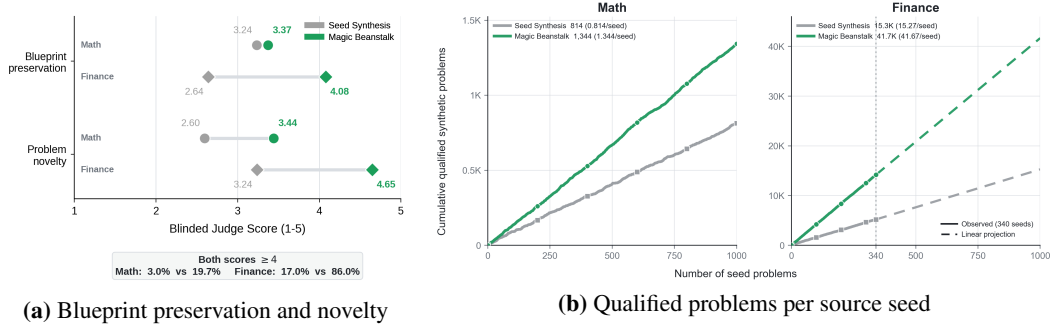


Figure 4: **Direct prompting a teacher to generate variants is limited by both the problems it constructs and the number of useful candidates it yields.** **Left:** We evaluate 300 same-seed pairs in math and 100 in finance for each approach. A judge scores each generated problem for reasoning-blueprint preservation and problem novelty. Blueprint preservation measures if the solutions to the synthetic problem requires the seed’s essential reasoning operations and dependencies. Novelty measures if the synthetic problem is new rather than a paraphrase, contextual rewrite, or numerical substitution. Higher is better. **Right:** Cumulative qualified problems as source seeds are added, (both methods evaluated on the same seeds). Qualification requires 1–7/8 correct and at least one correct response that terminates normally. In finance, we use same qualification. Finance curves are observed through 340 seeds and linearly projected thereafter. MBS produces more qualified descendants per seed while more often preserving the blueprint in a new problem.

with a blinded judge study over 300 generated problems in math and 100 in finance. Figure 4 (left) shows that seed synthesis often retains recognizable reasoning techniques, particularly in math, but frequently does so through a shallow variation of the original problem rather than a substantively new instantiation. And (2) **post-hoc filtering calibrates difficulty but cannot repair the candidate pool**. Filtering is subtractive and cannot turn a shallow variant into a substantively new problem, nor produce a candidate for a seed that yielded none. Seed synthesis consequently returns below one qualified problem per seed (Figure 4, right). We study the full yield and seed-coverage comparison in Section 4.1. Also, see appendix C for more details.

Takeaway. Three principles follow. First, hard problems are specifications. Their verified solutions name the reasoning operations and skills synthesis should target. Second, synthesis must do what filtering cannot and should be complementary to dynamic sampling. Synthetic problems should be substantively new and preserve the hard seed’s reasoning operations and their composition. Third, usefulness is relative. A problem carries signal for a given target policy and rollout budget, so generated problems must be calibrated to both. They should yield mixed target-policy rollouts with a complete correct response within the training budget.

3 MAGICBEANSTALK: EFFECTIVE DATA SYNTHESIS FROM HARD SEEDS

We now introduce MagicBeanStalk (MBS), a data synthesis algorithm motivated by the findings in in 2. Each stage in the following subsections is inspired by those principles.

3.1 PRELIMINARIES AND NOTATION

We assume access to a collection of **teacher** models $\mathcal{T} := \{T_1, T_2, \dots, T_M\}$. In our setting, these are strong reasoning LLMs used to solve, decompose, synthesize, and verify problems. Additionally, we define an ordered pool of **student** models $\mathcal{S} := \{S_1, S_2, \dots, S_J\}$, ranked from strongest (S_1) to weakest (S_J), and a target policy π . In our setting, π is part of the student pool. A problem is a tuple (p, a^*) where p is a question and $a^* \in \mathcal{A}$ is its ground-truth answer. In document-grounded settings (e.g. finance), we let the $p = (q, d)$ where d is a document snippet that contains the information required to answer q . **Decomposition tree.** A **decomposition tree** $\mathcal{G}_p := \langle p, \tau, a^*, \mathcal{C} \rangle$ is rooted at (p, a^*) with its verified teacher trace τ , and recursively contains a set of K **children** $\mathcal{C} = \{\mathcal{G}_{p_1}, \dots, \mathcal{G}_{p_K}\}$, each itself a tree on an easier subproblem. A node n with $\mathcal{C}_n = \emptyset$ is a **leaf**.

3.2 REJECTION-SAMPLE TEACHER TRACES

Given a set of verified problems (p, a^*) , we use a collection of teachers to sample reasoning traces. Formally, for each problem p , we iterate through teachers $T \in \mathcal{T}$ in order and, from each, draw up to N_t reasoning traces and answers $(\tau^{(i)}, a) \sim T(p)$ with $i \in \{1, \dots, N_t\}$. A trace is **verified** when its final answer matches the GT. We accept the first trace satisfying $\text{verified}(\tau, a^*) = 1$ and store it as the root’s verified trace in $\mathcal{G}_p$. Here, verified represents a verification function either answer matching or an LLM-as-a-judge. Problems for which no trace verifies after $|\mathcal{T}| \cdot N_t$ attempts are discarded. A collection of teacher reduces the number of discarded problems due to solvability. Section B.3 motivates why multiples teacher are beneficial for solution coverage.

3.3 TOP-DOWN PROBLEM DECOMPOSITION

We treat a verified (p, τ, a^*) as the root of a decomposition tree $\mathcal{G}_p$. The teacher is then asked to identify the key skills and knowledge required to solve p , and emit K easier self-contained subproblems that collectively teach those skills, each with its own answer and reasoning trace: $\{(p_k, \tau_k, a_k^*)\}_{k=1}^K \sim T(p, \tau, a^*)$. Each subproblem is itself rejection-sampled and verified as in the previous stage. Each verified subproblem becomes a child node $\mathcal{G}_{p_k}$ that is in turn used as a parent in the recursive decomposition. In our experiments $K \leq 3$.

Does the subproblem help a student solve the harder problem? At each node, we evaluate the student pool from weakest to strongest and select the strongest evaluated student with zero empirical accuracy as the evaluated student. We then run an *effectivity test*. Specifically, each evaluated student is given the K subproblems and their traces as in-context worked examples and re-tested on the parent. Let $\mathcal{S}_n \subseteq \mathcal{S}$ denote the students evaluated at node n . A decomposition is **effective** when conditioning raises accuracy for at least one student: $\exists S \in \mathcal{S}_n : \text{acc}^{\text{cond}}(S, p \mid \{p_k, \tau_k, a_k^*\}_k) > \text{acc}(S, p)$. Here $\text{acc}(S, p)$ is the fraction of N sampled solutions whose answer matches a^* . We keep effective decompositions and recurse on each child. If the student pool does not show an improvement, we re-prompt the teacher for a fresh decomposition with the previous failed attempts as negative context, up to N_d retries. Nodes whose decompositions remain ineffective are dropped. In our experiments $N = 8$ and $N_d = 3$, and we recurse up to depth $D = 3$. The effectivity test is motivated by the second design principle (See 2 and B.3).

3.4 BOTTOM-UP SYNTHESIS OF CALIBRATED PROBLEMS

At this stage, every retained seed has a decomposition tree $\mathcal{G}_p$ rooted at (p, τ, a^*) , with verified subproblems at its descendant nodes. We now walk this tree bottom-up to synthesize a parallel *synthetic* tree of new problems that share the original’s reasoning structure. At each leaf, we explicitly ask the teacher to generate harder variants of the leaf problem, and recursively generate a synthetic parent problem by combining the retained synthetic children. Formally, a synthetic parent $(\tilde{p}, \tilde{\tau}, \tilde{a}^*)$ is obtained recursively from its K synthetic child problems: $(\tilde{p}, \tilde{\tau}, \tilde{a}^*) \sim T(\{(\tilde{p}_k, \tilde{\tau}_k, \tilde{a}_k^*)\}_{k=1}^K; \mathcal{B}(\mathcal{G}_n))$. where $\mathcal{B}(\mathcal{G}_n)$ denotes the original parent–children configuration at the current node. The original (parent, children) tree is provided to the teacher as a demonstration pattern that the combination should mirror in logical structure and difficulty. Each candidate synthetic parent is itself rejection-sampled and verified, and is discarded when its accuracy on the weakest student S_J exceeds α_{parent} . Propagating upward, every node ends up with synthetic versions, yielding a complete synthetic tree that parallels the original. In our experiments $\alpha_{\text{parent}} = 0.625$ and up to $N_c = 10$ child-combination trials are attempted per parent.

Leaf synthesis. For each leaf $(p_\ell, \tau_\ell, a_\ell^*)$, the teacher samples N_ℓ harder variants of the question: $\{(\tilde{p}_\ell^{(s)}, \tilde{\tau}_\ell^{(s)}, \tilde{a}_\ell^{(s)*})\}_{s=1}^{N_\ell} \sim T(p_\ell, \tau_\ell, a_\ell^*)$. We experimentally noted that explicitly requiring *harder* variants at the leaves was beneficial. Without this constraint, the teacher tends to default to easy paraphrases that lose both difficulty and diversity of the synthetic tree. Variants whose accuracy on the weakest student S_J exceeds α_{leaf} are discarded, and we retry up to R rounds with the remaining teachers. In our experiments, $R = 3$, and $\alpha_{\text{leaf}} = 0.8$.

Grounding on new documents. In document-grounded scenarios (e.g., finance), each synthetic must remain answerable from a document. We retrieve top- K_d unseen documents from a corpus by embedding similarity to the seed’s document summary, then ask the teacher to extract from each

Table 1: **Main math results at 16K output tokens.** Pass@1 accuracy (%) across AIME 24/25, AMC, HMMT-F/N, Minerva, Olympiad, and Omega-500. Reference API models use 4 samples per problem and are included as context; gpt-oss-120b uses 16 and DeepSeek v4 Flash uses one. AVG is the mean across all 8 benchmarks and Δ is the within-base-model improvement.

Model	AIME24	AIME25	AMC	HMMT-F	HMMT-N	Minerva	Olympiad	Omega	AVG	Δ
<i>Reference API models</i>										
Claude Opus 4.6	98.3	68.3	97.0	52.5	61.7	60.9	88.6	45.2	71.6	—
Gemini 3.1 Pro	82.5	63.3	93.4	59.2	69.2	60.8	76.4	48.2	69.1	—
Gemini 3 Flash	66.7	48.3	86.1	50.0	55.0	59.4	72.6	35.5	59.2	—
GPT-5.2	62.5	50.0	79.2	28.3	45.8	53.3	67.9	36.5	53.0	—
MiniMax M2.7	56.7	60.0	84.9	45.0	48.3	54.1	64.7	39.0	56.6	—
<i>Base model: gpt-oss-120b</i>										
gpt-oss-120b (base)	70.0	63.3	89.0	40.0	50.0	55.1	71.4	50.8	61.2	—
+ RL (full source mixture)	80.0	56.7	93.9	43.3	46.7	52.9	72.3	52.4	62.3	+1.1
+ RL (Golden Goose (Lu et al., 2026))	80.0	60.0	91.5	43.3	50.0	54.8	72.0	53.2	63.1	+1.9
+ RL (in-budget Goldilocks source subset)	79.2	74.6	93.7	49.2	57.7	54.5	73.6	53.5	67.0	+5.8
+ RL (Seed synthesis Goldilocks, synthetic)	73.3	73.1	92.9	51.2	60.0	54.7	76.1	53.2	66.8	+5.6
+ RL (MagicBeanStalk, synthetic)	80.2	78.8	93.4	57.5	59.0	55.5	78.2	55.9	69.8	+8.6
<i>Base model: DeepSeek v4 Flash</i>										
DeepSeek v4 Flash (base)	76.7	80.0	92.7	73.3	76.7	57.0	75.4	47.6	72.4	—
+ RL (MagicBeanStalk, same data)	93.3	83.3	92.7	83.3	83.3	59.2	77.5	50.2	77.9	+5.4

a relevant snippet d' together with an *entity of interest* e' . The synthetic tree is then re-grounded on d' with every node threaded around e' . In our experiments $K_d \in \{35, 75\}$ documents per seed. Finally, we retain only synthetic problems that fall in the Goldilocks band of the target policy and that satisfy in-budget solvability.

4 EXPERIMENTAL RESULTS

In this section, we first quantify qualified yield, blueprint preservation, data quality, and downstream performance relative to the source seeds and seed synthesis in a control experiment. We then evaluate continual RLVR across 8 math benchmarks, transfer to a different target policy, performance beyond the training response budget, and document-grounded finance. Unless specifically mentioned, for most experiments involving training, we use as 16K rollout budget due to computational constrains.

4.1 FROM ZERO-ADVANTAGE SEEDS TO EFFECTIVE RLVR DATA

Qualified synthesis yield from zero-signal seeds. We randomly sample approximately 1,250 source seeds on which gpt-oss-120b obtained 0/8 correct rollouts at 16K. From the same seeds, MBS produces 3,370 descendants and seed synthesis produces 2,494. A descendant is qualified if it lies in the Goldilocks band and has at least one correct rollout that terminates normally within 16K. MBS yields qualified descendants from 74.7% of the seeds, compared with 43.8% under seed synthesis; its candidate-level qualified rate is also higher (42.8% versus 31.7%; Table 8). Our algorithm notably converts more zero-signal hard seeds into usable training data.

Blueprint preservation and novelty. For each method, GPT-5.6 scores 300 math and 100 finance seed-candidate pairs from 1 to 5 for blueprint preservation and substantive novelty. In math, our method preserves the blueprint comparably to seed synthesis while producing more novel problems. Concretely, 19.7% of MBS pairs score at least 4 on both criteria, compared with 3.0% for seed synthesis. In finance, the corresponding rates are 86.0% and 17.0% (Figure 4, left).

Data quality analysis. Three frontier models (GPT-5.6, Opus 4.8 and Gemini 3.1 Pro) assess whether each of 150 math and 50 finance randomly sampled problems are well-posed and its GT answer is correct. For finance, we also include the source document. All three judges reject only 8.0% of the math answers and none of the finance answers (Table 4). We report all agreement metrics but emphasize the usage of unanimous rejection. Failure to verify an answer may also reflect the judge’s limitations on difficult problems. Our hard-seed control experiment (B.3) shows this.

Downstream performance analysis. Starting from the same gpt-oss-120b checkpoint, we analyze the training dynamics for one epoch on data derived from the same fixed seed population, and report the average over the 4 core benchmarks (AIME 24/25, HMMT-F/N). The average is 65.3 for source-seed training, 63.9 for Goldilocks-filtered seed synthesis, and 69.2 for MBS (Figure 3, left). Seed synthesis does not improve over the source seeds, whereas MBS improves over both. This is a separate control run and is no the full-budget results in Table 1.

Table 2: **Inference-budget evaluation of 16K-trained checkpoints.** Parentheses report the difference from the base policy at the same inference budget. *Top*: average pass@1 across the 8 math benchmarks, average over 3 samples. *Bottom*: pass@1 on MathArena Apex-Shortlist (47 problems), average over 16 samples per problem, evaluated from the 16K training budget upward.

Training condition	8K	16K	24K	32K
<i>8 math benchmarks</i>				
<code>gpt-oss-120b</code> (base)	49.7	61.3	72.5	75.9
+ RL (in-budget Goldilocks source subset)	54.0 (+4.3)	67.1 (+5.8)	69.6 (−2.9)	72.0 (−3.9)
+ RL (Seed synthesis, Goldilocks synthetic)	54.2 (+4.5)	66.4 (+5.1)	72.5 (0.0)	75.6 (−0.3)
+ RL (MagicBeanStalk, synthetic)	58.3 (+8.6)	69.6 (+8.3)	73.5 (+1.0)	77.4 (+1.5)
<i>MathArena Apex-Shortlist</i>				
<code>gpt-oss-120b</code> (base)	–	1.5	6.8	16.2
+ RL (in-budget Goldilocks source subset)	–	7.4 (+5.9)	15.0 (+8.2)	18.9 (+2.7)
+ RL (Seed synthesis, Goldilocks synthetic)	–	4.7 (+3.2)	12.9 (+6.1)	20.6 (+4.4)
+ RL (MagicBeanStalk, synthetic)	–	12.5 (+11.0)	20.1 (+13.3)	27.1 (+10.9)

Performance on the original hard seeds after synthetic training. We reevaluate approximately 1,250 source seeds on which the initial `gpt-oss-120b` sample obtained 0/8 at 16K. A fresh base sample recovers 9.5% of these seeds, compared with 23.2% after seed synthesis training and 25.0% after MagicBeanStalk training. MagicBeanStalk also yields 840 correct rollouts and masters 14 seeds, compared with 694 and 6 under seed synthesis (Table 9). Both methods transfer learning back to their source seeds, while MBS produces more correct rollouts and more fully mastered seeds.

4.2 CONTINUAL RLVR ON MATH

Training data and baselines. We draw math seeds from an approximately 78K-problem open-source mixture of DAPO-Math-17K (Yu et al., 2025b), Skywork-OR1-RL-Data (He et al., 2025), Turing Open-RL (Patil et al., 2026), and a subset of StackMathQA (Zhang, 2024). We compare MBS with the full source mixture, its in-budget Goldilocks subset, Goldilocks-filtered seed synthesis, and Golden Goose (Lu et al., 2026). Our work focus is on the effectiveness of the synthesized data rather than to minimize synthesis cost or algorithm hyperparams. Therefore, training set sizes are each subset Goldilocks counts (Fig 2a) refiltered to match 16K training rollouts. RL implementation and hypers are fixed. We stop when a decline is not recovered within 10 subsequent iterations on the same held-out synthetic subset.

Training setup. We train `gpt-oss-120b` with GRPO on 2 nodes (16 H100 GPUs), using LoRA (rank 32), a constant lr of 4×10^{-5} , and a 16K response limit. Each step samples 16 responses for each of 32 prompts, with an optimization batch size of 32. DeepSeek v4 Flash uses full-model GRPO on 10 nodes (80 H100 GPUs), with a 10^{-6} lr and 8 responses under the same 16K limit. We use miles with Megatron-LM training and SGLang inference engine. To reject sample correct solutions, we use a pool of teachers including: Gemini 3 Flash, Claude Opus 4.6, DeepSeek V4 Pro, GPT 5.2 and Kimi K2.6. We use the same pool for both seed synthesis and MBS.

Evaluation. We report pass@1 with a 16K limit on the complete 8-benchmark suite: AIME 2024/2025, AMC, HMMT February and November, Minerva, Olympiad, and Omega-500. `gpt-oss-120b` uses 16 rollouts per problem. API rows use 4. Answers are checked using normalized string matching, numeric equivalence and GPT-5.2 as a judge.

Main result. Continual RLVR on MBS data raises the `gpt-oss-120b` average from 61.2 to 69.8 (+8.6 points) and improves most benchmarks (Table 1). Training on the full source mixture reaches 62.3 and on Golden Goose 63.1, while the in-budget Goldilocks source subset and seed synthesis reach 67.0 and 66.8. We use the released Golden Goose corpus as-is, without regenerating or re-filtering it for `gpt-oss-120b`, so this row is a published-data reference rather than a re-run of that method under our target policy. **Transfer to a different target policy.** We train DeepSeek v4 Flash on the same MBS data, without regeneration or target-specific re-filtering, and evaluate with 1 rollout per problem at 16K. Its 8-benchmark average rises from 72.4 to 77.9 (+5.4 points. Table 1).

Does the improvement persist beyond the training response budget? In this experiment, we hold each checkpoint and the evaluation protocol fixed and vary only the inference response length. All 3

Table 3: **Continual RLVR on MagicBeanStalk financial data.** Table 4: **Judge-assessed quality** Pass@1 and pass@5 (%) on SecQue and FinanceBench using 8 of our data. Three frontier judges rollouts and an 8K maximum response length. MBS improves classify synthetic problem-answer on both benchmarks.

Model	SecQue		FinanceBench		Domain	At least one verifies	Majority verifies	All 3 reject
	Pass@1	Pass@5	Pass@1	Pass@5				
Qwen3-4B-Instruct	32.4	43.1	65.9	76.0	Math	89.3%	80.0%	8.0%
+ RL (MagicBeanStalk)	39.3	52.5	68.3	76.8	Finance	100.0%	80.0%	0.0%

Table 5: **Qualified yield from hard seeds.** We synthesize descendants from approximately 1,250 seeds on which gpt-oss-120b obtained 0/8 correct rollouts at 16K. A qualified descendant is Goldilocks and admits a normally terminated correct rollout; seed conversion measures whether a seed yields at least one such descendant. MBS improves both candidate-level yield and seed-level conversion, turning substantially more hard seeds into usable RLVR data.

Method	Desc.	Goldilocks rate	Qualified rate	Seed conversion
Seed synthesis	2,494	36.8%	31.7%	43.8%
MagicBeanStalk	3,370	55.4%	42.8%	74.7%

Table 6: **Recovery on the original hard seeds.** Evaluation of the models trained with seed synthesis and MBS on approx 1,250 source seeds that received 0/8 at 16K. Recovery requires at least one correct rollout; correct rollouts aggregate all attempts. Both strategies transfer to the original hard seeds. This is expected for seed synthesis as variations effectively augments the seed problem neighborhood. MBS preserves transfer, master more source seeds, and generalizes better.

Policy	Recovered $\geq 1/8$	Correct rollouts	Mastered 8/8
Fresh base control	118 (9.5%)	164 (1.7%)	0 (0.0%)
Seed Synthesis	288 (23.2%)	694 (7.0%)	6 (0.5%)
MBS	310 (25.0%)	840 (8.5%)	14 (1.1%)

trained policies improve over the base policy at 16K. At 24K and 32K, however, source-seed training falls below the base policy and seed synthesis converges to it, whereas MBS remains above base by 1.0 and 1.5 points, respectively (Table 2, top). Next, we evaluate the same checkpoints at the same budgets on a substantially harder set known to benefit from larger responses. MathArena Apex-Shortlist (Dekoninck et al., 2026) contains 47 competition problems. MBS improves over base by 11.0, 13.3, and 10.9 points at 16K, 24K, and 32K (Table 2, bottom).

4.3 MAGICBEANSTALK FOR FINANCE DATA

Training data. Starting from 340 expert-collected questions grounded in 17 corporate credit agreements, MBS generates approximately 25K document-grounded candidates from the same seeds. MBS yields 14.2K Goldilocks problems (Figures 2).

Training setup. We use GRPO in veRL to train Qwen3-4B-Instruct on the MBS corpus with an 8K response limit. We use a batch size of 512 prompts, 16 responses per prompt, and a lr of 10^{-6} . Two additional nodes host Qwen3-30B-A3B-Instruct-2507, which assigns binary rewards by comparing each extracted final answer with the reference under a finance-aware equivalence rubric. **Evaluation.** We evaluate the Qwen3-4B-Instruct, and MBS-trained policy on SecQue (BenYoash et al., 2025) and FinanceBench (Islam et al., 2023). We follow each benchmarks eval protocol, sample 8 responses per problem at temperature 1.0 with an 8K response limit and report pass@1 and pass@5 and use GPT-5.2 as a judge.

Main result. Table 3 reports continual RLVR of Qwen3-4B-Instruct on the MBS finance corpus. Training on MBS improves pass@1 by 6.9 points on SecQue and 2.4 points on FinanceBench.

5 RELATED WORK

Scaling Training Data for RLVR. Collected corpora supply verified math and code problems (Albalak et al., 2025; Gao et al., 2024; Chen et al., 2025; Luo et al., 2025; Cui et al., 2025; Lu et al., 2025; Jain et al., 2024; Liu et al., 2025; Jung et al., 2025; Lin et al., 2026; Lu et al.). Others generate tasks in hand-designed environments (Lacombe et al., 2025; Stojanovski et al., 2025), adapt difficulty to the policy (Zeng et al., 2025; Xu et al., 2026), or mine tasks from Internet text (Lu et al., 2026). Closest to us, a teacher writes new problems from seeds or con-

cepts for SFT (Toshniwal et al., 2024; Zhao et al., 2025), VLMs (Liao et al., 2025; Acuna et al., 2025b; Jung et al., 2026; Acuna et al., 2025a), and RLVR (Yu et al., 2025a; Liang et al., 2025; 2026). Rather than collecting problems, hand-engineering environments, scaling quantity, or asking a teacher to synthesize based on seeds, we analyze what makes a synthetic problem useful for RLVR, then design a top-down, bottom-up recursive algorithm that turns hard seeds into new, policy- and budget-calibrated problems.

Algorithmic RL for Hard Problems. Dynamic sampling discards zero-advantage groups (Yu et al., 2025b), BroRL scales rollouts per prompt (Hu et al., 2025). Recent work guide exploration with oracle prefixes, hints, or off-policy traces (Qu et al., 2026; Li et al., 2026; Zhang et al., 2026). These methods modify the training algorithm or optimizer. Our work is complementary and focuses on the data rather than the modifying the algorithm with the same problems.

6 CONCLUSION

We show the value of RLVR data is relative to the problem, target policy, and rollout budget. We also show hard problems should guide the type of problems to synthesize. Based on these findings, we design key principles to guide effective data synthesis algorithms. MBS instantiates these principles by decomposing hard seeds into validated reasoning trees and regrowing them into substantively new, policy- and budget-calibrated problems. Our data improves `gpt-oss-120b` by +8.6 and DeepSeek v4 Flash by +5.4 points across 8 math benchmarks. In finance, 340 expert questions yield over 14,000 verifiable training problems and improve Qwen3 by +6.9 and +2.4 points on SecQue and FinanceBench, respectively.

AI USE STATEMENT

We used generative AI tools to help with language polishing and improve clarity. We additionally use LLM to generate synthetic datasets as this is the core of our work. The AI tools did not contribute to the intellectual content. We reviewed all AI-assisted edits and take responsibility for the final content of this work.

REPRODUCIBILITY STATEMENT

We use publicly available models and benchmarks with dataset splits and training hyperparameters, implementation details, and checkpoint selection disclosed in Section 4. Prompt templates for synthesis and evaluation appears in Section E and F. Other reproducibility details are in Section D. Reported results are averaged over multiple rounds as disclosed in in Section 4. One caveat may limit exact reproduction of the synthesis algorithm from scratch. Some of teachers used to reject sample solutions are proprietary models served behind APIs whose updates we do not control, so solutions and problems synthesized using them may differ if APIs change. We will release the generated MagicBeanStalk datasets upon acceptance.

6.1 ETHICS STATEMENT

We use LLM to generate training problems, so the resulting data may contain errors. We audit a sample with three additional models and report their agreement and rejection rates, while recognizing that these judgments may also contain mistakes. Our finance experiments evaluate benchmark performance and are intended to showcase the strength of the proposed algorithms. Further testing would be needed before relying on synthetic data to train models for financial decisions.

REFERENCES

David Acuna, Ximing Lu, Jaehun Jung, Hyunwoo Kim, Amlan Kar, Sanja Fidler, and Yejin Choi. Socratic-mcts: Test-time visual reasoning by asking the right questions. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pp. 24158–24171, 2025a.

-
- David Acuna, Chao-Han Huck Yang, Yuntian Deng, Jaehun Jung, Ximing Lu, Prithviraj Ammanabrolu, Hyunwoo Kim, Yuan-Hong Liao, and Yejin Choi. Long grounded thoughts: Synthesizing visual problems and reasoning chains at scale. *arXiv preprint arXiv:2511.05705*, 2025b.
- Alon Albalak, Duy Phung, Nathan Lile, Rafael Rafailov, Kanishk Gandhi, Louis Castricato, Anikait Singh, Chase Blagden, Violet Xiang, Dakota Mahan, and Nick Haber. Big-math: A large-scale, high-quality math dataset for reinforcement learning in language models, 2025. URL <https://arxiv.org/abs/2502.17387>.
- Noga BenYoash, Menachem Brief, Oded Ovadia, Gil Shenderovitz, Moshik Mishaeli, Rachel Lemberg, and Eitam Sheerit. Secque: A benchmark for evaluating real-world financial analysis capabilities. In *Proceedings of the Fourth Workshop on Generation, Evaluation and Metrics (GEM²)*, pp. 212–230, 2025.
- Yang Chen, Zhuolin Yang, Zihan Liu, Chankyu Lee, Peng Xu, Mohammad Shoeybi, Bryan Catanzaro, and Wei Ping. Acereason-nemotron: Advancing math and code reasoning through reinforcement learning. *arXiv preprint arXiv:2505.16400*, 2025.
- Ganqu Cui, Lifan Yuan, Zefan Wang, Hanbin Wang, Wendi Li, Bingxiang He, Yuchen Fan, Tianyu Yu, Qixin Xu, Weize Chen, et al. Process reinforcement through implicit rewards. *arXiv preprint arXiv:2502.01456*, 2025.
- Jasper Dekoninck, Nikola Jovanović, Tim Gehringer, Kári Rognvaldsson, Ivo Petrov, Chenhao Sun, and Martin Vechev. Beyond benchmarks: Matharena as an evaluation platform for mathematics with llms. 2026. URL <https://arxiv.org/abs/2605.00674>.
- Bofei Gao, Feifan Song, Zhe Yang, Zefan Cai, Yibo Miao, Qingxiu Dong, Lei Li, Chenghao Ma, Liang Chen, Runxin Xu, Zhengyang Tang, Benyou Wang, Daoguang Zan, Shanghaoran Quan, Ge Zhang, Lei Sha, Yichang Zhang, Xuancheng Ren, Tianyu Liu, and Baobao Chang. Omnimath: A universal olympiad level mathematic benchmark for large language models, 2024. URL <https://arxiv.org/abs/2410.07985>.
- Jujie He, Jiakai Liu, Chris Yuhao Liu, Rui Yan, Chaojie Wang, Peng Cheng, Xiaoyu Zhang, Fuxiang Zhang, Jiacheng Xu, Wei Shen, Siyuan Li, Liang Zeng, Tianwen Wei, Cheng Cheng, Bo An, Yang Liu, and Yahui Zhou. Skywork open reasoner 1 technical report. *arXiv preprint arXiv:2505.22312*, 2025.
- Jian Hu, Mingjie Liu, Ximing Lu, Fang Wu, Zaid Harchaoui, Shizhe Diao, Yejin Choi, Pavlo Molchanov, Jun Yang, Jan Kautz, and Yi Dong. Brorl: Scaling reinforcement learning via broadened exploration, 2025. URL <https://arxiv.org/abs/2510.01180>.
- Pranab Islam, Anand Kannappan, Douwe Kiela, Rebecca Qian, Nino Scherrer, and Bertie Vidgen. Financebench: A new benchmark for financial question answering. *arXiv preprint arXiv:2311.11944*, 2023.
- Naman Jain, King Han, Alex Gu, Wen-Ding Li, Fanjia Yan, Tianjun Zhang, Sida Wang, Armando Solar-Lezama, Koushik Sen, and Ion Stoica. Livecodebench: Holistic and contamination free evaluation of large language models for code, 2024. URL <https://arxiv.org/abs/2403.07974>.
- Jaehun Jung, Seungju Han, Ximing Lu, Skyler Hallinan, David Acuna, Shrimai Prabhumoye, Mostofa Patwary, Mohammad Shoeybi, Bryan Catanzaro, and Yejin Choi. Prismatic synthesis: Gradient-based data diversification boosts generalization in llm reasoning. In D. Belgrave, C. Zhang, H. Lin, R. Pascanu, P. Koniusz, M. Ghassemi, and N. Chen (eds.), *Advances in Neural Information Processing Systems*, volume 38, Main Conference, pp. 90649–90685. Curran Associates, Inc., 2025. doi: 10.52202/085713-3032. URL https://proceedings.neurips.cc/paper_files/paper/2025/file/82a34882f560db982d1257b5af461605-Paper-Conference.pdf.
- Jaehun Jung, Hyunwoo Kim, Brandon Cui, Ximing Lu, David Acuna, Prithviraj Ammanabrolu, and Yejin Choi. Deltaprompts: Escaping the zero-delta trap in multimodal distillation. *arXiv preprint arXiv:2605.15532*, 2026.

-
- Valentin Lacombe, Valentin Quesnel, and Damien Sileo. Reasoning core: A scalable rl environment for llm symbolic reasoning. *arXiv preprint arXiv:2509.18083*, 2025.
- Jiazheng Li, Hongzhou Lin, Hong Lu, Kaiyue Wen, Zaiwen Yang, Jiaxuan Gao, Yi Wu, and Jingzhao Zhang. Questa: Expanding reasoning capacity in llms via question augmentation. In *International Conference on Learning Representations*, volume 2026, pp. 144191–144215, 2026.
- Xiao Liang, Zhong-Zhi Li, Yeyun Gong, Yang Wang, Hengyuan Zhang, Yelong Shen, Ying Nian Wu, and Weizhu Chen. Sws: Self-aware weakness-driven problem synthesis in reinforcement learning for llm reasoning, 2025. URL <https://arxiv.org/abs/2506.08989>.
- Xiao Liang, Zhong-Zhi Li, Yeyun Gong, Yingnian Wu, Zhijiang Guo, Weizhu Chen, et al. Beyond pass@ 1: Self-play with variational problem synthesis sustains rlvr. In *International Conference on Learning Representations*, volume 2026, pp. 79443–79491, 2026.
- Yuan-Hong Liao, Sven Elflein, Liu He, Laura Leal-Taixé, Yejin Choi, Sanja Fidler, and David Acuna. Longperceptualthoughts: Distilling system-2 reasoning for system-1 perception. *arXiv preprint arXiv:2504.15362*, 2025.
- Yong Lin, Shange Tang, Bohan Lyu, Ziran Yang, Jui-Hui Chung, Haoyu Zhao, Lai Jiang, Yihan Geng, Jiawei Ge, Jingruo Sun, et al. Goedel-prover-v2: Scaling formal theorem proving with scaffolded data synthesis and self-correction. In *International Conference on Learning Representations*, volume 2026, pp. 11793–11818, 2026.
- Yifei Liu, Li Lyna Zhang, Yi Zhu, Bingcheng Dong, Xudong Zhou, Ning Shang, Fan Yang, and Mao Yang. rstar-coder: Scaling competitive code reasoning with a large-scale verified dataset, 2025. URL <https://arxiv.org/abs/2505.21297>.
- Dakuan Lu, Xiaoyu Tan, Rui Xu, Tianchu Yao, Chao Qu, Wei Chu, Yinghui Xu, and Yuan Qi. Scp-116k: A high-quality problem-solution dataset and a generalized pipeline for automated extraction in the higher education science domain, 2025. URL <https://arxiv.org/abs/2501.15587>.
- Ximing Lu, Seungju Han, David Acuna, Hyunwoo Kim, Jaehun Jung, Shrimai Prabhumoye, Niklas Muennighoff, Mostofa Patwary, Mohammad Shoeybi, Bryan Catanzaro, et al. Retro-search: Exploring untaken paths for deeper and efficient reasoning (2025). *arXiv preprint arXiv:2504.04383*.
- Ximing Lu, David Acuna, Jaehun Jung, Jian Hu, Di Zhang, Shizhe Diao, Yunheng Zou, Shaokun Zhang, Brandon Cui, Mingjie Liu, et al. Golden goose: A simple trick to synthesize unlimited rlvr tasks from unverifiable internet text. *arXiv preprint arXiv:2601.22975*, 2026.
- Michael Luo, Sijun Tan, Justin Wong, Xiaoxiang Shi, William Y. Tang, Manan Roongta, Colin Cai, Jeffrey Luo, Li Erran Li, Raluca Ada Popa, and Ion Stoica. Deepscaler: Surpassing ol-preview with a 1.5b model by scaling rl. <https://pretty-radio-b75.notion.site/DeepScaleR-Surpassing-O1-Preview-with-a-1-5B-Model-by-Scaling-RL-19681902c1468005b>, 2025. Notion Blog.
- Saurabh Patil, Anshuman Lall, Marko Pavlovic, Chinmayee Shukla, Seetesh Pande, Tejass Mohan Ukarde, Amanda Gollo Bertollo, Mahesh Joshi, and Kihwan Han. Open-rl, 2026. URL <https://huggingface.co/datasets/TuringEnterprises/Open-RL>.
- Yuxiao Qu, Amrith Setlur, Virginia Smith, Ruslan Salakhutdinov, and Aviral Kumar. Pope: Learning to reason on hard problems via privileged on-policy exploration. *arXiv preprint arXiv:2601.18779*, 2026.
- Zafir Stojanovski, Oliver Stanley, Joe Sharratt, Richard Jones, Abdulhakeem Adefioye, Jean Kadour, and Andreas Köpf. Reasoning gym: Reasoning environments for reinforcement learning with verifiable rewards, 2025. URL <https://arxiv.org/abs/2505.24760>.
- Shubham Toshniwal, Wei Du, Ivan Moshkov, Branislav Kisacanin, Alexan Ayrapetyan, and Igor Gitman. Openmathinstruct-2: Accelerating ai for math with massive open-source instruction data, 2024. URL <https://arxiv.org/abs/2410.01560>.

-
- Caijun Xu, Changyi Xiao, Zhongyuan Peng, Xinrun Wang, and Yixin Cao. Scaler: Synthetic scalable adaptive learning environment for reasoning. *arXiv preprint arXiv:2601.04809*, 2026.
- Ping Yu, Jack Lanchantin, Tianlu Wang, Weizhe Yuan, Olga Golovneva, Ilia Kulikov, Sainbayar Sukhbaatar, Jason Weston, and Jing Xu. Cot-self-instruct: Building high-quality synthetic prompts for reasoning and non-reasoning tasks. *arXiv preprint arXiv:2507.23751*, 2025a.
- Qiyang Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, Yu Yue, Weinan Dai, Tiantian Fan, Gaohong Liu, Lingjun Liu, Xin Liu, Haibin Lin, Zhiqi Lin, Bole Ma, Guangming Sheng, Yuxuan Tong, Chi Zhang, Mofan Zhang, Wang Zhang, Hang Zhu, Jinhua Zhu, Jiaze Chen, Jiangjie Chen, Chengyi Wang, Hongli Yu, Yuxuan Song, Xiangpeng Wei, Hao Zhou, Jingjing Liu, Wei-Ying Ma, Ya-Qin Zhang, Lin Yan, Mu Qiao, Yonghui Wu, and Mingxuan Wang. Dapo: An open-source llm reinforcement learning system at scale. *arXiv preprint arXiv:2503.14476*, 2025b. URL <https://arxiv.org/abs/2503.14476>.
- Zhiyuan Zeng, Hamish Ivison, Yiping Wang, Lifan Yuan, Shuyue Stella Li, Zhuorui Ye, Siting Li, Jacqueline He, Runlong Zhou, Tong Chen, Chenyang Zhao, Yulia Tsvetkov, Simon Shaolei Du, Natasha Jaques, Hao Peng, Pang Wei Koh, and Hanna Hajishirzi. Rlve: Scaling up reinforcement learning for language models with adaptive verifiable environments. *ArXiv*, abs/2511.07317, 2025. URL <https://api.semanticscholar.org/CorpusID:282911886>.
- Xichen Zhang, Sitong Wu, Yinghao Zhu, Haoru Tan, Shaozuo Yu, Ziyi He, and Jiaya Jia. Scaffgrpo: Scaffolded group relative policy optimization for enhancing llm reasoning. In *International Conference on Learning Representations*, volume 2026, pp. 131946–131974, 2026.
- Yifan Zhang. StackMathQA: A Curated Collection of 2 Million Mathematical Questions and Answers Sourced from Stack Exchange. Technical report, Math-AI, 2024.
- Xueliang Zhao, Wei Wu, Jian Guan, and Lingpeng Kong. Promptcot: Synthesizing olympiad-level problems for mathematical reasoning in large language models. In *Findings of the Association for Computational Linguistics: ACL 2025*, pp. 18167–18188, 2025.

A APPENDIX

B WHAT MAKES A PROBLEM USEFUL FOR RLVR?

B.1 A LARGE CORPUS CAN PROVIDE LITTLE LEARNING SIGNAL

We next use the empirical success rate to characterize the learning signal available in a large corpus of open-source mathematical reasoning problems. The corpus combines problems drawn from DAPO-Math-17K (Yu et al., 2025b), Skywork-OR1-RL-Data (He et al., 2025), Turing Open-RL (Patil et al., 2026), and a subset of StackMathQA Zhang (2024), and contains approximately 78,000 problems. For each problem, we sample $N = 8$ responses from `gpt-oss-120b` using rollout budget L . Despite the size of the corpus, only 12.2% of its problems fall within the observed Goldilocks band ($L = 32K$). As shown in Figure 2, most problems are solved in all rollouts and therefore have empirical success rate $\bar{r}_{\pi,L}(p) = 1$ while a 6.3% are not solved in any rollout. Therefore, roughly **88% of the corpus falls in the zero-advantage trap**. They contribute no group-relative advantage.

We then test whether the empirical Goldilocks criterion identifies problems that are more useful for downstream RLVR. Starting from the same initial `gpt-oss-120b` policy, we compare three computationally tractable training sets. We first construct a $\sim 7K$ -problem proxy whose proportions of hard, Goldilocks, and stale problems match those of the full open-source corpus. From this proxy, we extract the ~ 862 Goldilocks problems and a stricter 696-problem subset that also demonstrates in-budget solvability under the 16K training rollout limit. All conditions use the same training recipe and are evaluated after approximately one epoch. As shown in Figure 3(b), both the Goldilocks-only and the Goldilocks plus in-budget subsets reach a higher average accuracy than the full-mixture proxy, while training on an order of magnitude fewer problems. Thus, Goldilocks filtering concentrates useful RLVR signal. Filtering, however, can only select. It retains the small fraction of a corpus that already yields mixed outcomes and discards the rest, including the hard problems on which the policy never succeeds. Most importantly, filtering cannot produce a problem for a capability the corpus does not already cover.

B.2 DIFFICULTY IS RELATIVE TO THE POLICY AND TRAINING BUDGET

Problem difficulty in RLVR depends on both the target policy and the rollout budget used during training. We demonstrate each dependence through a controlled experiment. Let $f_i \in \{\text{stop}, \text{length}\}$ indicate whether response terminates normally or reaches the rollout limit L . We say that a problem has demonstrated *in-budget solvability* if at least one correct response terminates:

$$Q_{\pi,L}(p) = \mathbf{1}[\exists i : r_i = 1 \wedge f_i = \text{stop}]. \quad (2)$$

Dependence on the target policy. We first hold the problem set and rollout budget fixed and vary only the policy. We use the 15,470 problems that GPT-5-nano does not solve in every rollout, discarding those it has already mastered, and evaluate them also with `gpt-oss-120b` using 8 rollouts per problem and 32K response limit. Changing only the policy causes nearly one third of the problems (32.3%) to move between the zero-success, Goldilocks, and fully solved regions. Thus relative to a target policy, the same problem can provide different learning signal.

Dependence on the rollout budget. We next hold the policy and evaluation set fixed and vary only the maximum response length. Increasing the rollout budget of `gpt-oss-120b` from 16K to 64K reduces the fraction of hard problems from 33.1% to 10.6% and raises the average accuracy on the 8 math benchmarks from 61.2% to 78.9% (Figure 2b). Thus, the same problems appear substantially harder under a smaller rollout budget, even though the policy is unchanged. Therefore, a truncated response does not establish that the policy lacks the reasoning capability required by the problem. It only establishes that no complete solution was produced within budget. We therefore treat a problem as providing a clean in-budget group-relative learning signal only when:

$$0 < \bar{r}_{\pi,L}(p) < 1 \quad \text{and} \quad Q_{\pi,L}(p) = 1. \quad (3)$$

Difficulty is consequently a property of the tuple (p, π, L) , rather than of the problem alone.

B.3 VERIFIED HARD PROBLEMS SPECIFY FRONTIER CAPABILITIES

Hard problems play a paradoxical role in RLVR. Problems with empirical success rate zero provide no direct group-relative advantage signal. Yet, these problems may still reveal reasoning capabilities that the target policy lacks. We argue that a verified solution trace exposing the essential reasoning operations together with how those operations are composed reveals the capability the target policy lack. We refer to this structure as the problem’s *reasoning blueprint*. It provides a specification of capabilities at the frontier of the current policy. We define a *verified hard problem* as a solvable/correct problem for which $\bar{r}_{\pi,L}(p) = 0$ and all sampled responses terminate normally:

$$\bar{r}_{\pi,L}(p) = 0 \quad \text{and} \quad f_i = \text{stop} \quad \forall i \in \{1, \dots, N\}. \quad (4)$$

This termination requirement ensures that the observed failures reflect a reasoning limitation rather than an artifact of the rollout budget.

Extracting reasoning blueprints. We study 98 math hard seed problems randomly selected from the open corpus. For each seed, we obtain a verified solution and reasoning trace from a pool of frontier models. We use a pool of teacher (Gemini 3 Flash, Claude Opus 4.6, DeepSeek V4 Pro, GPT 5.2 and Kimi K2.6) as we found with one attempt per model, the strongest individual teacher solved only (59/98) seeds. From each trace, we then extract the essential reasoning operations and how they are composed (i.e. we extract their *reasoning blueprint*).

Controlled in-context experiment. For each seed, we generate a simpler subproblem that instantiates some of the operations in the reasoning blueprint and provide its verified solution as a single in-context example to the target policy. We use an LLM as a judge to verify the subproblem does not explicitly reveal the solution of the original problem. For simplicity, and to avoid best-of- K selection effects, we use only the first generated subproblem. After this intervention, the policy solves at least one rollout for 78/98 seeds (79.6%), while mean accuracy on the original hard problems increases from 0% to 46.9%. These results suggest that hard problems provide no direct RLVR signal while still serving as useful specifications of missing reasoning capabilities.

Are blueprints consistent across frontier models? Among the 43 seeds with at least two verified blueprints, we find 90.7% produce the same reasoning blueprint or a compatible variant. This suggests that the blueprint primarily reflects the structure of the problem rather than the idiosyncrasies of a particular frontier model.

Observation. Hard problems are not merely training examples; they can be specifications of capabilities at the frontier of the current policy. We call a verified problem a *capability-frontier seed* when the target policy cannot solve it reliably and its solution specifies a reasoning capability, or composition of capabilities, beyond the policy’s current competence. The in-context experiment shows one of the many actionable insights: a simpler, subproblem requiring a capability observed in the blueprint of the original problems solution can substantially improves the target policy’s success on the hard problem.

C SEED SYNTHESIS: WHY DIRECT SEED SYNTHESIS IS NOT ENOUGH

Filtering can only select from problems a corpus already contains , while hard seeds specify the reasoning the policy is missing and left out during filtering. The natural next step is therefore to generate new (easier) problems directly from those hard seeds. A simple way to synthesize problem starting with hard seeds is to provide the problem, reasoning trajectory, and its verified solution to a strong teacher , and perform rejection sampling on quality control, goldilocks and in-budget solvability. If (p, τ, a^*) denotes the seed problem, reasoning trace, and verified answer, seed synthesis samples:

$$(\tilde{p}, \tilde{\tau}, \tilde{a}^*) \sim T(p, \tau, a^*). \quad (5)$$

This baseline is straightforward and we experimentally observed it often retains the mathematical techniques used by the seed. In a controlled set of experiments, however, we observed **seed synthesis provides no clear gain beyond the seeds**. Starting from the same base policy and the same fixed seed population, we compare training on the 2,195 source seeds with training on approximately the same number of Goldilocks-filtered synthetic problems derived from those seeds.

Figure 3(a) shows the training curves. The best average accuracy across the 4 core math benchmarks (AIME 24/25, HMMT-F/N) is 65.3 for seed-only training and 63.9 for seed synthesis. Therefore, this simple method produces additional problem instances, but does not provide a clear downstream improvement in unseen benchmarks. We then investigate why:

Seed synthesis preserves techniques but often makes shallow variants. We study this behavior with a blinded judge study over 300 generated problems in math and 100 in finance. The judge takes in the seed, the reasoning blueprint and one generated problem with its reference solution, but not the synthesis method. It evaluates whether the generated solution requires the operations and dependencies in the seed blueprint, and whether the problem is substantively new rather than a paraphrase, contextual rewrite, or numerical substitution. Figure 4 shows that seed synthesis often retains recognizable reasoning techniques, particularly in math, but frequently does so through a shallow variation of the original problem rather than a substantively new instantiation.

Post-hoc filtering calibrates difficulty but cannot repair the candidate pool. Filtering is subtractive. It can calibrate the difficulty and response length of the candidates it retains, but it cannot turn a shallow variant into a substantively new problem, nor produce a candidate for a seed that yielded none. Seed synthesis consequently returns below one qualified problem per seed (Figure 4, right). We study the full yield and seed-coverage comparison in Section 4.1.

What changes when direct synthesis receives the MBS inference budget? We compare direct synthesis and MBS on the same 64 seeds. For the matched control, we repeatedly generate and verify direct-synthesis candidates from each seed until reaching or exceeding MBS’s per-seed construction budget. The resulting control receives 16.0M estimated construction tokens, compared with MBS’s 14.3M reference budget. We evaluate blueprint preservation and novelty using the same protocol as above, and estimate Goldilocks difficulty from $N = 8$ gpt-oss-120b rollouts with a 16K limit. As shown in Table 7, additional sampling improves direct synthesis’s Goldilocks coverage, but does not close its novelty gap. MBS yields an all-three candidate for 28 seeds, compared with 13 under the matched direct-synthesis control.

Table 7: Direct synthesis under the MBS construction budget. Samples is the number of evaluated candidates. Blueprint and novelty require judge scores of at least three, and Goldilocks denotes 1–7 correct responses among $N = 8$ gpt-oss-120b rollouts at 16K.

Method	Samples	Blueprint	Novelty	Goldilocks	All three
Direct synthesis	64	48/64	17/64	32/64	3/64
Direct synthesis (oversampling)	387	61/64	29/64	56/64	13/64
MBS	64	52/64	45/64	48/64	28/64

Observation. With today’s frontier models, a single call from the hard seed does not produce enough valid, new, blueprint-preserving problems for subsequent policy- and budget-based filtering.

Together with the preceding analysis of policy- and budget-relative learning signal, this result suggests a simple separation of roles. Hard problems specify the reasoning to target; the target policy and training rollout budget determine which generated problems are useful for RLVR. Ideally, we should aim to generate substantively new problems that preserve the hard seed’s essential reasoning operations and their composition, then retain those that yield both successful and unsuccessful target-policy rollouts and at least one correct target-policy rollout within the training budget.

D SUPPLEMENTARY REPRODUCIBILITY DETAILS

Teacher, student, and target-policy roles. The teacher pool solves seed and synthetic problems, proposes decompositions, generates new problems, and supplies candidates for verification. The ordered student pool $\mathcal{S}$ is used for the decomposition *effectivity* test. For an evaluated student S , we compare rollouts on a parent problem with rollouts obtained after conditioning on the verified child problems and their worked solutions; a decomposition is effective when this conditioning raises the empirical accuracy of at least one evaluated student. This test decides whether the proposed children are useful scaffolds. It does not decide whether a final synthetic problem is in the Goldilocks band.

Table 8: **Qualified yield from hard seeds.** We synthesize descendants from approximately 1,250 seeds on which gpt-oss-120b obtained 0/8 correct rollouts at 16K. A qualified descendant is Goldilocks and admits a normally terminated correct rollout; seed conversion measures whether a seed yields at least one such descendant. MBS improves both candidate-level yield and seed-level conversion, turning substantially more hard seeds into usable RLVR data.

Method	Desc.	Goldilocks rate	Qualified rate	Seed conversion
Seed synthesis	2,494	36.8%	31.7%	43.8%
MagicBeanStalk	3,370	55.4%	42.8%	74.7%

Table 9: **Recovery on the original hard seeds.** Evaluation of the base policy and models trained with seed synthesis and MBS on approx 1,250 source seeds that received 0/8 at 16K. Recovery requires at least one correct rollout; correct rollouts aggregate all attempts. Both strategies transfer to the original hard seeds. This is expected for seed synthesis as variations effectively augments the seed problem neighborhood. MBS preserves transfer, master more source seeds, and generalizes better to math benchmarks (see main table).

Policy	Recovered $\geq 1/8$	Correct rollouts	Mastered 8/8
Fresh base control	118 (9.5%)	164 (1.7%)	0 (0.0%)
Seed Synthesis	288 (23.2%)	694 (7.0%)	6 (0.5%)
MBS	310 (25.0%)	840 (8.5%)	14 (1.1%)

The target policy π has a separate role. Final Goldilocks membership and in-budget solvability are determined only from target-policy rollouts at the training response limit. In the reported setup, a retained problem has 1–7 correct responses among 8 target-policy rollouts and at least one correct response that terminates normally within the response budget. The target policy can also be a member of $\mathcal{S}$, but a positive effectivity test from any student never substitutes for this final target-policy screen.

Document-grounded finance. For finance, the document is part of the problem: $p = (q, d)$. It is not auxiliary metadata that may be dropped after synthesis. Decomposition and verification use the supplied snippet, and a re-grounded tree uses a new snippet throughout. Every synthesized question and its answer must be supported by that snippet alone; facts from the seed document cannot be carried into the new problem unless they also appear in the new document.

E CORE PROMPT TEMPLATES

The following are condensed task-defining templates. Bracketed text denotes runtime fields. Production wrappers also enforce serialization and answer formatting, while generic solving, retry, solution-rewriting, and parsing instructions are omitted here. A “verified solution” is teacher-side construction context, not an RLVR training target.

Problem decomposition.

Input: [PARENT PROBLEM], [VERIFIED TEACHER SOLUTION], [GROUND-TRUTH ANSWER], and, when applicable, [DOCUMENT].
Identify the key skills and knowledge required by the parent. Produce two or three easier, independent, self-contained subproblems that collectively teach those skills. Give each subproblem a correct worked solution and one concise final answer. If a document is supplied, every subproblem must be answerable using only that document.

Conditioned solving for the effectivity test.

Input: [VERIFIED CHILD PROBLEMS AND WORKED SOLUTIONS], [PARENT PROBLEM], and, when applicable, [DOCUMENT].
Study the solved child problems. Then solve the parent problem using the skills and techniques demonstrated by those examples. Return a complete solution and final answer.

Harder leaf synthesis.

Input: [LEAF PROBLEM], [VERIFIED SOLUTION], and, when applicable, [DOCUMENT].
Generate diverse variants that test the same core skills but are harder than the leaf and require more reasoning steps. Each variant must be self-contained and have exactly one verifiable final answer. Supply a correct worked solution. If a document is supplied, use no facts outside it.

Bottom-up parent composition.

Input: [ORIGINAL PARENT--CHILD CONFIGURATION], [SYNTHETIC CHILD PROBLEMS, SOLUTIONS, AND ANSWERS], and, when applicable, [DOCUMENT].

Combine the synthetic children into one new parent problem. Require the skills from all children and mirror the logical dependency pattern by which the original children form the original parent. Match the original parent’s difficulty and level of abstraction; do not simplify. Return one problem, a worked solution that composes the child results, and one final answer. A document-grounded parent must be answerable solely from the supplied document.

Finance document re-grounding.

Input: [SEED SUMMARY OR SNIPPET], [SEED ENTITY], and [NEW DOCUMENT].

Locate an analogous entity in the new document and copy a sufficiently complete supporting passage, preserving its numbers, tables, definitions, and surrounding conditions. Re-ground the synthetic tree on this new passage and entity. Preserve the reasoning roles of the seed tree, but import no seed-document facts. Every resulting node must be answerable from the copied passage alone.

Direct seed synthesis.

Input: [SEED PROBLEM], [VERIFIED REASONING TRACE], and [VERIFIED SOLUTION AND FINAL ANSWER].

Generate diverse, self-contained problems that test the same underlying skills identified in the original problem and its verified solution. The problem must be novel and not a simple rewrite. For each problem, provide a correct worked solution and one final answer.

F JUDGE-BASED ANALYSIS PROTOCOLS

F.1 BLUEPRINT PRESERVATION AND PROBLEM NOVELTY

The reported study uses same-seed candidate pairs: one bottom-up MagicBeanStalk candidate and one direct seed-synthesis candidate. The two candidates are selected in the observed Goldilocks band and matched on the recorded target-policy correct-rollout count. The reported samples contain 300 math pairs and 100 finance pairs. A fixed reasoning blueprint is first extracted from the seed problem, its verified solution, and its reasoning trace. Candidate scoring by GPT-5.6 is then symmetric and method-label blinded. The judge receives the seed, the fixed blueprint, and one generated problem with its reference solution and answer, but no method name. The two methods are scored in separate calls under the same rubric. The synthetic MBS tree is not exposed during candidate scoring.

Reasoning preservation (1–5).

1. The required reasoning is different; any overlap is only topical or surface-level.
2. One minor or peripheral component overlaps, but the main reasoning is not preserved.
3. A meaningful subset of the core operations is required, with an important operation or dependency omitted or changed.
4. Most core operations and their principal dependencies are required; additional reasoning is allowed.
5. The same core operations and their composition are clearly required by the generated problem.

Problem novelty (1–5).

1. The candidate is effectively a duplicate or paraphrase of the seed.
2. The candidate mainly substitutes numbers, names, entities, documents, line items, or superficial context.
3. The candidate is a meaningful variation of substantially the same setup.
4. The candidate is a substantively new setup that still instantiates the seed reasoning.
5. The candidate is a clearly new construction or composition that cannot be recovered through superficial substitutions.

The scores are assigned independently. Novelty without blueprint preservation does not count as successful transfer. The joint criterion reported in the paper is met only when both reasoning preservation and problem novelty are at least 4 for the same candidate.

Table 10: Component analyses. Teacher coverage uses 100 hard seeds under an equal four-call budget. The leaf comparison uses 10 fixed seeds. Qualified problems produce mixed outcomes over $N = 8$ gpt-oss-120b rollouts and at least one complete correct response within 16K.

Component	Without component	With component	Change
Teacher pool	Single teacher: 63.0%	Equal-call pool: 71.5%	+8.5 pp seed coverage
Effectivity test	22 teacher-valid decompositions	6 effective decompositions	16 non-helpful decompositions removed
Harder-leaf synthesis	Ordinary variants: 1/10	Harder variants: 3/10	+2 qualified seeds
Recursive depth	$D = 1$: 1,345 roots / 840 seeds	$D \leq 3$: 1,533 roots / 956 seeds	+188 roots / +116 seeds

G MBS ADDITIONAL ABLATION

Which MBS components matter? Table 10 evaluates four design choices at their corresponding construction stage. With the same four teacher calls per seed, the heterogeneous teacher pool covers more seeds than the strongest single teacher. Teacher verification alone retains all 22 valid decompositions, whereas the effectivity test removes the 16 whose solutions do not improve parent solving. Explicitly requesting harder leaf variants increases rollout-qualified coverage in the controlled construction audit, and recursive composition adds qualified problems from 116 source seeds not covered by one-level composition.